

Modular system

# Double-axis inverter IndraDrive M - HMD



Modular system

**Double-axis inverter ■ Ind** **ve M - HMD****Documentation**

- Operating Instructions
- Project Planning Manual


**Technical data**

		HMD01.1N-W0012	HMD01.1N-W0020	HMD01.1N-W0036
<b>Power</b>				
Continuous current	[A]	6.9	10	20
Maximum current	[A]	12	20	36
Motor nominal power typ.	[kW]	3	4	7.5
Input voltage	[V]	DC 254...750 V		
<b>DC bus</b>				
Switching frequency/max. output frequency	4 kHz	0...400 Hz		
	8 kHz	0...800 Hz		
Output voltage	[V]	3 x AC 0...main voltage V		
DC bus voltage	[V] DC	254...750 V		
<b>Control Voltage</b>				
Control Voltage	external	24V ± 20%		
Power consumption without control unit and motor brake	[W]	17		11
<b>Protection</b>				
Category Total		IP20 (IEC529)		
Degree of contamination		2 (EN50178)		
EMC		EN61800-3		
Cooling system		forced ventilated		
<b>Standards</b>				
Certification		EN61800-5-1UL 508 C-		
<b>Weight</b>				
Weight	[kg]	5.5	5.6	7.5
<b>Ambient conditions</b>				
Ambient temp. operation	[°C]	0 ... 40 °C		
	Derating [°C]	0 ... 55 °C		
Ambient temp. storage	[°C]	-25...55 °C		
Relative humidity operation	[%]	5...95 %		
Relative humidity storage	[%]	5...95 %		
Installation height	[m]	1000		
	[m] Derating	4000		

Modular system

**Double-axis inverter ■ IndraDrive M - HMD**

**Dimensions**

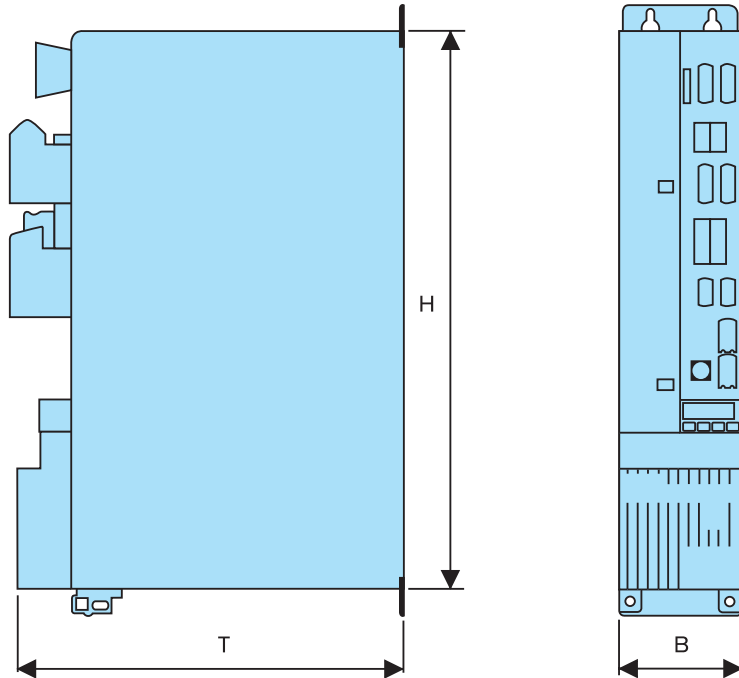

		HMD01.1N-W0012	HMD01.1N-W0020	HMD01.1N-W0036
<b>Dimensions</b>				
<b>Height H</b>	[mm]	440	440	440
<b>Width W</b>	[mm]	50	50	75
<b>Depth D</b>	[mm]	262	262	262

**Components**

Description	Page	Details
Control units	Double-axis	BASIC UNIVERSAL

**Bosch Rexroth AG**

Electric Drives and Controls

P.O. Box 13 57

97803 Lohr, Germany

Bgm.-Dr.-Nebel-Str. 2

97816 Lohr, Germany

Phone +49 9352-40-0

Fax +49 9352-40-4885

[www.boschrexroth.com/electrics](http://www.boschrexroth.com/electrics)

The data specified above only serve to describe the product.

As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.