

Photo-electric sensors

OsiSense XU General purpose

Single mode or multimode function

Format

Design 18

Metal

Plastic



| Single mode function | |
|---|-------------------------------------|
| Sensing distance (m) related to system | Diffuse with adjustable sensitivity |
| | Diffuse |
| | Polarised reflex |
| | Reflex |
| | Thru-beam |
| Type reference | |
| Pages | |

| Type | Sensing distance (m) |
|-------------------|----------------------|
| XUB 5B | 0.6 |
| XUB 4B | 0.1 |
| XUB 9B | 2 |
| XUB 1B | 4 |
| XUB 2B | 15 |
| XUB ●B (1) | |
| 5/26 | |

| Type | Sensing distance (m) |
|-------------------|----------------------|
| XUB 5A | 0.6 |
| XUB 4A | 0.1 |
| XUB 9A | 2 |
| XUB 1A | 4 |
| XUB 2A | 15 |
| XUB ●A (1) | |
| 5/28 | |

| Multimode function | |
|---|-------------------------------------|
| Sensing distance (m) related to system | Diffuse with background suppression |
| | Diffuse |
| | Polarised reflex |
| | Thru-beam |
| | |
| Type reference | |
| Pages | |

| Type | Sensing distance (m) |
|-------------------|----------------------|
| XUB 0B | 0.12 |
| | 0.30 |
| | 2 |
| | 15 |
| | |
| XUB 0B (1) | |
| 5/30 | |

| Type | Sensing distance (m) |
|-------------------|----------------------|
| XUB 0A | 0.12 |
| | 0.30 |
| | 2 |
| | 15 |
| | |
| XUB 0A (1) | |
| 5/30 | |

| High performance diffuse with adjustable background suppression | |
|---|--|
| Type reference | |
| Pages | |

| Type | Sensing distance (m) |
|------|----------------------|
| – | |
| – | |
| – | |

| Type | Sensing distance (m) |
|------|----------------------|
| – | |
| – | |
| – | |

| Characteristics | | |
|------------------------------|--------------------------|---------------------|
| Dimensions (w x h x d) in mm | | |
| Case | Materials | Plastic, PBT |
| | | Nickel plated brass |
| | | Stainless steel |
| Degree of protection | | |
| Supply | ≡ 3-wire (PNP/NPN) | |
| | ≈ 5-wire, relay output | |
| Function | NO | |
| | NC | |
| | NO/NC | |
| | NO + NC | |
| | | |
| Connection | Pre-cabled (L = 2 m) (2) | |
| | Connector | M8 (4-pin) ≡ 3-wire |
| | | M12 |
| | Screw terminals | |
| | Remote connector | |

| | | |
|--|--------------|---|
| Ø 18, threaded M18 x 1. | | |
| XUB●A/XUB●B: length 46 (62 for XUB 5 and connector version) | | |
| XUB 0A/XUB 0B: length 62 (pre-cabled version) or length 78 (connector version) | | |
| – | • | – |
| • | – | – |
| • (XUB 0S: see page 5/86) | – | – |
| IP 65, IP 67 | IP 65, IP 67 | – |
| IP 69K (XUB 0S, stainless steel case, see page 5/86) | – | – |
| • | • | • |
| (2-wire XU● M18, see page 5/150) | – | – |
| • | • | • |
| • | • | • |
| – | – | – |
| – | – | – |
| • | • | • |
| – | – | – |
| • | • | • |
| – | – | – |
| M8 and M12 remote connectors available: please consult our Customer Care Centre. | | |

(1) Sensors also available with line of sight 90° to case axis.
 (2) Cable lengths of 5 and 10 m also available, depending on model.

5

Photo-electric sensors

OsiSense XU General purpose

Single mode or multimode function

| | | |
|-------------------------|--------------------------------|--------------------------------|
| Miniature design | Compact design, 50 x 50 | Compact design, 92 x 71 |
| Plastic | Plastic | Plastic |



| Type | Sensing distance (m) | Type | Sensing distance (m) | Type | Sensing distance (m) |
|---------------|----------------------------------|---------------|---------------------------------|---------------|----------------------------------|
| XUM 5A | 1 (with adjustable sensitivity) | XUK 5A | 1 (with adjustable sensitivity) | XUX 5A | 2 (with adjustable sensitivity) |
| – | – | – | – | – | – |
| XUM 9A | 5 (with adjustable sensitivity) | XUK 9A | 5 | XUX 9A | 11 (with adjustable sensitivity) |
| – | – | XUK 1A | 7 | XUX 1A | 14 (with adjustable sensitivity) |
| XUM 2A | 15 (with adjustable sensitivity) | XUK 2A | 30 | XUX 2A | 40 (with adjustable sensitivity) |
| XUM ●A | | XUK ●A | | XUX ●A | |
| 5/32 | | 5/38 | | 5/44 | |

| Type | Sensing distance (m) | Type | Sensing distance (m) | Type | Sensing distance (m) |
|---------------|----------------------|--------|----------------------|--------|----------------------|
| XUM 0A | 0.10 | XUK 0A | 0.28 | XUX 0A | 1.3 |
| | 0.4 | | 0.8 | | 2 |
| | 3 | | 4 | | 11 |
| | 10 | | 30 | | 40 |
| XUM 0A | | | XUK 0A | | XUX 0A |
| 5/36 | | 5/40 | | 5/46 | |

| Type | Sensing distance (m) | Type | Sensing distance (m) | Type | Sensing distance (m) |
|--------------|----------------------|--------------|----------------------|--------------|----------------------|
| – | – | XUK 8 | 1 m | XUX 8 | 2 m |
| XUM 8 | | XUK 8 | | XUX 8 | |
| – | | 5/42 | | 5/48 | |

| | | |
|---|-------------------------------------|-------------------------------------|
| XUM ● A: 11 x 34 x 20 (pre-cabled) or 11 x 43 x 20 (M8) | 18 x 50 x 50 | 31 x 92 x 77 |
| XUM 0A: 12 x 34 x 20 (pre-cabled) or 12 x 45 x 20 (M8) | | |
| ● | ● | ● |
| – | – | – |
| – | – | – |
| IP 65, IP 67 | IP 65 | IP 65, IP 67 |
| ● | ● | ● |
| – | ● | ● |
| – | ● | ● |
| – | ● | ● |
| ● configurable using switch and by programming (XUM 0A) | ● by programming (XUK 0A and XUK 8) | ● by programming (XUX 0A and XUX 8) |
| – | ● relay output | ● relay output |
| ● | ● | – |
| ● | – | – |
| – | ● | ● |
| – | – | ● |

M8 and M12 remote connectors available: please consult our Customer Care Centre.



| | | | |
|--------------------------|---|---|---|
| Recommended applications | Detection of objects on small conveyors | Detection of labels on strip. Detection of sheet feed on printing machine | Detection on vibrating rail. Detection of transparent objects |
|--------------------------|---|---|---|



5

| Format | Optical fork | Optical fork | Laser optical fork |
|--|--|--|--|
| Dimensions (w x h x d) in mm | Passageway: 30 to 180 Depth: 30, 60, 95 | Passageway: 2 to 120 Depth: 42, 59, 95 | |
| Case | Metal | Metal | Metal |
| Sensing distance (mm) related to system | Diffuse with background suppression | | |
| | Diffuse | | |
| | Polarised reflex | | |
| | Reflex | | |
| | Thru-beam | | |
| Degree of protection | IP 65, IP 67 | IP 65 | IP 65 |
| Supply | <ul style="list-style-type: none"> • $\overline{\text{---}}$ – \sim – \sim | <ul style="list-style-type: none"> • $\overline{\text{---}}$ – \sim – \sim | <ul style="list-style-type: none"> • $\overline{\text{---}}$ – \sim – \sim |
| Output | PNP/NPN NO/NC | PNP/NPN (3) NO/NC (4) | PNP/NPN (3) NO/NC (4) |
| Connection | <ul style="list-style-type: none"> • Pre-cabled • Connector – Screw terminals | <ul style="list-style-type: none"> – Pre-cabled • Connector – Screw terminals | <ul style="list-style-type: none"> – Pre-cabled • Connector – Screw terminals |
| Type reference | XUV R● XUV A● | XUY FNEP● XUY FANEP● | XUY FLNEP● XUY FALNEP● |
| Pages | 5/50 | 5/52 | 5/54 |

(1) With or without teach mode, depending on model.
 (2) Depending on model.
 (3) Depending on wiring.
 (4) By programming.

| | | | | |
|--|---|-----------------------------------|---|---|
| Detection of transparent labels | Detection of opaque labels, of different colours | Detection of opaque labels | Detection of flags in lifts and transtockers. Integrated amplifier | Material handling: detection and counting of objects being fed to or exiting a machine |
|--|---|-----------------------------------|---|---|



| Ultrasonic fork | Optical fork | Optical fork | Optical fork | Frame design |
|--------------------------|--------------------------|--------------------------|-------------------------------|--|
| 16 x 47.3 x 90.5 | 20 x 90 x 26 | 12 x 37.5 x 80 | 14 x 58 x 68 | 15 x 50 x 108 15 x 86 x 131 25 x 230 x 205/265/335 |
| Metal | Metal | Metal | Plastic | Metal |
| – | – | – | – | – |
| – | – | – | – | – |
| – | – | – | – | – |
| 3 | 2 | 3 or 5 (2) | 3 | 3, 6, 12, 18, 25 (2) |
| IP 65 | IP 65 | IP 65 | IP 54 | IP 65 |
| • | • | • | • | • |
| – | – | – | – | – |
| – | – | – | – | – |
| PNP and NPN NO/NC (4) | PNP and NPN NO/NC (4) | PNP and NPN NO/NC (4) | Solid-state (PNP or NPN NO | PNP and NPN NO/NC (3) |
| – | – | – | • | – |
| • | • | • | – | • |
| – | – | – | – | – |
| XUV U06 | XUV K | XUY FA98 ● | XUV H XUV J | XUV F |
| 5/56 | 5/58 | 5/60 | 5/62 | 5/64 |

Recommended applications

| Packaging | | | | |
|---|--|---|--|--|
| Colour mark readers Detection of reference marks, contrasting colours and markings on packaging, printing, labelling machines, etc. | Colour mark readers Detection of reference marks on packaging paper, tubes | Colour mark readers Detection of reference marks, contrasting colours and markings on packaging, printing, labelling machines, etc. | Luminescence sensors Detection of invisible reference marks, markings, adhesives, varnishes, etc. Sensitive to the bluing agents generally present in inks, adhesives, varnishes, etc. | Illumination sensors Verifying operation of indicator lights |



5

| Format | Compact design | Fibre design | Compact design | Design 18 | Fibre design |
|---|--------------------------|-----------------------|----------------|-------------------------------|--|
| Dimensions (w x h x d) in mm | 50 x 50 x 15 | 13 x 72 x 30 | 31 x 81 x 58 | Ø 18, threaded, M18 x 1 L: 82 | 13 x 76.7 x 30 |
| Case | Plastic | Plastic | Metal | | Plastic |
| Sensing distance (m) related to system | | | | | |
| Diffuse with background suppression | – | – | – | – | Sensing distance depending on fibre used |
| Diffuse | 0.019 | ● | 0.009 | 0.02 | |
| Polarised reflex | – | – | – | – | |
| Reflex | – | – | – | – | |
| Thru-beam | – | – | – | – | |
| Degree of protection | IP 65 | IP 65 | IP 67 | IP 67 | IP 65 |
| Supply | | | | | |
| DC | ● | ● | ● | ● | ● |
| AC | – | – | – | – | – |
| | – | – | – | – | – |
| Output | Solid-state (PNP or NPN) | | | Solid-state (PNP) | PNP/NPN NO/NC programmable |
| Connection | | | | | |
| Pre-cabled | – | – | – | – | – |
| Connector | ● | ● | ● | ● | ● |
| Screw terminals | – | – | – | – | – |
| Type reference | XUK R | XUY DCF ●●966S | XUR K | XU5 M | XUY AFL ●●966S |
| Pages | 5/66 | 5/68 | 5/70 | 5/72 | 5/74 |

| Packaging | | | Food and beverage processing |
|---|--|--|---|
| Detection of any transparent object Bottle, flask, containers, film, etc. | For detection of colours, sorting Recognises colours for sorting or checking parts | Detection of water and aqueous liquids Level in opaque flasks etc. | STAINLESS STEEL cylindrical sensor (grade 304 CU) For use in vicinity of food or beverage processing machines |



| | | | | | | |
|--|-------------------------|----------------|------------------------------------|--------------------------|---------------------------------------|---------------------------------------|
| Design 18 | Compact design, 50 x 50 | Compact design | Compact design or fibre design | Compact design | Design 18 | Design 18 |
| Ø 18, threaded, M18 x 1 L: 64, 78 or 92 | 18 x 50 x 50 | 50 x 50 x 25 | 30 x 80 x 57 25 x 92 x 54 | 13 x 47 x 23 | Ø 18, threaded, M18 x 1 L: 64...92 | Ø 18, threaded, M18 x 1 L: 62...88 |
| Plastic or stainless steel (2) | Plastic | Plastic | Metal | Plastic | Stainless steel | Stainless steel |
| – | – | – | – | – | 0.12 | – |
| – | – | 0.020 | 0.040...0.060 0.040...0.250 (1) | – | 0.3 | 0.10 |
| 0...10.4 (with reflector) | – | – | – | – | 2 | 2 |
| – | 1.5 | – | – | – | – | 4 |
| – | – | – | – | 50 | 15 | 15 |
| IP 65 IP 67 | IP 65 | IP 65 | IP 65 (2) IP 67 (2) | IP 65 | IP 67, IP 69K | IP 67 |
| ● | ● | ● | ● | ● | ● | ● |
| – | – | – | – | – | – | – |
| – | – | – | – | – | – | – |
| Solid-state (PNP or NPN) | | | | Solid-state (PNP or NPN) | Solid-state (PNP and NPN) | Solid-state (PNP and NPN) |
| ● | ● | – | ● | ● | ● | ● |
| ● | ● | ● | – | – | ● | ● |
| – | – | – | – | – | – | – |
| XUB T | XUK T | XUK C | XUR C | XUM W | XUB 0S● | XU● N18 |
| 5/76 | 5/78 | 5/80 | 5/82 | 5/84 | 5/86 | 5/88 |

(1) Depending on fibres used.
 (2) Depending on model.

| | | | | |
|--------------------------|------------------------|---|----------------------------|----------------------------------|
| Recommended applications | Assembly | Conveying | Assembly and machine tools | Conveying and assembly |
| | Diameter 8 metal range | Detection of objects on conveyor and access control | Miniature, metal | Miniature, laser with teach mode |



5

| | | | | |
|---|-------------------------------------|--------------------------------|--------------------------|------------------|
| Format | Design 8 | Miniature design | Miniature design | Miniature design |
| Dimensions (w x h x d) in mm | Ø 8, threaded, M8 x 1 L: 40 | 20 x 32 x 13 10 x 40 x 13.5 | 16.2 x 41.15 x 29.5 | 12 x 32 x 20 |
| Case | Metal | Plastic | Metal | Plastic |
| Sensing distance (m) related to system | Diffuse with background suppression | • | – | • |
| | Diffuse | 0.05 | • | – |
| | Polarised reflex | – | • | • |
| | Reflex | – | – | – |
| | Thru-beam | 2 | • | • |
| Degree of protection | IP 65 (2) IP 67 (2) | IP 65 and IP 67 | IP 65 IP 67 IP 69K | IP 67 |
| Supply | DC | • | • | • |
| | AC | – | – | – |
| | AC | – | – | – |
| Output | Solid-state (PNP or NPN) | PNP or NPN NO/NC (1) | PNP or NPN NO/NC | PNP |
| Connection | Pre-cabled | • | • | • |
| | Connector | • | • | – |
| | Screw terminals | – | – | – |
| Type reference | XUA | XUY●●989 | XUM●B | XUY●●●929 |
| Pages | 5/92 | 5/94 | 5/96 | 5/100 |

(1) Depending on wiring.
(2) Depending on model.

| Material handling | | | | | | |
|-------------------|---|---|--|--|---|--|
| Laser | Diffuse with analogue output | Thru-beam with high excess gain | Laser transmission | Diffuse with background suppression, laser transmission | Diffuse with 2 channels using triangulation, with background suppression | |
| | Measurement, servo control, position control, eccentricity monitoring, concentricity monitoring, etc. | Detection of objects in difficult environments (smoke, dust, mist, etc.). Measuring opacity | Monitoring dimensions in series, monitoring roundness of a wheel | High precision, detection of any dark or shiny object, including small sized | | |




| | | | | | | |
|-------------------------------|----------------|------------------------------|------------------------------|------------------------------|---------------------------------------|--------------------------------|
| Design 18 | Compact design | Design 18 | Design 18 | Compact design, 50 x 50 | Compact design | Compact design |
| Ø 18, threaded M18 x 1 | 27 x 85 x 61 | Ø 18, threaded M18 x 1 L: 82 | Ø 18, threaded M18 x 1 L: 82 | 17 x 50 x 50 | 18 x 60 x 60 | 18 x 60 x 60 |
| Plastic or brass (2) | Plastic | Metal | Metal | Plastic | Plastic | Plastic |
| – | – | – | – | – | Adjustable from 50 to 300 mm | Adjustable from 50 to 600 mm |
| – | 0.20...0.80 | 0.05...0.4 | – | • | – | – |
| – | – | – | – | – | – | – |
| – | – | – | – | – | – | – |
| 0...100 with teach mode | – | – | 50 | – | – | – |
| IP 67 | IP 67 | IP 67 | IP 67 | IP 67 | IP 65 | IP 65 |
| • | • | • | • | • | • | • |
| – | – | – | – | – | – | – |
| – | – | – | – | – | – | – |
| PNP, NPN NO/NC by programming | Analogue (PNP) | – | Solid-state (PNP) + analogue | Solid-state (PNP) + analogue | PNP and NPN NO/NC depending on wiring | PNP and NPN NO/NC programmable |
| • | – | – | – | – | – | • |
| • | – | • | • | • | • | • |
| – | • | – | – | – | – | – |
| XUB L | XUJ | XU5 M | XU2 M | XUY P●●925 | XUY PS1● | XUY PS2● |
| 5/102 | 5/104 | 5/106 | 5/108 | 5/110 | 5/112 | 5/114 |

Recommended applications

Amplifier and fibre optics

| Amplifier, teach mode | "Plastic" fibre optics with end fittings | "Glass" fibre optics with end fittings | Ecofibre concept Bare fibre optics and end fittings supplied separately for customer assembly | Amplifier, teach mode or potentiometer |
|-----------------------|--|--|--|--|
|-----------------------|--|--|--|--|

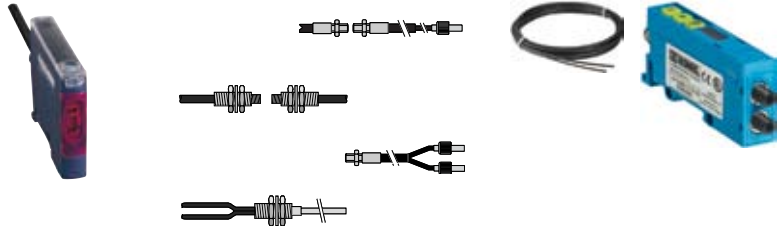

5

| | | | | | | |
|---|-------------------------------------|---|--|--|--|---|
| Format | | Fibre design | – | – | – | Fibre design |
| Dimensions (w x h x d) in mm | | 10 x 40 x 65 (amplifier) | Length (1) : 1 m, 2 m or 10 m | Length (1) : 0.60 m, 1 m, 1.5 m or 2 m | Length (1) : 1 m, 10 m or 50 m | 13 x 72.2 x 30 13 x 76.7 x 30 |
| Case | | Plastic | Plastic | Glass | Plastic | Plastic |
| Sensing distance (m) related to system | Diffuse with background suppression | – | – | – | Sensing distance: 70 mm to 4000 mm (1) | Sensing distance depending on fibre used |
| | Diffuse | 0.006 to 0.095 (2) | 6 to 95 (1) | 80 | | |
| | Polarised reflex | – | – | – | | |
| | Reflex | – | – | – | | |
| | Thru-beam | 0.050 to 2 (2) | 30 to 2500 (1) | 80 or 200 (1) | | |
| Degree of protection | | IP 65 (amplifier) IP 64 (fibres) | IP 64, IP 641 (1) IP 65, IP 651 (1) | – | – | IP 65 |
| Supply | ⋮ | • | – | – | – | • |
| | ~ | – | – | – | – | – |
| | ~ | – | – | – | – | – |
| Output | | Solid-state (PNP or NPN) (3) NO or NC (programmable) | – | – | – | PNP/NPN NO/NC dpg. on wiring or programmable dpg. on model |
| Connection | Pre-cabled | • | – | – | – | • |
| | Connector | • | – | – | – | • |
| | Screw terminals | – | – | – | – | – |
| Type reference | | XUD A | XUF | XUY FV● | XUY A● XUY FP● | XUY AF●966 AF●946 |
| Pages | | 5/116 | 5/118 | 5/128 | 5/134 | 5/136 |

(1) Depending on model.
 (2) Depending on fibre.
 (3) Depending on wiring.

| Other formats | | | Ø 18 AC/DC | Building, tertiary sectors | Accessories |
|---|-----------|-----------|------------------------|--|--|
| With stability LED. With alarm output (for XUC ●AK only) | Conveying | Conveying | 2-wire AC or DC supply | Monitoring of movement, relay output With audible signalling (buzzer) (1) | Reflectors, fixing clamps, mounting and adjustment accessories, etc. |



| | | | | | |
|--|----------------------------|--|---------------------------------------|--|-------------|
| Compact design | Compact design | – | Design 18 | Compact design | Accessories |
| 45 x 95 x 44 | 18 x 70 x 35 | 29 x 95 x 60 | Ø 18, threaded M18 x 1 L: 82...110 | 18 x 50 x 50 (XUK 1AR) 18 x 70 x 45 (XUL) 27 x 85 x 61 (XUJ B) | – |
| Plastic | Plastic | Plastic | Metal | Plastic | – |
| 1.2 | – | – | 0.12 | – | – |
| – | 0.7 | 1.5 or 4 (2) | 0.4 | – | – |
| 6 | 4 (with Ø 80 mm reflector) | 6 or 10 (2) | 2 | – | – |
| – | 6 (with Ø 80 mm reflector) | – | – | 7 with 50 x 50 reflector (XUK 1AR) 6 (XUL and XUJ B) | – |
| 50 | 8 | • | 15 | – | – |
| IP 67 and NEMA 4X | IP 67 | IP 65 and IP 67 | IP 67 | IP 65 (XUK 1AR) IP 67 (XUL) IP 40 (XUJ B) | – |
| • | • | • | – | – | – |
| – | • | • | – | – | – |
| • | – | – | • | • | – |
| Solid-state - PNP or NPN (XUC ●AK) 1 CO relay (XUC ●AR) | Solid-state PNP or NPN | PNP/NPN Relay NO/NC programmable | Solid-state | 1 NO/NC programmable relay (XUK 1AR and XUL) 1 NO relay (XUJ B) | – |
| • | • | – | • | • (XUK 1AR and XUL) | – |
| • | • | – | • | – | – |
| – | – | • | – | • (XUJ B) | – |
| XUC | XUL | XUY • 952/954 | XU● M18 | XUK 1AR, XUL, XUJ B (1) | XUZ● |
| 5/138 | 5/142 | 5/148 | 5/150 | 5/152, 5/154, 5/156 | 5/158 |

(1) With audible signalling (buzzer): reference XUJ B, see page 5/156.
(2) Depending on model.

Photo-electric sensors

OsiSense XU

Multimode: Simplicity through innovation

Principle


In proposing multimode products, Schneider Electric offers simplicity through innovation.

■ With the multimode function, a single product meets all the requirements for optical detection. Effectively, by simply pressing the “Teach mode” button, the sensor automatically acquires optimum configuration for the application requirements

- 1 Diffuse system detection of object.
- 2 Diffuse system, with background suppression, detection of object.
- 3 Reflex system (reflector accessory) detection of object.
- 4 Thru-beam system, on optical receiver (transmitter accessory for thru-beam use), detection of object.

■ In addition to this, a multimode sensors also means:

- improved performance: maximum sensing distance guaranteed and optimised for each application,
- simplified use: intuitive setting-up plus less and easier maintenance,
- lower costs: the number of references is divided by 10 and, consequently, selection and supply is simplified and storage costs significantly reduced,
- guaranteed maximum productivity.

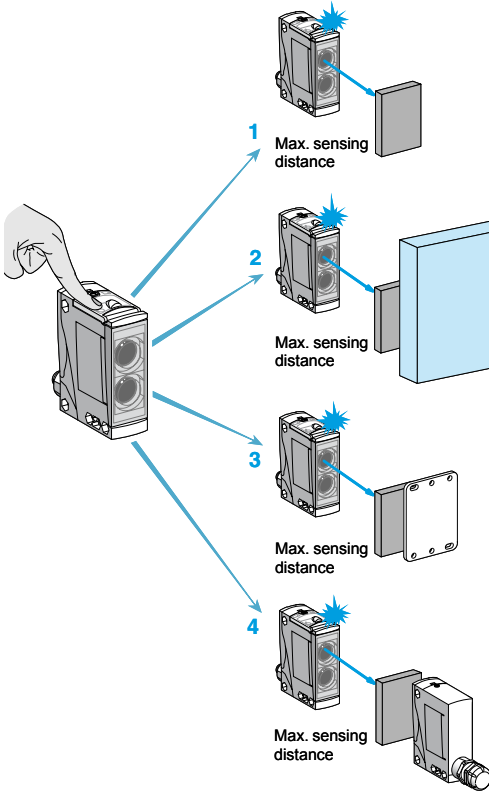


5

Straightforward NO or NC output

■ Irrespective of the detection mode used (diffuse, reflex, thru-beam, etc.), the outputs become either NO or NC (1).


■ A multimode sensor means immediate and intuitive setting-up that is accessible to all.

(1) The sensor is supplied in NO configuration. NO or NC selection is performed by simply pressing the Teach mode button.



Fixing accessories

A complete range of inexpensive mounting accessories (clamps, traditional or 3D brackets, etc.) is available that provides solutions for all installation and adjustment problems

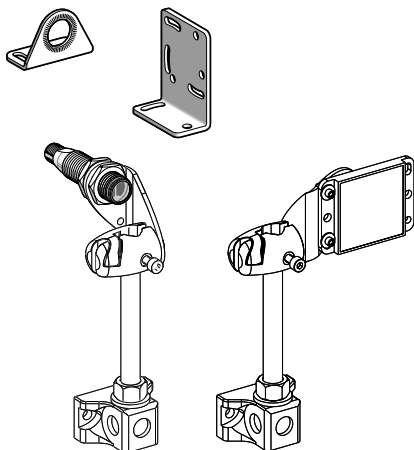

Design

Cylindrical 18

Miniature


Compact 50 x 50

Compact 92 x 77



| Dimensions (w x h x d) in mm | | M18 x 64 | 12 x 34 x 20 | 18 x 50 x 50 | 30 x 92 x 77 |
|-------------------------------|---|----------|--------------|--------------|--------------|
| Maximum sensing distance in m | Without accessory with background suppression | 0.12 | 0.10 | 0.28 | 1.3 |
| | Without accessory | 0.4 | 0.55 | 1.2 | 3 |
| | With polarised reflector | 3 | 4 | 5.7 | 15 |
| | With thru-beam accessory | 20 | 14 | 35 | 60 |
| Supply | DC | ■ | ■ | ■ | ■ |
| | AC | ■ | ■ | ■ | ■ |
| Connection | Pre-cabled | ■ | ■ | ■ | — |
| | Connector | ■ | ■ | ■ | ■ |
| | Screw terminals | — | — | — | ■ |
| | Screw terminals | — | — | — | ■ |
| Sensor type | XUB 0 | XUM 0 | XUK 0 | XUX 0 | |
| Pages | 5/30 | 5/36 | 5/40 | 5/46 | |

Sensing distances (see table above)

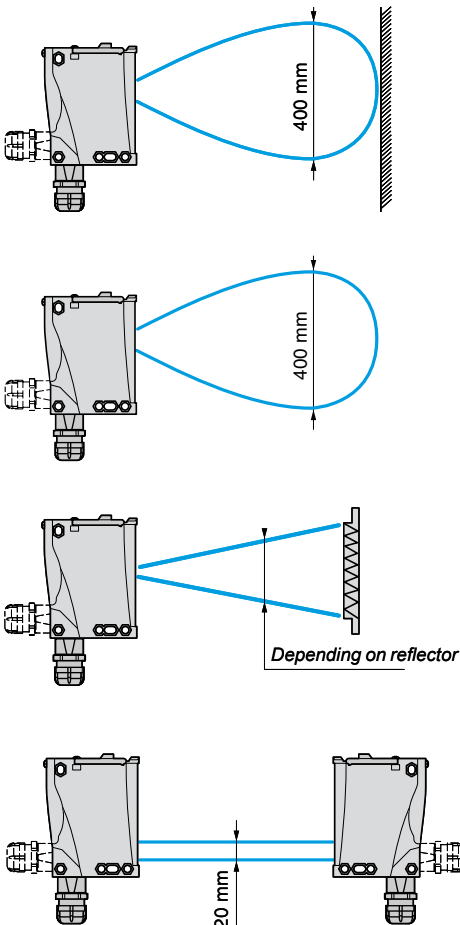

Sensing distance without accessory with background suppression

- Without accessory, the multimode sensor detects objects irrespective of their colour or background.
- A clean environment is recommended

Sensing distance without accessory

- Beyond the sensing distance with background suppression, the same multimode sensor without accessory detects objects but may be influenced by the backgrounds and colour of the objects to be detected.

Sensing distance with polarised reflector


- By installing a reflector opposite, the same multimode sensor detects objects irrespective of their shininess and colour.
- The size of the reflector must be smaller than that of the object to be detected.
- The larger the area of the reflector the longer the sensing distance.

Sensing distance with thru-beam transmitter accessory

- After setting-up and connecting a thru-beam transmitter accessory opposite, the same multimode sensor detects objects irrespective of their shininess, colour or background.
- The detection distance is a maximum.
- The sensor and the thru-beam transmitter must be carefully aligned.
- Good resistance to accumulation of dirt and dust.

Standards and certifications

Parameters related to the environment

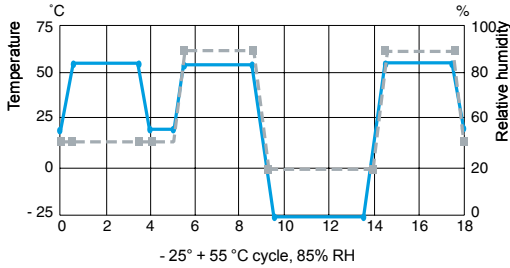

— Temperature °C
 - - - Relative humidity %

Recommendation

The sensors detailed in this catalogue are designed for use in standard industrial applications relating to presence detection. These sensors do not incorporate the required redundant electrical circuit enabling their usage in safety applications. For safety applications, please refer to our "Safety solutions using Preventa" catalogue.

Quality control

Our photo-electric sensors are subject to special precautions in order to guarantee their reliability in the most arduous industrial environments.

- **Qualification**
 - The product characteristics stated in this catalogue are subject to a **qualification procedure** carried out in our laboratories.
 - In particular, the products are subjected to **climatic cycle** tests for 3000 hours whilst powered-up to verify their ability to maintain their characteristics over time.
- **Production**
 - The electrical characteristics and sensing distances at both ambient temperature and extreme temperatures are 100% checked.
 - Products are randomly selected during the course of production and subjected to **monitoring tests** relating to all their characteristics.
- **Customer returns**
 - If, in spite of all these precautions, defective products are returned to us, they are subject to **systematic analysis and corrective actions** are implemented to eliminate the risks of the fault recurring.

Immunity to ambient light

■ OsiSense XU photo-electric sensors use the pulsed light principle. This provides a high degree of immunity to spurious light that conforms to standard **IEC 60947-5-2**.

Resistance to electromagnetic interference

The photo-electric sensors are tested in accordance with the recommendations of the standard **IEC 60947-5-2**

- Electrostatic discharges

IEC/EN 61000-4-2

⌚ 15 kV version, level 4
 ⌚ 8 kV version, level 3

- Radiated electromagnetic fields (electromagnetic waves)

IEC/EN 61000-4-3

10 V/metre, level 3

- Fast transients in salvos (motor start/stop interference)

IEC/EN 61000-4-4

2 kV, level 4

- Impulse voltages, lightning

IEC 60947-5-2

⌚ 2.5 kV version
 ⌚ 1 kV version

Mechanical shock resistance

The sensors are tested in accordance with standard IEC 60068-2-27, 30 gn, duration 11 ms.


Vibration resistance

The sensors are tested in accordance with standard IEC 60068-2-6, 7 gn, amplitude ± 1.5 mm, f = 10...55 Hz.


Resistance to chemicals in the environment

- Owing to the very wide range of chemicals encountered in industry, it is very difficult to give general guidelines common to all sensors.
 - To ensure lasting efficient operation, it is essential that any chemicals coming into contact with the sensors will not affect their casing and, in doing so, prevent their reliable operation (please refer to the characteristics pages for the various sensors).
- In all cases, the materials selected (see product characteristics) provide satisfactory compatibility in most industrial environments (for further information, please consult our Customer Care Centre).


5

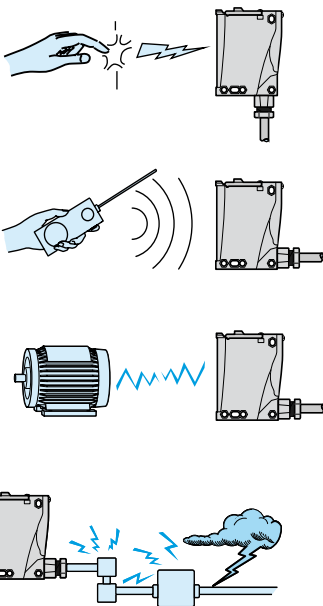

Principle of optical detection






- 1 Light beam transmitter
- 2 Light beam receiver
- 3 Signal processing stage
- 4 Output stage

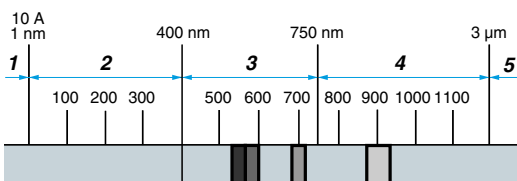

- 1 X rays, 2 Ultraviolet, 3 Visible light,
4 Near infrared, 5 Far infrared

Detection systems

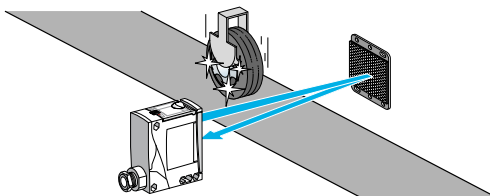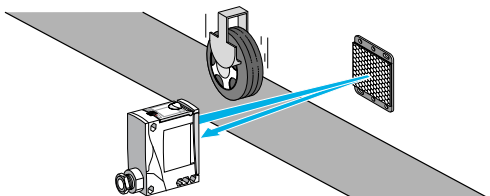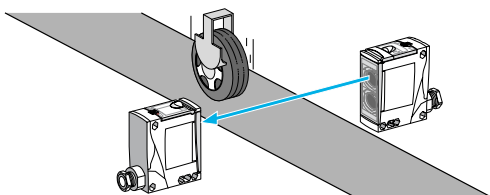

Composition of a photo-electric sensor

A photo-electric sensor basically comprises a light beam transmitter (light-emitting diode) and a light-sensitive receiver (photo-transistor).

A light-emitting diode is an electronic semi-conductor component that emits light when an electric current flows through it. This light can be visible or invisible, depending on the transmission wavelength.

Detection occurs when an object enters the transmitted light beam and, in so doing, affects the intensity of the light at the receiver. As the light intensity at the receiver decreases a point is reached whereby the output of the sensor changes state.

Light spectrum

Depending on the model and application requirements, the transmission beam is either non visible infrared (most common case) or ultraviolet (detection of luminescent materials). It may also be visible red or green (colour mark reading etc.) and laser red (long sensing distance and short focal length).

Modulation

The advantage of LEDs is their very fast response. To render the system insensitive to ambient light, the current flowing through the LED is modulated so as to produce a pulsed light transmission.

Only the pulsed signal will be used by the photo-transistor and processed to control the load.

Thru-beam system or multimode with thru-beam accessory

Advantages

- Long sensing distance (up to 60 m).
- Very precise detection, high repeat accuracy.
- Detection not affected by colour of object.
- Good resistance to difficult environments (dust, grime, etc.).

Drawbacks

- 2 units to be wired.
- The object to be detected must be opaque.
- Precise alignment required, which can be difficult since the sensor transmits in the infrared range (invisible).

Operating precautions

- When several sensors are used, care must be taken to ensure that no sensor is disrupted by another sensor (e.g. alternate mounting of transmitter/receiver etc.).

Advantages of multimode sensor with thru-beam accessory

- Easy alignment
- The sensor transmits in the visible red range during the alignment phase.
- 3 LEDs providing setting-up assistance.

Polarised reflex system or multimode with reflector accessory

Advantages

- Medium sensing distance (up to 15 m).
- Precise detection.
- Only one unit to be wired.
- Detection not affected by colour of object.
- Visible red beam transmission.

Drawbacks

- Precise alignment required.
- The object to be detected must be opaque and larger than the reflector.




Operating precautions

- When several sensors are used, they must be aligned in such a manner that no sensor is disrupted by another sensor.
- For short distance detection use a reflector with large trihedrons, type XUZ C24.
- For long distance detection use a reflector XUZ C50 or XUZ C80.
- To increase the sensing distance use reflector XUZ C100.
- If reflective tape is used, use rolls of tape XUZ B1 or XUZ B15 which are specially adapted for polarised reflex systems.

Advantages of multimode sensor with reflector accessory


- Easy alignment
- 3 LEDs providing setting-up assistance.
- The anti-interference function enables 2 sensors to be used without specific alignment precautions.
- Semi-transparent objects can be detected by using the teach mode function.

Detection systems (continued)

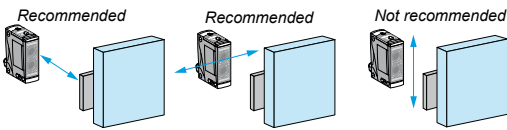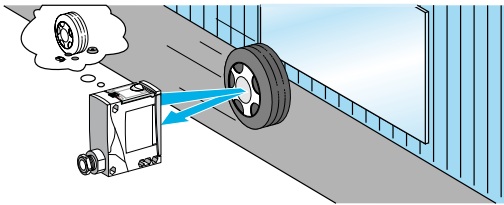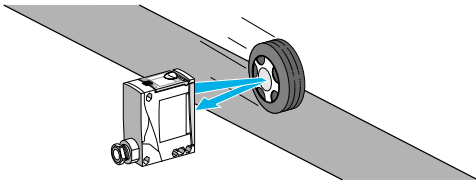


Positioning recommendations for sensor with background suppression

Specific systems



(1) Transmission LED
(2) Output LED

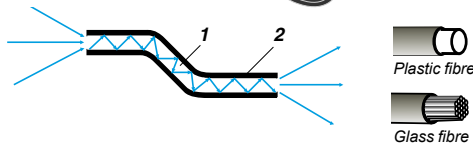

1 Core
2 Sheath

Diffuse system or multimode

- **Advantage**
 - Only one unit to be wired.
- **Drawbacks**
 - Short sensing distance.
 - Sensitivity to object or background colour differences.
 - Object sighting line difficult since the sensor transmits in the infrared range (invisible).
- **Operating precautions**
 - When several sensors are used, they must be aligned in such a manner that no sensor is disrupted by another sensor.
- **Advantages of a multimode sensor**
 - Easy alignment:
 - the sensor transmits in the visible red range during the alignment phase,
 - 3 LEDs providing setting-up assistance,
 - the anti-interference function enables 2 sensors to be used without specific alignment precautions.
 - Refined detection: the position of the object can be detected using the teach mode.

Diffuse, with or without background suppression, system or multimode

- **Advantages**
 - Only one unit to be wired.
 - Detection not affected by colour of object or background.
- **Drawbacks**
 - Short sensing distance.
 - Object sighting line difficult since the sensor transmits in the infrared range (invisible).
- **Operating precautions**
 - Detection can be affected by the object's direction of movement. To overcome this phenomenon (the hat effect), it is recommended that the sensor is mounted so that the object simultaneously breaks the beam of both lenses.
 - When several sensors are used, they must be aligned in such a manner that no sensor is disrupted by another sensor.
- **Advantages of a multimode sensor**
 - Easy alignment:
 - the sensor transmits in the visible red range during the alignment phase,
 - 3 LEDs providing setting-up assistance,
 - the anti-interference function enables 2 sensors to be used without specific alignment precautions,
 - the hat effect is minimised using the background teach mode.
 - Refined detection: the position of the object can be detected using the teach mode.

Optical forks

- Constructed from metal, the optical fork is a robust sensor that is particularly suited to conveying and packaging applications and detection of labels.
- Rugged optical detection device **not requiring alignment** in thru-beam mode.
- The beam from the transmitter limb is transmitted to the receiver limb. Due to its construction, **only one connection** is required as opposed to two for a traditional thru-beam function.
- The transmission sources are LEDs of various technologies:
 - Red for much improved efficiency during adjustment and maintenance
 - Red laser for detection of transparent materials or very small parts
 - Infrared, particularly for optical frames
 - Ultrasonic for detection of transparent labels (clear on clear)
- The beam is adjustable or fixed depending on the version. Adjustment enables the sensitivity to be altered and, therefore, detection of small parts down to dimensions of less than tenths of millimetres (minimum size of detectable object: 0.05 mm).
- The high switching frequency (from 4 kHz up to 25 kHz) is very useful in industrial applications involving high operating rates.

Fibre optics

- The fibre acts as a light conductor. Light rays entering the fibre at a certain angle are conveyed to the required location, with minimum loss.
- Separate amplifier.
 - Size kept to minimum.
 - This system enables detection of very small objects (approximately 1 mm).
 - And, detection is very precise.


Plastic fibres

- The core of the fibre is flexible plastic (PMMA). In general, there is only a single fibre of diameter 0.25 to 1 mm, depending on the model.
- Fibres are used with amplifiers transmitting red light.
 - Minimum bend radius:
 - 10 mm for fibres with 0.25 mm diameter core,
 - 25 mm for fibres with 1 mm diameter core.
 - **Advantages:** fibres can be cut to the required length.

Glass fibres

- The core of the fibre is silica. For maximum flexibility, each fibre comprises numerous strands that are approximately 50 µ in diameter.
- Fibres are used with amplifiers transmitting infrared or red light.
- Minimum bend radius:
 - 10 mm with plastic sheath,
 - 90 mm with stainless steel sheath.
- **Advantages**
 - Fibres suitable for use at high temperatures (250 °C).
 - Fibres with stainless steel sheath provide protection against mechanical impact and crushing.

Detection curves

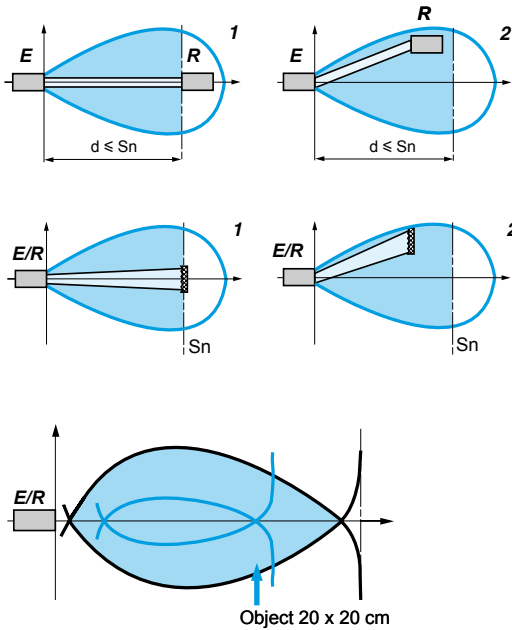

Thru-beam system

- The zone indicates the positioning tolerance of the receiver.
 - The zone represents the usable sensing zone of the system. Any opaque object entering this zone breaks the beam and causes the sensor's output to change state.
- 1 Ideal detection
 - 2 Acceptable detection
- T = transmitter
R = receiver


Polarised reflex system

- The zone indicates the positioning tolerance of the reflector.
 - The zone represents the usable sensing zone of the system. Any opaque object entering this zone breaks the beam and causes the sensor's output to change state.
- 1 Ideal detection
 - 2 Acceptable detection
- T = transmitter
R = receiver

Diffuse, with or without background suppression, system

- The zone represents the sensor's sensitivity zone.
- All of this zone is usable: any object that is adequately reflective entering this zone, in the direction of the arrow, will cause the sensor's output to change state. The black line corresponds to a light colour surface and the blue line to a darker colour surface.
- A test using the object to be detected will determine the zone of sensitivity in relation to its reflection coefficient.
- White 90% object
 - Grey 18% object
- For specific aspects of diffuse systems see page 5/16.
T = transmitter
R = receiver

Excess gain

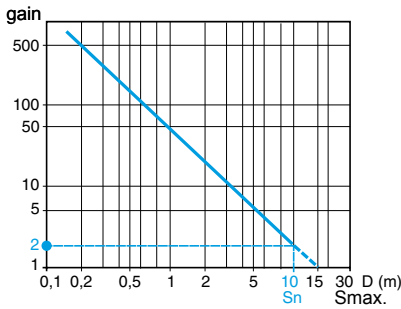

Operating margin

To ensure correct operation of a sensor in spite of environmental constraints, the sensors feature an operating margin. This margin can be expressed in terms of excess gain, which is the ratio:
Excess gain = Signal level received/Signal required for switching.

For all OsiSense XU sensors


- The **nominal sensing distance Sn** is defined as the sensing distance with an **excess gain of 2**, i.e. the sensing distance for which the sensor receives twice as much light energy as it strictly needs to switch it.
- The **maximum sensing distance** is defined as the sensing distance with an **excess gain of 1**. It corresponds to the maximum detection value.

The use of the sensor at the nominal sensing distance ensures the sensor's correct operation in normal operating conditions.

In extreme conditions, refer to the following setting-up recommendations:

- clean environment: work at nominal sensing distance Sn,
- slightly polluted environment: work at sensing distance Sn/2,
- moderately polluted environment: work at sensing distance Sn/4,
- heavily polluted environment: preferably use multimode sensors with thru-beam accessory (or the thru-beam system) with a sensing distance Sn/10.


Optical alignment aid

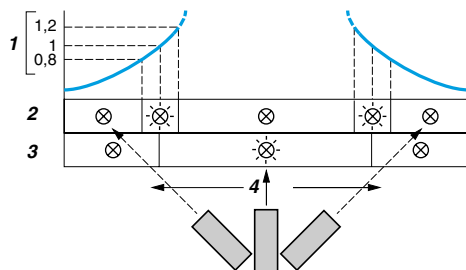


A red LED assists setting-up by illuminating when optimum alignment of the sensor is achieved.

- 1 Signal level
- 2 Red LED, on off
- 3 Green LED, on off
- 4 Optimum alignment

Detection distance using reflector

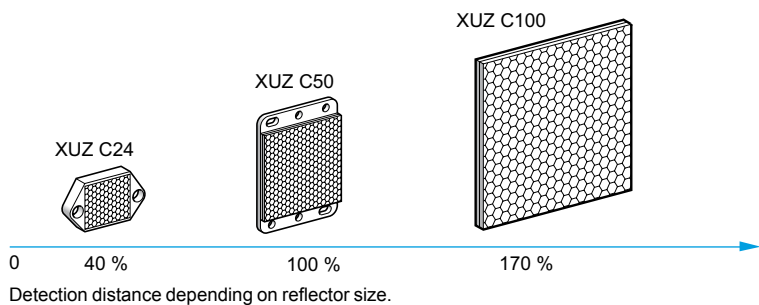

Outputs



2-wire technique ~ or ~

■ **Specific aspects**

These sensors are wired in series with the load to be switched. As a consequence, they are subject to:



- A residual current in the open state (current flowing through the sensor in the “open” state),
- A voltage drop in the closed state (voltage drop across the sensor’s terminals in the “closed” state).

■ **Advantages**

- Only 2 wires to be connected. They can be wired in series in the same way as mechanical limit switches.
- For use on 2-wire $\overline{\text{---}}$, they can be connected to either positive (PNP) or negative (NPN) logic PLC inputs.
- No risk of incorrect connections.

■ **Operating precautions**

- Check the possible effects of residual current and voltage drop on the actuator or input connected.
- These sensors do not incorporate overload or short-circuit protection and therefore, it is essential to connect a 0.4 A “quick-blow” fuse in series with the load.



3-wire technique $\overline{\text{---}}$

■ **Specific aspects**

- These sensors comprise 2 wires for the DC supply and a 3rd wire for the output signal.
- PNP type: switching the positive side to the load.
- NPN type: switching the negative side to the load.

■ **Advantages**

- No residual current, low voltage drop.

5-wire technique ~ or ~, relay output

■ **Specific aspects**




- Sensors incorporating output relay. The supply and output circuits are electrically separate.

■ **Advantages**

- \sim or $\overline{\text{---}}$ supply with a wide voltage range.
- High breaking capacity (approximately 3 A).
- Direct control of a simple automation system.
- Availability of a NC (normally closed) contact and a NO (normally open) contact.
- The sensor/relay contact galvanic isolation is 1500 to 2500 V, depending on the model.

■ **Operating precautions**

- Low switching frequency. Check that it is suitable for the application.
- Limited service life of relay. Check that it is suitable for the application.



Analogue technique

■ **Specific aspects**

There are two output configurations:

- Voltage output: the output voltage varies in proportion to the distance between the sensor and the object to be detected.
- Current output: the output current varies in proportion to the distance between the sensor and the object to be detected.

■ **Advantage**

- Availability of a physical item of data proportional to the distance between the sensor and the object to be detected.

■ **Operating precautions**

- Refer to the detailed descriptions of the sensor to assess the relative influence of the colour of the object to be detected.

- 1 Voltage output
- 2 Current output

Outputs (continued)

Output functions

In the past, the output functions of photo-electric sensors were always governed by the "light/dark" principle, i.e. the output would be activated on light being received for "light" switching and the output would be activated on light not being received for "dark" switching. This called for fastidious programming specific to each detection mode.

Now, the output functions of the OsiSense XU range of photo-electric sensors are in phase with the language of the automation system engineer, i.e. NO (normally open) or NC (normally closed).











■ **Advantages**


- NO output (or NO programming for multimode sensors): irrespective of the detection mode, the output of the sensor is activated when the object to be detected is present.
- NC output (or NC programming for multimode sensors): irrespective of the detection mode, the output of the sensor is activated when the object to be detected is not present.

■ **Advantages of multimode sensors**


By default, the output is NO programmed, i.e. the output of the sensor is activated when the object to be detected is present.

- By pressing the teach button, the output can be programmed to NC, i.e. the output of the sensor is activated when the object to be detected is not present.


| System | NO output or NO programming | Yellow LED | NC output or NC programming | Yellow LED |
|---|-----------------------------|------------|-----------------------------|------------|
| Object present | | | | |
| Diffuse  | Activated | On ☀ | Not activated | Off ⊗ |
| Diffuse with background suppression  | Activated | On ☀ | Not activated | Off ⊗ |
| Reflex  | Activated | On ☀ | Not activated | Off ⊗ |
| Polarised reflex  | Activated | On ☀ | Not activated | Off ⊗ |
| Thru-beam  | Activated | On ☀ | Not activated | Off ⊗ |
| No object present | | | | |
| Diffuse  | Not activated | Off ⊗ | Activated | On ☀ |
| Diffuse with background suppression  | Not activated | Off ⊗ | Activated | On ☀ |
| Reflex  | Not activated | Off ⊗ | Activated | On ☀ |
| Polarised reflex  | Not activated | Off ⊗ | Activated | On ☀ |
| Thru-beam  | Not activated | Off ⊗ | Activated | On ☀ |

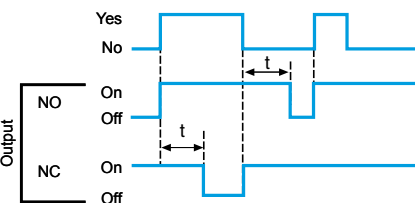

Time delay on beam break

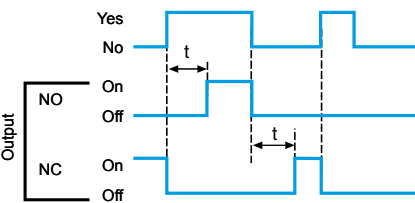


Monostable

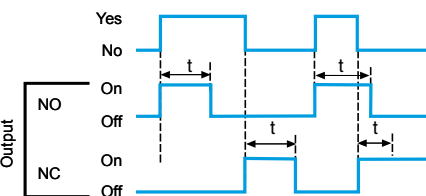

Output signal time delay

- Certain sensor models (XUK, XUX and XUD) incorporate a time delay output.
- These time delays enable simple automation systems to be established.
- There are three types of time delay:
 - Time delay on beam make (ON delay).
 - Time delay on beam break (OFF delay).
 - Monostable (one shot).

Connections

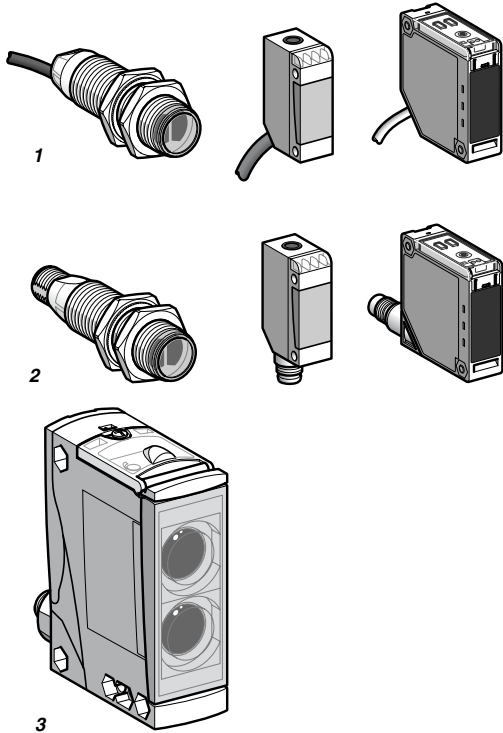

All our sensors are available either in pre-cabled version (except XUX; screw terminal with cable gland version) or connector version.

The connectors used are:

M12 (4-pin)



M8 (4-pin)



1/2" 20UNF (3-pin)



Types of connection

- 1 **Factory fitted moulded cable:** good protection against splashing liquids.
- 2 **Connector:** easy installation and maintenance.
- 3 **Screw terminals:** flexibility, cable runs to required length.

Wiring advice

- Length of cable: no limitation up to 200 m or up to a line capacitance of <math>< 0.1 \mu\text{F}</math> (characteristics of sensors remain unaffected). In this case, it is important to take into account the voltage drop on the line.
- Separation of control and power circuit wiring: the sensors are immune to electrical interference encountered in normal industrial conditions. Where extreme conditions of electrical "noise" could occur (motors etc.), it is advisable to protect against transients in the normal way:
 - suppress interference at source and filter the power supply,
 - separate power and control wiring from each other,
 - ensure the HF equipotentiality of the site,
 - limit the length of cable,
 - connect the sensor with supply switched off.
- Dust and damp protection of connections: the level of dust and damp protection depends on how carefully the cable glands or connectors are tightened. To efficiently protect the sensors from dust and damp, select the correct diameter cable for the cable gland used.


| Cable gland | Diameter of cable | |
|-------------|-------------------|---------|
| | Minimum | Maximum |
| 9P | 6 | 8 |
| 11P | 8 | 10 |
| 13P | 10 | 12 |
| ISO 16 | 7 | 10 |
| ISO 20 | 10 | 12 |

Diagnostics, beam break test

A test input enables the transmitted beam to be broken in order to verify that the output of the sensor changes state. Fault diagnostics regarding correct operation of the sensor can therefore be carried out.

- 1 **Beam made**
 - 2 **Beam broken**
- VI: test input for breaking transmitted beam.

Complementary functions

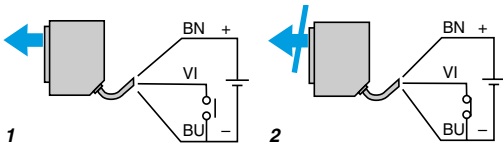





Verification of correct operation

In the event of dirty lenses (reflectors), an excessively polluted atmosphere or a slight disturbance of optical alignment (mechanical impact on support), the level of light energy received by the sensor will decrease until it ceases to operate.

To overcome this problem, all our products incorporate:

- a red alarm LED,
- an alarm output, for connection in the automation system, to warn the operator that the operation of the sensor is stable but close to its limits (applies to sensors XUK, XUX, XUD).

Specific aspects of electronic sensors



Terminology

Residual current (Ir)

- The residual current (Ir) corresponds to the current flowing through the sensor when in the "open" state.
- Characteristic of 2-wire type sensors.

Voltage drop (Ud)

- The voltage drop (Ud) corresponds to the voltage drop at the sensor's terminals when in the "closed" state (value measured at nominal current rating of sensor).
- Characteristic of 2-wire type proximity sensors.

First-up delay

The first-up delay corresponds to the time (t) between the connection of the power supply to the sensor and its fully operational state.

- 1 Supply voltage U on
- 2 Sensor operational at state 1
- 3 Sensor at state 0

Response time

- Response time (Ra): the time delay between the object to be detected entering the sensor's operating zone and the subsequent change of output state. This parameter limits the speed and size of the object.
- Recovery time (Rr): the time delay between an object to be detected leaving the sensor's operating zone and the subsequent change of output state. This parameter limits the interval between successive objects.

Power supplies

Sensors for AC circuits (~ and ~ models)

Check that the voltage limits of the sensor are compatible with the nominal voltage of the AC supply used.

Sensors for DC circuits (— models)

- DC source: check that the voltage limits of the sensor and the acceptable level of ripple are compatible with the supply used.
- AC source (comprising transformer, rectifier, smoothing capacitor): the supply voltage must be within the operating limits specified for the sensor.
- Where the voltage is derived from a single-phase AC supply, the voltage must be rectified and smoothed to ensure that:
 - the peak voltage of the DC supply is lower than the maximum voltage rating of the sensor.
$$\text{Peak voltage} = \text{nominal voltage} \times \sqrt{2}$$
 - the minimum voltage of the supply is greater than the minimum voltage rating of the sensor, given that:

$$\Delta V = (I \times t) / C$$

$$\Delta V = \text{max. ripple: } 10\% (V),$$








$$I = \text{anticipated load current (mA)},$$

$$t = \text{period of 1 cycle (10 ms full-wave rectified for a 50 Hz supply frequency)},$$

$$C = \text{capacitance } (\mu\text{F}).$$
- As a general rule, use a transformer with a lower secondary voltage (Ue) than the required DC voltage (U).

Example: ~ 18 V to obtain — 24 V, ~ 36 V to obtain — 48 V. Fit a smoothing capacitor of 400 μF minimum per sensor, or 2000 μF minimum per Ampere required.

Setting-up

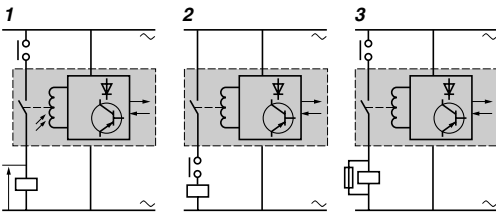

Connection in series

2-wire type sensors

- The following points should be taken into account:

- Series wiring is only possible using sensors with wide voltage limits.

Based on the assumption that each sensor has the same residual current value, each sensor, in the open state, will share the supply voltage, i.e.

$$U_{\text{sensor}} = \frac{U_{\text{supply}}}{n \text{ sensors}}$$

U_{sensor} and U_{supply} must remain within the sensor's voltage limits.

- If only one sensor in the circuit is in the open state, it will be supplied at a voltage almost equal to the supply voltage.

- When in the closed state, a small voltage drop is present across each sensor. The resultant loss of voltage at the load will be the sum of the individual voltage drops and therefore, the load voltage should be selected accordingly.

3-wire type sensors

This connection method is not recommended.

- Correct operation of the sensors cannot be assured and, if this method is used, tests should be made before installation.

- The following points should be taken into account:

- The first sensor carries the load current in addition to the no-load current consumption values of the other sensors connected in series. For certain models, this connection method is not possible unless a current limiting resistor is used.

- When in the closed state, a small voltage drop is present across each sensor. The load should therefore be selected accordingly.

- As sensor 1 closes, sensor 2 does not operate until a certain time (t) has elapsed (corresponding to the first-up delay) and likewise for the following sensors in the sequence.

- The use of "flywheel" diodes is recommended when an inductive load is being switched.

Wiring sensors to devices with mechanical contact

2 and 3-wire type sensors

- The following points should be taken into account:

- When the mechanical contact is open, the sensor is not supplied.

- When the contact closes, the sensor does not operate until a certain time (t) has elapsed (corresponding to the first-up delay).

- In scheme 1, as the external contact opens, the voltage transient caused by the breaking of the inductive load will appear inside the sensor and, if greater than the recommended max. insulation voltage, may cause a "flashover" within the sensor.

- The return path of this voltage will be back to one line of the supply, through the sensor, and should "flashover" occur anywhere on the printed circuit board, severe damage could occur.

- It is therefore recommended to use schemes 2 or 3.

Connection in parallel

2-wire type sensors

This connection method is not recommended.

- Should one of the sensors be in the closed state, the sensor in parallel will be "shorted-out" and no longer supplied. As the first sensor passes into the open state, the second sensor will become energised and will be subject to its first-up delay.

- This configuration is only permissible where the sensors will be working alternately.

- This method of connection can lead to irreversible damage of the units.

3-wire type sensors

- No specific restrictions. The use of "flywheel" diodes is recommended when an inductive load (relay) is being switched.

Wiring sensors to devices with mechanical contact

2 and 3-wire type sensors

- No specific restrictions.

- For these sensors, the supply and output circuits are electrically separate.

- The sensor/relay contact galvanic isolation is 1500 to 2500 V, depending on the model.


- The maximum voltage, depending on the model, across each contact is ~ 250 V.

Setting-up precautions (continued)



AC supply


- **2-wire type sensors cannot be connected directly to an AC supply.**
- This would result in immediate destruction of the sensor and considerable danger to the user.
- An appropriate load (refer to the instruction sheet supplied with the sensor) must always be connected in series with the sensor.



Capacitive load ($C > 0.1 \mu\text{F}$)

- On power-up, it is necessary to limit (by resistor) the charging current of the capacitive load C.
- The voltage drop in the sensor can also be taken into account by subtracting it from the supply voltage for the calculation of R.

$$R = \frac{U \text{ (supply)}}{I \text{ max. (sensor)}}$$

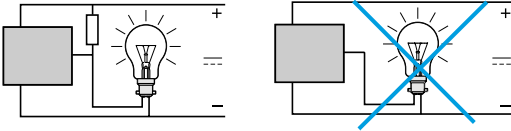

Load comprising an incandescent lamp

- If the load comprises an incandescent lamp, the cold state resistance can be 10 times lower than the hot state resistance. This can cause very high current levels on switching. Fit a pre-heat resistor in parallel with the sensor.

$$R = \frac{U^2}{P} \times 10, \text{ U = supply voltage and P = lamp power}$$

Fast trouble shooting guide

| Problem | Possible causes | Remedy | |
|--|---|---|---|
| The sensor's output will not change state when an object enters the operating zone | On multimode sensor: setting-up error (detection mode programming) | <ul style="list-style-type: none"> ■ Use the detection mode display option. After a RESET, follow the environment teach mode procedure. | |
| | Output stage faulty or complete failure of the sensor (in either case, the sensor must be replaced), or the short-circuit protection has tripped. | <ul style="list-style-type: none"> ■ Check that the sensor is compatible with the supply being used. ■ Check the load current characteristics: <ul style="list-style-type: none"> □ if load current $I \geq$ maximum switching capacity, an auxiliary relay, of the CAD N type for example, should be interposed between the sensor and the load. □ if $I \leq$ maximum switching capacity, check or wiring faults (short-circuit). ■ In all cases, a 0.4 A "quick-blow" fuse should be fitted in | |
| | Wiring error | <ul style="list-style-type: none"> ■ Check that the wiring conforms to the wiring shown on the sensor label or instruction sheet. | |
| | Supply fault | <ul style="list-style-type: none"> ■ Check that the sensor is compatible with the supply (\sim or ---). ■ Check that the supply voltage is within the voltage limits of the sensor. Remember that with a rectified, smoothed supply, ■ ($U_{\text{peak}} = U_{\text{nominal}} \times \sqrt{2}$ with a ripple voltage of \leq | |
| | With a reflex system: incorrect use or poor state of reflector | <ul style="list-style-type: none"> ■ The reflex system must operate in conjunction with a reflector. Adhere to the operating distances and check the alignment between the sensor and the reflector. ■ Replace the reflector if it has been damaged. ■ Clean the reflector and sensor lenses. | |
| | Influence of ambient light | <ul style="list-style-type: none"> ■ Make sure that the sensor is not dazzled by stray light (neon, sun, oven, etc.). ■ Fit a lens hood or turn the sensor. | |
| | False or erratic operation, with or without the presence of an object in the operating zone | On multimode sensor: setting-up error (detection mode programming) | <ul style="list-style-type: none"> ■ Use the detection mode display option. After a RESET, follow the environment teach mode procedure. |
| | | Influence of background or surface condition of the object to be detected (stray reflections) | <ul style="list-style-type: none"> ■ Refer to the instruction sheet supplied with the sensor. For sensors with adjustable sensitivity, reduce or increase the sensing distance. |
| | | Operating distance poorly defined for the reflector or object to be detected | <ul style="list-style-type: none"> ■ Apply the correction coefficients. ■ Realign the system. ■ Clean the sensor lenses and reflector, or, if damaged, replace it. |
| | | Influence of immediate environment | <ul style="list-style-type: none"> ■ Check the cleanliness of the lenses and reflector. ■ Fit a lens hood, where required. |
| Influence of transient interference on the supply lines | | <ul style="list-style-type: none"> ■ Ensure that any DC supplies, when derived from rectified AC, are correctly smoothed ($C > 400 \mu\text{F}$). ■ Separate AC power cables from low-level DC cables (--- 24 V low level). ■ Where very long distances are involved, use suitable cable: screened and twisted pairs of the correct cross-sectional area. | |
| Equipment prone to emitting electromagnetic interference | | <ul style="list-style-type: none"> ■ Position the sensors as far away as possible from any sources of interference. | |
| Response time of the sensor too slow for the particular object being detected | | <ul style="list-style-type: none"> ■ Check the suitability of the sensor for the position or shape of the object to be detected. ■ If necessary, select a sensor with a higher switching frequency. | |
| Influence of high temperature | | <ul style="list-style-type: none"> ■ Eliminate sources of radiated heat or protect the sensor casing with a heat shield. ■ Realign, having adjusted the temperature around the fixing support. | |
| Influence of ambient light | | <ul style="list-style-type: none"> ■ Make sure that the sensor is not disrupted by a intermittent source of light (flashing light, rotating mirror beacon, hinged mirror, reflective door, etc.). ■ Fit a lens hood or turn the sensor. | |

Fast troubleshooting guide (continued)

| Problem | Possible causes | Remedy |
|--|--------------------------------|---|
| No detection following a period of service | Vibration, shock | <ul style="list-style-type: none"> ■ Realign the system ■ Replace the support or protect the sensor. |
| | Deterioration of relay contact | <ul style="list-style-type: none"> ■ On an inductive load, use an RC suppressor connected in parallel with the load. ■ To eliminate contact contamination, the minimum current recommended is 15 mA. ■ Relay output models are not recommended for fast counting of objects since their service life is too short. Use models with a solid-state output. |
| | Dusty atmosphere | <ul style="list-style-type: none"> ■ Clean the lenses and reflector with a soft cloth. |

Note:


- **Sensors with a test input** enable automatic verification of their correct operation.
- **Sensors with an alarm output** enable the operator to be informed, for preventive maintenance purposes, that the operating limits of sensors have been reached (dirty etc.).

Photo-electric sensors


OsiSense XU, single mode function

Design 18, plastic


Three-wire DC, solid-state output




XUB ●A●●NM12




XUB ●A●●NL2




XUB ●A●●WM12




XUB ●A●●WL2




XUZ C50




XUZ B2003




XUZ 2001



XUZ A118



XUZ 2003



XUZ A218

Connector

| Sensing distance (Sn) m | Function | Output | Line of sight | Reference | Weight kg |
|-------------------------|------------------|------------------|------------------|--------------|-----------|
| Diffuse system | | | | | |
| 0.1 | NO | PNP | Along case axis | XUB 4APANM12 | 0.040 |
| | | | 90° to case axis | XUB 4APAWM12 | 0.040 |
| | NPN | Along case axis | XUB 4ANANM12 | 0.040 | |
| | | 90° to case axis | XUB 4ANAWM12 | 0.040 | |
| | NC | PNP | Along case axis | XUB 4APBNM12 | 0.040 |
| | | | 90° to case axis | XUB 4APBWM12 | 0.040 |
| NPN | Along case axis | XUB 4ANBNM12 | 0.040 | | |
| | 90° to case axis | XUB 4ANBWM12 | 0.040 | | |

Diffuse system with adjustable sensitivity

| | | | | | |
|-----|------------------|------------------|------------------|--------------|-------|
| 0.6 | NO | PNP | Along case axis | XUB 5APANM12 | 0.045 |
| | | | 90° to case axis | XUB 5APAWM12 | 0.050 |
| | NPN | Along case axis | XUB 5ANANM12 | 0.045 | |
| | | 90° to case axis | XUB 5ANAWM12 | 0.050 | |
| | NC | PNP | Along case axis | XUB 5APBNM12 | 0.045 |
| | | | 90° to case axis | XUB 5APBWM12 | 0.050 |
| NPN | Along case axis | XUB 5ANBNM12 | 0.045 | | |
| | 90° to case axis | XUB 5ANBWM12 | 0.050 | | |

Polarised reflex system

| | | | | | |
|-----|------------------|------------------|------------------|--------------|-------|
| 2 | NO | PNP | Along case axis | XUB 9APANM12 | 0.040 |
| | | | 90° to case axis | XUB 9APAWM12 | 0.040 |
| | NPN | Along case axis | XUB 9ANANM12 | 0.040 | |
| | | 90° to case axis | XUB 9ANAWM12 | 0.040 | |
| | NC | PNP | Along case axis | XUB 9APBNM12 | 0.040 |
| | | | 90° to case axis | XUB 9APBWM12 | 0.040 |
| NPN | Along case axis | XUB 9ANBNM12 | 0.040 | | |
| | 90° to case axis | XUB 9ANBWM12 | 0.040 | | |

Reflector 50 x 50 mm – – – XUZ C50 0.020

Reflex system

| | | | | | |
|-----|------------------|------------------|------------------|--------------|-------|
| 4 | NO | PNP | Along case axis | XUB 1APANM12 | 0.040 |
| | | | 90° to case axis | XUB 1APAWM12 | 0.040 |
| | NPN | Along case axis | XUB 1ANANM12 | 0.040 | |
| | | 90° to case axis | XUB 1ANAWM12 | 0.040 | |
| | NC | PNP | Along case axis | XUB 1APBNM12 | 0.040 |
| | | | 90° to case axis | XUB 1APBWM12 | 0.040 |
| NPN | Along case axis | XUB 1ANBNM12 | 0.040 | | |
| | 90° to case axis | XUB 1ANBWM12 | 0.040 | | |

Reflector 50 x 50 mm – – – XUZ C50 0.020

Thru-beam system

| | | | | | |
|--------------------|-----------------|------------------|------------------|---------------|-------|
| Transmitter | – | – | Along case axis | XUB 2AKSNM12T | 0.040 |
| 15 | | | 90° to case axis | XUB 2AKSWM12T | 0.040 |
| Receiver | NO | PNP | Along case axis | XUB 2APANM12R | 0.040 |
| | | | 90° to case axis | XUB 2APAWM12R | 0.040 |
| | NPN | Along case axis | XUB 2ANANM12R | 0.040 | |
| | | 90° to case axis | XUB 2ANAWM12R | 0.040 | |
| | NC | PNP | Along case axis | XUB 2APBNM12R | 0.040 |
| | | | 90° to case axis | XUB 2APBWM12R | 0.040 |
| NPN | Along case axis | XUB 2ANBNM12R | 0.040 | | |
| | | | 90° to case axis | XUB 2ANBWM12R | 0.040 |

Fixing accessories (1)

| Description | Reference | Weight kg |
|--|-----------|-----------|
| 3D fixing kit for use on M12 rod, for XUB or XUZ C50 | XUZ B2003 | 0.170 |
| M12 rod | XUZ 2001 | 0.050 |
| Support for M12 rod | XUZ 2003 | 0.150 |
| Stainless steel fixing bracket | XUZ A118 | 0.045 |
| Plastic fixing bracket with adjustable ball-joint | XUZ A218 | 0.035 |





Pre-cabled

For a pre-cabled sensor, replace M12 by L2 for a 2 m long cable, or by L5 for a 5 m long cable. Example: XUB 1APANM12 becomes XUB 1APANL2 for a 2 m long cable and XUB 1APANL5 for a 5 m long cable.






For availability, please consult our Customer Care Centre.

(1) For further information, see page 5/158.

| Characteristics | | XUB 1, XUB 2, XUB 4, XUB 5, XUB 9 | XUB 1, XUB 2, XUB 4, XUB 5, XUB 9 |
|---|---------------------------|---|-----------------------------------|
| Sensor type | | UL, CSA, CE | |
| Product certifications | | UL, CSA, CE | |
| Connection | Connector | M12 | – |
| | Pre-cabled | – | Length: 2 m |
| Sensing distance nominal Sn / (excess gain = 2) | maximum (excess gain = 1) | m | |
| | | 0.1 / 0.15 diffuse | |
| | | m | |
| | | 0.6 / 0.8 diffuse with adjustable sensitivity | |
| | | m | |
| | 2 / 3 polarised reflex | | |
| | m | | |
| | 4 / 5.5 reflex | | |
| | m | | |
| | 15 / 20 thru-beam | | |
| Type of transmission | | Infrared, except polarised reflex (red) | |
| Degree of protection | | Conforming to IEC 60529 | |
| Storage temperature | | °C | |
| Operating temperature | | °C | |
| Materials | Case | PBT | |
| | Lens | PMMA | |
| | Cable | – | PvR |
| Vibration resistance | | Conforming to IEC 60068-2-6 | |
| Shock resistance | | Conforming to IEC 60068-2-27 | |
| Indicator lights | Output state | Yellow LED (except for XUB 2●●●●●T) | |
| | Supply on | Green LED (only for XUB 2●●●●●T) | |
| Rated supply voltage | | V | |
| Voltage limits (including ripple) | | V | |
| Current consumption, no-load | | mA | |
| Switching capacity | | mA | |
| Voltage drop, closed state | | V | |
| Maximum switching frequency | | Hz | |
| Delays | First-up | ms | |
| | Response | ms | |
| | Recovery | ms | |

| Wiring schemes | M12 connector | Pre-cabled | PNP | NPN | Transmitter |
|----------------|--|--|---|--|---|
| |  <p>3 (-) 1 (+) 4 OUT/Output 2 Beam break input (1)</p> | <p>(-) BU (Blue) (+) BN (Brown) (OUT/Output) BK (Black) Beam break input (1) VI (Violet)</p> |  <p>BN/1 PNP BK/4 (NO/NC) BU/3</p> |  <p>BN/1 NPN BK/4 (NO/NC) BU/3</p> |  <p>1/BN + 2/VI 3/BU -</p> <p>Input 2/VI: - not connected: beam made - connected to -: beam broken</p> |

See connection on page 9/44

| Detection curves | Thru-beam system | Diffuse system | Diffuse system with adjustable sensitivity | Reflex system | Polarised reflex system |
|------------------|--|---|---|--|---|
| |  <p>Sn ≤ 15 m</p> |  <p>Sn ≤ 10 cm</p> |  <p>Sn ≤ 60 cm</p> |  <p>Sn ≤ 4 m</p> |  <p>Sn ≤ 2 m</p> |
| | | Object 10 x 10 cm; 1 White 90%; 2 Grey 18% | | With reflector XUZ C50 | With reflector XUZ C50 |

| Dimensions | Pre-cabled (mm) | | Connector (mm) | |
|--|-----------------|----|----------------|----|
| XUB | a | b | a | b |
| Ø 18, line of sight along case axis | 46 (2) | 28 | 60 (1) | 28 |
| Ø 18, line of sight 90° to case axis | 62 | 28 | 76 | 28 |
| Ø 18, line of sight along case axis XUB 5 | 62 | 44 | 76 | 44 |
| Ø 18, line of sight 90° to case axis XUB 5 | 78 | 44 | 92 | 44 |

(1) Beam break input on thru-beam transmitter only.


(2) For XUB 9●●●●● (polarised reflex) 46 becomes 48 mm and 60 becomes 62 mm.

Photo-electric sensors


OsiSense XU, single mode function

Design 18, metal


Three-wire DC, solid-state output




XUB ●B●●NM12




XUB ●B●●NL2




XUB ●B●●WM12




XUB ●B●●WL2




XUZ C50




XUZ B2003




XUZ 2001



XUZ A118



XUZ 2003



XUZ A218

Connector

| Sensing distance (Sn) m | Function | Output | Line of sight | Reference | Weight kg |
|-------------------------|------------------|------------------|------------------|--------------|-----------|
| Diffuse system | | | | | |
| 0.1 | NO | PNP | Along case axis | XUB 4BPANM12 | 0.050 |
| | | | 90° to case axis | XUB 4BPAWM12 | 0.050 |
| | NPN | Along case axis | XUB 4BNANM12 | 0.050 | |
| | | 90° to case axis | XUB 4BNAWM12 | 0.050 | |
| | NC | PNP | Along case axis | XUB 4BPBWM12 | 0.050 |
| | | | 90° to case axis | XUB 4BPNM12 | 0.050 |
| NPN | Along case axis | XUB 4BNBNM12 | 0.050 | | |
| | 90° to case axis | XUB 4BNBWM12 | 0.050 | | |

Diffuse system with adjustable sensitivity

| | | | | | |
|-----|------------------|------------------|------------------|--------------|-------|
| 0.6 | NO | PNP | Along case axis | XUB 5BPANM12 | 0.055 |
| | | | 90° to case axis | XUB 5BPAWM12 | 0.060 |
| | NPN | Along case axis | XUB 5BNANM12 | 0.055 | |
| | | 90° to case axis | XUB 5BNAWM12 | 0.060 | |
| | NC | PNP | Along case axis | XUB 5BPBWM12 | 0.055 |
| | | | 90° to case axis | XUB 5BPNM12 | 0.060 |
| NPN | Along case axis | XUB 5BNBNM12 | 0.055 | | |
| | 90° to case axis | XUB 5BNBWM12 | 0.060 | | |

Polarised reflex system

| | | | | | |
|-----|------------------|------------------|------------------|--------------|-------|
| 2 | NO | PNP | Along case axis | XUB 9BPANM12 | 0.050 |
| | | | 90° to case axis | XUB 9BPAWM12 | 0.050 |
| | NPN | Along case axis | XUB 9BNANM12 | 0.050 | |
| | | 90° to case axis | XUB 9BNAWM12 | 0.050 | |
| | NC | PNP | Along case axis | XUB 9BPBWM12 | 0.050 |
| | | | 90° to case axis | XUB 9BPNM12 | 0.050 |
| NPN | Along case axis | XUB 9BNBNM12 | 0.050 | | |
| | 90° to case axis | XUB 9BNBWM12 | 0.050 | | |

| | | | | | |
|--------------------------------|---|---|---|---------|-------|
| Reflector 50 x 50 mm | – | – | – | XUZ C50 | 0.020 |
|--------------------------------|---|---|---|---------|-------|

Reflex system

| | | | | | |
|-----|------------------|------------------|------------------|--------------|-------|
| 4 | NO | PNP | Along case axis | XUB 1BPANM12 | 0.050 |
| | | | 90° to case axis | XUB 1BPAWM12 | 0.050 |
| | NPN | Along case axis | XUB 1BNANM12 | 0.050 | |
| | | 90° to case axis | XUB 1BNAWM12 | 0.050 | |
| | NC | PNP | Along case axis | XUB 1BPBWM12 | 0.050 |
| | | | 90° to case axis | XUB 1BPNM12 | 0.050 |
| NPN | Along case axis | XUB 1BNBNM12 | 0.050 | | |
| | 90° to case axis | XUB 1BNBWM12 | 0.050 | | |

| | | | | | |
|--------------------------------|---|---|---|---------|-------|
| Reflector 50 x 50 mm | – | – | – | XUZ C50 | 0.020 |
|--------------------------------|---|---|---|---------|-------|

Thru-beam system

| | | | | | |
|--------------------------|------------------|------------------|------------------|---------------|-------|
| Transmitter 15 | – | – | Along case axis | XUB 2BKSNM12T | 0.050 |
| | | | 90° to case axis | XUB 2BKSWM12T | 0.050 |
| Receiver 15 | NO | PNP | Along case axis | XUB 2BPANM12R | 0.050 |
| | | | 90° to case axis | XUB 2BPAWM12R | 0.050 |
| | NPN | Along case axis | XUB 2BNANM12R | 0.050 | |
| | | 90° to case axis | XUB 2BNAWM12R | 0.050 | |
| | NC | PNP | Along case axis | XUB 2BPBWM12R | 0.050 |
| | | | 90° to case axis | XUB 2BPNM12R | 0.050 |
| NPN | Along case axis | XUB 2BNBNM12R | 0.050 | | |
| | 90° to case axis | XUB 2BNBWM12R | 0.050 | | |

Fixing accessories (1)

| Description | Reference | Weight kg |
|---|-----------|-----------|
| 3D fixing kit for use on M12 rod, for XUB or XUZ C50 | XUZ B2003 | 0.170 |
| M12 rod | XUZ 2001 | 0.050 |
| Support for M12 rod | XUZ 2003 | 0.150 |
| Stainless steel fixing bracket | XUZ A118 | 0.045 |
| Plastic fixing bracket with adjustable ball-joint | XUZ A218 | 0.035 |

Pre-cabled


For a pre-cabled sensor, replace **M12** by **L2** for a 2 m long cable, or by **L5** for a 5 m long cable. Example: XUB 1BPANM12 becomes XUB 1BPANL2 for a 2 m long cable and XUB 1BPANL5 for a 5 m long cable.

For availability, please consult our Customer Care Centre.

(1) For further information, see page 5/158.


| Characteristics | | XUB 1, XUB 2, XUB 4, XUB 5, XUB 9 | XUB 1, XUB 2, XUB 4, XUB 5, XUB 9 |
|---|------------------------------|--|-----------------------------------|
| Sensor type | | UL, CSA, CE | |
| Product certifications | | UL, CSA, CE | |
| Connection | Connector | M12 | – |
| | Pre-cabled | – | Length: 2 m |
| Sensing distance nominal Sn / maximum (excess gain = 2) (excess gain = 1) | m | 0.1 / 0.15 diffuse | |
| | m | 0.6 / 0.8 diffuse with adjustable sensitivity | |
| | m | 2 / 3 polarised reflex | |
| | m | 4 / 5.5 reflex | |
| | m | 15 / 20 thru-beam | |
| Type of transmission | | Infrared, except polarised reflex (red) | |
| Degree of protection | Conforming to IEC 60529 | IP 65, IP 67, double insulation □ | |
| Storage temperature | | °C -40...+70 | |
| Operating temperature | | °C -25...+55 | |
| Materials | Case | Nickel plated brass | |
| | Lens | PMMA | |
| | Cable | – | PvR |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1.5 mm (f = 10 to 55 Hz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Indicator lights | Output state | Yellow LED (except for XUB 2●●●●●T) | |
| | Supply on | Green LED (only for XUB 2●●●●●T) | |
| Rated supply voltage | | V --- 12...24 with protection against reverse polarity | |
| Voltage limits (including ripple) | | V --- 10...36 | |
| Current consumption, no-load | | mA 35 | |
| Switching capacity | | mA ≤ 100 with overload and short-circuit protection | |
| Voltage drop, closed state | | V 1.5 | |
| Maximum switching frequency | | Hz 500 | |
| Delays | First-up | ms < 15 | |
| | Response | ms < 1 | |
| | Recovery | ms < 1 | |

Wiring schemes

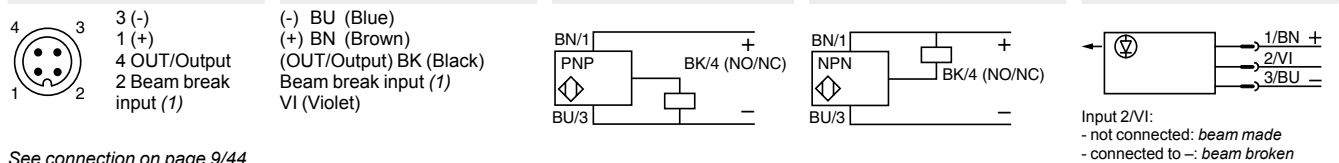

See connection on page 9/44

Detection curves

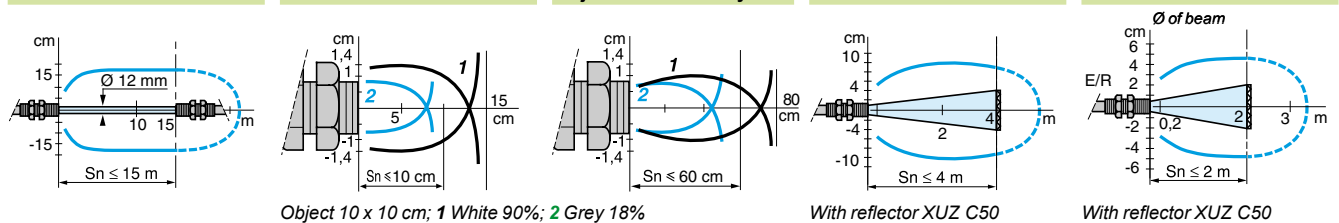

Dimensions

| XUB | Pre-cabled (mm) | | Connector (mm) | |
|--|-----------------|----|----------------|----|
| | a | b | a | b |
| ∅ 18, line of sight along case axis | 46 (2) | 28 | 60 (1) | 28 |
| ∅ 18, line of sight 90° to case axis | 62 | 28 | 76 | 28 |
| ∅ 18, line of sight along case axis XUB 5 | 62 | 44 | 76 | 44 |
| ∅ 18, line of sight 90° to case axis XUB 5 | 78 | 44 | 92 | 44 |

(1) Beam break input on thru-beam transmitter only.


(2) For XUB 9●●●●● (polarised reflex) 46 becomes 48 mm and 60 becomes 62 mm.

Photo-electric sensors


OsiSense XU multimode

Design 18, metal or plastic


Three-wire DC, solid-state output




XUB 0...NL2




XUB 0...WL2




XUB 0...NM12




XUB 0...WM12




XUZ C50




XUZ B2003




XUZ A118



XUZ A218



XUZ 2001



XUZ 2003

Ø 18 metal

Pre-cabled (1)

| Sensing distance (Sn) (2) m | Function | Output | Line of sight | Reference | Weight kg |
|--|--------------------------|------------------|------------------------|------------------------|-----------|
| 0...15 depending on whether accessories are used | NO or NC, by programming | PNP | Along case axis | XUB 0BPSNL2 | 0.105 |
| | | NPN | 90° to case axis | XUB 0BPSWL2 (3) | 0.110 |
| | NPN | Along case axis | XUB 0BNSNL2 | 0.105 | |
| | | 90° to case axis | XUB 0BNSWL2 (3) | 0.110 | |

M12 connector

| | | | | | |
|--|--------------------------|------------------|-------------------------|-------------------------|-------|
| 0...15 depending on whether accessories are used | NO or NC, by programming | PNP | Along case axis | XUB 0BPSNM12 | 0.055 |
| | | NPN | 90° to case axis | XUB 0BPSWM12 (3) | 0.060 |
| | NPN | Along case axis | XUB 0BNSNM12 | 0.055 | |
| | | 90° to case axis | XUB 0BNSWM12 (3) | 0.060 | |

Accessories

| Description | Connecti-on | Line of sight | Reference | Weight kg |
|-----------------------|----------------|------------------|--------------------------|-----------|
| Thru-beam transmitter | Pre-cabled (1) | Along case axis | XUB 0BKSNL2T | 0.105 |
| | | 90° to case axis | XUB 0BKSWL2T (3) | 0.110 |
| | M12 connector | Along case axis | XUB 0BKSNM12T | 0.055 |
| | | 90° to case axis | XUB 0BKSWM12T (3) | 0.060 |
| Reflector 50 x 50 mm | - | - | XUZ C50 | 0.020 |

Ø 18 plastic

Pre-cabled (1)

| Sensing distance (Sn) (3) m | Function | Output | Line of sight | Reference | Weight kg |
|--|--------------------------|------------------|------------------------|------------------------|-----------|
| 0...15 depending on whether accessories are used | NO or NC, by programming | PNP | Along case axis | XUB 0APSNL2 | 0.095 |
| | | NPN | 90° to case axis | XUB 0APSWL2 (3) | 0.100 |
| | NPN | Along case axis | XUB 0ANSNL2 | 0.095 | |
| | | 90° to case axis | XUB 0ANSWL2 (3) | 0.100 | |

M12 connector

| | | | | | |
|--|--------------------------|------------------|-------------------------|-------------------------|-------|
| 0...15 depending on whether accessories are used | NO or NC, by programming | PNP | Along case axis | XUB 0APSNM12 | 0.045 |
| | | NPN | 90° to case axis | XUB 0APSWM12 (3) | 0.050 |
| | NPN | Along case axis | XUB 0ANSNM12 | 0.045 | |
| | | 90° to case axis | XUB 0ANSWM12 (3) | 0.050 | |

Accessories

| Description | Connecti-on | Line of sight | Reference | Weight kg |
|-----------------------|----------------|------------------|--------------------------|-----------|
| Thru-beam transmitter | Pre-cabled (1) | Along case axis | XUB 0AKSNL2T | 0.095 |
| | | 90° to case axis | XUB 0AKSWL2T (3) | 0.100 |
| | M12 connector | Along case axis | XUB 0AKSNM12T | 0.045 |
| | | 90° to case axis | XUB 0AKSWM12T (3) | 0.050 |
| Reflector 50 x 50 mm | - | - | XUZ C50 | 0.020 |

Fixing accessories (4)

| Description | Reference | Weight kg |
|--|------------------|-----------|
| 3D fixing kit for use on M12 rod, for XUB or XUZ C50 | XUZ B2003 | 0.170 |
| M12 rod | XUZ 2001 | 0.050 |
| Support for M12 rod | XUZ 2003 | 0.150 |
| Stainless steel fixing bracket | XUZ A118 | 0.045 |
| Plastic fixing bracket with adjustable ball-joint | XUZ A218 | 0.035 |

(1) For a 5 m long cable, replace L2 by L5.

Example: XUB 0BPSNL2 becomes **XUB 0BPSNL5**.

For availability, please consult our Customer Care Centre.





(2) For further information, see page 5/31.

(3) For line of sight 90° to case axis versions, see sensing distances on page 5/31.

(4) For further information, see page 5/158.


| Characteristics | | XUB 0●●●●M12, XUB 0●●●●M12T | XUB 0●●●●L2, XUB 0●●●●L2T |
|---|--|--|-----------------------------------|
| Sensor type | | UL, CSA, CE | |
| Product certifications | | UL, CSA, CE | |
| Connection | Connector | M12 | – |
| | Pre-cabled | – | Length: 2 m |
| Sensing distance nominal Sn / (excess gain = 2) | maximum (excess gain = 1) | Line of sight along case axis | Line of sight 90° to case axis |
| | | m | 0.12 / 0.12 |
| | | m | 0.3 / 0.4 |
| | | m | 2 / 3 |
| Sensing distance nominal Sn / (excess gain = 2) | | m | 0.11 / 0.11 |
| | | m | 0.2 / 0.3 |
| | | m | 1.5 / 2 |
| | | m | 7 / 10 |
| Type of transmission | Infrared, except for polarised reflex (red) | | |
| Degree of protection | Conforming to IEC 60529 | | |
| Storage temperature | °C -40...+70 | | |
| Operating temperature | °C -25...+55 | | |
| Materials | Case: nickel plated brass for XUB 0B or PBT for XUB 0A; Lens: PMMA; Cable: PvR | | |
| Vibration resistance | Conforming to IEC 60068-2-6 | | |
| Shock resistance | Conforming to IEC 60068-2-27 | | |
| Indicator lights | Output state | Yellow LED (transmission present for XUB 0●●●●●●T) | |
| | Supply on | Green LED | |
| | Optical alignment aid/dirty | Red LED (except for XUB 0●●●●●●T) | |
| Rated supply voltage | V --- 12...24 with protection against reverse polarity | | |
| Voltage limits (including ripple) | V --- 10...36 | | |
| Current consumption, no-load | mA 35 (20 for XUB 0●●●●●●T) | | |
| Switching capacity | mA ≤ 100 with overload and short-circuit protection | | |
| Voltage drop, closed state | V < 1.5 | | |
| Maximum switching frequency | Hz 250 (200 for diffuse with background suppression) | | |
| Delays | First-up | ms < 200 | |
| | Response | ms < 2 (< 2.5 for diffuse with background suppression) | |
| | Recovery | ms < 2 (< 2.5 for diffuse with background suppression) | |

Wiring schemes


| | | | | |
|--|---|--|---|---|
| M12 connector  <p>3 (-) 1 (+) 4 OUT/Output 2 Beam break input (1)</p> | Pre-cabled (-) BU (Blue) (+) BN (Brown) OUT/Output BK (Black) Beam break input (1) VI (Violet) | Receiver, PNP output  | Receiver, NPN output  | Thru-beam transmitter  <p>Input 2/VI: - not connected: beam made</p> |
|--|---|--|---|---|

See connection on page 9/44.

Detection curves (line of sight along case axis)

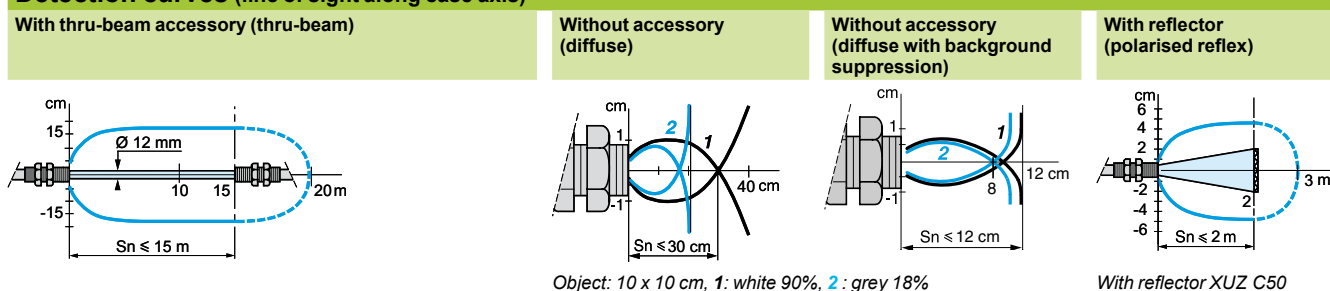

Variation of usable sensing distance Su (without accessory, with adjustable background suppression)

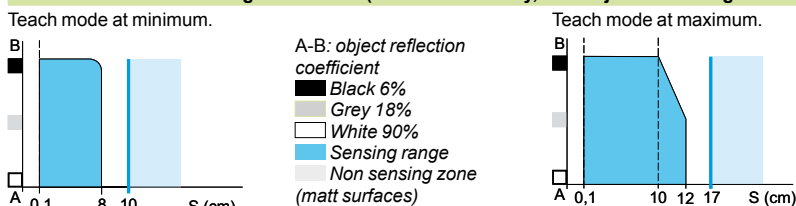

Dimensions

| XUB | Pre-cabled (mm) | | Connector (mm) | |
|--------------------------------------|-----------------|----|----------------|----|
| | a | b | a | b |
| Ø 18, line of sight along case axis | 64 (2) | 44 | 78 (2) | 44 |
| Ø 18, line of sight 90° to case axis | 78 | 44 | 92 | 44 |

(1) Beam break input on thru-beam transmitter only.

(2) For XUB 0●●●●●●T, 64 becomes 62 mm and 78 becomes 76 mm.


Photo-electric sensors

OsiSense XU, general purpose, single mode function


Miniature design, plastic

Three-wire DC, solid-state output


NO/NC configuration switch




XUM 5A●CNL2




XUM 5A●CNM8




XUZ C50




XUZ C08




XUM 2AKCNL2T




XUM 2A●CNL2R




XUZMSV●●




XUZMSH●●




XUZMU01




XUZAM01



XUZAM04



XUZAM02



XUZAM03

| Sensing distance (Sn) | Function | Output | Connection | Reference | Weight kg |
|---|--------------------------------|--------|--------------------------------------|-------------|-----------|
| Diffuse system with adjustable sensitivity | | | | | |
| 1 m | NO/NC, configuration by switch | PNP | Pre-cabled (L = 2 m) M8 connector | XUM 5APCNL2 | 0.063 |
| | | NPN | Pre-cabled (L = 2 m) M8 connector | XUM 5ANCNL2 | 0.063 |
| | | PNP | Pre-cabled (L = 2 m) M8 connector | XUM 5APCNM8 | 0.010 |
| | | NPN | Pre-cabled (L = 2 m) M8 connector | XUM 5ANCNM8 | 0.010 |

| Polarised reflex system with adjustable sensitivity | | | | | |
|--|--------------------------------|-----|--------------------------------------|-------------|-------|
| 5 m with reflector XUZ C50 | NO/NC, configuration by switch | PNP | Pre-cabled (L = 2 m) M8 connector | XUM 9APCNL2 | 0.063 |
| 2 m with reflector XUZ C08 | | | Pre-cabled (L = 2 m) M8 connector | XUM 9APCNM8 | 0.010 |
| | NO/NC, configuration by switch | NPN | Pre-cabled (L = 2 m) M8 connector | XUM 9ANCNL2 | 0.063 |
| | | | Pre-cabled (L = 2 m) M8 connector | XUM 9ANCNM8 | 0.010 |

| Reflectors | | | | | |
|---------------------------------|---|---|---|---------|-------|
| Universal reflector 50 x 50 mm | - | - | - | XUZ C50 | 0.020 |
| Lateral reflector 8.6 x 29.5 mm | - | - | - | XUZ C08 | 0.006 |

| Thru-beam system (transmitter + receiver) with adjustable sensitivity | | | | | |
|--|--------------------------------|-----|--------------------------------------|-------------|-------|
| 15 m | NO/NC, configuration by switch | PNP | Pre-cabled (L = 2 m) M8 connector | XUM 2APCNL2 | 0.119 |
| | | | Pre-cabled (L = 2 m) M8 connector | XUM 2APCNM8 | 0.019 |
| | | NPN | Pre-cabled (L = 2 m) M8 connector | XUM 2ANCNL2 | 0.119 |
| | | | Pre-cabled (L = 2 m) M8 connector | XUM 2ANCNM8 | 0.019 |

| Transmitter only | | | | | |
|-------------------------|--|--|----------------------|--------------|-------|
| 15 m | | | Pre-cabled (L = 2 m) | XUM 2AKCNL2T | 0.063 |
| | | | M8 connector | XUM 2AKCNM8T | 0.010 |

| Receiver only | | | | | |
|----------------------|--------------------------------|-----|--------------------------------------|--------------|-------|
| 15 m | NO/NC, configuration by switch | PNP | Pre-cabled (L = 2 m) M8 connector | XUM 2APCNL2R | 0.063 |
| | | | Pre-cabled (L = 2 m) M8 connector | XUM 2APCNM8R | 0.010 |
| | | NPN | Pre-cabled (L = 2 m) M8 connector | XUM 2ANCNL2R | 0.063 |
| | | | Pre-cabled (L = 2 m) M8 connector | XUM 2ANCNM8R | 0.010 |

| Accessories for thru-beam system | | | | | |
|--|---------------|--------------------|-----------|-----------|--|
| Description | Dimensions mm | Sensing distance m | Reference | Weight kg | |
| Vertical diaphragm <i>Sold in lots of 2</i> | 0.5 x 6.4 | 1.2 | XUZ MSV05 | 0.002 | |
| | 1 x 6.4 | 3 | XUZ MSV10 | 0.002 | |
| | 1.5 x 6.4 | 4 | XUZ MSV15 | 0.002 | |
| | 2 x 6.4 | 5 | XUZ MSV20 | 0.002 | |
| Horizontal diaphragm <i>Sold in lots of 2</i> | 0.5 x 6.4 | 1.2 | XUZ MSH05 | 0.002 | |
| | 1 x 6.4 | 3 | XUZ MSH10 | 0.002 | |
| | 1.5 x 6.4 | 4 | XUZ MSH15 | 0.002 | |
| | 2 x 6.4 | 5 | XUZ MSH20 | 0.002 | |
| Anti-interference filter <i>Sold in lots of 4</i> | - | 7 | XUZ MU01 | 0.006 | |

| Fixing accessories | | |
|---|-----------|-----------|
| Description | Reference | Weight kg |
| Base mounting fixing bracket | XUZ AM01 | 0.017 |
| Side mounting fixing bracket | XUZ AM04 | 0.026 |
| Vertical fixing bracket with protective cover (1) | XUZ AM02 | 0.062 |
| Horizontal fixing bracket with protective cover (1) | XUZ AM03 | 0.026 |

(1) For pre-cabled version

Photo-electric sensors

OsiSense XU, general purpose, single mode function


Miniature design, plastic

Three-wire DC, solid-state output

NO/NC configuration switch

| Characteristics | | XUM ●A●●●M8 | XUM ●A●●●L2 |
|---|------------------------------|--|--|
| Sensor type | | XUM ●A●●●M8 | |
| Product certifications | | CE, cULus, CTick | |
| Connection | Connector | M8 | – |
| | Pre-cabled | – | Length: 2 m |
| Nominal sensing distance S_n (excess gain = 2) | m | 1 diffuse with adjustable sensitivity | |
| | m | 5 polarised reflex with adjustable sensitivity | |
| | m | 15 thru-beam with adjustable sensitivity | |
| Type of transmission | | Red, except diffuse system (Infrared) | |
| Degree of protection | Conforming to IEC 60529 | IP 65, IP 67 | |
| Storage temperature | | °C - 40...+ 70 | |
| Operating temperature | | °C - 30...+ 60 | |
| Materials | Case | PBT | |
| | Lens | PMMA | |
| | Cable | – | PVC (black for transmitter, grey for other versions) |
| Vibration resistance | Conforming to IEC 60068-2-6 | 10 to 55 Hz, amplitude ± 1.5 mm, 2 hours in each direction X, Y and Z | |
| Shock resistance | Conforming to IEC 60068-2-27 | 500 m/s ² 10 x in each direction X, Y and Z | |
| Indicator lights | Output state | Orange LED (excluding transmitter) | |
| | Stability | Green LED | |
| | Transmitter | Orange LED: supply on | |
| | Receiver | Red LED: light received; green LED: supply on | |
| Rated supply voltage | | V --- 12...24 with protection against reverse polarity | |
| Voltage limits (including ripple) | | V --- 10...30 | |
| Current consumption, no-load | | mA 16 for XUM 5; 13 for XUM 9; 11 for transmitter XUM 2; 13 for receiver XUM 2 | |
| Switching capacity | | mA ≤ 100 with overload and short-circuit protection | |
| Voltage drop, closed state | | V ≤ 3 | |
| Maximum switching frequency | | Hz 1000 | |
| Delays | First-up | ms < 100 | |
| | Response | ms 0.5 | |
| | Recovery | ms 0.5 | |

Wiring schemes

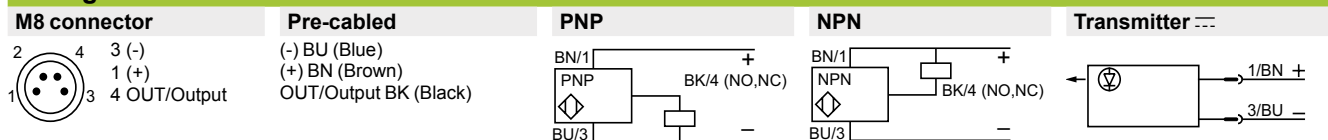

See connection on page 9/44.

Curves

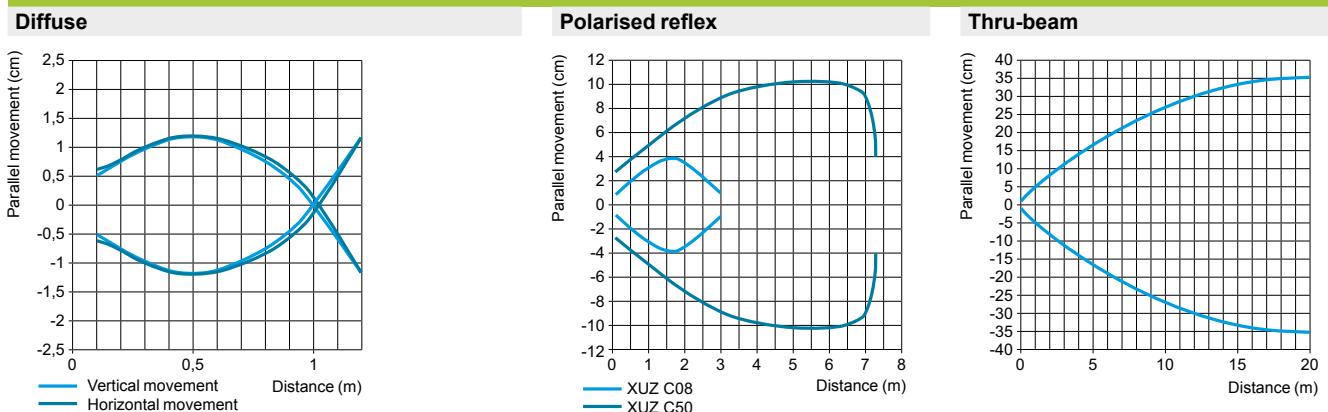


Photo-electric sensors

OsiSense XU, general purpose, single mode function

Miniature design, plastic

Three-wire DC, solid-state output



NO/NC configuration switch

Diffuse system, polarised reflex system

Pre-cabled version

Description - XUM 5A●CNL2,
XUM 9A●CNL2

Dimensions - XUM 5A●CNL2,
XUM 9A●CNL2





- (1) Configuration switch.
- (2) Output state LED.
- (3) Stability and power on LED.
- (4) Adjustment potentiometer.

R: Reception, T: Transmission.
(1) Potentiometer.

Connector version

Description - XUM 5A●CNM8,
XUM 9A●CNM8

Dimensions - XUM 5A●CNM8,
XUM 9A●CNM8

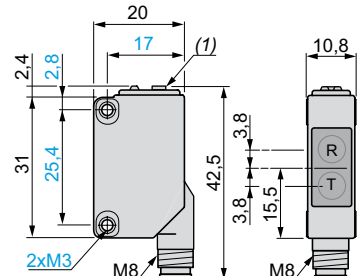

- (1) Configuration switch.
- (2) Output state LED.
- (3) Stability and power on LED.
- (4) Adjustment potentiometer.



R: Reception, T: Transmission.
(1) Potentiometer.

Thru-beam system

Pre-cabled version

Description - XUM
2AKCNL2T

Dimensions - XUM 2AKCNL2T





- (4) Adjustment potentiometer.
- (5) Power on LED.

T: Transmission.
(1) Potentiometer.

Description - XUM
2A●CNL2R

Dimensions - XUM 2A●CNL2R





- (1) Configuration switch.
- (2) Output state LED.
- (3) Stability and power on LED.

R: Reception.
(1) Output state LED on front face.

Connector version

Description - XUM
2AKCNM8T

Dimensions - XUM 2AKCNM8T





- (4) Adjustment potentiometer.
- (5) Power on LED.

T: Transmission.
(1) Potentiometer.

Description - XUM
2A●CNM8R

Dimensions - XUM 2A●CNM8R

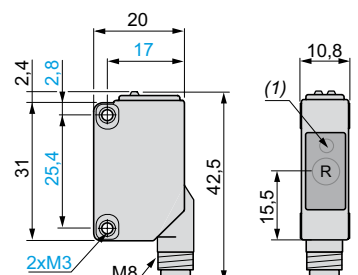

- (1) Configuration switch.
- (2) Output state LED.
- (3) Stability and power on LED.

R: Reception.
(1) Output state LED on front face.

Photo-electric sensors

OsiSense XU, general purpose, single mode function


Miniature design, plastic

Three-wire DC, solid-state output


Accessories

Reflectors

XUZ C50

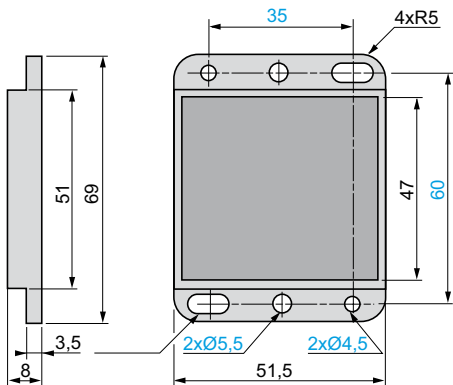


XUZ C08

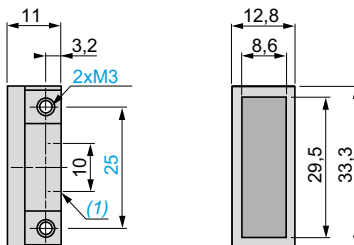


1) 2 x M3

Fixing brackets

XUZ AM01

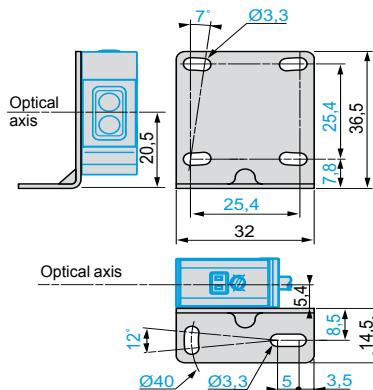


XUZ AM04

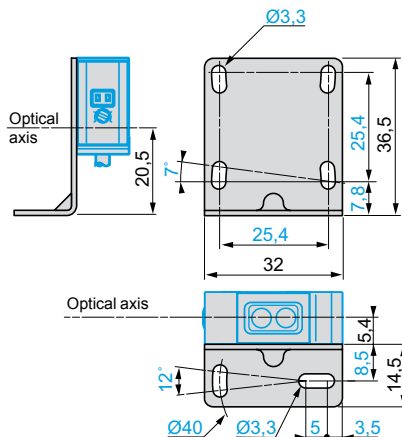


Fixing bracket with protective cover

XUZ AM03

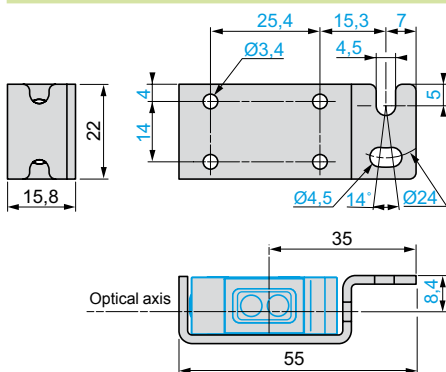


XUZ AM02

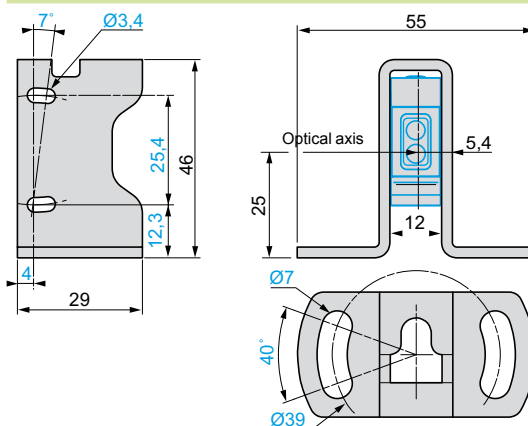


Diaphragms

XUZ MSV●●



XUZ MSH●●



XUZ a

| | |
|-------|-----|
| MSV05 | 0.5 |
| MSV10 | 1 |
| MSV15 | 1.5 |
| MSV20 | 2 |
| MSH05 | 0.5 |
| MSH10 | 1 |
| MSH15 | 1.5 |
| MSH20 | 2 |

Filter

XUZ MU01





Photo-electric sensors

OsiSense XU, general purpose


Multimode function

Miniature design


Three-wire DC, solid-state output




XUM 0A...L2




XUM 0A...M8




XUZ C50




XUZ M2003




XUZ M2004



XUZ A50

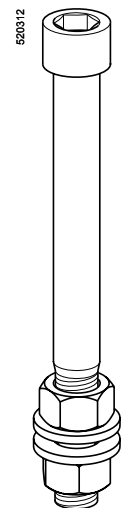

XUZ 2001



XUZ 2003

Miniature design, DC

| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|--|-----------------------------|--------|-----------------------------|-------------|-----------|
| 0...10 depending on whether accessories are used | NO or NC, by programming | PNP | Pre-cabled (L = 2 m) (1) | XUM 0APSAL2 | 0.050 |
| | | | M8 connector | XUM 0APSAM8 | 0.035 |
| | | NPN | Pre-cabled (L = 2 m) (1) | XUM 0ANSAL2 | 0.050 |
| | | | M8 connector | XUM 0ANSAM8 | 0.035 |

Accessories

| Description | Connection | Reference | Weight kg |
|-------------------------|-----------------------------|--------------|-----------|
| Thru-beam transmitter | Pre-cabled (L = 2 m) (1) | XUM 0AKSAL2T | 0.050 |
| | M8 connector | XUM 0AKSAM8T | 0.035 |
| Reflector 50 x 50 mm | – | XUZ C50 | 0.020 |

Fixing accessories (2)

| Description | Reference | Weight kg |
|---|-----------|-----------|
| 3D fixing kit for use on M12 rod, for XUM or XUZ C50 | XUZ M2003 | 0.140 |
| 3D fixing kit for use on M12 rod and with protective cover for XUM | XUZ M2004 | 0.155 |
| M12 rod | XUZ 2001 | 0.050 |
| Support for M12 rod | XUZ 2003 | 0.150 |
| Fixing bracket | XUZ A50 | 0.015 |

(1) For a 5 m long cable, replace L2 by L5.

Example: XUM 0APSAL2 becomes XUM 0APSAL5.






(2) For further information, see page 5/158.

Dimensions (mm)

XUM 0A...L2

XUM 0A...M8

Possible orientation of elbowed connector




| Characteristics | | XUM ●●●●●M8 | XUM ●●●●●L2 |
|---|--|---|--------------|
| Sensor type | | UL, CSA, CE | |
| Product certifications | | M8 | |
| Connection | | - | |
| Connector | | - | |
| Pre-cabled | | Length: 2 m | |
| Nominal sensing distance S_n (excess gain = 2) | | m 0.11 / 0.11 without accessory (diffuse with background suppression) m 0.4 / 0.55 without accessory (diffuse) m 3 / 4 with reflector (polarised reflex) m 10 / 14 with transmitter for thru-beam function (thru-beam) | |
| Type of transmission | | Infrared, except polarised reflex (red) | |
| Degree of protection | | Conforming to IEC 60529 | IP 65, IP 67 |
| Storage temperature | | IP 65, IP 67, double insulation □ | |
| Operating temperature | | °C -40...+70 | |
| Materials | | °C -25...+55 | |
| Case | | PBT | |
| Lens | | PMMA | |
| Cable | | - | |
| Vibration resistance | | - | |
| Conforming to IEC 60068-2-6 | | 7 gn, amplitude ± 1.5 mm (f = 10 to 55 Hz) | |
| Shock resistance | | 30 gn, duration 11 ms | |
| Indicator lights | | PvR | |
| Output state | | Yellow LED (transmission present for XUM 0●●●●●T) | |
| Supply on | | Green LED | |
| Optical alignment aid/dirty | | Red LED (except for XUM 0●●●●●T) | |
| Rated supply voltage | | V --- 12...24 with protection against reverse polarity | |
| Voltage limits (including ripple) | | V --- 10...30 | |
| Current consumption, no-load | | mA 35 (20 for XUM 0●●●●●T) | |
| Switching capacity | | mA ≤ 100 with overload and short-circuit protection | |
| Voltage drop, closed state | | V ≤ 1.5 | |
| Maximum switching frequency | | Hz 250 (200 for diffuse with background suppression) | |
| Delays | | ms < 200 | |
| First-up | | ms < 2 (< 2.5 for diffuse with background suppression) | |
| Response | | ms < 2 (< 2.5 for diffuse with background suppression) | |
| Recovery | | ms < 2 (< 2.5 for diffuse with background suppression) | |

Wiring schemes

| M8 connector | Pre-cabled | Receiver, PNP output | Receiver, NPN output | Thru-beam function transmitter |
|--|--|----------------------|----------------------|---|
| <p>3 (-) 1 (+) 4 OUT/Output 2 Beam break input (1)</p> | <p>(-) BU (Blue) (+) BN (Brown) OUT/Output BK (Black) Beam break input VI (Violet) (1)</p> | | | <p>Input 2/VI: - not connected: beam made - connected to -: beam broken</p> |


See connection on page 9/44.

Detection curves

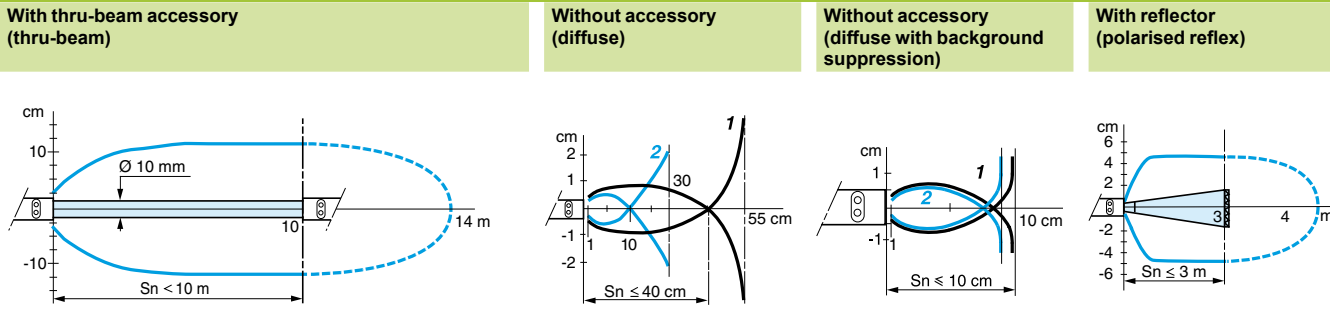

Object: 10 x 10 cm, 1: white 90%, 2: grey 18%

Variation of usable sensing distance S_u (without accessory, with adjustable background suppression)

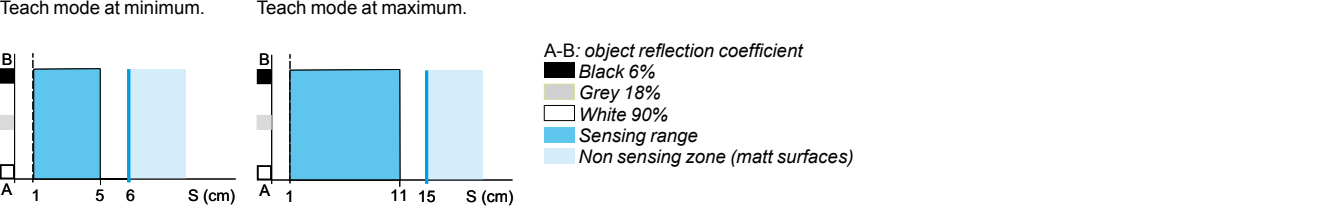

(1) Beam break input on thru-beam transmitter only.


Photo-electric sensors

OsiSense XU, general purpose, single mode function


Compact design, 50 x 50

Five-wire AC or DC, 1 CO relay output


Three-wire DC, solid-state output




XUK A...L2




XUK A...M12




XUZ C50




XUZ K2003




XUZ K2004



XUZ A51



XUZ 2001



XUZ 2003

| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|---|--------------------------|--------------------------|--------------------------|------------------|------------------|
| Diffuse system with adjustable sensitivity | | | | | |
| DC | | | | | |
| 1 | NO | PNP | Pre-cabled (L = 2 m) (1) | XUK 5APANL2 | 0.190 |
| | | | M12 connector | XUK 5APANM12 | 0.070 |
| | NPN | PNP | Pre-cabled (L = 2 m) (1) | XUK 5ANANL2 | 0.190 |
| | | | M12 connector | XUK 5ANANM12 | 0.070 |
| | NC | PNP | Pre-cabled (L = 2 m) (1) | XUK 5APBNL2 | 0.190 |
| | | | M12 connector | XUK 5APBNM12 | 0.070 |
| NPN | PNP | Pre-cabled (L = 2 m) (1) | XUK 5ANBNL2 | 0.190 | |
| | | M12 connector | XUK 5ANBNM12 | 0.070 | |
| AC or DC | | | | | |
| 1 | NO + NC | Relay | Pre-cabled (L = 2 m) (1) | XUK 5ARCNL2 | 0.190 |
| Polarised reflex system | | | | | |
| DC | | | | | |
| 5 | NO | PNP | Pre-cabled (L = 2 m) (1) | XUK 9APANL2 | 0.190 |
| | | | M12 connector | XUK 9APANM12 | 0.070 |
| | NPN | PNP | Pre-cabled (L = 2 m) (1) | XUK 9ANANL2 | 0.190 |
| | | | M12 connector | XUK 9ANANM12 | 0.070 |
| | NC | PNP | Pre-cabled (L = 2 m) (1) | XUK 9APBNL2 | 0.190 |
| | | | M12 connector | XUK 9APBNM12 | 0.070 |
| NPN | PNP | Pre-cabled (L = 2 m) (1) | XUK 9ANBNL2 | 0.190 | |
| | | M12 connector | XUK 9ANBNM12 | 0.070 | |
| DC or AC | | | | | |
| 5 | NO + NC | Relay | Pre-cabled (L = 2 m) (1) | XUK 9ARCNL2 | 0.190 |
| | Reflector 50 x 50 mm (2) | - | - | XUZ C50 | 0.020 |
| Reflex system | | | | | |
| DC | | | | | |
| 7 | NO | PNP | Pre-cabled (L = 2 m) (1) | XUK 1APANL2 | 0.070 |
| | | | M12 connector | XUK 1APANM12 | 0.070 |
| | NPN | PNP | Pre-cabled (L = 2 m) (1) | XUK 1ANANL2 | 0.070 |
| | | | M12 connector | XUK 1ANANM12 | 0.070 |
| | NC | PNP | Pre-cabled (L = 2 m) (1) | XUK 1APBNL2 | 0.070 |
| | | | M12 connector | XUK 1APBNM12 | 0.070 |
| NPN | PNP | Pre-cabled (L = 2 m) (1) | XUK 1ANBNL2 | 0.070 | |
| | | M12 connector | XUK 1ANBNM12 | 0.070 | |
| AC or DC | | | | | |
| 7 | NO + NC | Relay | Pre-cabled (L = 2 m) (1) | XUK 1ARCNL2 | 0.175 |
| | Reflector 50 x 50 mm (2) | - | - | XUZ C50 | 0.020 |
| Thru-beam system | | | | | |
| DC | | | | | |
| Transmitter 30 | - | - | Pre-cabled (L = 2 m) (1) | XUK 2AKSNL2T | 0.190 |
| | - | - | M12 connector | XUK 2AKSNM12T | 0.070 |
| Receiver 30 | NO | PNP | Pre-cabled (L = 2 m) (1) | XUK 2APANL2R | 0.140 |
| | | | M12 connector | XUK 2APANM12R | 0.075 |
| | NPN | PNP | Pre-cabled (L = 2 m) (1) | XUK 2ANANL2R | 0.140 |
| | | | M12 connector | XUK 2ANANM12R | 0.075 |
| | NC | PNP | Pre-cabled (L = 2 m) (1) | XUK 2APBNL2R | 0.140 |
| | | | M12 connector | XUK 2APBNM12R | 0.075 |
| NPN | PNP | Pre-cabled (L = 2 m) (1) | XUK 2ANBNL2R | 0.140 | |
| | | M12 connector | XUK 2ANBNM12R | 0.075 | |
| AC or DC | | | | | |
| Transmitter, 30 | - | - | Pre-cabled (L = 2 m) (1) | XUK 2ARCNL2T | 0.140 |
| Receiver, 30 | NO + NC | Relay | Pre-cabled (L = 2 m) (1) | XUK 2ARCNL2R | 0.070 |
| Fixing accessories (2) | | | | | |
| Description | | | | Reference | Weight kg |
| 3D fixing kit for use on M12 rod, for XUK or XUZ C50 | | | | XUZ K2003 | 0.170 |
| 3D fixing kit for use on M12 rod, with protective cover for XUK | | | | XUZ K2004 | 0.270 |
| M12 rod | | | | XUZ 2001 | 0.050 |
| Support for M12 rod | | | | XUZ 2003 | 0.150 |
| Fixing bracket | | | | XUZ A51 | 0.050 |

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10. Example: XUK 5APANL2 becomes XUK 5APANL5 or XUK 5APANL10.

For availability, please consult our Customer Care Centre.

(2) For further information, see page 5/158.

Photo-electric sensors

OsiSense XU, general purpose, single mode function

Compact design, 50 x 50







Five-wire AC or DC, 1 CO relay output

Three-wire DC, solid-state output


Characteristics

| Sensor type | | XUK ●●●●M12 | XUK ●●●●L2 |
|--|------------------------------|---|----------------------------|
| Product certifications | | UL, CSA, CE | |
| Connection | | M12 connector | Pre-cabled, length: 2 m |
| Sensing distance nominal S_n / maximum (excess gain = 2) (excess gain = 1) | m | PNP/NPN or relay output 1 / 1.5 diffuse | |
| | m | PNP/NPN or relay output 5 / 8 polarised reflex | |
| | m | PNP/NPN or relay output 7 / 10 reflex | |
| | m | PNP/NPN or relay output 30 / 45 thru-beam | |
| Type of transmission | | Infrared, except polarised reflex (red) | |
| Degree of protection | | Conforming to IEC 60529 | IP 65, double insulation □ |
| Storage temperature | | °C - 40...+ 70 | |
| Operating temperature | | °C - 25...+ 55 | |
| Materials | Case | PBT | |
| | Lens | PMMA | |
| | Cable | - PVC | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1.5 mm (f = 10 to 55 Hz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Indicator lights | Output state | Yellow LED (except for XUK 2●●●●●T) | |
| | Supply on | Green LED (only for XUK 2●●●●●T) | |
| Rated supply voltage | PNP/NPN | V 12...24 with protection against reverse polarity | |
| | Relay output | V - | ≈ 24...240 |
| Voltage limits (including ripple) | PNP/NPN | V --- 10...36 | |
| | Relay output | V - | ≈ 20...264 |
| Current consumption, no-load | PNP/NPN | mA ≤ 35 | |
| Power consumption | Relay output | W - | ≈ 2 |
| Switching capacity | PNP/NPN | mA ≤ 100 with overload and short-circuit protection | |
| | Relay output | A - | ≈ 3 |
| Voltage drop, closed state | | V ≤ 1.5 | |
| Maximum switching frequency | PNP/NPN | Hz 250 | |
| | Relay output | Hz - | 20 |
| Delays | First-up | ms < 15 (PNP/NPN); < 60 (relay output) | |
| | Response | ms < 2 (PNP/NPN); < 25 (relay output) | |
| | Recovery | ms < 2 (PNP/NPN); < 25 (relay output) | |


Wiring schemes
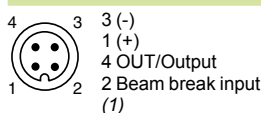
| M12 connector | Pre-cabled, PNP/NPN | Receiver, PNP output | Thru-beam transmitter --- |
|--|--|---|---|
|  <p>4 3 3 (-) 1 2 1 (+) 4 OUT/Output 2 Beam break input (1)</p> | <p>(-) BU (Blue) (+) BN (Brown) OUT/Output BK (Black) Beam break input (1) VI (Violet)</p> |  <p>BN/1 PNP BK/4 (NO,NC) BU/3</p> |  <p>1 BN + 2 VI 3 BU -</p> <p>Input 2VI: - not connected: beam made - connected to -: beam broken</p> |
| See connection on page 9/44. (1) Beam break input on thru-beam transmitter only. | <p>Pre-cabled, relay output (~) BU (Blue), (~) BN (Brown) Relay common/GY (Grey) NO BK (Black) NC WH (White)</p> |  <p>BN/1 NPN BK/4 (NO,NC) BU/3</p> |  <p>BN ~ BU ~</p> |
| | | |  <p>BN ~ BK ~ WH ~ BU ~</p> |

Detection curves

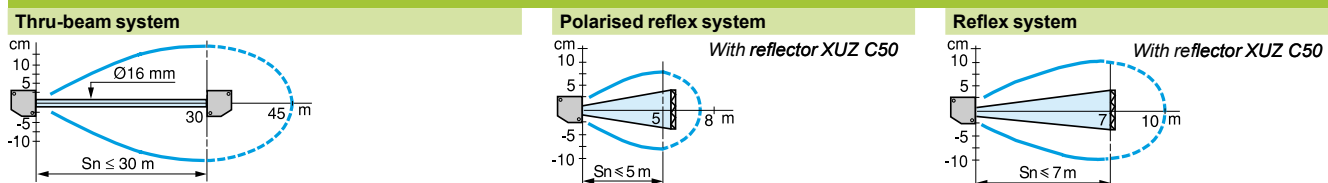

Diffuse system



Object: 10 x 10 cm,
1: white 90%, 2: grey 18%

Dimensions


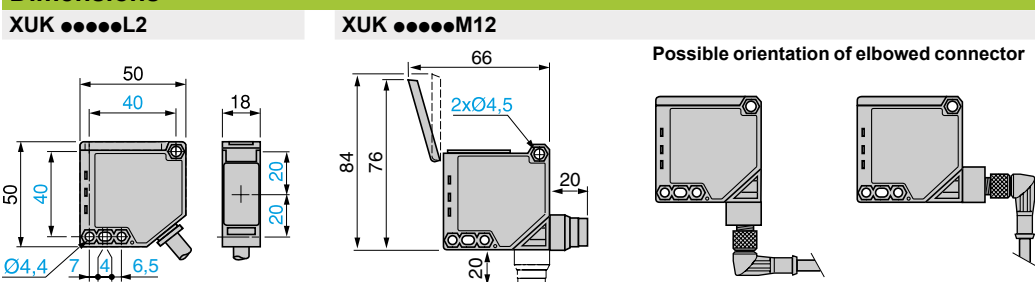


Photo-electric sensors


OsiSense XU, general purpose, multimode function

Compact design 50 x 50


5-wire AC or DC, 1 CO relay output




XUK 0AKSAL2




XUK 0AKSAM12




XUZ C50




XUZ K2003




XUZ K2004



XUZ A51



XUZ 2001



XUZ 2003

References

DC

| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|--|--------------------------|---------|---|---|----------------|
| 0...30 depending on whether accessories are used | NO or NC, by programming | PNP/NPN | Pre-cabled (L = 2 m) (1) M12 connector | XUK 0AKSAL2 XUK 0AKSAM12 | 0.175 0.090 |

Accessories

| Description | Connection | Reference | Weight kg |
|------------------------------------|---|---|----------------|
| Transmitter for thru-beam function | Pre-cabled (L = 2 m) (1) M12 connector | XUK 0AKSAL2T XUK 0AKSAM12T | 0.140 0.090 |
| Reflector 50 x 50 mm | – | XUZ C50 | 0.020 |

AC or DC

| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|--|--------------------------|------------------|--------------------------|--------------------|-----------|
| 0...30 depending on whether accessories are used | NO or NC, by programming | Time delay relay | Pre-cabled (L = 2 m) (1) | XUK 0ARCTL2 | 0.175 |

Accessories

| Description | Connection | Reference | Weight kg |
|------------------------------------|--------------------------|---------------------|-----------|
| Transmitter for thru-beam function | Pre-cabled (L = 2 m) (1) | XUK 0ARCTL2T | 0.140 |
| Reflector 50 x 50 mm | – | XUZ C50 | 0.020 |

Fixing accessories (2)

| Description | Reference | Weight kg |
|---|------------------|-----------|
| 3D fixing kit for use on M12 rod, for XUK or XUZ C50 | XUZ K2003 | 0.170 |
| 3D fixing kit for use on M12 rod, with protective cover for XUK | XUZ K2004 | 0.270 |
| M12 rod | XUZ 2001 | 0.050 |
| Support for M12 rod | XUZ 2003 | 0.150 |
| Fixing bracket | XUZ A51 | 0.050 |


(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XUK 0AKSAL2 becomes XUK 0AKSAL5 or XUK 0AKSAL10.


(2) For further information, see page 5/158.

Dimensions (mm)


XUK 0A●●●L2



XUK 0A●●●M12




Possible orientation of elbowed connector

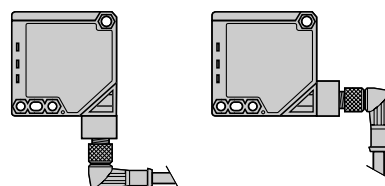


| Characteristics | | XUK ●●●●M12 | XUK ●●●●L2 |
|-------------------------------------|--|---|------------|
| Sensor type | | UL, CSA, CE | |
| Product certifications | | M12 connector | |
| Connection | | Pre-cabled, length: 2 m | |
| Sensing distance | | 0.28 / 0.28 without accessory (diffuse with background suppression) | |
| nominal Sn / maximum | | 0.8 / 1.2 without accessory (diffuse) | |
| (excess gain = 2) (excess gain = 1) | | 4 / 5.7 with reflector (polarised reflex) | |
| Type of transmission | | 30 / 35 with transmitter for thru-beam function (thru-beam) | |
| Degree of protection | | Infrared, except polarised reflex (red) | |
| Conforming to IEC 60529 | | IP 65, double insulation | |
| Storage temperature | | °C - 40...+ 70 | |
| Operating temperature | | °C - 25...+ 55 | |
| Materials | | Case: PBT | |
| | | Lens: PMMA | |
| | | Cable: - PvR | |
| Vibration resistance | | Conforming to IEC 60068-2-6 | |
| Shock resistance | | Conforming to IEC 60068-2-27 | |
| Indicator lights | | Output state: Yellow LED (transmission present for XUK 0●●●●●T) | |
| | | Supply on: Green LED | |
| | | Optical alignment aid/dirty: Red LED (except for XUK 0●●●●●T) | |
| Alarm output | | mA ≤ 50 with overload and short-circuit protection (except XUK 0ARCT●) | |
| Rated supply voltage | | PNP/NPN: V 12...24 --- with protection against reverse polarity | |
| | | Relay output: V - ≈ 24...240 | |
| Voltage limits (including ripple) | | PNP/NPN: V 10...36 --- | |
| | | Relay output: V - ≈ 20...264 | |
| Current consumption, no-load | | PNP/NPN: mA ≤ 35; 20 for XUK 0AK●●●●T | |
| Power consumption | | Relay output: W - 3 ~ or --- | |
| Switching capacity | | PNP/NPN: mA ≤ 100 with overload and short-circuit protection | |
| | | Relay output: A - 3 ~ or --- | |
| Voltage drop, closed state | | V ≤ 1.5 | |
| Time delay | | Relay output: s 0...10 on-delay, off-delay, monostable | |
| Maximum switching frequency | | PNP/NPN: Hz 250 (200 for diffuse with background suppression) | |
| | | Relay output: Hz - 20 | |
| Delays | | First-up: ms < 200 (PNP/NPN); < 300 (relay output) | |
| | | Response: ms < 2 (PNP/NPN); < 25 (relay output) (< 2.5 for diffuse with background suppression) | |
| | | Recovery: ms < 2 (PNP/NPN); < 25 (relay output) (< 2.5 for diffuse with background suppression) | |

Wiring schemes

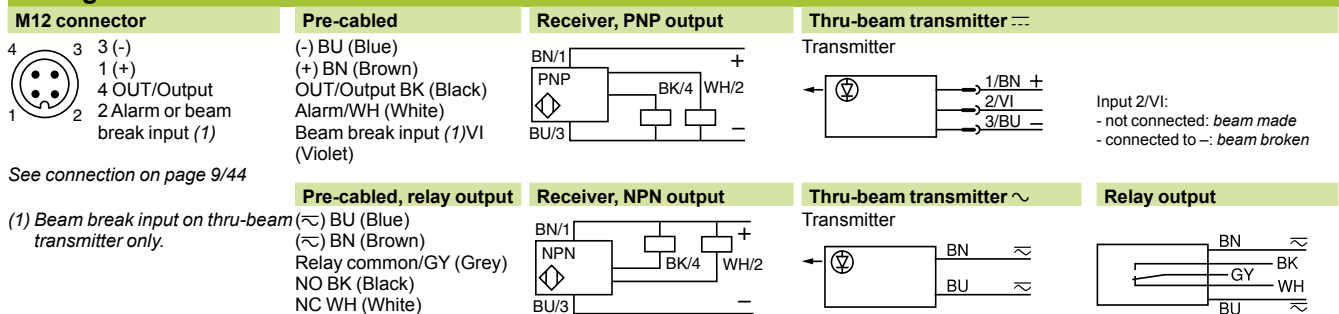

Detection curves

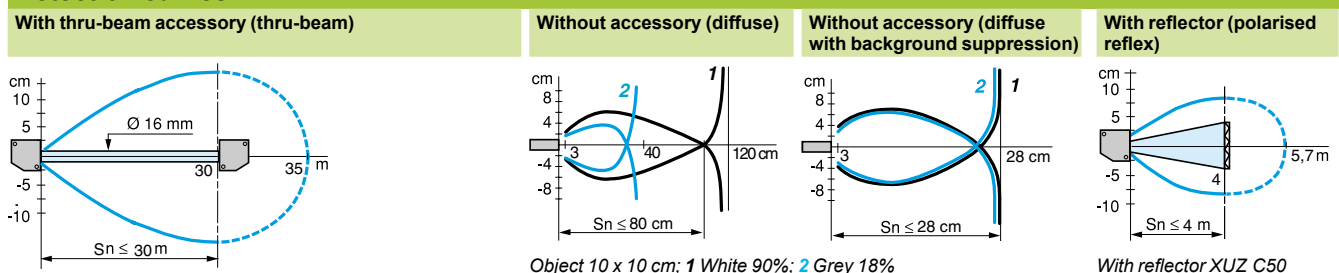

Variation of usable sensing distance Su (without accessory, with adjustable background suppression)

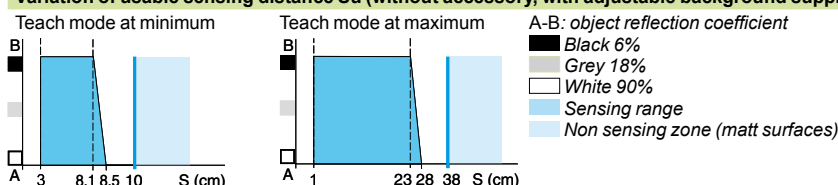


Photo-electric sensors

OsiSense XU, general purpose
With adjustable background suppression
Mechanical display of setting
DC supply. Solid-state output

Compact design



| | |
|-------------------------------|--|
| System | Diffuse with adjustable background suppression, long sensing distance with high accuracy |
| Type of transmission | Infrared |
| Nominal sensing distance (Sn) | 1 m |

References

| | | | |
|---------------------------------|--------------------------------|--------------------|---------------------|
| 3-wire, PNP or NPN programmable | NO or NC programmable function | XUK 8AKSNL2 | XUK 8AKSNM12 |
| Weight (kg) | | 0.190 | 0.070 |

Characteristics

| | |
|------------------------------|--|
| Product certifications | CE, UL, CSA |
| Ambient air temperature | For operation: - 25...+ 55 °C. For storage: - 30...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 7 gn (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 10 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 IP 65 (IP 30 with cover open). NEMA 4X indoor use, 12 and 13 double insulation |
| Materials | Case: PC, lenses: PMMA, cable: PVC |
| Connection (1) | Pre-cabled, diameter 6 mm, length 2 m, wire c.s.a.: 5 x 0.34 mm ² M12 male connector, 4-pin, can be set at 2 positions (suitable female connectors, including pre-wired versions, see page 9/44) |
| Rated supply voltage | ⋯ 12...24 V with protection against reverse polarity |
| Voltage limits | ⋯ 10...36 V (including ripple) |
| Switching capacity (sealed) | ≤ 100 mA with overload and short-circuit protection |
| Voltage drop, closed state | ≤ 1.5 V |
| Current consumption, no-load | 35 mA |
| Maximum switching frequency | 250 Hz |
| Delays | First-up: ≤ 80 ms; response: ≤ 2 ms; recovery: ≤ 2 ms |

| Function table | Function | Diffuse system | |
|---|----------|-------------------------------|----------------------------|
| | | No object present in the beam | Object present in the beam |
| Output state (PNP or NPN) indicator: yellow LED (illuminated when sensor output is ON) | NO | | |
| | NC | | |


(1) For a 5 m long cable replace L2 by L10.

Photo-electric sensors


OsiSense XU, general purpose
With adjustable background suppression
Mechanical display of setting
DC supply. Solid-state output

Detection curves

Variation of usable sensing distance S_u

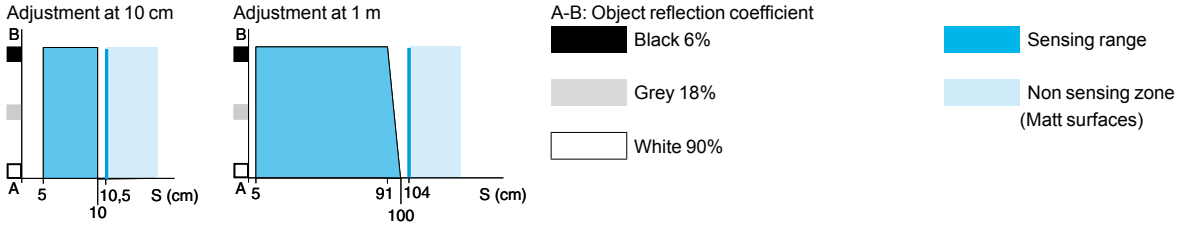


Sensing distance adjustment

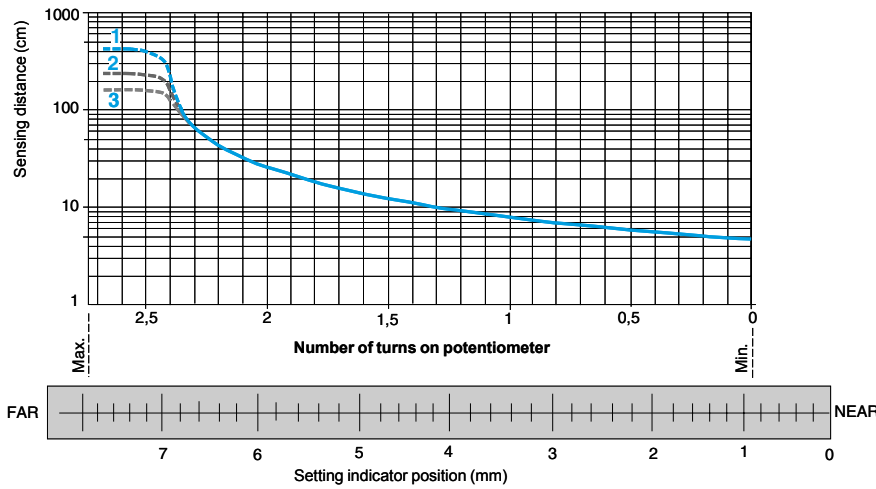

- 1 White 90%
- 2 Grey 18%
- 3 Black 6%


Relative difference in sensing distances according to object colour

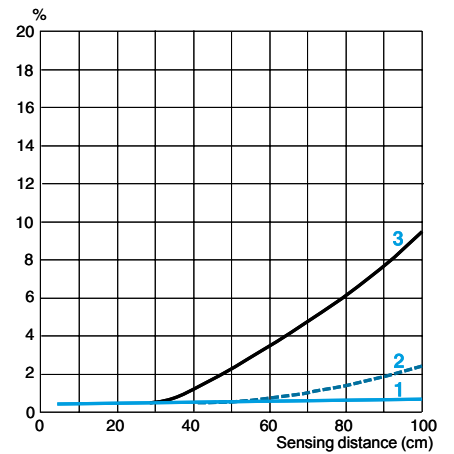

- 1 White 90%
- 2 Grey 18%
- 3 Black 6%


Dimensions

XUK 8AKSNL2

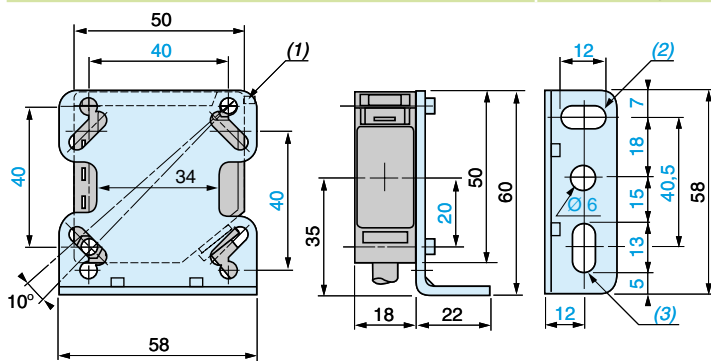

- (1) Cover locking tongue.
- (2) 1 elongated hole $\varnothing 6 \times 12$.
- (3) 1 elongated hole $\varnothing 6 \times 13$.

Functions



Switches

- 1 NO/NC programming
- 2 PNP or NPN output

LED

- 3 Yellow LED, output

Potentiometer


- 4 Sensing distance adjustment

Setting indicator

- 5 Potentiometer setting indication


Bracket fixing

XUK 8AKSNM12 with cover raised

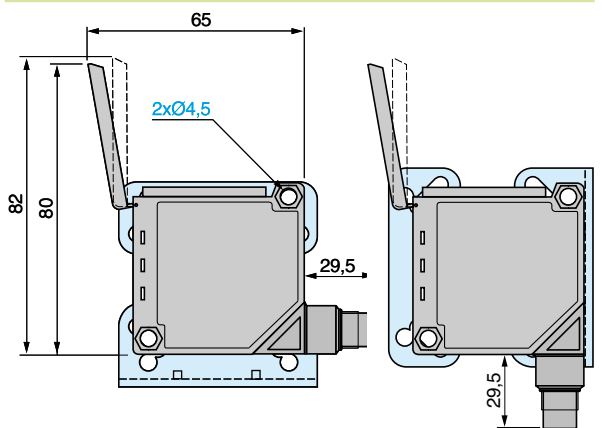


Wiring schemes (3-wire ...)

NO/NC programming



NPN output



NO: detection of object presence
NC: detection of object absence


Cable connections

XUK 8AKSNL2

- (-) BU (Blue)
- (+) BN (Brown)
- (OUT) BK (Black)

Connector scheme

XUK 8AKSNM12



See connection on page 9/44.


Photo-electric sensors

OsiSense XU, general purpose, single mode function


Compact design

Five-wire AC or DC, 1 CO relay output


Three-wire DC, solid-state output




XUX ●A●●●T16




XUX ●A●●●M12




XUZ C50




XUZ X2003




XUZ X2004



XUZ 2001



XUZ X2000



XUZ 2003

| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg | | |
|---|----------|---------------------|---------------------|---------------|---------------------|---------------|-------|
| Diffuse system (1) | | | | | | | |
| DC | | | | | | | |
| 2.1 | NO | PNP | Screw terminals (3) | XUX 5APANT16 | 0.200 | | |
| | | | M12 connector | XUX 5APANM12 | 0.200 | | |
| | NPN | NPN | Screw terminals (3) | XUX 5ANANT16 | 0.200 | | |
| | | | M12 connector | XUX 5ANANM12 | 0.200 | | |
| | NC | PNP | Screw terminals (3) | XUX 5APBNT16 | 0.200 | | |
| | | | M12 connector | XUX 5APBNM12 | 0.200 | | |
| NPN | NPN | Screw terminals (3) | XUX 5ANBNT16 | 0.200 | | | |
| | | M12 connector | XUX 5ANBNM12 | 0.200 | | | |
| AC or DC | | | | | | | |
| 2.1 | NO + NC | Relay | Screw terminals (3) | XUX 5ARCNT16 | 0.200 | | |
| Polarised reflex system (1) | | | | | | | |
| DC | | | | | | | |
| 11 | NO | PNP | Screw terminals (3) | XUX 9APANT16 | 0.200 | | |
| | | | M12 connector | XUX 9APANM12 | 0.200 | | |
| | NPN | NPN | Screw terminals (3) | XUX 9ANANT16 | 0.200 | | |
| | | | M12 connector | XUX 9ANANM12 | 0.200 | | |
| | NC | PNP | Screw terminals (3) | XUX 9APBNT16 | 0.200 | | |
| | | | M12 connector | XUX 9APBNM12 | 0.200 | | |
| NPN | NPN | Screw terminals (3) | XUX 9ANBNT16 | 0.200 | | | |
| | | M12 connector | XUX 9ANBNM12 | 0.200 | | | |
| AC or DC | | | | | | | |
| 11 | NO + NC | Relay | Screw terminals (3) | XUX 9ARCNT16 | 0.200 | | |
| Reflector 50 x 50 mm (2) | | | – | XUZ C50 | 0.020 | | |
| Reflex system (1) | | | | | | | |
| DC | | | | | | | |
| 14 | NO | PNP | Screw terminals (3) | XUX 1APANT16 | 0.200 | | |
| | | | M12 connector | XUX 1APANM12 | 0.200 | | |
| | NPN | NPN | Screw terminals (3) | XUX 1ANANT16 | 0.200 | | |
| | | | M12 connector | XUX 1ANANM12 | 0.200 | | |
| | NC | PNP | Screw terminals (3) | XUX 1APBNT16 | 0.200 | | |
| | | | M12 connector | XUX 1APBNM12 | 0.200 | | |
| NPN | NPN | Screw terminals (3) | XUX 1ANBNT16 | 0.200 | | | |
| | | M12 connector | XUX 1ANBNM12 | 0.200 | | | |
| AC or DC | | | | | | | |
| 14 | NO + NC | Relay | Screw terminals (3) | XUX 1ARCNT16 | 0.200 | | |
| Reflector 50 x 50 mm (2) | | | – | XUZ C50 | 0.020 | | |
| Thru-beam system (1) | | | | | | | |
| DC | | | | | | | |
| Transmitter 40 | | | Screw terminals (3) | XUX 0AKSAT16T | 0.200 | | |
| | | | M12 connector | XUX 0AKSAM12T | 0.200 | | |
| Receiver 40 | NO | PNP | Screw terminals (3) | XUX 2APANT16R | 0.200 | | |
| | | | M12 connector | XUX 2APANM12R | 0.200 | | |
| | NPN | NPN | Screw terminals (3) | XUX 2ANANT16R | 0.200 | | |
| | | | M12 connector | XUX 2ANANM12R | 0.200 | | |
| NC | PNP | Screw terminals (3) | XUX 2APBNT16R | 0.200 | | | |
| | | M12 connector | XUX 2APBNM12R | 0.200 | | | |
| NPN | NPN | Screw terminals (3) | XUX 2ANBNT16R | 0.200 | | | |
| | | M12 connector | XUX 2ANBNM12R | 0.200 | | | |
| AC or DC | | | | | | | |
| Transmitter 40 | | | Screw terminals (3) | XUX 0ARCNT16T | 0.200 | | |
| Receiver 40 | | | NO + NC | Relay | Screw terminals (3) | XUX 2ARCNT16R | 0.200 |
| Fixing accessories (2) | | | | | | | |
| Description | | | | Reference | Weight kg | | |
| 3D fixing kit for use on M12 rod, for XUX or XUZ C50 | | | | XUZ X2003 | 0.220 | | |
| 3D fixing kit for use on M12 rod, with protective cover for XUX | | | | XUZ X2004 | 0.420 | | |
| M12 rod | | | | XUZ 2001 | 0.050 | | |
| Support for M12 rod | | | | XUZ 2003 | 0.150 | | |
| Fixing bracket | | | | XUZ X2000 | 0.120 | | |

(1) With adjustable sensitivity.

(2) For further information, see page 5/158.

(3) Screw terminals with ISO 16 cable gland for cable Ø 7 to 10 mm.

Photo-electric sensors

OsiSense XU, general purpose, single mode function

Compact design

Five-wire AC or DC, 1 CO relay output

Three-wire DC, solid-state output

| Characteristics | | XUX●●●●●M12 | XUX●AN●NT16, ●AP●NT16 | XUX●ARC●T16 |
|-------------------------------------|--|--|-----------------------|-------------|
| Sensor type | | UL, CSA, CE | | |
| Product certifications | | M12 connector | | |
| Connection | | Screw terminals, ISO 16 cable gland | | |
| Sensing distance | | 2.1 / 3 diffuse with adjustable sensitivity | | |
| nominal Sn / maximum | | 11 / 15 polarised reflex with adjustable sensitivity | | |
| (excess gain = 2) (excess gain = 1) | | 14 / 20 reflex with adjustable sensitivity | | |
| | | 40 / 60 thru-beam with adjustable sensitivity | | |
| Type of transmission | | Infrared, except polarised reflex (red) | | |
| Degree of protection | | Conforming to IEC 60529 | | |
| Storage temperature | | °C -40...+70 | | |
| Operating temperature | | °C -25...+55 | | |
| Materials | | Case: PBT | | |
| | | Lens: PMMA | | |
| Vibration resistance | | Conforming to IEC 60068-2-6 | | |
| Shock resistance | | Conforming to IEC 60068-2-27 | | |
| Indicator lights | | Output state: Yellow LED (transmission present for XUX 0●●●●●●T c) | | |
| | | Supply on: Green LED | | |
| Rated supply voltage | | PNP/NPN: V 12...24 with protection against reverse polarity | | |
| | | Relay output: V - | | |
| Voltage limits (including ripple) | | PNP/NPN: V --- 10...36 | | |
| | | Relay output: V - | | |
| Current consumption, no-load | | PNP/NPN: mA ≤35 (20 for XUX 0●●●●●●T) | | |
| Power consumption | | Relay output: W - | | |
| Switching capacity | | PNP/NPN: mA ≤100 with overload and short-circuit protection | | |
| | | Relay output: A - | | |
| Voltage drop, closed state | | V ≤1.5 | | |
| Maximum switching frequency | | PNP/NPN: Hz 250 | | |
| | | Relay output: Hz - | | |
| Delays | | First-up: ms <15 (PNP/NPN); <60 (relay output) | | |
| | | Response: ms <2 (PNP/NPN); <25 (relay output) | | |
| | | Recovery: ms <2 (PNP/NPN); <25 (relay output) | | |


Wiring schemes

| M12 connector | Relay output ~ | PNP/NPN --- | Transmitter --- | Transmitter ~ |
|---------------|------------------|----------------------|-------------------------------------|------------------|
| | Terminals | M12 Terminals | M12 Terminals | Terminals |
| | 1 ⊗ ~ | 1 ● 1 ⊗ + | 1 ● 1 ⊗ + | 1 ⊗ ~ |
| | 2 ⊗ ~ | 3 ● 2 ⊗ - | 3 ● 2 ⊗ - | 2 ⊗ ~ |
| | 3 ⊗ NO | 4 ● 3 ⊗ Output | 2 ● 3 ⊗ Beam break input (1) | |
| | 4 ⊗ Relay common | | (1) Input not connected: beam made. | |
| | 5 ⊗ NC | | Input connected to -: beam broken. | |

See connection on page 9/44.

Maximum permissible conductor c.s.a.: 1 x 1.5 mm² or 1 x 0.75 mm² with cable end.

Detection curves

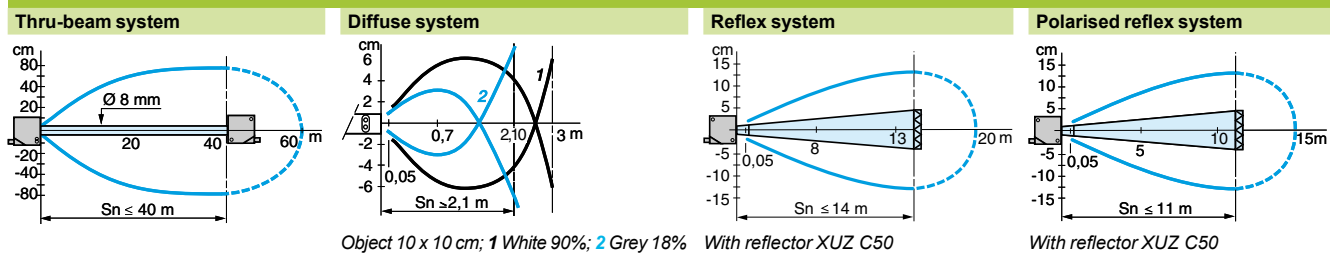

Dimensions

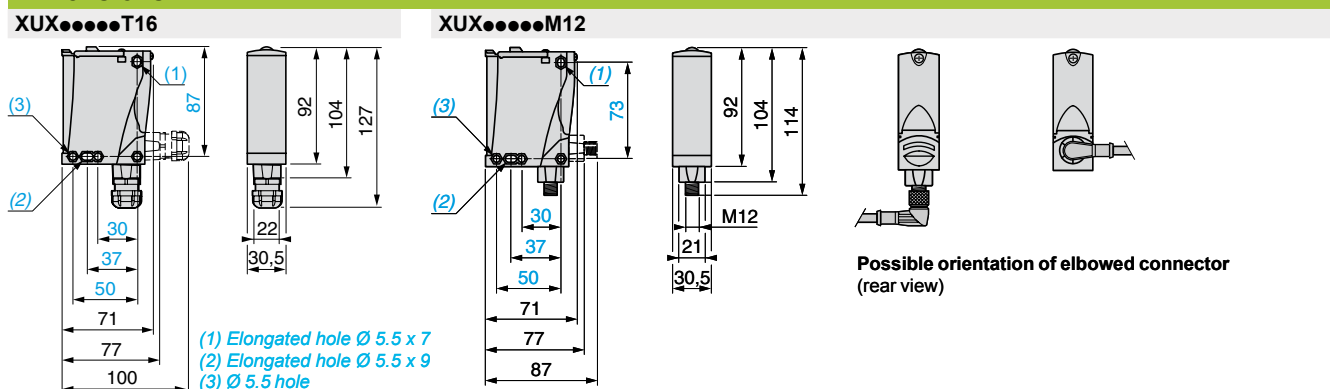



Photo-electric sensors

OsiSense XU, general purpose, multimode function ⁽¹⁾


Compact design

Five-wire AC or DC, 1 CO relay output


Three-wire DC, solid-state output




XUX 0ARCTT16




XUX 0AKSAM12




XUZ X2003




XUZ C50




XUZ X2004




XUZ 2001



XUZ X2000



XUZ X2001



XUZ 2003

References

DC

| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|--|--------------------------|---------|--|--|----------------|
| 0...40 depending on whether accessories are used | NO or NC, by programming | PNP/NPN | Screw terminals, ISO 16 cable gland (3) M12 connector | XUX 0AKSAT16 XUX 0AKSAM12 | 0.200 0.200 |

Accessories

| Description | Connection | Reference | Weight kg |
|------------------------------------|--|--|----------------|
| Transmitter for thru-beam function | Screw terminals, ISO 16 cable gland (3) M12 connector | XUX 0AKSAT16T XUX 0AKSAM12T | 0.200 0.200 |
| Reflector 50 x 50 mm | – | XUZ C50 | 0.020 |

AC or DC

| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|--|--------------------------|------------------|---|---------------------|-----------|
| 0...40 depending on whether accessories are used | NO or NC, by programming | Time delay relay | Screw terminals, ISO 16 cable gland (3) | XUX 0ARCTT16 | 0.200 |

Accessories

| Description | Connection | Reference | Weight kg |
|------------------------------------|---|----------------------|-----------|
| Transmitter for thru-beam function | Screw terminals, ISO 16 cable gland (3) | XUX 0ARCTT16T | 0.200 |
| Reflector 50 x 50 mm | – | XUZ C50 | 0.020 |

Fixing accessories (2)

| Description | Reference | Weight kg |
|---|------------------|-----------|
| 3D fixing kit for use on M12 rod, for XUX or XUZ C50 | XUZ X2003 | 0.220 |
| 3D fixing kit for use on M12 rod, with protective cover for XUX | XUZ X2004 | 0.420 |
| M12 rod | XUZ 2001 | 0.050 |
| Support for M12 rod | XUZ 2003 | 0.150 |
| Fixing bracket | XUZ X2000 | 0.120 |
| Adaptor, ISO 16 - 1/2" NPT | XUZ X2001 | 0.050 |
| Adaptor, ISO 16 - ISO 20 | XUZ X2002 | 0.050 |


(1) For further information on the multimode function, see page 5/12

(2) For further information, see page 5/158.


(3) For Ø 7 to 10 mm cable.

Dimensions

XUX●●●●●T16

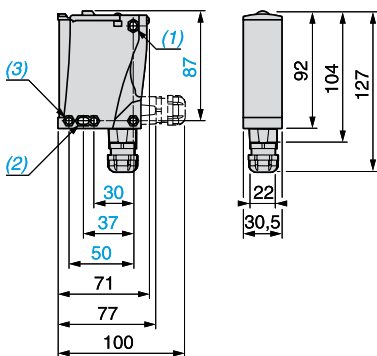

XUX●●●●●M12

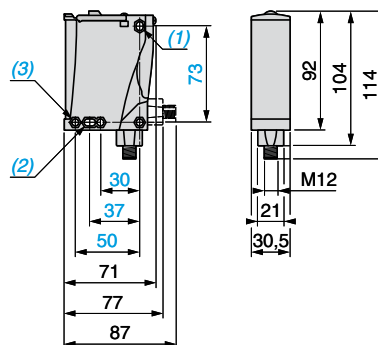

Possible orientation of elbowed connector (rear view)




Photo-electric sensors

OsiSense XU, general purpose, multimode function

Compact design

Five-wire AC or DC, 1 CO relay output

Three-wire DC, solid-state output


| Characteristics | | XUX●●●●●M12 | XUX●●●●●T16 |
|-------------------------------------|------------------------------|---|---|
| Sensor type | | UL, CSA, CE | |
| Product certifications | | M12 connector | Screw terminals, ISO 16 cable gland |
| Connection | | | |
| Sensing distance | | 1.3 / 1.3 without accessory (diffuse with background suppression) | |
| nominal S_n / maximum | | 2 / 3 without accessory (diffuse) | |
| (excess gain = 2) (excess gain = 1) | | 11 / 15 with reflector (polarised reflex) | |
| | | 40 / 60 with transmitter for thru-beam function (thru-beam) | |
| Type of transmission | | Infrared, except for polarised reflex (red) | |
| Degree of protection | Conforming to IEC 60529 | IP 65, IP 67, double insulation | |
| Storage temperature | | °C -40...+70 | |
| Operating temperature | | °C -25...+55 | |
| Materials | Case | PBT | |
| | Lens | PMMA | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1.5 mm (f = 10 to 55 Hz) | |
| Shock resistance | Conforming to IEC 60067-2-27 | 30 gn, duration 11 ms | |
| Indicator lights | Output state | Yellow LED (transmission present for XUX 0●●●●●T) | |
| | Supply on | Green LED | |
| | Stability | Red LED (except for XUX 0●●●●●T) | |
| Rated supply voltage | PNP/NPN | V \sim 12...24 with protection against reverse polarity | |
| | Relay output | V - | 24...240 \sim or \sim |
| Voltage limits (including ripple) | PNP/NPN | V \sim 10...36 | |
| | Relay output | V - | 20...264 \sim or \sim |
| Current consumption, no-load | PNP/NPN | mA \leq 35 (20 for XUX 0●●●●●T) | |
| Power consumption | Relay output | W - | 2 \sim or \sim |
| Alarm output | | mA \leq 100 with overload and short-circuit protection | |
| Switching capacity | PNP/NPN | mA \leq 100 with overload and short-circuit protection | |
| | Relay output | A - | 500 000 operating cycles 3 A: $\cos \varphi = 1/0.5$ A: $\cos \varphi = 0.4$ |
| Voltage drop, closed state | | V \leq 1.5 | |
| Maximum switching frequency | PNP/NPN | Hz 240 | |
| | Relay output | Hz - | 20 |
| Time delay | Relay output | s - | 0.02...15 on-delay, off-delay, monostable |
| Delays | First-up | ms $<$ 200 | |
| | Response | ms $<$ 2 (PNP/NPN); $<$ 25 (relay output) | |
| | Recovery | ms $<$ 2 (PNP/NPN); $<$ 25 (relay output) | |

Wiring schemes

| M12 connector | Relay output \sim | PNP/NPN \sim | Transmitter \sim | Transmitter \sim |
|---------------|--|--|---|----------------------|
| | Terminals | M12 Terminals | M12 Terminals | Terminals |
| | 1 \sim 2 \sim 3 NO 4 Relay common 5 NC | 1 ● 1 \oplus 3 ● 2 \ominus 4 ● 3 \oplus Output 2 ● 4 \oplus Alarm | 1 ● 1 \oplus 3 ● 2 \ominus 2 ● 3 \oplus Beam break input (1) (1) Input not connected: beam made. Input connected to -: beam broken. | 1 \sim 2 \sim |

Maximum permissible conductor c.s.a.: 1 x 1.5 mm² or 1 x 0.75 mm² with cable end.

Detection curves

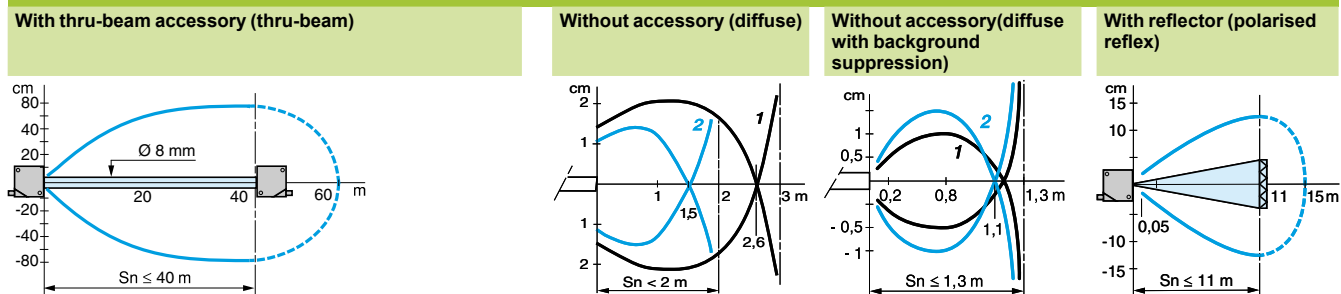

Variation of usable sensing distance S_u (without accessory, with adjustable background suppression)

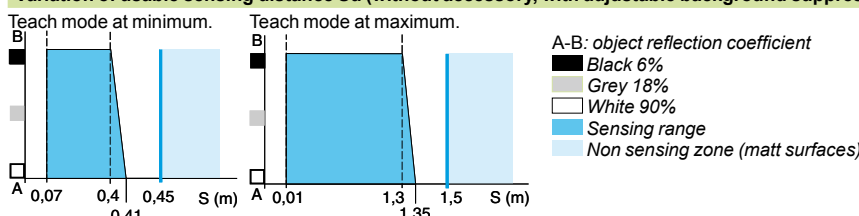


Photo-electric sensors

OsiSense XU, general purpose
With adjustable background suppression
Five-wire AC or DC, 1 CO relay output
Three-wire DC, solid-state output

Compact design



| | |
|-------------------------------|--|
| System | Diffuse with adjustable background suppression, long sensing distance with high accuracy |
| Type of transmission | Infrared |
| Nominal sensing distance (Sn) | 2 m |

References

| | | | | |
|--|--------------------------------|--------------|--------------|--------------|
| 5-wire, AC/DC with terminal connections and ISO 16 cable gland | NO or NC programmable function | XUX 8ARCTT16 | – | |
| 3-wire, PNP or NPN programmable | NO or NC programmable function | – | XUX 8AKSAT16 | XUX 8AKSAM12 |
| Weight (kg) | | 0.200 | 0.200 | 0.200 |

Characteristics

| | | |
|------------------------------|------------------------------|--|
| Product certifications | | CE, UL, CSA |
| Ambient air temperature | | For operation: - 25...+ 55 °C. For storage: - 40...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 10 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 65, IP 67, double insulation (IP 30 with cover open) |
| Materials | | Case: PC, lenses: PMMA |
| Connection | | Terminal connections via ISO 16 cable gland (7 to 10 mm cable) M12 male connector, 4-pin, can be set at 2 positions |
| Rated supply voltage | | ~ or ☐ 24...240 V ☐ 12...24 V with protection against reverse polarity |
| Voltage limits | | ~ or ☐ 20...264 V (including ripple) ☐ 10...0.36V (including ripple) |
| Switching capacity (sealed) | Relay output PNP/NPN | 500 000 operating cycles; 3A Cos φ = 1; 0.5 A Cos φ = 0.4 – ≤ 100 mA with overload and short-circuit protection |
| Indicator light | Output state Supply on | Yellow LED Green LED Red LED |
| Voltage drop, closed state | | ≤ 1.5 V |
| Current consumption, no-load | | 35 mA |
| Maximum switching frequency | Relay output PNP/NPN | 20 Hz – 150 Hz |
| Time delay | Relay output | 0.02...15 s monostable, on delay or off-delay |
| Delays | Relay output PNP/NPN | First-up: ≤ 200 ms; response: ≤ 25 ms; recovery: ≤ 25 ms – First-up: ≤ 200 ms; response: ≤ 3.5 ms; recovery: ≤ 2.5 ms |

| Function table | Function | Diffuse system | | | |
|---|----------|-------------------------------|--|----------------------------|--|
| | | No object present in the beam | | Object present in the beam | |
| Output state (PNP or NPN) indicator: yellow LED (illuminated when sensor output is ON) | NO | | | | |
| | NC | | | | |


5

Photo-electric sensors


OsiSense XU, general purpose
With adjustable background suppression
Five-wire AC or DC, 1 CO relay output
Three-wire DC, solid-state output

Detection curves

Variation of usable sensing distance Su

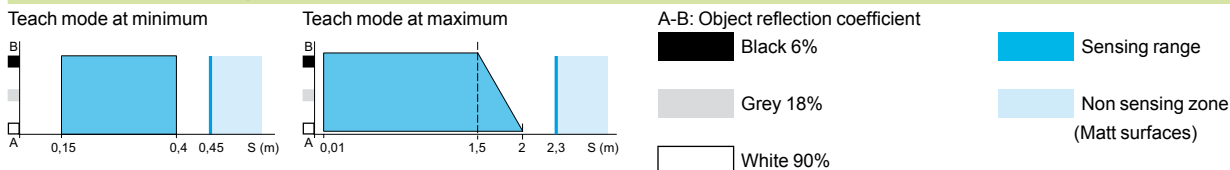


Detection curves

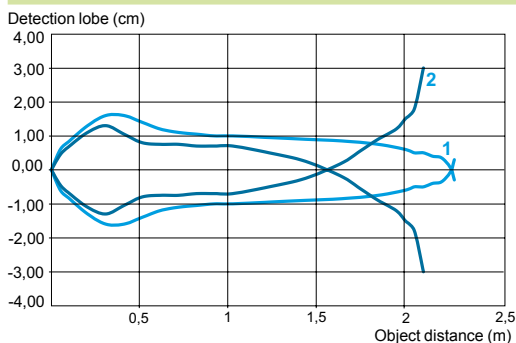

Object: 10 x 10 cm
1 white 90%
2 grey 18%


Relative difference in sensing distances according to object colour

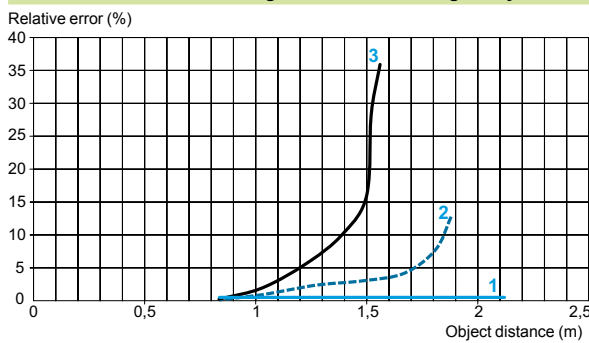


Object: 10 x 10 cm
1 white 90%
2 grey 18%
3 black 6%

Dimensions

XUX●●●●●T16

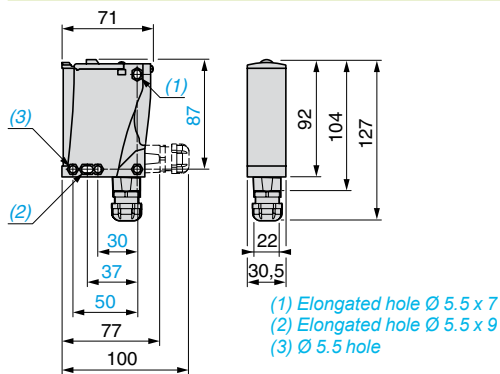

XUX●●●●●M12

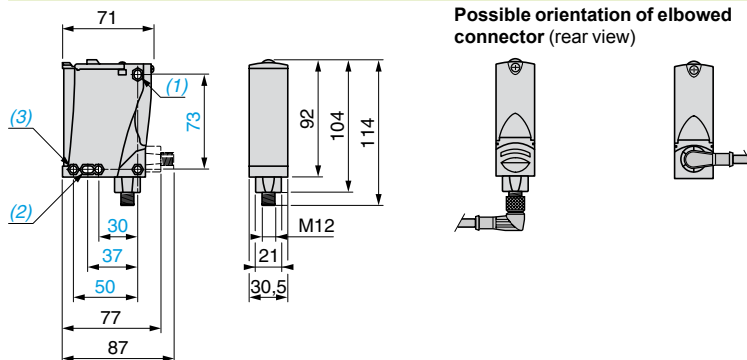

Wiring schemes

M12 connector



See connection on page 9/44.

Relay output \sim

Terminals

- 1 \sim
- 2 \sim
- 3 NO
- 4 Relay common
- 5 NC

PNP/NPN ---

M12 Terminals

- | | |
|-----|--------------------------------|
| 1 ● | 1 \varnothing + |
| 3 ● | 2 \varnothing - |
| 4 ● | 3 \varnothing Output |
| 2 ● | 4 \varnothing Alarm inactive |

Maximum permissible conductor c.s.a.: 1 x 1.5 mm²
or 1 x 0.75 mm² with cable end.

Typical application

Wrapping system/outer wrapping

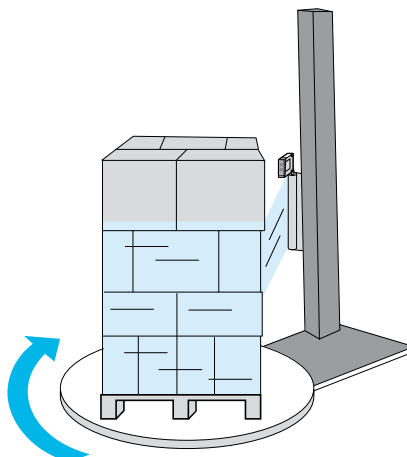



Photo-electric sensors

OsiSense XU

Optical fork without adjustment

DC supply. Solid-state output

Optical fork without adjustment

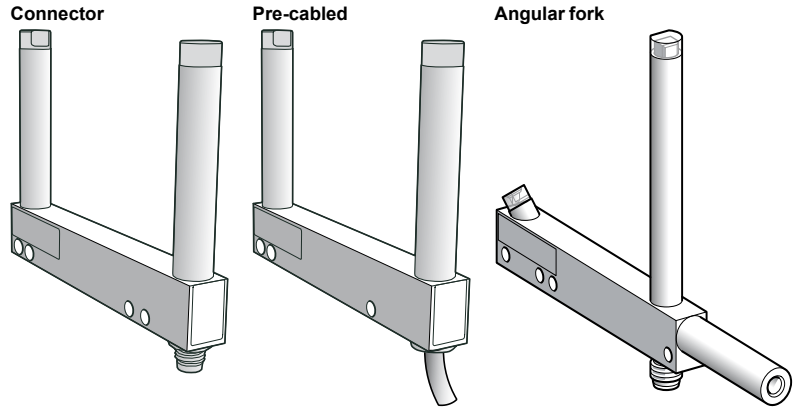

| | | |
|--|-----------------------|---------------|
| System | Thru-beam | |
| Type of transmission | Red LED, modulated | |
| Nominal sensing distance (Sn) | 2...180 mm | |
| Minimum size of object detected | Passageway 2...120 mm | 0.8 mm |
| | Passageway ≥ 150 mm | 1.5 mm |
| Fork type | XUV R● | XUV A● |

References of forks type XUV R●

| 3-wire NO or NC function PNP or NPN output | Passageway (A) | Function | Output | Pre-cabled, length 2 m. Depth (B): 30 mm | |
|--|----------------|----------|-----------------------|--|-----------------------|
| <p>A = Passageway B = Depth</p> | 30 mm | NO | PNP | XUV R0303PANL2 | |
| | 50 mm | NO | PNP | M8 connector, 3-pin. Depth (B): 60 mm | |
| | | | NPN | XUV R0605PANM8 | |
| | | | NC | PNP | XUV R0605NANM8 |
| | | | NPN | XUV R0605PBNM8 | |
| | 80 mm | NO | PNP | XUV R0605NBNM8 | |
| | | | NPN | XUV R0608PANM8 | |
| | | | NC | PNP | XUV R0608NANM8 |
| | | | NPN | XUV R0608PBNM8 | |
| | 120 mm | NO | PNP | XUV R0608NBNM8 | |
| | | | NPN | XUV R1212PANM8 | |
| | | | NC | PNP | XUV R1212NANM8 |
| NPN | | | XUV R1212PBNM8 | | |
| 180 mm | NO | PNP | XUV R1212NBNM8 | | |
| | | NPN | XUV R1218PANM8 | | |
| | | NC | PNP | XUV R1218NANM8 | |
| | | NPN | XUV R1218PBNM8 | | |
| | | | | XUV R1218NBNM8 | |

Weight (kg) 0.080 to 0.190 depending on model

References of forks type XUV A●

| 3-wire NO function, PNP output | Type | Function | Output | M8 connector, 3-pin |
|-----------------------------------|--------|----------|--------|-----------------------|
| <p>A = Passageway</p> | 50 mm | NO | PNP | XUV A0505PANM8 |
| | 80 mm | NO | PNP | XUV A0808PANM8 |
| | 120 mm | NO | PNP | XUV A1212PANM8 |
| | 150 mm | NO | PNP | XUV A1515PANM8 |

Weight (kg) 0.100 to 0.195 depending on model

Other versions: please consult our Customer Care Centre.


Applications: detection on conveyor, detection on vibrating rail.

Accessories

| Description | Details | Length of cable (m) | Reference | Weight kg |
|------------------------|---------------|---------------------|--------------------|-----------|
| Pre-wired M8 connector | Straight | 2 | XZC P0566L2 | 0.060 |
| | Elbowed (90°) | 2 | XZC P0666L2 | 0.060 |
| | Straight | 5 | XZC P0566L5 | 0.120 |
| | Elbowed (90°) | 5 | XZC P0666L5 | 0.120 |


| Characteristics | | XUV R● | XUV A |
|--|------------------------------|--|-------|
| Product certifications | | CE, UL, CSA | CE |
| Ambient air temperature | For operation | - 10...+ 60 °C | |
| | For storage | - 40...+ 80 °C | |
| Degree of protection | Conforming to IEC 60529 | IP 65 and IP 67 | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 0.75 mm (f = 10 to 55 Hz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Materials | Case | Painted aluminium and polyamide | |
| Rated supply voltage | | — 12...24 V with protection against reverse polarity | |
| Voltage limits (including ripple) | | — 10...30 V | |
| Immunity to ambient light | Natural light | 10 000 lux | |
| | Incandescent bulb | 5000 lux | |
| Switching capacity | | 100 mA with overload and short-circuit protection | |
| Voltage drop, closed state | | < 1.5 V | |
| Current consumption, no-load | | < 20 mA | |
| Maximum switching frequency | | 4000 Hz | |
| Delays | First-up | 140 ms max. | |
| | Stability | ± 15 µs | |
| Indicator lights | Yellow LED | Output signal | |

Dimensions

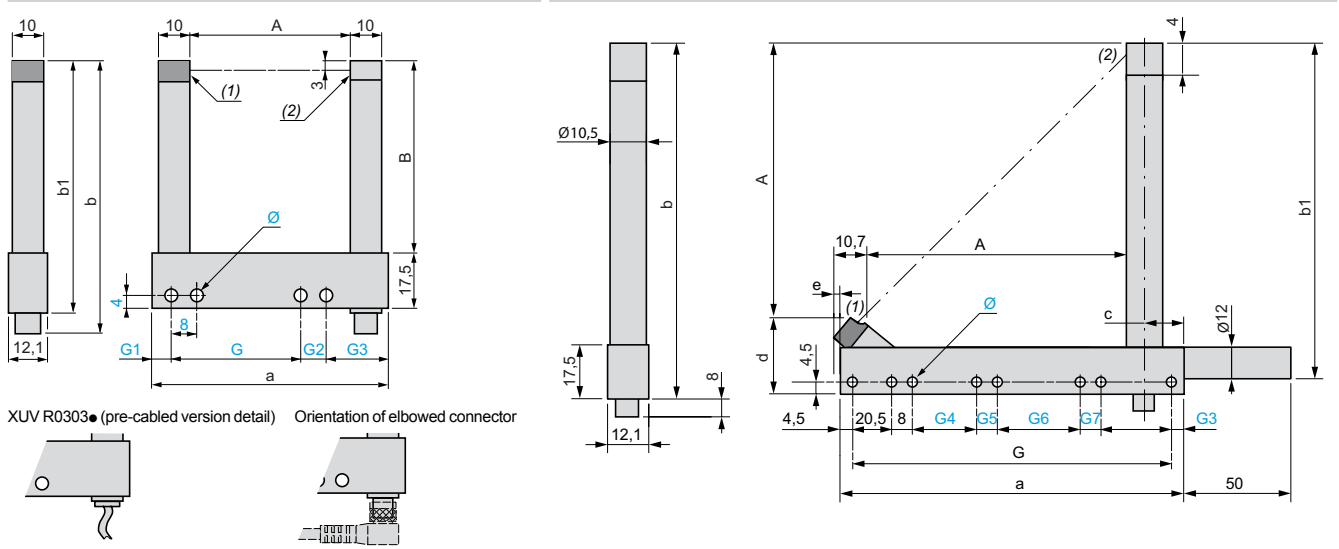

| (1) Transmission LED - (2) Yellow LED: output signal | | | | | | | | | | (1) Transmission LED - (2) Yellow LED: output signal | | | | | | | | | | | | | | | | | | |
|--|--------------|---------|-----|-------|------|-----|-----|----|------|--|-----------------|------|---------|-----|-----|-----|-----|----|----|-----|---------|----|----|----|----|-------|-------|---|
| Type XUV R | Passageway A | Depth B | a | b | b1 | G | G1 | G2 | G3 | Ø | Type XUV A | Type | Depth A | a | b | b1 | G | G1 | G2 | G3 | Ø | G4 | G5 | G6 | G7 | c | d | e |
| XUV R0303●●●●●● | 30 | 40 | 54 | 65.7 | 57.5 | 30 | 17 | — | — | 4 x 4.3 | XUV A0505●●●●●● | 50 | 44.3 | 75 | 83 | 75 | 66 | — | — | 4.5 | 4 x 4.3 | — | — | — | — | 14.75 | 26.41 | 0 |
| XUV R0605●●●●●● | 50 | 60 | 74 | 85.7 | 77.5 | 40 | 6.5 | 8 | 19.5 | 4 x 4.3 | XUV A0808●●●●●● | 80 | 74.3 | 105 | 113 | 105 | 96 | — | — | 4.5 | 4 x 4.3 | — | — | — | — | 14.75 | 26.41 | 0 |
| XUV R0608●●●●●● | 80 | 60 | 104 | 85.7 | 77.5 | 70 | 6.5 | 8 | 19.5 | 4 x 4.3 | XUV A1212●●●●●● | 120 | 112.3 | 145 | 154 | 146 | 136 | — | — | 4.5 | 4 x 4.3 | — | — | — | — | 19.75 | 29.24 | 3 |
| XUV R01212●●●●●● | 120 | 124.3 | 144 | 150.2 | 142 | 100 | 17 | 10 | 17 | 4 x 4.3 | XUV A1515●●●●●● | 150 | 142.3 | 175 | 184 | 176 | 166 | — | — | 4.5 | 8 x 4.3 | 24 | 8 | 60 | 8 | 19.75 | 29.24 | 3 |
| XUV R01218●●●●●● | 180 | 124.3 | 204 | 150.2 | 142 | 152 | 22 | 8 | 22 | 4 x 4.3 | | | | | | | | | | | | | | | | | | |

Wiring schemes



Application examples

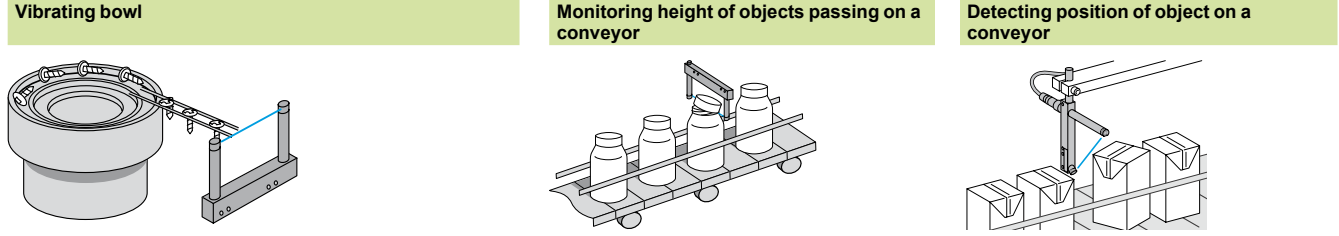


Photo-electric sensors

OsiSense XU Application


Optical fork with teach mode

DC supply. Solid-state output

Optical fork with teach mode


+/- numeric potentiometer mode
Green keypad

Teach mode
Yellow keypad

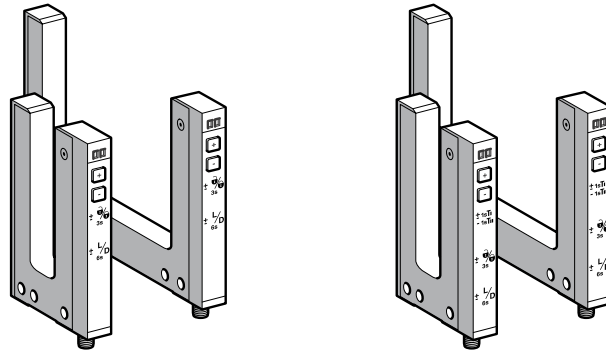

| | |
|---------------------------------|-------------------------|
| System | Thru-beam |
| Type of transmission | Infrared LED, modulated |
| Nominal sensing distance (Sn) | 2...120 mm |
| Minimum size of object detected | Passageway 2...120 mm |
| Fork type | XUY FNEP● XUY FANEP● |

References

| 4-wire, PNP/NPN independent outputs | NO/NC function, selectable | Passageway (A) | | | Depth (B) | | | |
|---|----------------------------|----------------|---------------|---------------|----------------|----------------|----------------|-----------------|
| | | mm | 42 | 59 | 95 | 42 | 59 | 95 |
|  <p>A = Passageway B = Depth</p> | | 2 | XUY FNEP40002 | XUY FNEP60002 | XUY FNEP100002 | XUY FANEP40002 | XUY FANEP60002 | XUY FANEP100002 |
| | | 5 | XUY FNEP40005 | XUY FNEP60005 | XUY FNEP100005 | XUY FANEP40005 | XUY FANEP60005 | XUY FANEP100005 |
| | | 15 | XUY FNEP40015 | XUY FNEP60015 | XUY FNEP100015 | XUY FANEP40015 | XUY FANEP60015 | XUY FANEP100015 |
| | | 30 | XUY FNEP40030 | XUY FNEP60030 | XUY FNEP100030 | XUY FANEP40030 | XUY FANEP60030 | XUY FANEP100030 |
| | | 50 | XUY FNEP40050 | XUY FNEP60050 | XUY FNEP100050 | XUY FANEP40050 | XUY FANEP60050 | XUY FANEP100050 |
| | | 80 | XUY FNEP40080 | XUY FNEP60080 | XUY FNEP100080 | XUY FANEP40080 | XUY FANEP60080 | XUY FANEP100080 |
| | | 120 | XUY FNEP40120 | XUY FNEP60120 | XUY FNEP100120 | XUY FANEP40120 | XUY FANEP60120 | XUY FANEP100120 |

Weight (kg) 0.055 to 0.128 depending on model

Characteristics

| | | |
|-----------------------------------|---|---|
| Product certifications | CE, cULus. This product is UL Listed if supplied by a class II or isolated supply delivering --- 30 V max. (isolated transformer for example) and protected by a UL fuse rated at 3A max. | |
| Ambient air temperature | For operation | - 20...+ 60 °C |
| | For storage | - 30...+ 80 °C |
| Degree of protection | Conforming to IEC 60529 | IP 65 |
| Connection | M8, 4-pin male connector (for 3-pin version please consult our Customer Care Centre) | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 0.75 mm (f = 10 to 55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms |
| Materials | Case | Painted aluminium and polyamide/glass |
| Rated supply voltage | --- 12...24 V with protection against reverse polarity | |
| Voltage limits (including ripple) | --- 10...30 V | |
| Immunity to ambient light | Natural light | 10 000 lux |
| | Incandescent bulb | 5000 lux |
| Outputs | PNP and NPN | By independent wire |
| | NO/NC | By programming |
| Switching capacity | 100 mA with overload and short-circuit protection | |
| Voltage drop, closed state | < 2 V | |
| Current consumption, no-load | 40 mA | |
| Permissible capacitive load | 330 nF | |
| Maximum switching frequency | 10 kHz | |
| Response time | Stability | +/- 20 µs |
| Indicator lights | Yellow LED | Output signal |
| | Red LED | Adjustment mode and keypad locking |


Application: Detection of labels, detection of double sheet, detection of reference marks, detection on conveyor, detection on vibrating rail.

Accessories

| Description | Details | Length of cable (m) | References | Weight kg |
|------------------------|---------------|---------------------|-------------|-----------|
| Pre-wired M8 connector | Straight | 2 | XZC P0941L2 | 0.080 |
| | Elbowed (90°) | 2 | XZC P1041L2 | 0.080 |
| | Straight | 5 | XZC P0941L5 | 0.180 |
| | Elbowed (90°) | 5 | XZC P1041L5 | 0.180 |


Presentation

XUY FNEP●●●



- 1 Yellow LED "ON": Output activated
- 2 Red LED "ON": Adjustments and keypad locking
- 3, 4 Sensitivity adjustment
- 3+4 Keypad locking (3 s ≤ press time < 6 s)
- 3+4 NO/NC (press time ≥ 6 s)


XUY FANEP●●●



- 1 Yellow LED "ON": Output activated
- 2 Red LED "ON": Adjustments and keypad locking
- 3, 4 Sensitivity adjustment
- 3+4 Teach mode and automatic adjustment of sensitivity (press time < 3 seconds)
- 3+4 Keypad locking (3 s ≤ press time < 6 s)
- 3+4 NO/NC (press time ≥ 6 s)

Dimensions

XUY FNEP●●● / XUY FANEP●●●

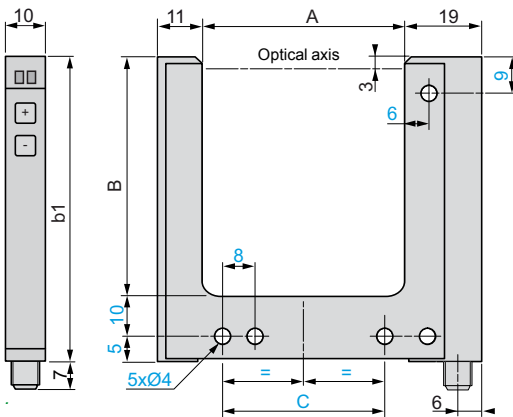

| XUY | Passageway Depth | | b1 | C |
|----------------|------------------|------------|-------------|-----|
| | A | B | | |
| FNEP/FANEP●002 | 2 | 42, 59, 95 | 57, 74, 110 | 14 |
| FNEP/FANEP●005 | 5 | 42, 59, 95 | 57, 74, 110 | 14 |
| FNEP/FANEP●015 | 15 | 42, 59, 95 | 57, 74, 110 | 27 |
| FNEP/FANEP●030 | 30 | 42, 59, 95 | 57, 74, 110 | 42 |
| FNEP/FANEP●050 | 50 | 42, 59, 95 | 57, 74, 110 | 40 |
| FNEP/FANEP●080 | 80 | 42, 59, 95 | 57, 74, 110 | 70 |
| FNEP/FANEP●120 | 120 | 42, 59, 95 | 57, 74, 110 | 110 |

5

Wiring schemes


Cabling



Pin n° - colour

- 1 BN: Brown
- 2 WH: White
- 3 BU: Blue
- 4 BK: Black


M8 connector

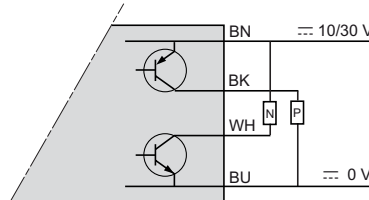

Application examples


Green keypad: Potentiometer mode

Detection of labels on belt

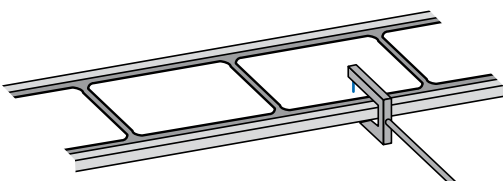


Yellow keypad: Teach mode


Detection of sheet feed on printing machine

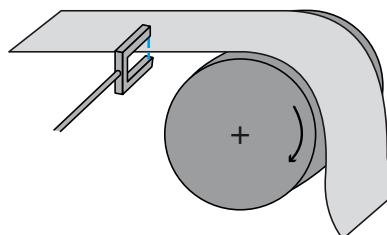

High sensitivity fork range




Laser class 1, conforming to IEC 825-1

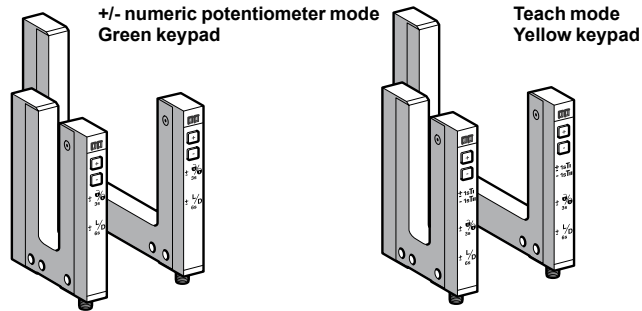

| | | |
|--|--|--------------------|
| System | Thru-beam | |
| Type of transmission | Red laser, modulated, class 1, wavelength: 670 m | |
| Nominal sensing distance (Sn) | 2...120 mm | |
| Minimum size of object detected | Passageway 2...120 mm 0.05 mm (repeat accuracy 0.01 mm) | |
| Fork type | XUY FLNEP● | XUY FALNEP● |

References

4-wire, PNP/NPN independent outputs NO/NC function, selectable



A = Passageway
B = Depth

| Passageway (A) mm | Depth (B) | | | Depth (B) | | |
|----------------------|----------------|----------------|-----------------|-----------------|-----------------|------------------|
| | 42 | 59 | 95 | 42 | 59 | 95 |
| 2 | XUY FLNEP40002 | XUY FLNEP60002 | XUY FLNEP100002 | XUY FALNEP40002 | XUY FALNEP60002 | XUY FALNEP100002 |
| 5 | XUY FLNEP40005 | XUY FLNEP60005 | XUY FLNEP100005 | XUY FALNEP40005 | XUY FALNEP60005 | XUY FALNEP100005 |
| 15 | XUY FLNEP40015 | XUY FLNEP60015 | XUY FLNEP100015 | XUY FALNEP40015 | XUY FALNEP60015 | XUY FALNEP100015 |
| 30 | XUY FLNEP40030 | XUY FLNEP60030 | XUY FLNEP100030 | XUY FALNEP40030 | XUY FALNEP60030 | XUY FALNEP100030 |
| 50 | XUY FLNEP40050 | XUY FLNEP60050 | XUY FLNEP100050 | XUY FALNEP40050 | XUY FALNEP60050 | XUY FALNEP100050 |
| 80 | XUY FLNEP40080 | XUY FLNEP60080 | XUY FLNEP100080 | XUY FALNEP40080 | XUY FALNEP60080 | XUY FALNEP100080 |
| 120 | XUY FLNEP40120 | XUY FLNEP60120 | XUY FLNEP100120 | XUY FALNEP40120 | XUY FALNEP60120 | XUY FALNEP100120 |

Weight (kg) 0.055 to 0.128 depending on model

Characteristics

| | | |
|--|---|---|
| Product certifications | CE, cULus. This product is UL Listed if supplied by a class II or isolated supply delivering ≤ 30 V max. (isolated transformer for example) and protected by a UL fuse rated at 3 A max. | |
| Ambient air temperature | For operation | -20...+50 °C |
| | For storage | -30...+80 °C |
| Degree of protection | Conforming to IEC 60529 IP 65 | |
| Connection | M8, 4-pin male connector | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 0.75 mm (f = 10 to 55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms |
| Materials | Case | Painted aluminium and polyamide/glass |
| Rated supply voltage | $\leq 12...24$ V with protection against reverse polarity | |
| Voltage limits (including ripple) | $\leq 10...30$ V | |
| Immunity to ambient light | Natural light | 10 000 lux |
| | Incandescent bulb | 5000 lux |
| Outputs | PNP/NPN | By wiring |
| | NO/NC | Using teach mode |
| Switching capacity | 100 mA with overload and short-circuit protection | |
| Voltage drop, closed state | < 2 V | |
| Current consumption, no-load | < 40 mA | |
| Permissible capacitive load | 330 nF | |
| Maximum switching frequency | 10 kHz | |
| Response time | +/- 20 μ s | |
| Indicator lights | Yellow LED: output signal; red LED: keypad locking and adjustments | |


■ Applications: Detection of reference marks, detection on conveyor, detection on vibrating rail, detection of transparent object.

Accessories

| Description | Details | Length of cable (m) | References | Weight kg |
|------------------------|---------------|---------------------|-------------|-----------|
| Pre-wired M8 connector | Straight | 2 | XZC P0941L2 | 0.080 |
| | Elbowed (90°) | 2 | XZC P1041L2 | 0.080 |
| | Straight | 5 | XZC P0941L5 | 0.180 |
| | Elbowed (90°) | 5 | XZC P1041L5 | 0.180 |


Presentation

XUY FLNEP●



- 1 Yellow LED "ON":
Output activated
- 2 Red LED "ON":
Adjustments and keypad
locking
- 3,4 Sensitivity adjustment
- 3+4 Keypad locking
(3 s ≤ press time < 6 s)
- 3+4 NO/NC (press time ≥ 6 s)


XUY FALNEP●



- 1 Yellow LED "ON":
Output activated
- 2 Red LED "ON":
Adjustments and keypad
locking
- 3,4 Sensitivity adjustment
- 3+4 Teach mode and automatic adjustment of sensitivity
(press time < 3 seconds)
- 3+4 Keypad locking (3 s ≤ press time < 6 s)
- 3+4 NO/NC (press time ≥ 6 s)

Dimensions

XUY FLNEP●/XUY FALNEP●

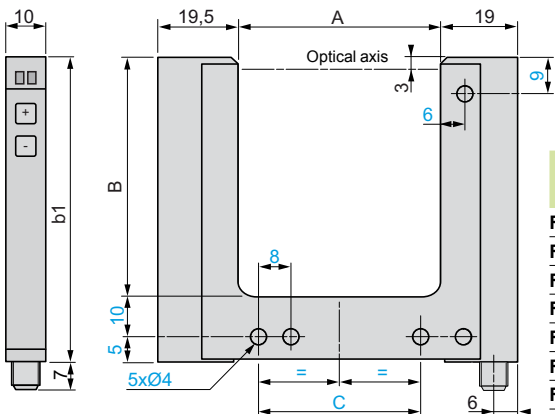

| XUY | Passageway Depth | | b1 | C |
|------------------|------------------|------------|-------------|-----|
| | A | B | | |
| FLNEP/FALNEP●2 | 2 | 42, 59, 95 | 57, 74, 110 | 14 |
| FLNEP/FALNEP●5 | 5 | 42, 59, 95 | 57, 74, 110 | 14 |
| FLNEP/FALNEP●15 | 15 | 42, 59, 95 | 57, 74, 110 | 27 |
| FLNEP/FALNEP●30 | 30 | 42, 59, 95 | 57, 74, 110 | 42 |
| FLNEP/FALNEP●50 | 50 | 42, 59, 95 | 57, 74, 110 | 40 |
| FLNEP/FALNEP●80 | 80 | 42, 59, 95 | 57, 74, 110 | 70 |
| FLNEP/FALNEP●120 | 120 | 42, 59, 95 | 57, 74, 110 | 110 |

Wiring schemes


Cabling



Pin n° - colour

- 1 BN: Brown
- 2 WH: White
- 3 BU: Blue
- 4 BK: Black


M8 connector

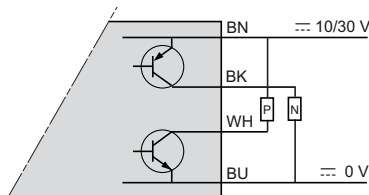

Application examples


Green keypad: Potentiometer mode

Detection of an object exiting a vibrating bowl



Yellow keypad: Teach mode

Detection of transparent bottles (glass, PET...)




Ultrasonic sensor

OsiSense XU Application, packaging series

For detection of transparent labels

DC supply. Solid-state output

Fork design



| | |
|--------------------------------------|------------|
| System | Thru-beam |
| Type of transmission | Ultrasonic |
| Nominal sensing distance (Sn) | 3 mm |









References

| | | |
|-------------------------------|--|-----------------------|
| 4-wire, PNP and NPN | NO or NC programmable function | XUV U06M3KCNM8 |
| Adjustment | By numerical potentiometer (+/- buttons) and red LED | |
| Protection of settings | By locking keypad | |
| Weight (kg) | 0.130 | |


Characteristics

| | | |
|-------------------------------|-----------------------------------|---|
| Product certifications | CE, IEC 60947-5-2 | |
| Materials | Aluminium case | |
| Connection | M8, 4-pin connector | |
| Detection performance | Minimum length of label | 2 mm |
| | Minimum distance between 2 labels | 2 mm |
| | Maximum flow rate | 120 m/min |
| | Detection accuracy | +/- 0.16mm at 60m/min +/- 0.30mm at 120m/min |
| Supply | Rated supply voltage | 12...24 V with protection against reverse polarity |
| | Voltage limits | 10...30 V (including ripple) |
| | Current consumption, no-load | 40 mA |
| | Residual voltage | |
| | At 100 mA | < 2 V |
| | At 10 mA | < 1 V |
| Output | Maximum rated current | 100 mA with overload and short-circuit protection |
| | Maximum switching frequency | 500 Hz |
| | Indicator lights | |
| | Output state | Yellow LED |
| Delay | On and Off: 500 µs | |
| Environment | Operating temperature | + 5...+ 55 °C |
| | Storage temperature | - 20 °C...+ 70 °C |
| | Degree of protection | IP 65 |

Function table


| | Function | Thru-beam system | |
|--|----------|---|---|
| | | No label present in the beam (output inactive) | Label present in the beam (output active) |
| Output state (PNP or NPN) indicator: yellow LED (illuminated when sensor output is ON) | NC |   |   |
| | NO |   |   |

Presentation (adjustment and display)



- 1 Tripping threshold adjustment using +/- buttons
- 2 Locking of keypad by simultaneously pressing ± buttons and holding down for 3 s
- 3 Selection of output type (NO or NC) by simultaneously pressing ± buttons and holding down for 6 s
- 4 Yellow LED: ON when outputs active (current established)
Yellow LED: flashes slowly in event of output short-circuit
- 5 Red LED: ON each time the +/- buttons are pressed
Red LED: Permanently ON when keypad locked
Red LED: OFF when keypad unlocked

Dimensions

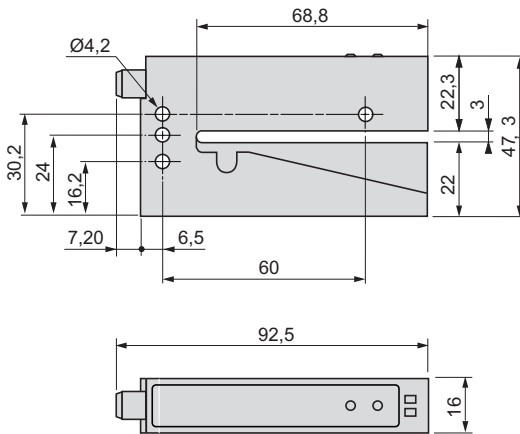


Wiring schemes (sensor connector pin view)

Connector



| | | |
|---|-------|------------------|
| 1 | Brown | --- + 10... 30 V |
| 2 | White | NPN output |
| 3 | Blue | --- 0 V |
| 4 | Black | PNP output |

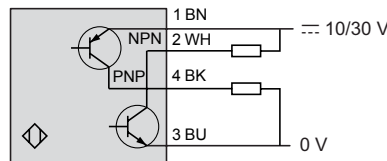

Application examples

Detection of transparent labels transparent on opaque strip

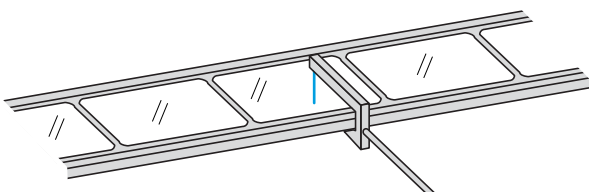



Photo-electric sensors

OsiSense XU Application, packaging series

For detection of labels (1)

DC supply. Solid-state output

Fork design



| | | |
|-------------------------------|-----------|-----------|
| System | Thru-beam | |
| Type of transmission | Infrared | Red/green |
| Nominal sensing distance (Sn) | 2 mm | |

References

| | | | |
|---------------------|------------------------------------|-------------------|--------------------|
| 3-wire, PNP and NPN | NO or NC programmable function (2) | XUV K0252S | XUV K0252VS |
| Weight (kg) | 0.120 | | |

Characteristics

| | | |
|------------------------------|--|--|
| Product certifications | CE | |
| Ambient air temperature | For operation: 0...+55 °C. For storage: -20...+70 °C | |
| Vibration resistance | Conforming to IEC 60068-2-6 | Amplitude ±1.5 mm up to 55 Hz, 7 gn (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 65 |
| Connection | M8 connector (suitable female connectors, see page 9/44) | |
| Materials | Case: zinc alloy; lenses: glass | |
| Rated supply voltage | = 12...24 V with protection against reverse polarity | |
| Voltage limits | = 10...30 V (including ripple) | |
| Switching capacity (sealed) | ≤ 100 mA with overload and short-circuit protection | |
| Voltage drop, closed state | ≤ 1.5 V | |
| Output clamping resistor | 10 kΩ | |
| Current consumption, no-load | ≤ 50 mA | |
| Maximum switching frequency | 25 kHz | |
| Delays | First-up: ≤ 30 ms; response < 100 μs; recovery < 100 μs | |
| Indicator lights | Output state | Yellow LED |
| | Sensor ready | Green LED |
| | Read error | Red LED |

| Function table | Function | Thru-beam system | |
|---|----------|------------------------------|---------------------------|
| | | No label present in the beam | Label present in the beam |
| Output state (PNP or NPN) indicator: yellow LED (illuminated when sensor output is ON) | NC | | |
| | NO | | |

(1) Applications: the infrared transmission beam sensor **XUV K0252S** is suitable for the detection of all types of opaque labels; the red/green transmission sensor **XUV K0252VS** is suitable for the detection of all types of labels of different colours.

(2) This sensor is adjustable using teach mode: the NC or NO function is selected when performing the first stage of teaching for setting-up the sensor (see programming using teach mode, page 5/59).


Photo-electric sensors

OsiSense XU Application, packaging series

For detection of labels

DC supply. Solid-state output

Presentation

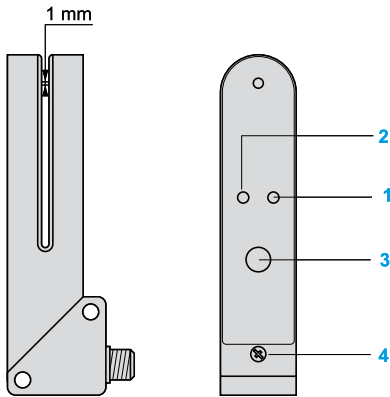


Programming using teach mode


- Place the label to be detected in the beam of the optical fork. Press the SET button and hold down until the green LED 2 goes out,
- When the green LED 2 flashes, the detector has “learnt” the label. Following this, place the backing to which the label is affixed in the beam of the optical fork. Press the SET button and hold down until the green LED 2 goes out,
- When the green LED 2 illuminates as a steady light teaching is completed and the sensor is ready for operation.

- 1 Yellow LED, output state indicator
- 2 Dual colour green/red LED, Ready/Error
- 3 Teach mode programming SET button
- 4 Locking screw

Dimensions

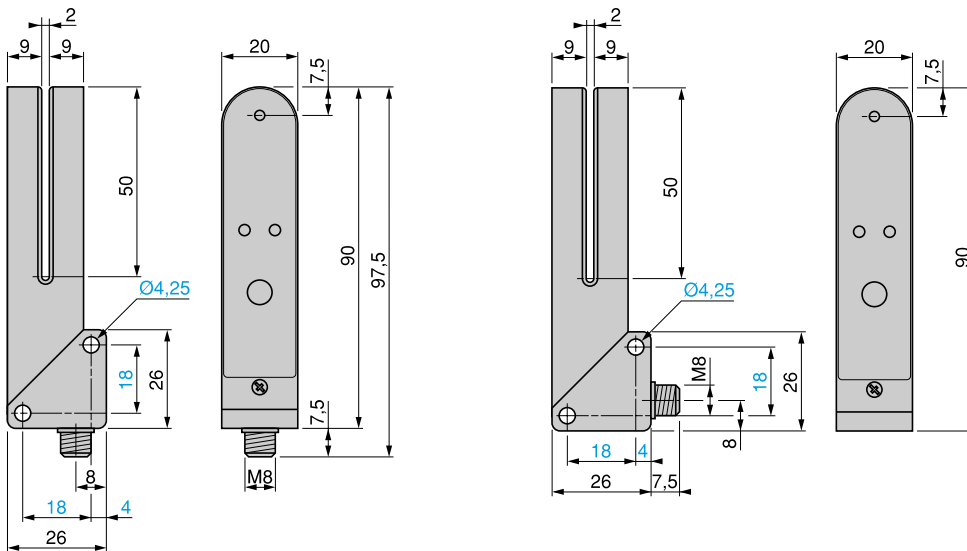

Connector scheme (sensor connector pin view)



See connection on page 9/44.

Photo-electric sensors


OsiSense XU Application, packaging series

Optical fork with teach mode

For detection of labels

DC supply. Solid-state output

Fork design



| | | | |
|---|---|--|------------------------|
| System | | Thru-beam | |
| Type of transmission | | Infrared, continuous | |
| Nominal sensing distance (Sn) (Passageway) | | 3 mm | 5 mm |
| References | | | |
| 4-wire, PNP and NPN | NO or NC programmable function (1) Automatic adjustment using teach mode | XUY FA983003COS | XUY FA983005COS |
| Weight (kg) | | 0.07 | 0.07 |
| Characteristics | | | |
| Product certifications | | CE, cULus | |
| Ambient air temperature | For operation | - 20...+ 60 °C | |
| | For storage | - 30...+ 80 °C | |
| Degree of protection | Conforming to IEC 60529 | IP 65 | |
| Connection | | M8, 4-pin connector (for pre-cabled version please consult our Customer Care Centre) | |
| Materials | | Anodised aluminium | |
| Rated supply voltage | | ⎓ 12...24 V with protection against reverse polarity | |
| Voltage limits (including ripple) | | ⎓ 10...30 V | |
| Switching capacity (sealed) | | ≤ 100 mA with overload and short-circuit protection | |
| Immunity to ambient light | Natural light | 3000 lux | |
| | Incandescent bulb | 3000 lux | |
| Voltage drop, closed state | | < 2 V | |
| Current consumption, no-load | | 40 mA | |
| Maximum switching frequency | | 10 kHz | |
| Delays | | Response: 50 μs; recovery: 50 μs | |
| Indicator lights | | Green LED: no object present Red LED: keypad locking and adjustments. | |

| Function table | Function | Thru-beam system | |
|---|----------|------------------------------|---------------------------|
| | | No label present in the beam | Label present in the beam |
| Output state (PNP or NPN) indicator: green LED (illuminated when sensor output is ON) | NC | | |
| | NO | | |

(1) By reversing supply connections.

Photo-electric sensors


OsiSense XU Application, packaging series

Optical fork with teach mode

For detection of labels

DC supply. Solid-state output


Presentation (adjustment and indicators)

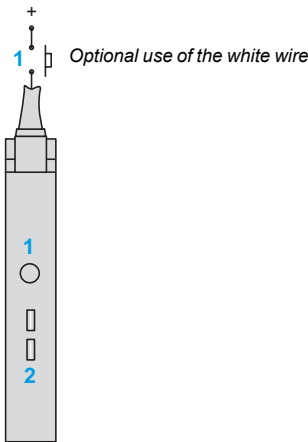

Teaching is performed on the item to which the label is affixed

- 1 Teach mode button
 - 1 press: standard teaching (red LED flashes for 2 s)
 - 2 presses: fine teaching (green LED flashes for 2 s)
 - 1 prolonged press: keypad locking (red LED on)
- 2 Red LED and green LED flash: short-circuit or object too opaque.

Dimensions

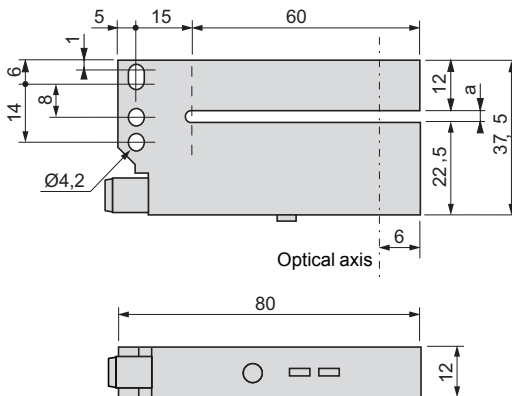

| XUY | a (passageway) |
|-------------|----------------|
| FA98●●●3COS | 2 |
| FA98●●●5COS | 5 |

5


Wiring schemes (sensor connector pin view)

Connector



Pin n° - colour


- 1 BN: Brown
- 2 WH: White (input)
- 3 BU: Blue
- 4 BK: Black (PNP and NPN outputs)

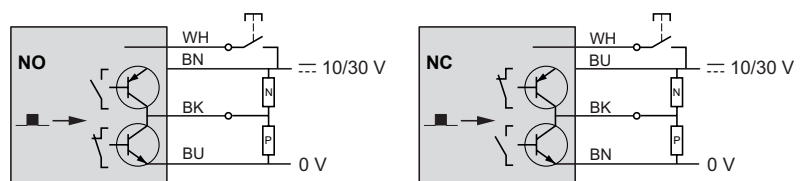

■ → Object detected
If the white wire is not used, connect to 0 V.

Application examples

Detection of overlapping envelopes

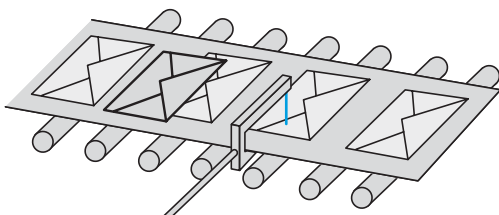

Detection of labels on belt

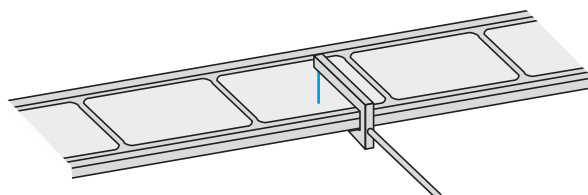



Photo-electric sensors



OsiSense XU Application, material handling series

Optical fork with integrated amplifier

DC supply. Solid-state output


Fork design

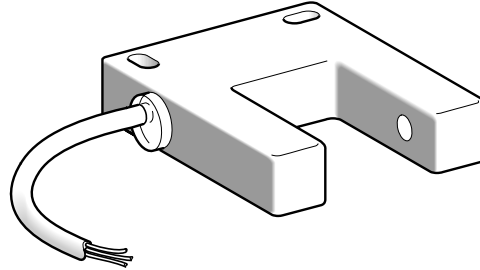


| | | | |
|---|------------------------------|---|---|
| System | | Thru-beam | |
| Type of transmission | | Infrared | |
| Nominal sensing distance (Sn) | | 30 mm | |
| References | | | |
| 3-wire, PNP | NO function | XUV H0312 | |
| 3-wire, NPN | NO function | XUV J0312 | |
| Weight (kg) | | 0.130 | |
| Characteristics | | | |
| Product certifications | | CE | |
| Ambient air temperature | For operation | - 5...+ 55 °C | |
| | For storage | - 20...+ 70 °C | |
| Vibration resistance | Conforming to IEC 60068-2-6 | Amplitude ±1 mm up to 42 Hz, 7 gn (f = 10...42 Hz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Degree of protection | Conforming to IEC 60529 | IP 54 | |
| Connection | | Pre-cabled: diameter 5 mm, length 2 m, wire c.s.a.: 3 x 0.34 mm ² | |
| Materials | Case | PC/ABS | |
| | Lenses | PMMA | |
| | Cable | PvR | |
| Rated supply voltage | | 24 V with protection against reverse polarity | |
| Voltage limits | | 19...38 V (including ripple) | |
| Switching capacity (sealed) | | ≤150 mA with overload and short-circuit protection | |
| Voltage drop, closed state | | ≤ 1.5 V | |
| Current consumption, no-load | | ≤ 20 mA | |
| Maximum switching frequency | | 1000 Hz | |
| Delays | First-up | ≤ 30 ms | |
| | Response | 500 μs | |
| | Recovery | 500 μs | |
| Function table | | | |
| NO function | Function | Thru-beam system | Object present in the beam |
| Output state (PNP or NPN) indicator: red LED (illuminated when sensor output is ON) | NO |  |  |

5

Detection curve



Dimensions

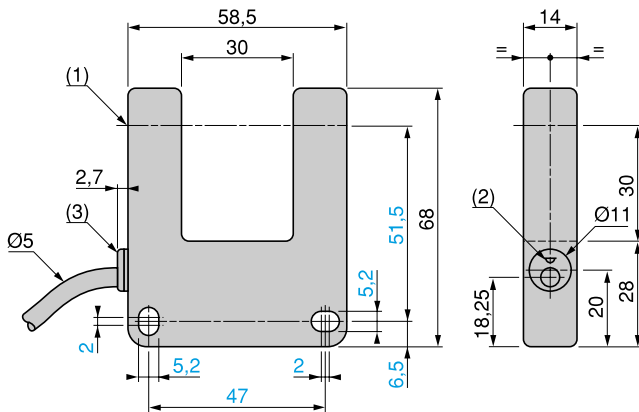

(1) Optical axis

(2) Red LED


(3) Diffuser

Max. tightening torque of fixing screws: 3 N.m

Wiring schemes (3-wire ...)

NO function

PNP output



NPN output





Photo-electric sensors

OsiSense XU Application, conveying series

Dynamic detection of passage of objects (1)

For counting parts

DC supply. Solid-state output

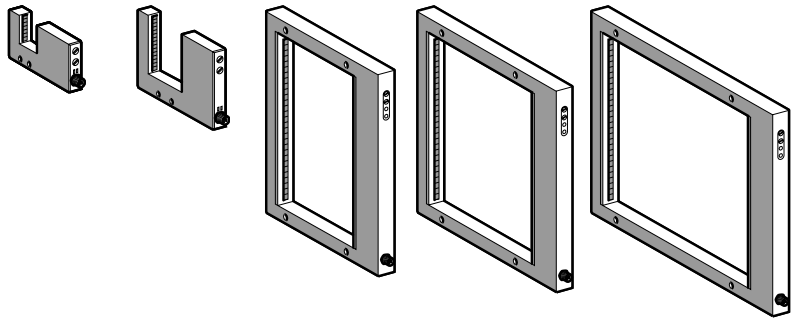

| | | | | | |
|--|-------------------|-------------------|---------------------------------|---------------------|---------------------|
| System | Thru-beam | | | | |
| Type of transmission | Infrared | | | | |
| Passageway dimensions | 30 x 30 mm | 60 x 60 mm | 200 x 120 mm | 200 x 180 mm | 200 x 250 mm |
| Minimum size of object detected | Ø 2 mm | | Ø 4 or 10 mm depending on model | | |

References

| | | | | | | |
|--|---------------------------------|------------------|------------------|--------------------|--------------------|--------------------|
| 4-wire, PNP and NPN NO or NC programmable function | Minimum size of object detected | – | – | – | – | – |
| | Ø 2 mm | XUV F30M8 | XUV F60M8 | – | – | – |
| | Ø 4 mm | – | – | XUV F120M12 | XUV F180M12 | XUV F250M12 |
| | Ø 10 mm | – | – | XUY FRS120S | XUY FRS180S | XUY FRS250S |
| Weight (kg) | 0.080 | 0.140 | 1.060 | 1.200 | 1.320 | |

References of U shape frames

Open (U shape) frames for sizes 120, 180 and 250 mm are also available.
To order an open frame, add the letter **U** to the end of the reference. Example: XUV F120M12 becomes **XUV F120M12U**.

Characteristics

| | | |
|-------------------------------------|--|---|
| Product certifications | CE, cULus | |
| Ambient air temperature | For operation: 0...+60 °C. For storage: -20...+80 °C | |
| Vibration resistance | 25 gn, amplitude ± 2 mm (f = 10...55 Hz), conforming to IEC 60068-2-6 | |
| Shock resistance | 30 gn, duration 11 ms, conforming to IEC 60068-2-27 | |
| Degree of protection | Conforming to IEC 60529 | IP 65 |
| Connection | M8 connector (suitable female connectors, including pre-wired versions, see page 9/44) | M12 connector (suitable female connectors, including pre-wired versions, see page 9/44) |
| Materials | Case | Painted aluminium |
| | Lenses | Polycarbonate Altuglass |
| Immunity to ambient light | Sunlight: 4000 lux max., incandescent light: 400 lux max. | |
| Passing speed of object | Min.: 10 cm/s, max.: 15 m/s (Ø 2 mm object) | Min.: 10 cm/s, max.: 15 m/s (Ø 4 mm object) |
| Rated supply voltage | --- 24 V with protection against reverse polarity | |
| Voltage limits | --- 18...30 V (including ripple) | |
| Switching capacity (sealed) | ≤ 100 mA with overload and short-circuit protection | |
| Voltage drop, closed state | < 2 V | |
| Current consumption, no-load | ≤ 120 mA | ≤ 400 mA |
| Maximum switching frequency | 500 Hz | |
| Delays | Response: < 1 ms; recovery: < 1 ms | |
| Time delay | Off-delay (reset): adjustable between 0 and 5 seconds | |

| Function table | Function | Thru-beam system | |
|--|----------|-------------------------------|------------------------------------|
| | | No object present in the beam | Passage of object through the beam |
| Output state (PNP or NPN) indicator: green LED (illuminated when sensor output is ON) | NC | | |
| | NO | | |

(1) Sensors XUV F are suitable for detecting the passage of all types of objects (both metal and plastic, of any shape and colour) providing the flow is dynamic.
Applications: counting parts, flow control of injection machine parts, etc.

Photo-electric sensors

OsiSense XU Application, conveying series


Dynamic detection of passage of objects

For counting parts


DC supply. Solid-state output

Presentation


XUV F30M8



XUV F60M8




XUV F●●0M12, XUY FRS●●0S

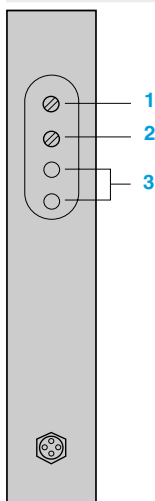


- 1 Sensitivity adjustment potentiometer.
 - 2 Time delay adjustment potentiometer (XUV only)
- Indicators:
- 3 Green LED: output
 - Red LED: becoming dirty (XUV only)
- Notes:
- in the event of a supply malfunction, the red LED flashes,
 - in the event of a short-circuit on the output, both the red and green LEDs flash.

Dimensions


XUV F30M8

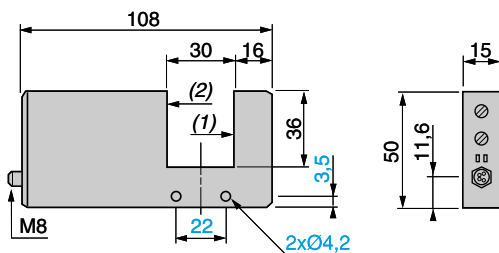

XUV F60M8

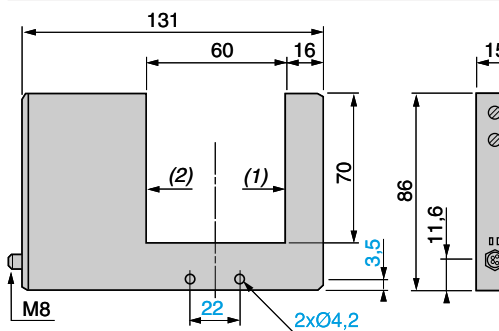

XUV F●●0M12, XUY FRS●●0S

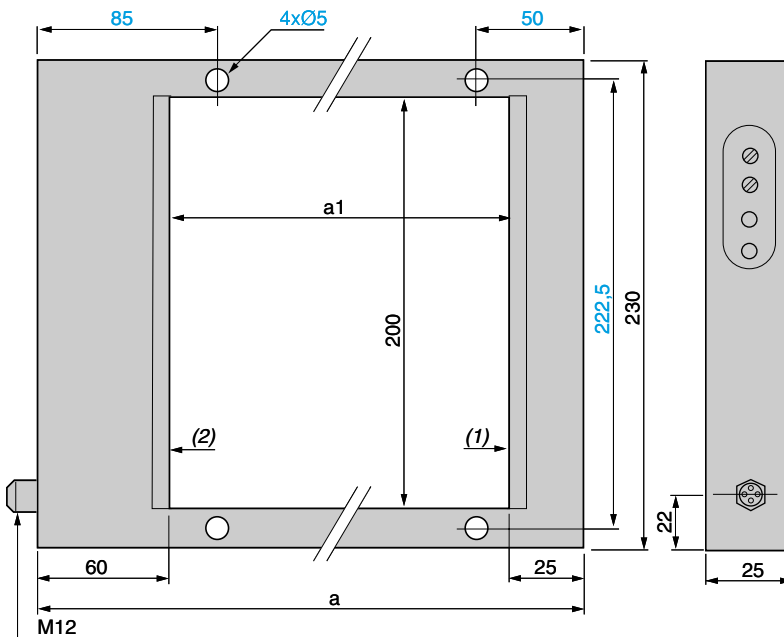


- (1) Transmitting face
- (2) Reception face

| XUV | XUY | a | a1 |
|---------|---------|-----|-----|
| F120M12 | FRS120S | 205 | 120 |
| F180M12 | FRS180S | 265 | 180 |
| F250M12 | FRS250S | 335 | 250 |

Schemes


Wiring schemes (4-wire $\overline{\text{---}}$)

NO output programmed (1)

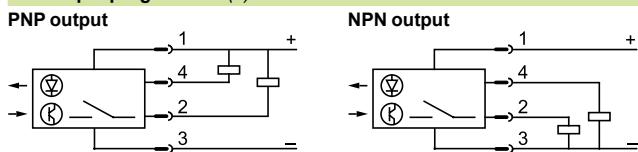

Connector scheme (sensor connector pin view)

NO output programmed (1)

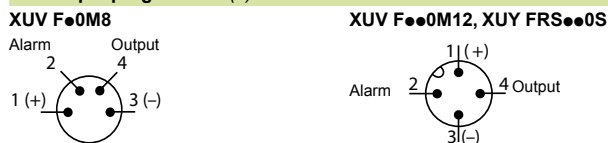

See connection on page 9/44.


Note: the alarm (2) triggers in the event of an object stopping within the beam.
(1) To program the sensor for NC output, connect contact 3 to (+) and contact 1 to (-).



Photo-electric sensors

OsiSense XU Application, packaging series
Compact design, 50 x 50
Colour mark readers ⁽¹⁾
DC supply. Solid-state output

Compact design, 50 x 50



| | |
|--|------------------------|
| System | Diffuse |
| Type of transmission | White LED (400-700 nm) |
| Nominal sensing distance (S _n) | 19 mm |

References

| Description | Reference |
|--------------------|--------------------------|
| 3-wire, PNP or NPN | PNP output NPN output |
| | XUK R1PSMM12 |
| | XUK R1NSMM12 |
| Weight (kg) | 0.045 |

Characteristics

| | |
|---|---|
| Product certifications | CE, cULus |
| Ambient air temperature | For operation: -10...+55 °C For storage: -20...+70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 Amplitude ± 0.5 mm, f = 10...55 Hz for each axis |
| Shock resistance | Conforming to IEC 60068-2-27 30 gn, duration 11 ms, 6 shocks on each axis |
| Degree of protection | Conforming to IEC 60529 IP 65 |
| Connection | M12, 4-pin connector; can be set at 90° |
| Materials | Case: ABS Lenses: Glass (window tilted, anti-reflective glass) |
| Spot diameter | At 19 mm: Ø 3.5 mm |
| Resolution | 0.5 mm |
| Depth of field | ± 2 mm |
| Adjustment | Teach mode using button or remotely using "remote" wire |
| Indicator lights | Output: Yellow LED Stability: Green LED: Ready Flashing green/red: error |
| Rated supply voltage | --- 12...24 V |
| Voltage limits | --- 10...30 V (including ripple) |
| Switching capacity (sealed) | ≤ 100 mA with protection against reverse polarity, overload and short-circuit |
| Voltage drop, closed state (saturation voltage) | ≤ 2 V |
| Current consumption, no-load | ≤ 30 mA |
| Maximum linear speed of mark | 2.5 m/s for 1 mm wide mark |
| Maximum switching frequency | 5 kHz |
| Delay | 100 µs for response and recovery |
| Time delay | Time delay function: Minimum time output active: 20 ms Auxiliary functions: Remote teaching via "remote" wire; teach mode button locking Operating mode: Standard teaching: output activated on dark mark |


(1) Applications: detection of contrasting colours on reflective, matt or embossed surfaces. Colour mark and index mark reading function on automated packaging and filling systems and on labelling, heat sealing, thermo-forming and printing machines, etc.

Photo-electric sensors

OsiSense XU Application, packaging series
Compact design, 50 x 50
Colour mark readers
DC supply. Solid-state output


Presentation

Description




- 1 Output LED
- 2 Dual colour stability LED
- 3 SET button

Detection zone and spot size



| | a (mm) | Ø (mm) |
|--------------|--------|--------|
| XUK R1•SMM12 | 19 | 3.5 |

Detection curve

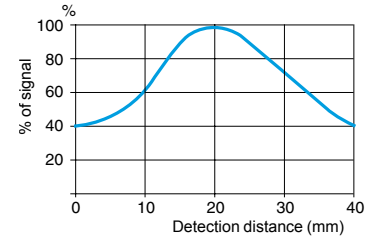


Fixing accessory


| Description | Reference | Weight kg |
|---|-----------|-----------|
| Fixing bracket (2 screws, 2 nuts and 2 washers included) | XUZ K2000 | 0.040 |

Dimensions

XUK R1•SMM12

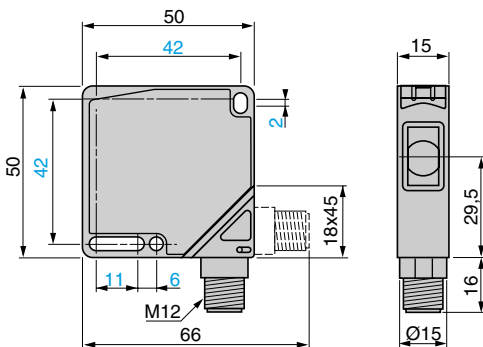


Fixing bracket XUZ K2000

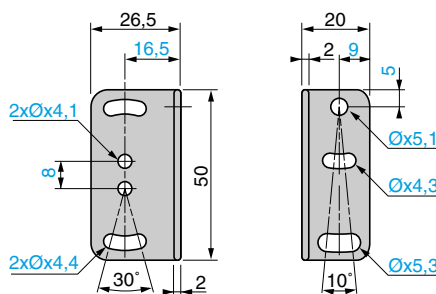

Schemes

Connector scheme

Sensor connector pin view



See connection on page 9/44.


| Pin N° | Type | Colour |
|--------|----------------------|--------|
| 1 | 10...30 V | Brown |
| 2 | Adjustment input (1) | White |
| 3 | 0 V | Blue |
| 4 | Output | Black |

(1) Connecting the "Remote" adjustment input to + V DC is equivalent to pressing the SET button.

Wiring schemes

Automatic NC or NO selection depending on chronological order of teaching for the mark and the background.

PNP output



NPN output




Photo-electric sensors

OsiSense XU Application, packaging series


Colour mark readers

With teach mode

DC supply. Solid-state output

Colour mark reading using plastic fibre optic

Remote reading by coaxial fibre optic



| | |
|--------------------------------------|---|
| System | Diffuse |
| Type of transmission | White LED (450 - 650 nm) |
| Nominal sensing distance (Sn) | 18 mm with fibre optic XUY FPDC61/101 4 mm with fibre optic XUY FPDCM861/M8101 |

References

| | | |
|-------------------------------|----------------|--------------------------|
| 4-wire, PNP/NPN output | NO/NC function | XUY DCFCO966S (1) |
| Weight (kg) | | 0.047 |

Characteristics

| | | |
|---|-------------------------|---|
| Product certifications | | CE |
| Ambient air temperature | For operation | 0...+ 40 °C |
| | For storage | - 20...+ 80 °C |
| Degree of protection | Conforming to IEC 60529 | IP 65 |
| Connection | | M8 male connector |
| Materials | Case | Polyamide |
| | Lens | Polyamide |
| Rated supply voltage | | 24 V |
| Spot diameter | | 1.5 mm |
| Modulation frequency | | 40 kHz |
| Depth of field | | FPDC: + 7/- 5 mm Black/White, + 1/- 3 mm Grey/White FPDCM8: ± 1 mm |
| Adjustment | | By teaching background and mark |
| Voltage limits (including ripple) | | 10...30 V with protection against reverse polarity |
| Immunity to ambient light | Incandescent bulb | 10 000 lux |
| | Natural light | 20 000 lux |
| Switching capacity | | 100 mA with overload and short-circuit protection |
| Voltage drop, closed state | | < 2 V |
| Current consumption, no-load | | 50 mA |
| Maximum switching frequency | | 20 kHz |
| Delays | Response and recovery | 25 µs |
| Output state indication | | LED |

Accessories

(1) Sensor XUY DCFCO966S only operates with fibres XUY FPDC●●●● and XUY FPDCM8●●●, to be ordered separately.

| Description | Details | Length of fibre | Length of cable | References | Weight |
|---|---------------|-----------------|-----------------|----------------------|--------|
| | | mm | m | | kg |
| Integrated fibre optic <i>to be ordered at the same time as the amplifier</i> | M18 | 600 | – | XUY FPDC61 | 0.100 |
| | | 1000 | – | XUY FPDC101 | 0.115 |
| | M8 | 600 | – | XUY FPDCM861 | 0.060 |
| | | 1000 | – | XUY FPDCM8101 | 0.075 |
| Pre-wired M8 connector | Straight | – | 2 | XZC P0941L2 | 0.080 |
| | | – | 2 | XZC P1041L2 | 0.080 |
| | Elbowed (90°) | – | 5 | XZC P0941L5 | 0.180 |
| | | – | 5 | XZC P1041L5 | 0.180 |

Photo-electric sensors


OsiSense XU Application, packaging series

Colour mark readers

With teach mode

DC supply. Solid-state output

Presentation


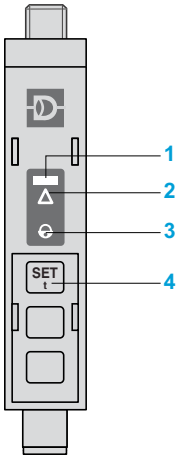


- 1 Detection of the lightest shade
- 2 Programming assistance
- 3 Alarm/press button
- 4 Programming button


Dimensions

XUY DCFC0966S

Mounting on 35 mm rail

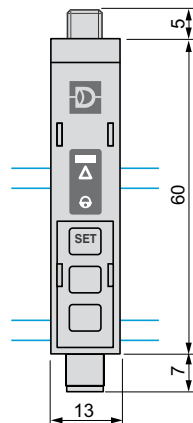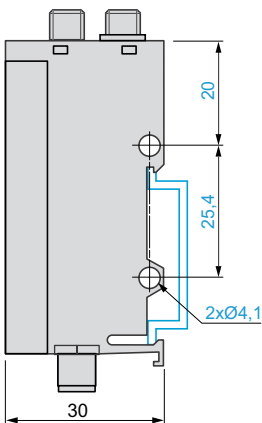


XUY FPDC●●●●●

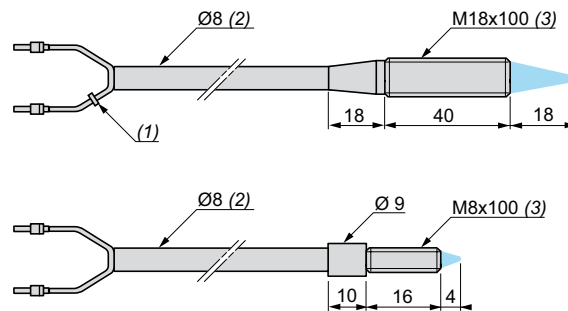

- (1) The ring indicates that the fibre is transmitting.
 (2) Bend radius: 15 mm.
 (3) 2 nuts included with fibre optic.

Wiring schemes

Cabling

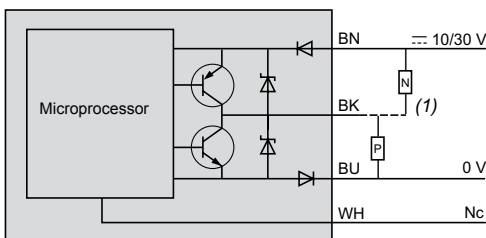

M8 connector



Pin n° - colour

1 BN: Brown

2 WH: White

3 BU: Blue

4 BK: Black

- (1) High level on first shade "taught".
 Nc: Not connected


Photo-electric sensors

OsiSense XU Application, packaging series

Colour mark readers (1)

DC supply. Solid-state output

Compact design



| | |
|---|--|
| System | Diffuse |
| Type of transmission (line of sight along case axis or at 90° depending on position of lens) | Red or green, automatically selected when using teach mode |
| Nominal sensing distance (Sn) | 9 mm (7 mm with XUR Z02 or 18 mm with XUR Z01) (2) |
| Sensitivity adjustment | Automatic when using teach mode |

References

| | | |
|--|------------------------------------|---------------------|
| 3-wire, PNP or NPN programmable | NO or NC programmable function (3) | XUR K1KSMM12 |
| Weight (kg) | | 0.550 |

Characteristics

| | |
|---|---|
| Product certifications | CE |
| Ambient air temperature | For operation: - 10...+ 55 °C. For storage: - 20...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 7 gn, amplitude ± 0.6 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 30 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 IP 67 |
| Connection | M12 connector, can be set at 3 positions (suitable female connectors, including pre-wired versions, see page 9/44) |
| Materials | Case: zinc alloy; lenses: glass |
| Spot dimensions | At 9 mm: 1.5 x 5 mm (with lens XUR Z0 see table on page 5/71) |
| Minimum detectable width of mark | 0.5 mm |
| Maximum vertical inclination of reader | 20° |
| Maximum linear speed of mark | 10 m/s (for 1 mm wide mark) |
| Rated supply voltage | 12...24 V with protection against reverse polarity |
| Voltage limits | 10...30 V (including ripple) |
| Switching capacity (sealed) | ≤ 200 mA with overload and short-circuit protection |
| Voltage drop, closed state | ≤ 1 V (NPN); ≤ 2 V (PNP) |
| Current consumption, no-load | ≤ 80 mA |
| Maximum switching frequency | 10 kHz |
| Delays | First-up: ≤ 100 ms; response: ≤ 50 μs; recovery: ≤ 50 μs |
| Time delay | "OFF delay": 20 ms, activated/deactivated by internal switch |
| Analogue output | 0...5.5 V (voltage proportional to light reflected by the object) |

| Function table | Function | Detection of dark mark on light background | | Function | Detection of light mark on dark background | |
|---|----------|--|--------------------------|----------|--|--------------------------|
| | | No mark present in the beam | Mark present in the beam | | No mark present in the beam | Mark present in the beam |
| Output state (PNP or NPN) indicator: red LED (illuminated when sensor output is ON) | NC | | | NO | | |
| | NO | | | NC | | |


(1) Applications: detection of contrasting colours on reflective, matt or embossed surfaces. Colour mark and index mark reading function on automated packaging and filling systems and on labelling, heat sealing, thermo-forming and printing machines, etc.

(2) Lenses for reduction or magnification of spot (see page 5/158 and spot size table on page 5/71).

(3) Automatic programming depending on chronological order of teaching for the mark and the background.

XUR K1KSMM12


Detection zone and spot size (mm)




| XUR | a | b | c |
|---------------------|----|---|-----|
| K●●●●●●●● | 9 | 5 | 1.5 |
| K●●●●●●●● + XUR Z01 | 18 | 7 | 2 |
| K●●●●●●●● + XUR Z02 | 7 | 4 | 1 |

Lenses XUR Z0●, see page 5/158

Detection curve

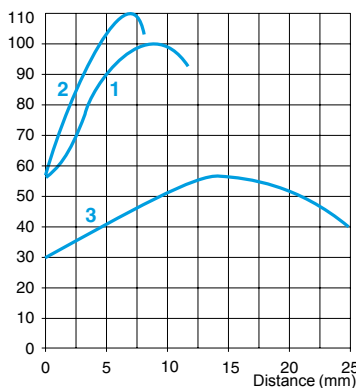


Vertical inclination



An angle of 5 to 10° from vertical is recommended for reflective or transparent surfaces.
Maximum vertical inclination: 20°.

Dimensions

XUR K1KSMM12

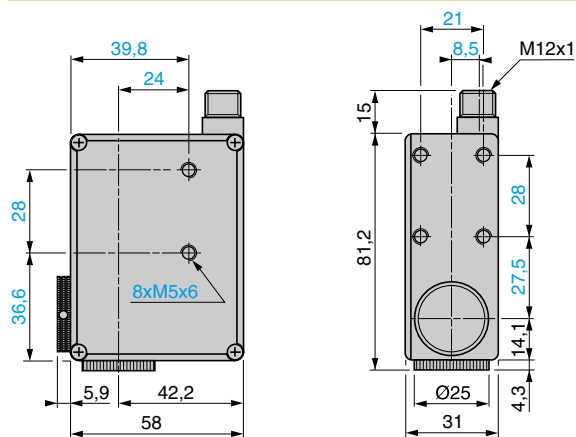


Wiring schemes (3-wire ---)


XUR K1KSMM12

Automatic NC or NO selection depending on chronological order of teaching for the mark and the background

PNP output




NPN output




R = 2.2 kΩ

Connector scheme

(sensor connector pin view)



Functions



- 1 Green LED, sensor in teach mode
- 2 Red LED, output state
- 3 Teach mode button for mark
- 4 background

PNP/NPN programming and time delay by internal switches

See connection on page 9/44.


Photo-electric sensors

OsiSense XU Application, packaging series

Luminescence sensor ⁽¹⁾

DC supply. Solid-state output

Design 18



| | |
|-------------------------------|---|
| System | Diffuse |
| Type of transmission | Ultraviolet (370 nm) |
| Nominal sensing distance (Sn) | 20 mm for colour mark reading, 0...80 mm in diffuse mode |
| Sensitivity adjustment | By potentiometer |

References

| | | |
|-------------|-----------------|------------|
| 3-wire, PNP | NO function (2) | XU5 M18U1D |
| Weight (kg) | | 0.075 |

Characteristics

| | | |
|------------------------------|------------------------------|--|
| Product certifications | | CE, CSA, UL |
| Ambient air temperature | For operation | - 25...+ 55 °C |
| | For storage | - 40...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 0.6 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 67 |
| Connection | | M12 connector (suitable female connectors, including pre-wired versions, see page 9/44) |
| Materials | Case | Nickel plated brass |
| | Lenses | PMMA |
| Spot diameter | | At 20 mm: Ø 3 x 1 mm |
| Auxiliary functions | | External synchronisation, locking |
| Indicator lights | Output state | Green LED |
| | Teach mode | — |
| Rated supply voltage | | --- 12...24 V with protection against reverse polarity |
| Voltage limits | | --- 10...30 V (including ripple) |
| Switching capacity (sealed) | | ≤ 100 mA with protection against reverse polarity, overload and short-circuit |
| Voltage drop, closed state | | ≤ 1.5 V (PNP) |
| Current consumption, no-load | | ≤ 20 mA |
| Maximum switching frequency | | 1 kHz |
| Delays | First-up | ≤ 100 ms |
| | Response | ≤ 500 µs |
| | Recovery | ≤ 500 µs |
| Time delay | | "OFF delay": 20 ms, activated/deactivated by cabling method |


(1) Applications: detection of invisible reference marks, markings, glues or varnishes containing bluing agents.

(2) Output activated when a blued mark on a non blued background is present.

Curves

XU5 M18U1D


Detection curves



Object 5 x 5 cm, white 90%
Spot size at 20 mm: oval, \varnothing 3 x 1 mm

Vertical inclination


$$5^\circ < \alpha < 20^\circ$$



An angle of 5 to 10°
from vertical is recommended
for reflective or transparent
surfaces
Maximum vertical inclination: 20°

Dimensions

XU5 M18U1D

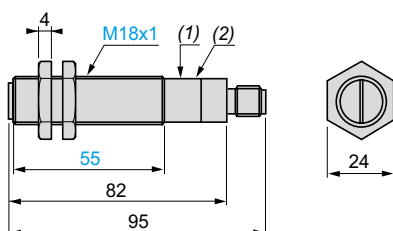


(1) Potentiometer
(2) Green LED
Fixing nut tightening torque: 15 N.m.

Wiring schemes

XU5 M18U1D


Connector scheme

(Sensor connector pin view)




Wiring schemes (3-wire ...)

PNP output
Without output signal time delay



With output signal time delay (20 ms)




(1) "OFF delay" of output signal:
- no time delay: connect contact 2 to (+)
- 20 ms time delay: connect contact 2 to (-)

Photo-electric sensors

OsiSense XU Application, packaging series
Detection of illumination using plastic fibre optic
and teach mode
Four-wire DC. Solid-state output

Fibre design

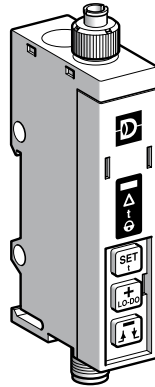

| | | |
|-----------------------------------|--|--|
| Nominal sensing distance (Sn) | Depending on fibre optic used | |
| References | | |
| 4-wire, PNP/NPN output | NO/NC programmable function | XUY AFLCO966S |
| Weight (kg) | 0.054 | |
| Characteristics | | |
| Product certifications | CE | |
| Ambient air temperature | For operation | 0...+ 60 °C |
| | For storage | - 20...+ 80 °C |
| Degree of protection | Conforming to IEC 60529 | IP 65 |
| Connection | M8, 4-pin male connector | |
| Materials | Case | Polycarbonate |
| Rated supply voltage | --- 12...24 V with protection against reverse polarity | |
| Voltage limits (including ripple) | --- 10...30 V | |
| Switching capacity | 100 mA with overload and short-circuit protection | |
| Voltage drop, closed state | 2 V | |
| Current consumption, no-load | < 40 mA | |
| Maximum switching frequency | < 5 Hz | |
| External input | Active | < 1.4 V |
| | Inactive | > 3 V |
| Delays | Response and recovery | < 100 ms |
| Output time delay | Range | 0...5 s in 11 adjustment increments |
| | Duration of each increment | First increment 40 ms then 500 ms for each press |
| Indicator lights | Output signal | Green LED |
| | Limit of detection | Red LED |
| | Time delay active | Red LED |
| Sensitivity adjustment | Using teach (fine mode or standard mode) Adjustment possible using +/- button Remote teaching using external input (fine mode) | |

- Applications
- Verifying operation of indicator lights on electrical appliances
- Testing car headlights on production line

Accessories

| Description | Details | Length of cable | References | Weight |
|-------------------------|---------------|-----------------|-------------|--------|
| | | m | | kg |
| Plastic fibre optic (1) | Ø 2.2 mm | 1 | XUY A005 | 0.007 |
| Pre-wired M8 connector | Straight | 2 | XZC P0941L2 | 0.080 |
| | Elbowed (90°) | 2 | XZC P1041L2 | 0.080 |
| | Straight | 5 | XZC P0941L5 | 0.180 |
| | Elbowed (90°) | 5 | XZC P1041L5 | 0.180 |

(1) End fitting, see page 5/134.


Photo-electric sensors

OsiSense XU Application, packaging series

Detection of illumination using plastic fibre optic
and teach mode

Four-wire DC. Solid-state output


Presentation

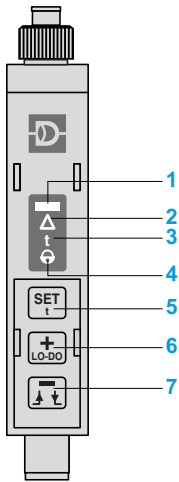

- 1 Output signal
- 2 Limit of detection
Positioning assistance
- 3 Time delay active
- 4 Action keypad
Keypad locking
- 5 Automatic adjustment of threshold
Access to special functions
- 6 Sensitivity increase
NO/NC output
Time delay increase
- 7 Sensitivity decrease
On-delay, Off-delay inversion
Time delay decrease

Dimensions


Mounting on 35 mm L rail

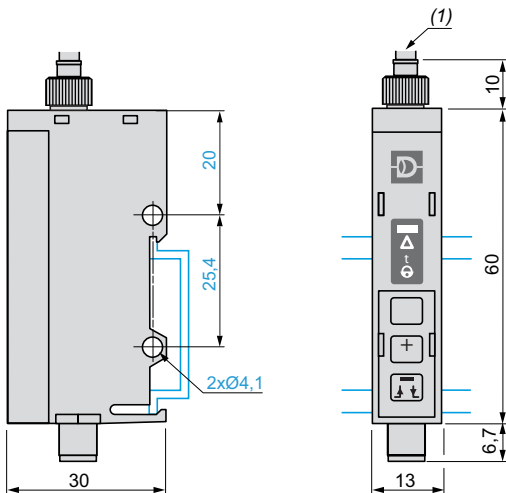

(1) Ø 2.2 mm plastic fibre optic.


Wiring schemes

Scheme

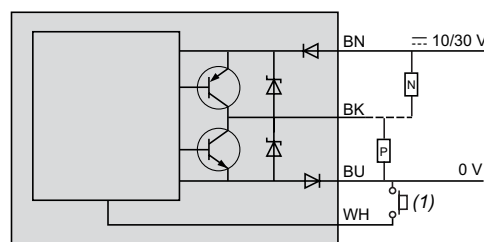

M8 connector

Pin n° - colour




- 1 BN: Brown
- 2 WH: White
- 3 BU: Blue
- 4 BK: Black

(1) Remote teaching. If not used: connect to +.

Application examples

Verifying operation of car headlights on an assembly line

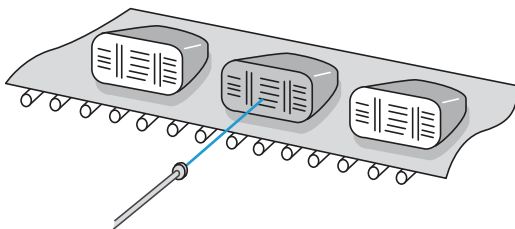

Verifying operation of indicator lights on electrical appliances

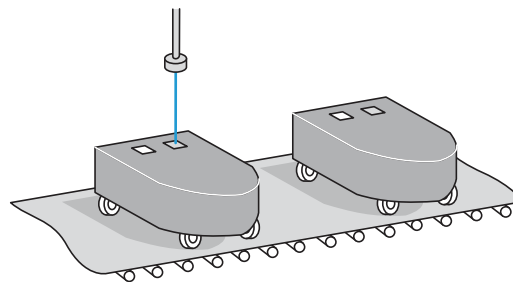



Photo-electric sensors

OsiSense XU Application, packaging series


For detection of transparent materials

Design 18, plastic or stainless steel


Three-wire DC, solid-state output




XUB T●●●NL2




XUB T●●●WL2




XUB T●●●NM12




XUB T●●●WM12




XUZ C50




XUZ C50HP




XUZ B2003




XUZ A118



XUZ A218



XUZ 2001



XUZ 2003

Ø 18 plastic, coaxial polarised reflex with teach mode

| Sensing distance (Sn) m | Function | Line of sight | Output | Reference | Weight kg |
|--|--------------------------|------------------|--------|-------------------------|-----------|
| Pre-cabled (2) | | | | | |
| 0...1.4 With reflector XUZ C50/C50HP | NO or NC, by programming | Along case axis | PNP | XUB TAPSNL2 (1) | 0.110 |
| | | | NPN | XUB TANSNL2 (1) | 0.110 |
| 0...0.8 With reflector XUZ C50/C50HP | NO or NC, by programming | 90° to case axis | PNP | XUB TAPSWL2 (1) | 0.113 |
| | | | NPN | XUB TANSWL2 (1) | 0.113 |
| M12 connector | | | | | |
| 0...1.4 With reflector XUZ C50/C50HP | NO or NC, by programming | Along case axis | PNP | XUB TAPSNM12 (1) | 0.045 |
| | | | NPN | XUB TANSNM12 (1) | 0.045 |
| 0...0.8 With reflector XUZ C50/C50HP | NO or NC, by programming | 90° to case axis | PNP | XUB TAPSWM12 (1) | 0.048 |
| | | | NPN | XUB TANSWM12 (1) | 0.048 |

Ø 18 stainless steel, coaxial polarised reflex with teach mode

| Sensing distance (Sn) m | Function | Line of sight | Output | Reference | Weight kg |
|--|--------------------------|------------------|--------|-------------------------|-----------|
| Pre-cabled (2) | | | | | |
| 0...1.4 With reflector XUZ C50/C50HP | NO or NC, by programming | Along case axis | PNP | XUB TSPSNL2 (1) | 0.135 |
| | | | NPN | XUB TSNSNL2 (1) | 0.135 |
| 0...0.8 With reflector XUZ C50/C50HP | NO or NC, by programming | 90° to case axis | PNP | XUB TSPSWL2 (1) | 0.138 |
| | | | NPN | XUB TSNSWL2 (1) | 0.138 |
| M12 connector | | | | | |
| 0...1.4 With reflector XUZ C50/C50HP | NO or NC, by programming | Along case axis | PNP | XUB TSPSNM12 (1) | 0.070 |
| | | | NPN | XUB TSNSNM12 (1) | 0.070 |
| 0...0.8 With reflector XUZ C50/C50HP | NO or NC, by programming | 90° to case axis | PNP | XUB TSPSWM12 (1) | 0.073 |
| | | | NPN | XUB TSNSWM12 (1) | 0.073 |

Ø 18 plastic, reflex with teach mode

| Sensing distance (Sn) m | Function | Line of sight | Output | Reference | Weight kg |
|--|--------------------------|-----------------|--------|---------------------|-----------|
| Pre-cabled (2) | | | | | |
| 0.1...0.8 With reflector XUZ C50 | NO or NC, by programming | Along case axis | PNP | XUB T1PSNL2 | 0.103 |
| | | | NPN | XUB T1NSNL2 | 0.103 |
| M12 connector | | | | | |
| 0.1...0.8 With reflector XUZ C50 | NO or NC, by programming | Along case axis | PNP | XUB T1PSNM12 | 0.045 |
| | | | NPN | XUB T1NSNM12 | 0.045 |

Accessories for XUB T●●●●● (3)

| Description | Dimensions | Reference | Weight kg |
|---|------------|------------------|-----------|
| Universal reflector | 50 x 50 mm | XUZ C50 | 0.020 |
| Application reflector (accuracy, detection sensitivity) | 50 x 50 mm | XUZ C50HP | 0.020 |

Fixing accessories (4)

| Description | Reference | Weight kg |
|--|------------------|-----------|
| 3D fixing kit for use on M12 rod, for XUB T or XUZ C50/C50HP | XUZ B2003 | 0.170 |
| M12 rod | XUZ 2001 | 0.050 |
| Support for M12 rod | XUZ 2003 | 0.150 |
| Stainless steel fixing bracket | XUZ A118 | 0.045 |
| Plastic fixing bracket with adjustable ball-joint | XUZ A218 | 0.035 |

(1) Application reflector **XUZ C50HP** included with sensor.

(2) For a 5 m long cable, replace L2 by L5.

Example: **XUB TAPSNL2** becomes **XUB TAPSNL5**.

(3) For further information, see page 5/159

(4) For further information, see page 5/158.

Photo-electric sensors

OsiSense XU Application, packaging series

For detection of transparent materials


Design 18, plastic or stainless steel

Three-wire DC, solid-state output

| Characteristics | | XUB T●●●●M12/ XUB T●●●●L2 | XUB T1●●●●M12/ XUB T1●●●●L2 |
|-------------------------------------|--------------------------------|--|---|
| Sensor type | | | |
| Product certifications | | UL, CSA, CE | |
| Connection | Connector | M12 (male) | |
| | Pre-cabled | Length: 2 m, wire c.s.a.: 3 x .034 mm ² | |
| Nominal sensing distance Sn | Line of sight along case axis | m | 0 to 1.4 with reflector XUZ C50/C50HP 0.1 to 0.8 with reflector XUZ C50 |
| | Line of sight 90° to case axis | m | 0 to 0.8 with reflector XUZ C50/C50HP - |
| Beam divergence | | 1.5° (Ø 37mm spot at 1.4 m) | |
| Blind zone | | m | 0 0.1 |
| Preferred object approach direction | | Any Lenses on horizontal plane for horizontal passage of object | |
| Type of transmission | | Coaxial polarised red Dual lens red | |
| Degree of protection | | Conforming to IEC 60529 IP 65, IP 67, double insulation □ IP 69K for XUB TS●●●● | |
| Temperature | Storage | °C | - 40...+ 70 |
| | Operation | °C | 0...+ 55 |
| Materials | Case | XUB TA and XUB T1 ●●●●: plastic PBT XUB TS●●●●: stainless steel (grade 304Cu) | |
| | Lens | PMMA | |
| | Cable | PvR | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1 mm (f = 10 to 55 Hz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Indicator lights | Output state | Yellow LED | |
| | Supply on | Green LED | |
| | Stability | Red LED | Red LED for alignment only |
| Rated supply voltage | | V | --- 12...24 with protection against reverse polarity |
| Voltage limits (including ripple) | | V | --- 10...32 |
| Current consumption, no-load | | mA | 45 30 |
| Switching capacity | | mA | ≤ 100 with overload and short-circuit protection |
| Voltage drop, closed state | | V | ≤ 1.5 |
| Maximum switching frequency | | Hz | 1000 250 |
| Delays | First-up | ms | < 200 < 2000 |
| | Response and recovery | µs | < 500 < 2000 |

Wiring schemes


M12 connector




Pre-cabled

(-) BU (Blue)
(+) BN (Brown)
OUT/Output BK (Black)

PNP



NPN




See connection on page 9/44.

Detection curves

With reflector XUZ C50●●

Line of sight along case axis | Line of sight 90° to case axis

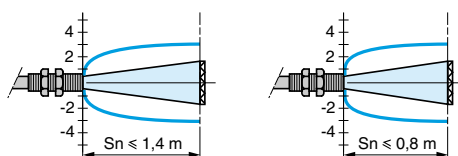


Sn ≤ 1.4 m (XUBT)
Sn ≤ 0.8 m (XUBT1)

Sn ≤ 0.8 m (XUBT only)

Dimensions


XUB T●●●●



| | Pre-cabled (mm) | | Connector (mm) | |
|--------------------------------------|-----------------|----|----------------|----|
| | a | b | a | b |
| Ø 18, line of sight along case axis | 64 | 44 | 78 | 44 |
| Ø 18, line of sight 90° to case axis | 78 | 44 | 92 | 44 |


Setting-up

Recommended distances and application restraints

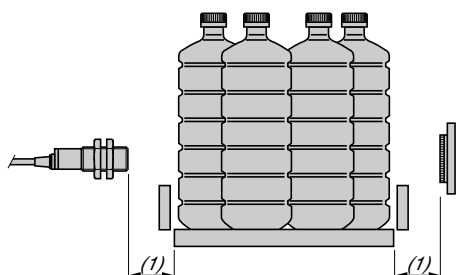


(1) Blind zone

Application examples

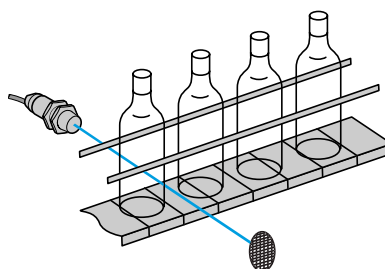

Detection of transparent bottles

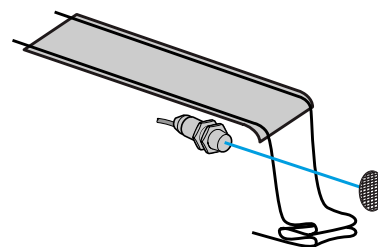


Detection of plastic film

For precise detection or magnifying glass effect cases, it is advisable to use XUBT●●●●M12/L2.

Photo-electric sensors

OsiSense XU Application, packaging series
For detection of transparent materials, with teach mode
and automatic compensation for accumulation of dirt (1)
Solid-state output

Compact design

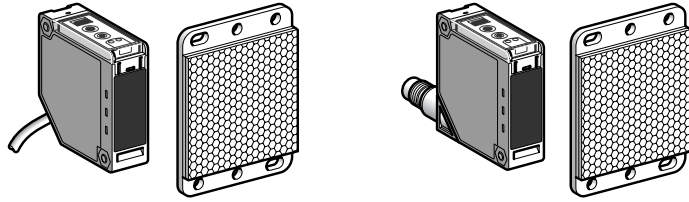

| | |
|--------------------------------------|-----------------------------------|
| System | Reflex |
| Type of transmission | Red |
| Nominal sensing distance (Sn) | 1.5 m (with 50 x 50 mm reflector) |

References

| | | | |
|--------------------|--------------------------------|------------------------|-------------------------|
| 3-wire, PNP or NPN | NO or NC programmable function | XUK T1KSML2 (2) | XUK T1KSMM12 (2) |
| Weight (kg) | | 0.280 | 0.120 |

Characteristics






| | | |
|-------------------------------------|---|---|
| Product certifications | CE, UL, CSA | |
| Ambient air temperature | For operation | - 25...+ 55 °C |
| | For storage | - 30...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 10 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 65 |
| Materials | Case | PC |
| | Lenses | PMMA |
| | Cable | PVC |
| Connection | Pre-cabled, diameter 6 mm, length 2 m, wire c.s.a.: 4 x 0.34 mm ² | M12 male connector, can be set at 2 positions (suitable female connectors, including pre-wired versions, see page 9/44) |
| Rated supply voltage | --- 12...24 V with protection against reverse polarity | |
| Voltage limits | --- 10...30 V (including ripple) | |
| Switching capacity (sealed) | ≤ 100 mA with overload and short-circuit protection | |
| Voltage drop, closed state | ≤ 2 V | |
| Current consumption, no-load | ≤ 35 mA | |
| Maximum switching frequency | 1500 Hz | |
| Delays | First-up | ≤ 80 ms |
| | Response | ≤ 0.3 ms |
| | Recovery | ≤ 0.3 ms |
| Time delay | Monostable, on-delay or off-delay (programmable) adjustable from 0.1 to 5 seconds | |

| Function table | Function | Reflex system | |
|---|----------|-------------------------------|----------------------------|
| | | No object present in the beam | Object present in the beam |
| Output state (PNP or NPN) indicator: yellow LED (illuminated when sensor output is ON) | NC | | |
| | NO | | |

(1) Sensor memorises, in teach mode, the environmental conditions in which the object is to be detected and adapts to any variations.
(2) 50 x 50 mm reflector **XUZ C50** included with the sensor.

Photo-electric sensors

OsiSense XU Application, packaging series
For detection of transparent materials, with teach mode
and automatic compensation for accumulation of dirt
Solid-state output

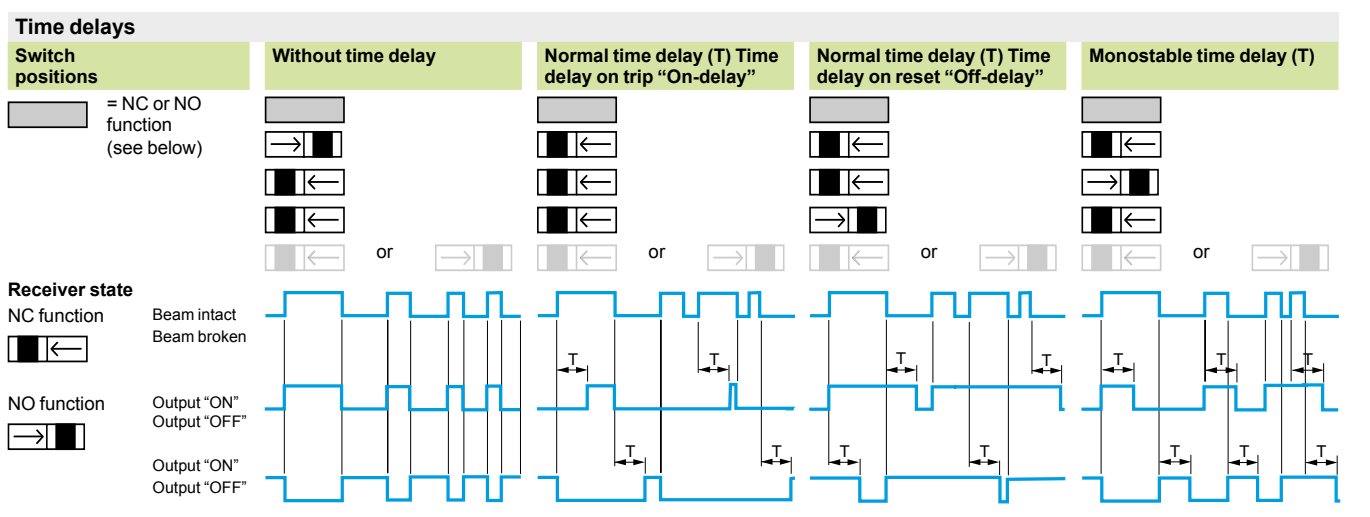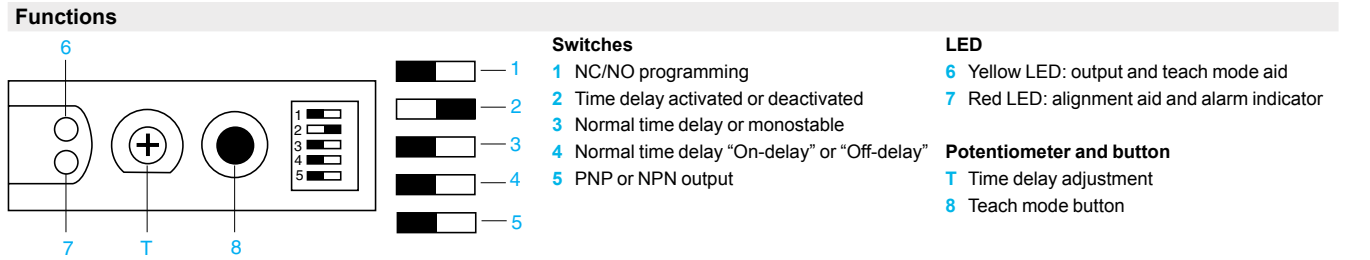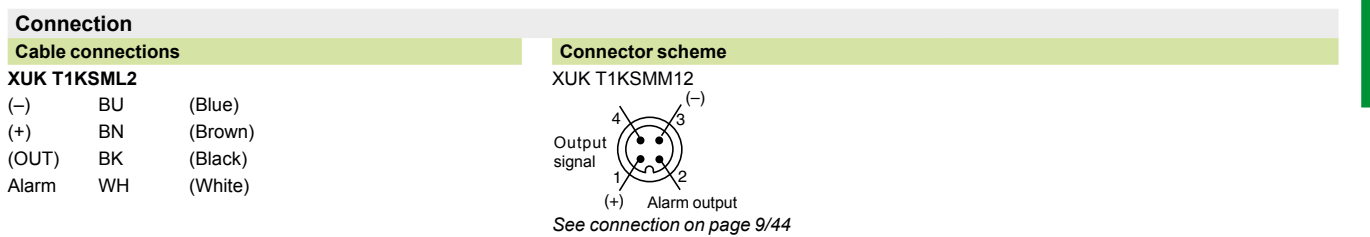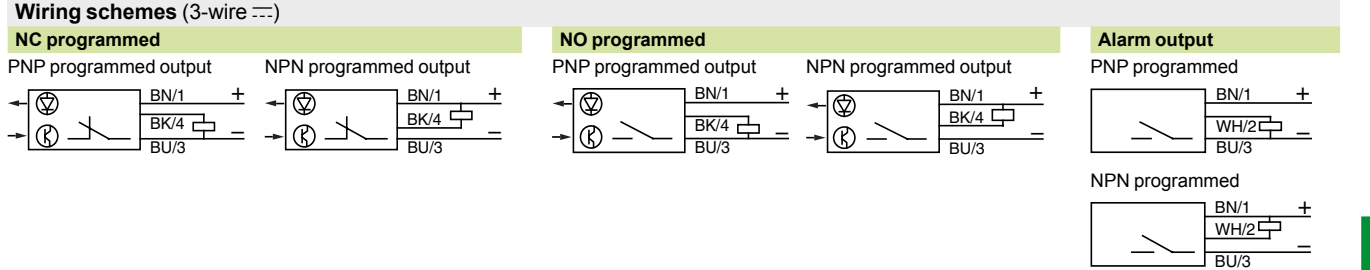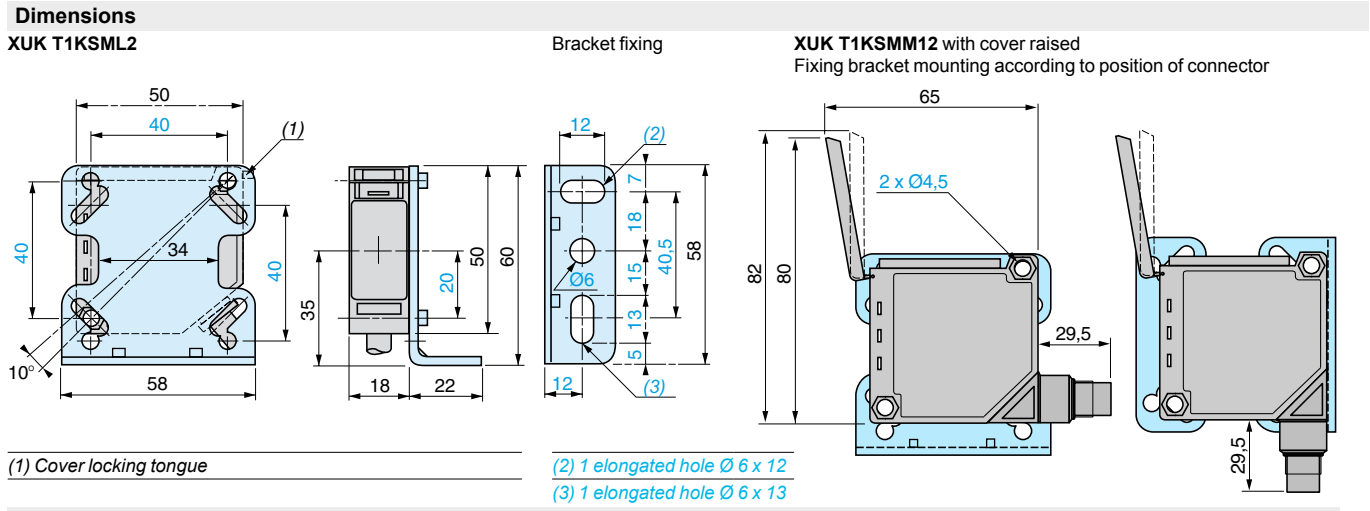


Accessories:
page 5/158

Photo-electric sensors

OsiSense XU Application, packaging series
Compact design, 50 x 50
For colour detection ⁽¹⁾
DC supply. Solid-state output

Compact design, 50 x 50



| | |
|-------------------------------|--|
| System | Diffuse |
| Type of transmission | White LED (400-700 nm) |
| Type of colour processing | RGB |
| Nominal sensing distance (Sn) | 20 mm (Operational distance, see curve on page 5/81) |

References

| | | |
|-------------------------------|-------------|---------------------|
| 3-wire, PNP + 1 synchro input | NO function | XUK C1PSMM12 |
| 3-wire, NPN + 1 synchro input | NO function | XUK C1NSMM12 |
| Weight (kg) | | 0.085 |

Characteristics

| | | |
|------------------------------|------------------------------|---|
| Product certifications | | CE, cULus |
| Ambient air temperature | For operation | - 10...+ 55 °C |
| | For storage | - 20...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | Amplitude ± 0.5 mm, f = 10...55 Hz for each axis |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms, 6 shocks on each axis |
| Degree of protection | Conforming to IEC 60529 | IP 65 |
| Connection | | M12, 8-pin connector; can be set at 90° |
| Materials | Case | ABS |
| | Lenses | Glass (window tilted, anti-reflective glass) |
| Spot diameter | | At 20 mm: Ø 4 mm |
| Adjustment | Teach mode | Teaching using SET (adjustment) and SEL (Selection) buttons |
| | Operating mode | C (colour) or C+I (colour + intensity), independent for each channel |
| | Tolerance level | Selectable tolerance for varying shades of colour from TOL 0 to TOL 9 |
| Auxiliary functions | | External synchronisation, locking |
| Indicator lights and display | Display | 4-digit |
| | Output active | 3 green LEDs: output 1, 2 or 3 |
| | Output state "OUT" | Yellow LED if one output (1, 2 or 3) activated |
| Rated supply voltage | | DC 12...24 V |
| Voltage limits | | DC 10...30 V (including ripple) |
| Switching capacity (sealed) | | ≤ 100 mA with protection against reverse polarity, overload and short-circuit |
| Voltage drop, closed state | | ≤ 2 V |
| Current consumption, no-load | | ≤ 60 mA |
| Maximum switching frequency | | 1.5 kHz |
| Delay | | 335 µs for response and recovery |
| Time delay | | Selectable (5, 10, 20, 30 or 40 ms) |

| Function table for each channel (3 channels) NO function | Colour recognised by sensor | Colour not recognised by sensor |
|---|-----------------------------|---------------------------------|
| Output state (PNP or NPN) indicator (illuminated when sensor output is ON) | | |

(1) Applications: OsiSense XU "Full colour" is a colour sensor that can recognise up to 3 colours. It can be used to sort objects by colour or to monitor colours, and is insensitive to surface finishes (matt or reflective), as well as ambient lighting. The sensor is suitable for use in many industrial sectors, such as packaging machines, printing machines, etc.

Photo-electric sensors

OsiSense XU Application, packaging series


Compact design, 50 x 50

For colour detection

DC supply. Solid-state output


Presentation

Description




- 1 Output LED
- 2 OUT1, OUT2 and OUT3 LEDs
- 3 Display (green, 4-digit)
- 4 SEL button (adjustment)
- 5 SET button

Detection zone and spot size



| | a (mm) | Ø (mm) |
|--------------|--------|--------|
| XUK C1●SMM12 | 20 | 4 |


Detection curve

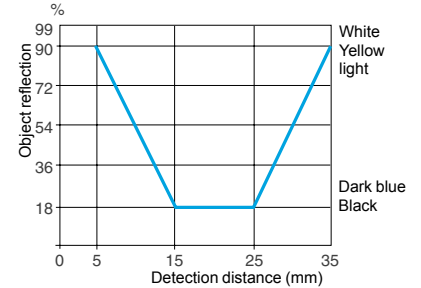

Detection distance related to object's degree of reflection

Diagram

SYNC passive = VDC, SYNC active = 0 V

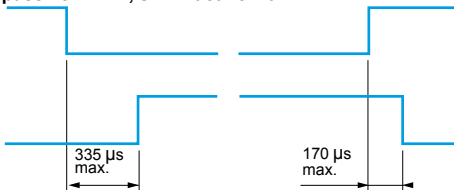


Accessories


| Description | Diameter mm | Length m | Reference | Weight kg |
|--|-------------|----------|-----------|-----------|
| Pre-wired M12, 8-pin connectors, shielded cable (1) | 6.5 | 3 | XSZ MCR03 | 0.230 |
| | | 10 | XSZ MCR10 | 0.715 |
| Fixing bracket (2 screws, 2 nuts and 2 washers included) | - | - | XUZ K2000 | 0.040 |

Dimensions

XUK C1●SMM12

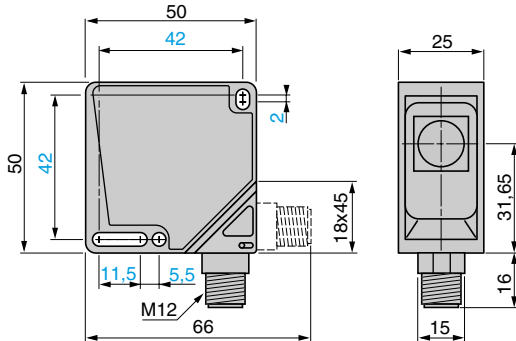


Fixing bracket XUZ K2000

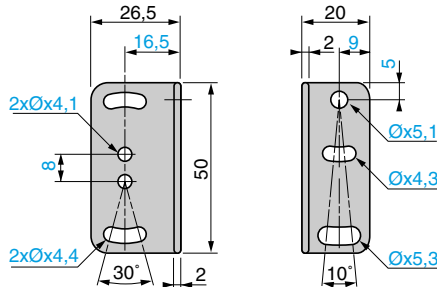

Wiring schemes

Pre-wired connector XSZ MCR●●


Sensor connector pin view



Wiring schemes

PNP output + synchro input

NPN output + synchro input

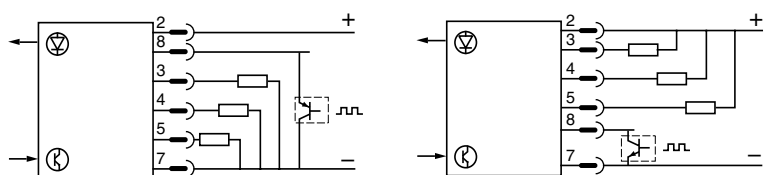

| Pin N° | Type | Colour (2) |
|--------|---------------|------------------|
| 1 | - | WH (white) |
| 2 | --- 10...30 V | BN (brown) |
| 3 | Output 1 | TAN (tan) |
| 4 | Output 2 | YE (yellow) |
| 5 | Output 3 | GY (grey) |
| 6 | - | PK (pink) |
| 7 | 0 V | VT (violet) |
| 8 | Synchro | RD (red) |
| - | Screening | TR (transparent) |

(1) The use of shielded cable is recommended in order ensure correct operation of the sensor, especially in environments subject to electromagnetic interference.

(2) With pre-wired connector XSZ MCR●●.


Photo-electric sensors

OsiSense XU Application, packaging series

For colour detection ⁽¹⁾

DC supply. Solid-state output

Compact design and fibre design

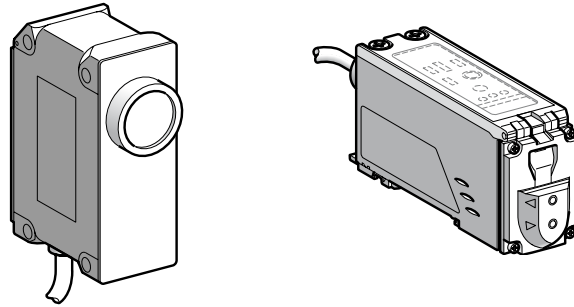

| | | |
|-------------------------------|---------------------|---|
| System | Diffuse | Thru-beam or diffuse depending on fibres optics selected |
| Type of transmission | Red, blue and green | |
| Nominal sensing distance (Sn) | 40...60 mm | 4...250 mm depending on fibre optics used (see page 5/83) |

References

| | | | |
|-------------|-------------|--------------------|--------------------|
| 3-wire, PNP | NO function | XUR C3PPML2 | XUR C4PPML2 |
| 3-wire, NPN | NO function | XUR C3NPML2 | XUR C4NPML2 |
| Weight (kg) | | 0.260 | 0.190 |


Characteristics

| | | | |
|---|------------------------------|--|--|
| Product certifications | | CE | |
| Ambient air temperature | For operation | - 10...+ 50 °C | |
| | For storage | - 30...+ 70 °C | |
| Ambient humidity | | 35...85% RH (without condensation) | |
| Vibration resistance | Conforming to IEC 60068-2-6 | Amplitude ± 0.75 mm, f = 10...55 Hz, 2 hours on the 3 axes | |
| Shock resistance | Conforming to IEC 60068-2-27 | 50 gn, 5 shocks on the 3 axes | |
| Degree of protection | Conforming to IEC 60529 | IP 67 | IP 65 |
| Connection Pre-cabled: diameter 5.4 mm, length 2 m, wire c.s.a.: 7 x 0.2 mm ² | | | |
| Materials | Case | Aluminium | |
| | Lenses | Glass | — |
| | Cable | Vinyl rubber sleeve | |
| | Cover | Polyacrylate | |
| Spot diameter | | At 40 mm: 4 mm | Depending on fibre optics used: 2.5...8 mm (see page 5/83) |
| | | At 50 mm: 6 mm | |
| | | At 60 mm: 8 mm | |
| Immunity to ambient light | Sunlight | 10 000 Lux max. | |
| | Halogen light | 3000 Lux max. | |
| Rated supply voltage | | --- 12...24 V | |
| Voltage limits | | --- 10...30 V (including ripple) | |
| Switching capacity (sealed) | | ≤ 100 mA with overload and short-circuit protection | |
| Voltage drop, closed state | | ≤ 1.5 V | |
| Current consumption, no-load | | ≤ 150 mA | |
| Switching time | | Programmable by switch: 0.8 ms, 1.5 ms or 6 ms | |
| Maximum switching frequency | | 1.2 kHz | |
| Time delay | | Programmable by switch: 40 ms on falling edge | |

| | | |
|---|-----------------------------|---------------------------------|
| Function table for each channel (3 channels) NO function | Colour recognised by sensor | Colour not recognised by sensor |
| Output state (PNP or NPN) indicator (illuminated when sensor output is ON) | | |

(1) Applications: OsiSense XU "Full colour" is a colour sensor that can recognise up to 3 colours. It can be used to sort objects by colour or to monitor colours, and is insensitive to surface finishes (matt or reflective), as well as ambient lighting. The sensor is suitable for use in many industrial sectors, such as packaging machines, printing machines, etc.

Presentation

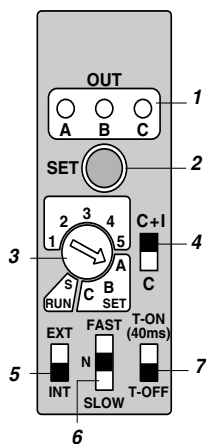

1 Operational status LED

2 Teach mode button, for memorising reference colours (SET)

3 Reference colours and operating mode selector


- Selection of reference colours (SET)
- Selection of operating mode:
 - TOLERANCE mode (positions 1...5): 5 positions allow selection of the tolerance level to be applied to the shading of the colour to be detected.
 - RUN mode (position S): this mode enables sorting by colour.

4 C or C + I selector

- Mode "C": this mode is used for the detection of different coloured objects.
- Mode "C + I": in this mode the sensor is insensitive to varying surface finishes of the object.

5 Synchronisation mode selector

- Internal synchronisation mode (INT): in this mode, colour detection is performed continually.
- External synchronisation mode (EXT): in this mode, colour detection is synchronised with an external signal.

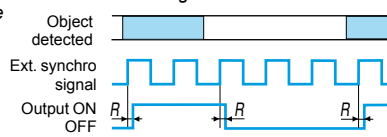


6 Response time mode selector


- Fast mode (F), normal mode (N) or slow mode (S).

7 Output time delay selector (T-ON/T-OFF)

- Output time delay, internal synchronisation mode




- Output time delay, external synchronisation mode

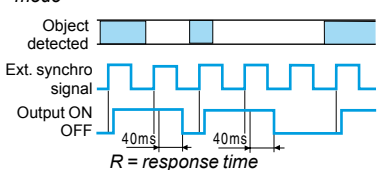

- Same colour
- Different colour


Dimensions

XUR C3●PML2

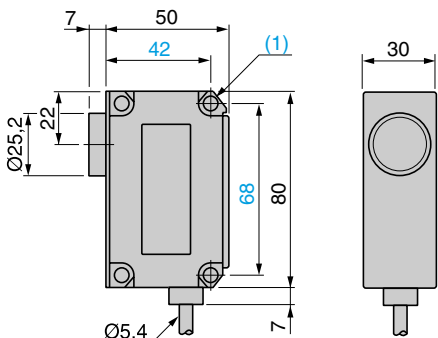


(1) 2 holes for M5 screws, depth 10 mm

XUR C4●PML2

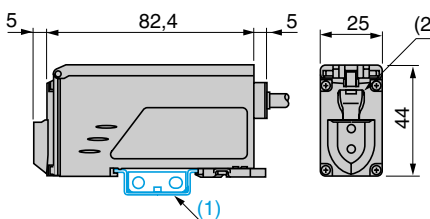

- (1) Mounting on rail
- (2) Fibre optic clamp
- (3) 1 elongated hole $\varnothing 4.4 \times 5.4$
- (4) 2 elongated holes $\varnothing 4.4 \times 6.4$

Mounting rail fixing



Mounting

Installation precautions

XUR C3●PML2




Figure 1

XUR C4●PML2




Figure 2

■ To obtain optimal detection of the colours, it is recommended that the sensor be positioned such that the transmitted light beams strikes the object at an angle of 15° from its vertical axis (figure 1).

■ The direction of travel of the object must be as shown in figure 2. This provides detection that is less sensitive to variations in the angle of detection.

Suitable fibre optics. For further information, see pages 5/118 to 5/121.

| Type of fibre | System | Reference | Sensing distance (mm) | Diameter of spot (mm) |
|---------------|---------|----------------------|-----------------------|-----------------------|
| Focused | Diffuse | XUF N5L01L2 | 10 | $\varnothing 2.5$ |
| | | XUF N5L02L2 | 20 | $\varnothing 5$ |
| | | XUF N5L03L2 | 30 | $\varnothing 8$ |
| Standard | Diffuse | XUF N05321 | 5 | - |
| | | XUF S0520 | 4 | - |
| | | XUF N02323 + XUF Z06 | 7 | $\varnothing 0.5$ |
| | | XUF N12301 + XUF Z01 | 250 | - |
| Thru-beam | (1) | XUF S2020 + XUF Z01 | 150 | - |

(1) Detection of colour by transparency

Cable connections

| | | |
|----|----------|--|
| BN | (brown) | + Supply (12...24 V) |
| BU | (blue) | - |
| PK | (pink) | SET signal (remote activation of teach mode to memorise reference colours) |
| VI | (violet) | EXT signal (external synchronisation) |
| BK | (black) | Output A |
| WH | (white) | Output B |
| GR | (grey) | Output C |

Wiring scheme


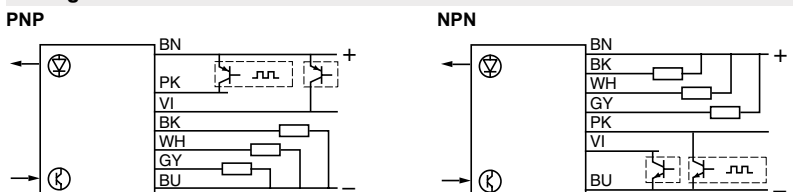


Photo-electric sensors

OsiSense XU Application, packaging series
Thru-beam system for detection of water
and aqueous liquids

Miniature design

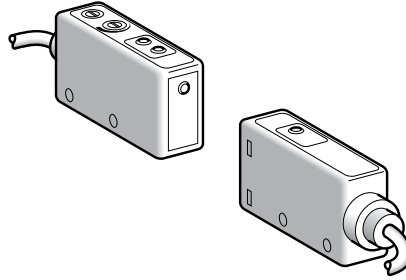

| | |
|--------------------------------------|--|
| System | Thru-beam |
| Type of transmission | Infrared (transmission frequency = 1450 nm) |
| Nominal sensing distance (Sn) | 50 m (use between 10 and 20 cm, see applications) |

References


| | |
|---|------------------------|
| 3-wire, PNP and NPN NO or NC programmable function | XUM W1KSNL2 (1) |
| Weight (kg) | 0.155 |

Characteristics

| | |
|-------------------------------------|---|
| Product certifications | CE |
| Ambient air temperature | For operation: 0...+ 40 °C. For storage: - 5...+ 50 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 25 gn, amplitude ± 2 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 30 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 IP 65 |
| Connection | Pre-cabled, diameter 4 mm, length 2 m, wire c.s.a.: 2 x 0.2 mm ² (transmitter) or 4 x 0.2 mm ² (receiver) |
| Materials | Case: PBT, lenses: polycarbonate, cable: PUR |
| Rated supply voltage | --- 10.8...26.4 V with protection against reverse polarity |
| Voltage limits | --- 10...30 V (including ripple) |
| Solid-state digital output | Switching capacity (sealed) ≤ 100 mA with overload and short-circuit protection Voltage drop, closed state ≤ 2 V Maximum switching frequency 1 kHz Delays First-up: ≤ 50 ms; response: ≤ 0.5 ms; recovery: ≤ 0.5 ms |
| Current consumption, no-load | ≤ 45 mA (transmitter + receiver) |
| Indicator lights | Transmitter Green LED, supply on Receiver Yellow LED: solid-state output (LED on, output on) Green LED: stability (see diagram on page 5/85) |

(1) Reference for both transmitter and receiver for thru-beam system.

(2) **Application examples:** detection of the level of aqueous liquids in any transparent or "almost" opaque container, and any product containing water molecules (adhesives, ice creams, damp fabrics, etc.).

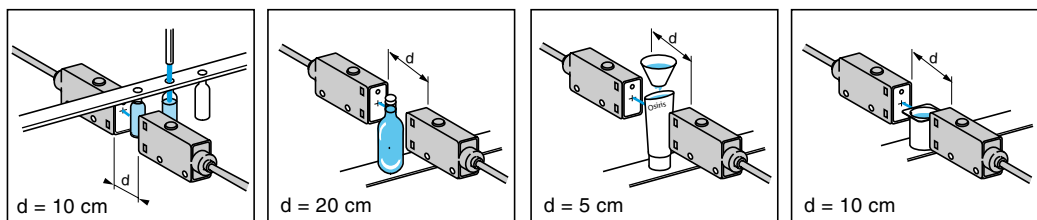


Transparent containers

Almost opaque containers

Photo-electric sensors


OsiSense XU Application, packaging series
Thru-beam system for detection of water
and aqueous liquids

Detection principle

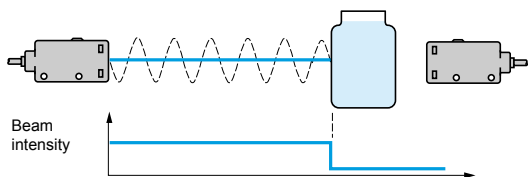


The wavelength of the transmitted beam corresponds to the maximum absorption frequency of water molecules.

Transmission curves

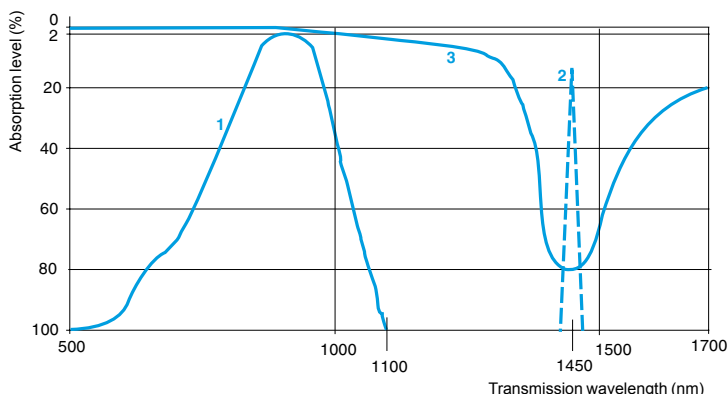


- 1 Transmission curve of a standard photo-electric sensor
- 2 Transmission curve of sensor **XUM W1KSNL2**
- 3 Curve of water absorption against incident beam wavelength


Excess gain curve

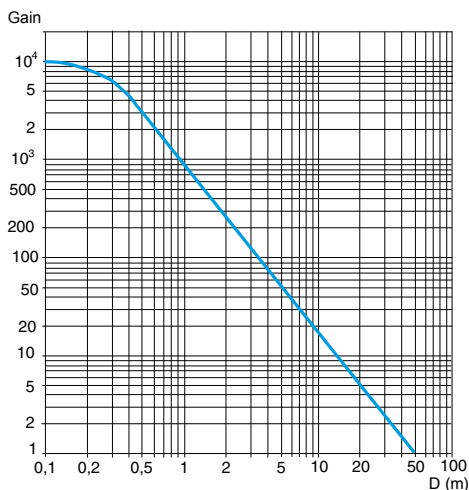

Stability curve

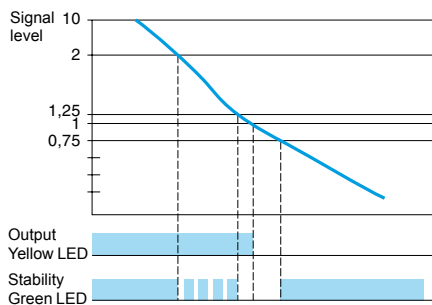

Functions



LED

- 1 Yellow LED, output
- 2 Green LED, stability


Potentiometer

- 3 Sensitivity adjustment

Switch

- 4 NO/NC programming
NO: detection of object
NC: detection of object absence

Dimensions

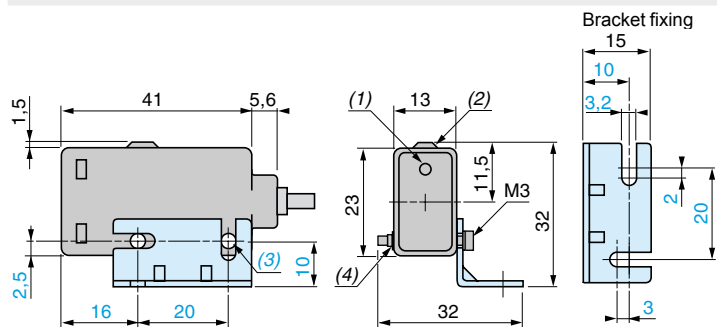

- (1) Output LED.
- (2) Output LED and stability LED.
- (3) 2 holes $\varnothing 3.2$.
- (4) Locknut plate.

Wiring schemes (3-wire ...)

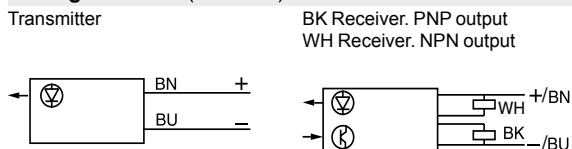



Photo-electric sensors

OsiSense XU Application, multimode


food and beverage processing series

Design 18, metal, stainless steel


Three-wire DC, solid-state output




XUB 0●●●NL2




XUB 0●●●WL2




XUB 0●●●NM12




XUB 0●●●WM12




XUZ C50



XUZ A118



XUZ A218



XUZ B2005

Ø 18 stainless steel

Pre-cabled (1)

| Sensing distance (Sn) (2) m | Function | Output | Line of sight | Reference | Weight kg |
|--|--------------------------|--------|------------------|------------------------|-----------|
| 0...15 depending on whether accessories are used | NO or NC, by programming | PNP | Along case axis | XUB 0SPSNL2 | 0.105 |
| | | | 90° to case axis | XUB 0SPSWL2 (3) | 0.110 |
| | | NPN | Along case axis | XUB 0SNSNL2 | 0.105 |
| | | | 90° to case axis | XUB 0SNSWL2 (3) | 0.110 |

M12 connector

| | | | | | |
|--|--------------------------|-----|------------------|-------------------------|-------|
| 0...15 depending on whether accessories are used | NO or NC, by programming | PNP | Along case axis | XUB 0SPSNM12 | 0.055 |
| | | | 90° to case axis | XUB 0SPSWM12 (3) | 0.060 |
| | | NPN | Along case axis | XUB 0SNSNM12 | 0.055 |
| | | | 90° to case axis | XUB 0SNSWM12 (3) | 0.060 |

Accessories

| Description | Connecti-on | Line of sight | Reference | Weight kg |
|--|----------------|------------------|--------------------------|-----------|
| Thru-beam accessories (transmitter) | Pre-cabled (1) | Along case axis | XUB 0SKSNL2T | 0.105 |
| | | 90° to case axis | XUB 0SKSWL2T (3) | 0.110 |
| | M12 connector | Along case axis | XUB 0SKSNM12T | 0.055 |
| | | 90° to case axis | XUB 0SKSWM12T (3) | 0.060 |
| Reflector 50 x 50 mm | – | – | XUZ C50 | 0.020 |

Fixing accessories (4)

| Description | Reference | Weight kg |
|---|------------------|-----------|
| Stainless steel fixing bracket | XUZ A118 | 0.045 |
| Plastic fixing bracket with adjustable ball-joint | XUZ A218 | 0.035 |
| Plastic fixing clamp, 24.1 mm centres with locking screw | XUZ B2005 | 0.007 |

(1) For a 5 m long cable, replace L2 by L5.

Example: XUB 0SPSNL2 becomes XUB 0SPSNL5.





(2) For further information, see page 5/87.

(3) For line of sight 90° to case axis versions, see sensing distances on page 5/87.

(4) For further information, see page 5/158.


| Characteristics | | XUB 0●●●●M12, XUB 0●●●●M12T | XUB 0●●●●L2, XUB 0●●●●L2T | | |
|--|------------------------------|--|--------------------------------|-------------|---|
| Sensor type | | UL, CSA, CE | | | |
| Product certifications | | UL, CSA, CE | | | |
| Connection | Connector | M12 | — | | |
| | Pre-cabled | — | Length: 2 m | | |
| Sensing distance nominal S_n / maximum (excess gain = 2) (excess gain = 1) | | Line of sight along case axis | Line of sight 90° to case axis | | |
| | | m | 0.12 / 0.12 | 0.11 / 0.11 | Accessory |
| | | m | 0.3 / 0.4 | 0.2 / 0.3 | Without (diffuse with background suppression) |
| | | m | 2 / 3 | 1.5 / 2 | Without (diffuse) |
| Type of transmission | | Infrared, except polarised reflex (red) | | | |
| | | IP 65, IP 67 conforming to IEC 60529; IP 69K conforming to DIN 40050; double insulation II | | | |
| Degree of protection | | | | | |
| Storage temperature | °C | - 40...+ 70 | | | |
| Operating temperature | °C | - 25...+ 55 | | | |
| Materials | | Case: stainless steel, grade 304CU; Lens: PMMA; Cable: PvR | | | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1.5 mm (f = 10 to 55 Hz) | | | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | | | |
| Indicator lights | Output state | Yellow LED (transmission present for XUB 0●●●●●●T) | | | |
| | Supply on | Green LED | | | |
| | Stability | Red LED (except for XUB 0●●●●●●T) | | | |
| Rated supply voltage | V | — 12...24 with protection against reverse polarity | | | |
| Voltage limits (including ripple) | V | — 10...36 | | | |
| Current consumption, no-load | mA | 35 (20 for XUB 0●●●●●●T) | | | |
| Switching capacity | mA | ≤ 100 with overload and short-circuit protection | | | |
| Voltage drop, closed state | V | 1.5 | | | |
| Maximum switching frequency | Hz | 250 | | | |
| Delays | First-up | ms | < 200 | | |
| | Response | ms | < 2 | | |
| | Recovery | ms | < 2 | | |

Wiring schemes


| M12 connector | Pre-cabled | PNP | NPN | Thru-beam accessory |
|--|--|---|--|---|
|  <p>4 3 (-) 1 2 (+) 3 (-) 1 (+) 4 OUT/Output 2 Beam break input (1)</p> | <p>(-) BU (Blue) (+) BN (Brown) OUT/Output BK (Black) Beam break input (1) VI (Violet)</p> |  <p>BN/1 PNP BU/3 BK/4</p> |  <p>BN/1 NPN BU/3 BK/4</p> |  <p>1/BN + 2/VI + 3/BU =</p> <p>Input 2/VI: - not connected: beam made - connected to -: beam broken</p> |

See connection on page 9/44.

Detection curves (line of sight along case axis)

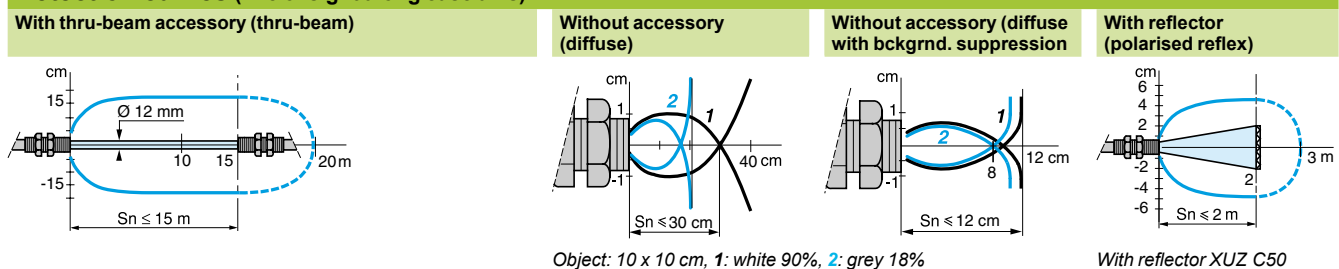

Variation of usable sensing distance S_u (without accessory, with adjustable background suppression)

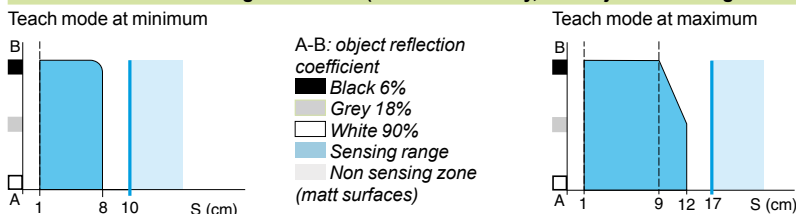

Dimensions


| XUB | Pre-cabled (mm) | | Connector (mm) | |
|--------------------------------------|-----------------|----|----------------|----|
| | a | b | a | b |
| Ø 18, line of sight along case axis | 64 (2) | 44 | 78 (2) | 44 |
| Ø 18, line of sight 90° to case axis | 78 | 44 | 92 | 44 |

(1) Beam break input on thru-beam transmitter only.
(2) For XUB 0●●●●●●T, 64 becomes 62 mm and 78 becomes 76 mm.

Photo-electric sensors

OsiSense XU Application, single mode
food and beverage processing series
Stainless steel case M18 x 1
DC. Solid-state output

Design 18

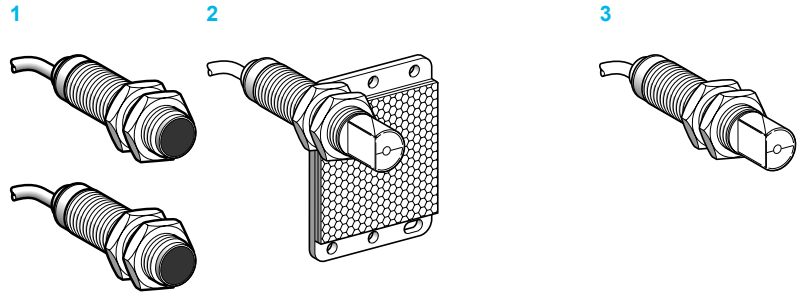

| System | | Thru-beam 1 | Reflex 2 | Polarised reflex 2 | Diffuse 3 |
|----------------------|------------------------------|-------------|-----------------------------------|---------------------------------|-----------|
| Type of transmission | | Infrared | Infrared | Red | Infrared |
| Sensing distance | Nominal Sn (excess gain = 2) | 15 m | 4 m | 2 m | 0.10 m |
| | Maximum (excess gain = 1) | 20 m | 5.5 m (with 50 x 50 mm reflector) | 3 m (with 50 x 50 mm reflector) | 0.15 m |

References of pre-cabled versions (1)

| | | | | | |
|---|--------------------------------|-------------------|-------------------|-------------------|---------------|
| 3-wire, PNP NO or NC programmable function | Line of sight along case axis | XU2 N18PP341 (2) | XU1 N18PP341 (3) | XU9 N18PP341 (3) | XU5 N18PP341 |
| | Line of sight 90° to case axis | XU2 N18PP341W (2) | XU1 N18PP341W (3) | XU9 N18PP341W (3) | XU5 N18PP341W |
| 3-wire, NPN NO or NC programmable function | Line of sight along case axis | XU2 N18NP341 (2) | XU1 N18NP341 (3) | XU9 N18NP341 (3) | XU5 N18NP341 |
| | Line of sight 90° to case axis | XU2 N18NP341W (2) | XU1 N18NP341W (3) | XU9 N18NP341W (3) | XU5 N18NP341W |
| Weight (kg) | | 0.270 | 0.155 | 0.155 | 0.135 |

References of connector versions

| | | | | | |
|---|--------------------------------|--------------------|--------------------|--------------------|----------------|
| 3-wire, PNP NO or NC programmable function | Line of sight along case axis | XU2 N18PP341D (2) | XU1 N18PP341D (3) | XU9 N18PP341D (3) | XU5 N18PP341D |
| | Line of sight 90° to case axis | XU2 N18PP341WD (2) | XU1 N18PP341WD (3) | XU9 N18PP341WD (3) | XU5 N18PP341WD |
| 3-wire, NPN NO or NC programmable function | Line of sight along case axis | XU2 N18NP341D (2) | XU1 N18NP341D (3) | XU9 N18NP341D (3) | XU5 N18NP341D |
| | Line of sight 90° to case axis | XU2 N18NP341WD (2) | XU1 N18NP341WD (3) | XU9 N18NP341WD (3) | XU5 N18NP341WD |
| Weight (kg) | | 0.130 | 0.085 | 0.085 | 0.065 |

(1) Sensors available with 5 m long cable: To order, add L5 to the end of the reference selected from above.

Example: sensor XU1 N18PP341 with 5 m cable becomes XU1 N18PP341L5.

(2) Reference for both transmitter and receiver for thru-beam system sensors.

(3) 50 x 50 mm reflector included with reflex system sensors.

References of fixing accessories

| Description | Reference | Weight kg |
|--------------------------------|-----------|-----------|
| Stainless steel fixing bracket | XUZ A118 | 0.045 |
| Plastic fixing bracket | XUZ A218 | 0.035 |
| Set of 2 stainless steel nuts | XSZ E318 | 0.020 |
| Set of 2 plastic nuts | XSZ E218 | 0.004 |

Characteristics


| | | |
|-------------------------------------|------------------------------|---|
| Product certifications | | CE, UL, CSA |
| Ambient air temperature | | For operation: -25...0...+55 °C. For storage: -40...+70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 25 gn, amplitude ± 1.5 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms |
| Degree of protection | | IP 67 |
| Connection | | Pre-cabled, diameter 4.2 mm, length 2 m (3), wire c.s.a.: 4 x 0.34 mm ² |
| | | Connector |
| | | M12 male connector, 4-pin (suitable female connectors, including pre-wired versions, see page 9/44) |
| Materials | | Case |
| | | Food and beverage processing stainless steel, grade 304 Cu |
| | | Lenses |
| | | PMMA |
| | | Cable |
| | | PvR |
| Rated supply voltage | | 12...24 with protection against reverse polarity |
| Voltage limits | | 10...30 V (including ripple) |
| Switching capacity (sealed) | | ≤ 100 with overload and short-circuit protection |
| Voltage drop, closed state | | ≤ 1.5 V |
| Current consumption, no-load | | ≤ 30 mA (reflex and diffuse), ≤ 50 mA (thru-beam) |
| Maximum switching frequency | | 500 Hz |
| Delays | | First-up |
| | | ≤ 15 ms |
| | | Response |
| | | ≤ 1 ms |
| | | Recovery |
| | | ≤ 1 ms |
| Indicator lights | | Supply on |
| | | Green LED, on transmitter only |
| | | Output state |
| | | Yellow LED, on receiver only |

(1) Sensors available with 5 m long cable: To order, add L5 to the end of the reference selected from above.
Example: sensor XU1 N18PP341 with 5 m cable becomes XU1 N18PP341L5.


Curves

Detection curves


Thru-beam system




Reflex system with reflector XUZ C50



Polarised reflex system with reflector XUZ C50




Diffuse system




Excess gain curves (ambient temperature: + 25 °C)


Thru-beam system




Reflex system with reflector XUZ C50



Polarised reflex system with reflector XUZ C50



Diffuse system



Object 10 x 10 cm
White 90%

Photo-electric sensors

OsiSense XU Application, single mode


food and beverage processing series

Stainless steel case M18 x 1


DC. Solid-state output

Dimensions


XU● N18●●341

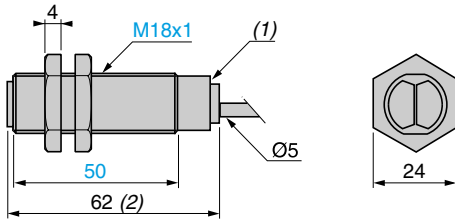


XU● N18●●341W

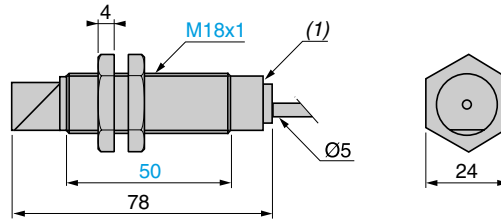

XU● N18●●341D

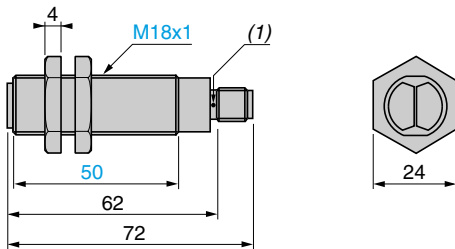

XU● N18●●341WD

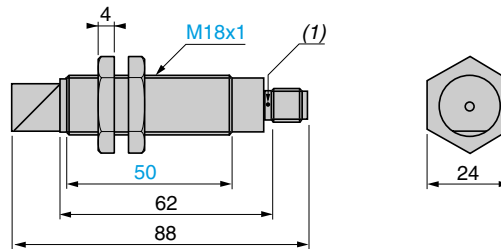

5

(1) LED

(2) 64 for XU9 N18●●341

Fixing nut tightening torque: < 15 N.m

Connector tightening torque: 2 N.m

Photo-electric sensors

OsiSense XU Application, single mode
 food and beverage processing series
 Stainless steel case M18 x 1
 DC. Solid-state output

Wiring schemes

M12 connector



3 (-)
 1 (+)
 4 OUT/Output
 2 Prog (or beam break input for thru-beam transmitter only)


Pre-cabled

(-) BU (Blue)
 (+) BN (Brown)
 (Out/Output) BK (Black)
 (Prog) OG (Orange)
 (Beam break input) VI (Violet) on thru-beam transmitter only


See connection on page 9/44.

Wiring schemes - diffuse


PNP NO




PNP NC




NPN NO



NPN NC




Transmitter




Wiring schemes - reflex and thru-beam


PNP NO




PNP NC



NPN NO




NPN NC



Beam break input on thru-beam transmitter only

Beam made



Beam broken





Photo-electric sensors

OsiSense XU Application, assembly series
Metal case, cylindrical, threaded M8 x 1
DC supply. Solid-state output

Design 8

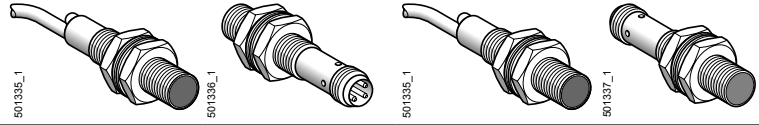

| | | | | | |
|-------------------------------|------------|-----------|-----------|----------|----------|
| Connection | Pre-cabled | ■ | – | ■ | – |
| | Connector | – | ■ | – | ■ |
| System | | Thru-beam | Thru-beam | Diffuse | Diffuse |
| Type of transmission | | Infrared | Infrared | Infrared | Infrared |
| Nominal sensing distance (Sn) | | 2 m | 2 m | 0.05 m | 0.05 m |

References

| | | | | | |
|-------------|-------------|-----------|------------|-----------|------------|
| 3-wire, PNP | NO function | XUA H0214 | XUA H0214S | XUA H0515 | XUA H0515S |
| | NC function | XUA H0224 | XUA H0224S | XUA H0525 | XUA H0525S |
| 3-wire, NPN | NO function | XUA J0214 | XUA J0214S | XUA J0515 | XUA J0515S |
| | NC function | XUA J0224 | XUA J0224S | XUA J0525 | XUA J0525S |
| Transmitter | | XUA H0203 | XUA H0203S | – | – |
| Weight (kg) | | 0.050 | 0.015 | 0.50 | 0.015 |

Characteristics


| | | | | | |
|-----------------------------------|------------------------------|---|-------|---------------|-------|
| Product certifications | | CE, cULus | | | |
| Ambient air temperature | For operation | – 25...+ 55 °C | | | |
| | For storage | – 30...+ 70 °C | | | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1 mm (f = 10...55 Hz) | | | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | | | |
| Degree of protection | Conforming to IEC 60529 | IP 67 - IP 65 | IP 65 | IP 67 - IP 65 | IP 65 |
| Connection | Pre-cabled | Ø 3.5 mm, length 2 m, wire c.s.a.: 3 x 0.14 mm ² | | | |
| | Connector | M8 female connectors, 3-pin, see page 9/44 | | | |
| Materials | Case | Nickel plated brass | | | |
| | Cable | PvR | – | PvR | – |
| | Lenses | PMMA | | | |
| Rated supply voltage | | ⎓ 12...24 V with protection against reverse polarity | | | |
| Voltage limits (including ripple) | | ⎓ 10...30 V | | | |
| Switching capacity (sealed) | | ≤ 100 mA with overload and short-circuit protection | | | |
| Voltage drop, closed state | | ≤ 1 V | | | |
| Current consumption, no-load | Transmitter | ≤ 15 mA | | | |
| | Receiver | ≤ 10 mA | | | |
| | Diffuse | ≤ 25 mA | | | |
| Maximum switching frequency | | 2000 Hz | | 1000 Hz | |
| Delays | First-up | ≤ 20 ms | | | |
| | Response and recovery | ≤ 0.25 ms | | ≤ 0.5 ms | |

| Function table | Function | Diffuse or through beam system | |
|--|----------|--------------------------------|----------------------------|
| | | No object present in the beam | Object present in the beam |
| Output state (PNP or NPN) indicator: yellow LED (illuminated when sensor output is ON) | NO | | |
| | NC | | |


Curves

Detection curves

Thru-beam system

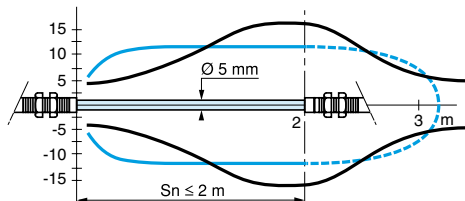


Diffuse system




Object 5 x 5 cm; 1 White 90%; 2 Grey 18%

Excess gain curves (ambient temperature: ± 25 °C)


Thru-beam system



Diffuse system



Variation of sensing distance S_n

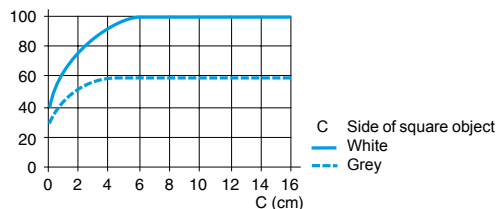


Detection differential (H) when object approaches from the front: $H \leq 25\%$ of S_n

Object 5 x 5 cm, White 90%


Dimensions

XUA

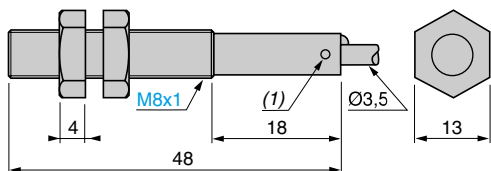

(1) LED, 4 viewing ports at 90°.


XUA ●●●●S

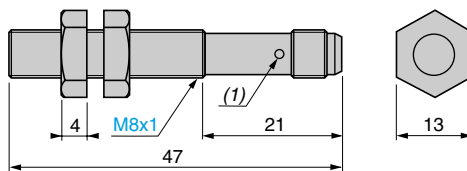

(1) LED, 4 viewing ports at 90°.

Note: fixing nut tightening torque: < 2 N.m

M8 connector



See connection on page 9/44




Wiring schemes (3-wire ---)

XUA

Transmitter

PNP


NPN




Beam break test

For thru-beam transmitter XUA H0203 only


For thru-beam transmitter XUA H0203S only




Beam made
LED on (steady light)



Beam broken
LED flashing



Beam made
LED on (steady light)



Beam broken
LED flashing


Photo-electric sensors

OsiSense XU Application


Conveying and access control series

Miniature design


Four-wire DC, solid-state output



XUY PS989S●



XUY B989S●

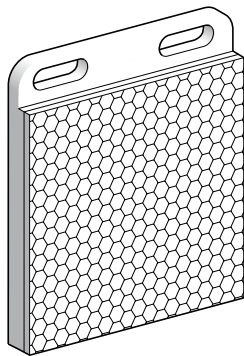

XUY 1111

Diffuse system with background suppression

| Sensing dist. (Sn) m | Function | Output | Connection | Reference | Weight kg |
|----------------------|---------------------------|--------|----------------------|----------------------|-----------|
| 0.015...0.08 | NO/NC depending on wiring | PNP | Pre-cabled (L = 2 m) | XUY PS989SP | 0.075 |
| | | | M8 connector | XUY PSCO989SP | 0.044 |
| | | NPN | Pre-cabled (L = 2 m) | XUY PS989SN | 0.075 |
| | | | M8 connector | XUY PSCO989SN | 0.044 |

Diffuse system with adjustable sensitivity

| Sensing dist. (Sn) m | Function | Output | Connection | Reference | Weight kg |
|----------------------|---------------------------|--------|----------------------|---------------------|-----------|
| 0.03...0.25 | NO/NC depending on wiring | PNP | Pre-cabled (L = 2 m) | XUY P989SP | 0.075 |
| | | | M8 connector | XUY PCO989SP | 0.044 |
| | | NPN | Pre-cabled (L = 2 m) | XUY P989SN | 0.075 |
| | | | M8 connector | XUY PCO989SN | 0.044 |

Polarised reflex system

| Sensing dist. (Sn) m | Function | Output | Connection | Reference | Weight kg |
|-----------------------------|---------------------------|--------|----------------------|-------------------------|-----------|
| 1 with 50 x 50 mm reflector | NO/NC depending on wiring | PNP | Pre-cabled (L = 2 m) | XUY B989SP (1) | 0.093 |
| | | | M8 connector | XUY BCO989SP (1) | 0.061 |
| | | NPN | Pre-cabled (L = 2 m) | XUY B989SN (1) | 0.093 |
| | | | M8 connector | XUY BCO989SN (1) | 0.061 |

(1) 50 x 50 mm reflector (XUY 1111) and multi-adjustment fixing bracket included with sensor.

Accessory

| Accessory | For use with | Reference | Weight kg |
|-----------------------|-------------------|-----------------|-----------|
| Reflector, 50 x 50 mm | XUY B989S● | XUY 1111 | 0.018 |

Thru-beam system


| Sensing dist. (Sn) m | Function | Output | Connection | Reference | Weight kg |
|----------------------|---------------------------|--------|----------------------|---------------------|-----------|
| 4 (Transmitter) | - | - | Pre-cabled (L = 2 m) | XUY E989 | 0.075 |
| | | | M8 connector | XUY ECO989 | 0.044 |
| 4 (Receiver) | NO/NC depending on wiring | PNP | Pre-cabled (L = 2 m) | XUY R989SP | 0.075 |
| | | | M8 connector | XUY RCO989SP | 0.044 |
| | | NPN | Pre-cabled (L = 2 m) | XUY R989SN | 0.075 |
| | | | M8 connector | XUY RCO989SN | 0.044 |

Applications:


- Monitoring position or presence of parts, with background suppression
- Detection of height of objects on a conveyor
- Detection of product, pellet, powder levels.

Dimensions


XUY PS989S●

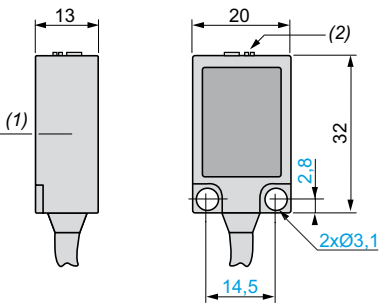

XUY E989 and XUY R989●●




XUY 1111

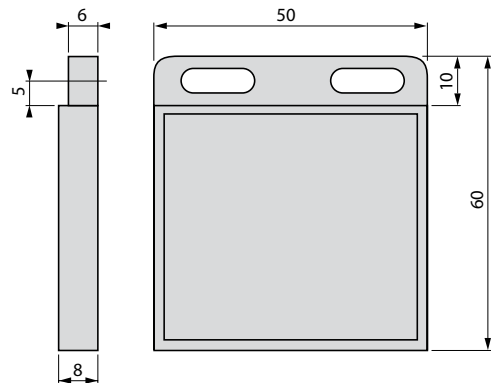

XUY ●989S●

Transmitter/Receiver



(1) Optical axis
(2) Accuracy adjustment

Characteristics

| | | | |
|--|-------------------------|--|--|
| Sensor type | | XUY ●●●●● | XUY ●CO●●●●● |
| Product certifications | | CE, cULus (1) | |
| Connection | Connector | – | M8, 4-pin, on 0.2 m flying lead |
| | Pre-cabled | Length: 2 m | – |
| Nominal sensing distance (Sn) | m | 0.08 diffuse with background suppression | |
| | m | 0.25 diffuse with adjustable sensitivity | |
| | m | 1 polarised reflex (with 50 x 50 mm reflector) | |
| | m | 4 thru-beam | |
| Type of transmission | LED | Red, pulsed | |
| | Modulation frequency | 6 kHz (4 kHz for XUY PS●●989S●) | |
| Degree of protection | Conforming to IEC 60529 | IP 65 and IP 67 | |
| Ambient air temperature | For storage | °C | -20...+80 |
| | For operation | °C | 0...+50 |
| Materials | Case | ABS | |
| | Lens | PMMA | |
| | Cable | PVC | PUR |
| Immunity to ambient light | Natural light | Lux | 10 000 (insensitive for XUY PS●●989S●) |
| | Incandescent bulb | Lux | 5000 (insensitive for XUY PS●●989S●) |
| Rated supply voltage | | V | ≐ 12...24 with protection against reverse polarity |
| Voltage limits (including ripple) | | V | ≐ 10...30 |
| Current consumption, no-load | | mA | < 25 |
| Switching capacity per output | | mA | 100 with overload and short-circuit protection |
| Voltage drop, closed state | | V | At 100 mA: < 2; at 10 mA: < 1 |
| Maximum switching frequency | | Hz | 500 |
| Delays | Response and recovery | ms | 1 |

(1) This product is UL Listed if supplied by a class II or isolated supply delivering ≐ 30 V max. (isolated transformer for example) and protected by a UL fuse rated at 3 A max.

Wiring scheme - connector

| M8 | Pin n° - colour |
|----|--------------------|
| | 1 BN: Brown |
| | 2 WH: White |
| | 3 BU: Blue |
| | 4 BK: Black |

Transmitter


| | | |
|----|-----------|-------------------|
| BN | ≐ 10-30 V | Nc: Not connected |
| BK | Nc | |
| WH | Nc | |
| BU | 0 V | |

Wiring scheme - pre-cabled


| Diffuse | | Polarised reflex and thru-beam | |
|------------|------------|--------------------------------|------------|
| PNP output | NPN output | PNP output | NPN output |
| | | | |
| | | | |

Application examples

Access control

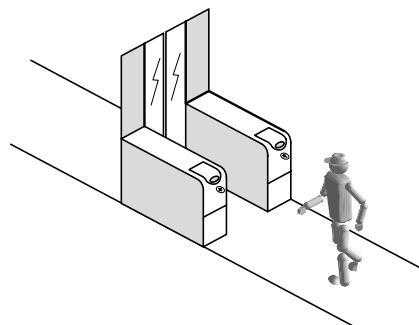

Monitoring metal rods

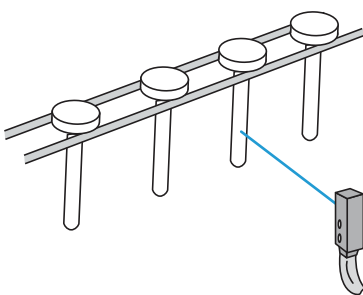

Detection of tin cans on a conveyor


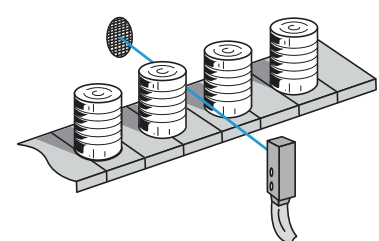


Photo-electric sensors


OsiSense XU Application, packaging and machine tool series

Miniature design, metal


Three-wire DC, solid-state output




XUM 5B●●NL2




XUZ C50




XUZ C08



XUM 2B2KCL2T



XUM 2B●●NL2R



XUZ AM81

| Sensing distance (Sn) | Function | Output | Connection | Reference | Weight kg |
|-----------------------|----------|--------|------------|-----------|-----------|
|-----------------------|----------|--------|------------|-----------|-----------|

Diffuse system with adjustable sensitivity

| | | | | | |
|--------|----|-----|----------------------|-------------|-------|
| 0.77 m | NO | PNP | Pre-cabled (L = 2 m) | XUM 5BPANL2 | 0.128 |
| | | NPN | Pre-cabled (L = 2 m) | XUM 5BNANL2 | 0.128 |
| | NC | PNP | Pre-cabled (L = 2 m) | XUM 5BPPNL2 | 0.128 |
| | | NPN | Pre-cabled (L = 2 m) | XUM 5BNBNL2 | 0.128 |

Polarised reflex system

| | | | | | |
|----------------------------|----|-----|----------------------|-------------|-------|
| 5 m with reflector XUZ C50 | NO | PNP | Pre-cabled (L = 2 m) | XUM 9BPANL2 | 0.128 |
| | | NPN | Pre-cabled (L = 2 m) | XUM 9BNANL2 | 0.128 |
| 2 m with reflector XUZ C08 | NC | PNP | Pre-cabled (L = 2 m) | XUM 9BPPNL2 | 0.128 |
| | | NPN | Pre-cabled (L = 2 m) | XUM 9BNBNL2 | 0.128 |

Reflectors

| | | | | | |
|---------------------------------|---|---|--|---------|-------|
| Universal reflector 50 x 50 mm | - | - | | XUZ C50 | 0.020 |
| Lateral reflector 8.6 x 29.5 mm | - | - | | XUZ C08 | 0.006 |

Thru-beam system (transmitter + receiver)

| | | | | | |
|------|----|-----|----------------------|-------------|-------|
| 15 m | NO | PNP | Pre-cabled (L = 2 m) | XUM 2BPANL2 | 0.237 |
| | | NPN | Pre-cabled (L = 2 m) | XUM 2BNANL2 | 0.237 |
| | NC | PNP | Pre-cabled (L = 2 m) | XUM 2BPPNL2 | 0.237 |
| | | NPN | Pre-cabled (L = 2 m) | XUM 2BNBNL2 | 0.237 |

Transmitter only

| | | | | | |
|------|--|--|----------------------|--------------|-------|
| 15 m | | | Pre-cabled (L = 2 m) | XUM 2BKCNL2T | 0.128 |
|------|--|--|----------------------|--------------|-------|

Receiver only


| | | | | | |
|------|----|-----|----------------------|--------------|-------|
| 15 m | NO | PNP | Pre-cabled (L = 2 m) | XUM 2BPANL2R | 0.128 |
| | | NPN | Pre-cabled (L = 2 m) | XUM 2BNANL2R | 0.128 |
| | NC | PNP | Pre-cabled (L = 2 m) | XUM 2BPPNL2R | 0.128 |
| | | NPN | Pre-cabled (L = 2 m) | XUM 2BNBNL2R | 0.128 |

Fixing accessory

| Description | Reference | Weight kg |
|------------------------------|-----------|-----------|
| Base mounting fixing bracket | XUZ AM81 | 0.020 |

| Characteristics | | XUM ●B●●NL2 |
|-------------------------------------|------------------------------|--|
| Sensor type | | CE, cULus, CTick |
| Product certifications | | Length: 2 m |
| Connection | Pre-cabled | |
| Sensing distance | | 0.77 diffuse system with adjustable sensitivity |
| nominal Sn / maximum | | 5 polarised reflex |
| (excess gain = 2) (excess gain = 1) | | 15 thru-beam |
| Type of transmission | | Infrared, except polarised reflex system (red) |
| Degree of protection | Conforming to IEC 60529 | IP 65, IP 67 |
| | DIN 40050 | IP 69K |
| Storage temperature | | °C - 40...+ 70 |
| Operating temperature | | °C - 30...+ 60 |
| Materials | Case | Zamack and stainless steel |
| | Lens | Glass |
| | Cable | – PVC (black for transmitter, grey for other versions) |
| Vibration resistance | Conforming to IEC 60068-2-6 | 10 to 55 Hz, amplitude ± 1.5 mm, 2 hours in each direction X, Y and Z |
| Shock resistance | Conforming to IEC 60068-2-27 | 500 m/s² 10 x in each direction X, Y and Z |
| Indicator lights | Output state | Orange LED (excluding transmitter) |
| | Stability | Green LED |
| | Transmitter | Orange LED: supply on |
| | Receiver | Red LED: light received; green LED: supply on |
| Rated supply voltage | | V --- 12...24 with protection against reverse polarity |
| Voltage limits (including ripple) | | V --- 10...30 |
| Current consumption, no-load | | mA 16 for XUM 5; 13 for XUM 9; 11 for transmitter XUM 2; 13 for receiver XUM 2 |
| Switching capacity | | mA ≤ 100 with overload and short-circuit protection |
| Voltage drop, closed state | | V ≤ 3 |
| Maximum switching frequency | | Hz 1000 |
| Delays | First-up | ms < 100 |
| | Response | ms 0.5 |
| | Recovery | ms 0.5 |

Wiring schemes

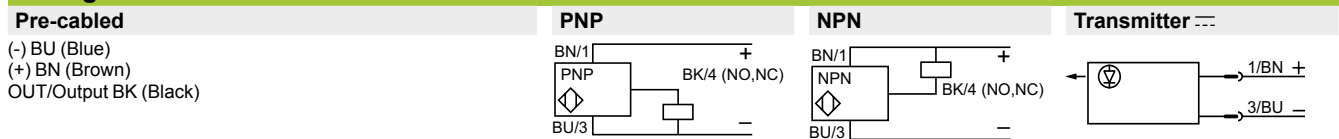

Curves

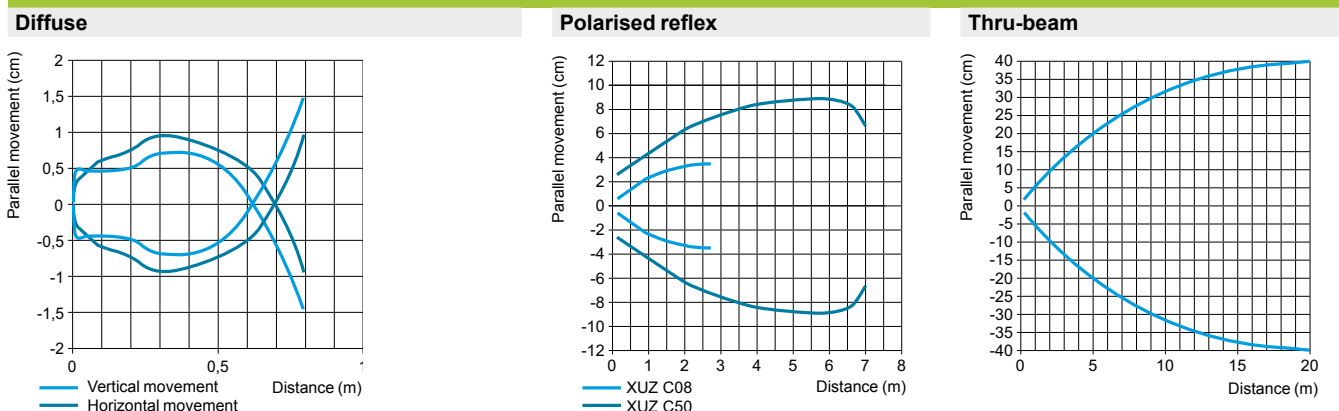


Photo-electric sensors

OsiSense XU Application, packaging and machine tool series



Miniature design, metal

Three-wire DC, solid-state output

Diffuse system

Description - XUM 5B●●NL2

Dimensions - XUM 5B●●NL2

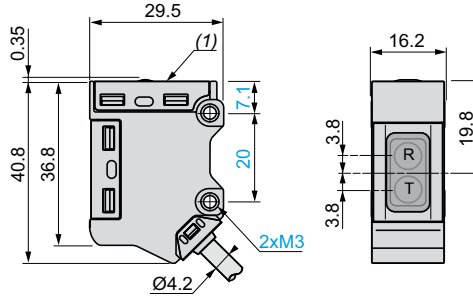



- (1) Output state LED.
- (2) Stability and power on LED.
- (3) Adjustment potentiometer.

- (1) Potentiometer.
- R: Reception, T: Transmission.

Polarised reflex system

Description - XUM 9B●●NL2

Dimensions - XUM 9B●●NL2

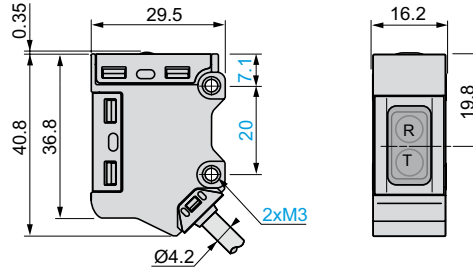

- (1) Output state LED.
- (2) Stability and power on LED.




- R: Reception, T: Transmission.

Thru-beam system

Description - XUM 2BKCNL2T


Dimensions - XUM 2BKCNL2T

Dimensions - XUM 2B●●NL2R

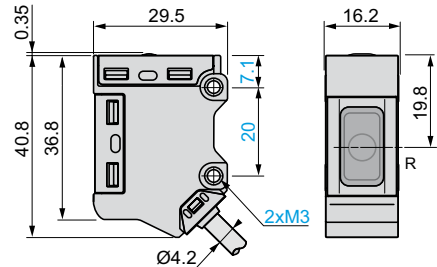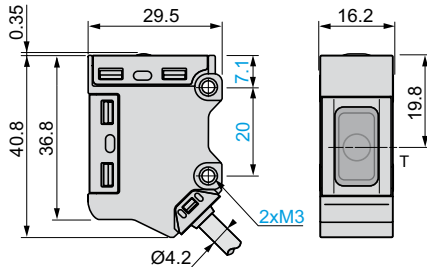

- (1) Output state LED.

Description - XUM 2B●●NL2R



- (1) Output state LED.
- (2) Stability and power on LED.

- T: Transmission.

- R: Reception

Photo-electric sensors

OsiSense XU Application, packaging and machine tool series


Miniature design, metal

Three-wire DC, solid-state output


Accessories

Reflectors

XUZ C08



XUZ C50

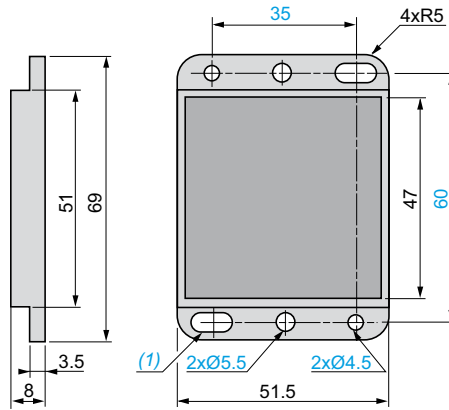

(1) 2 x M3

(1) Elongated holes Ø 4.5 x 8

Fixing bracket

XUZ AM81


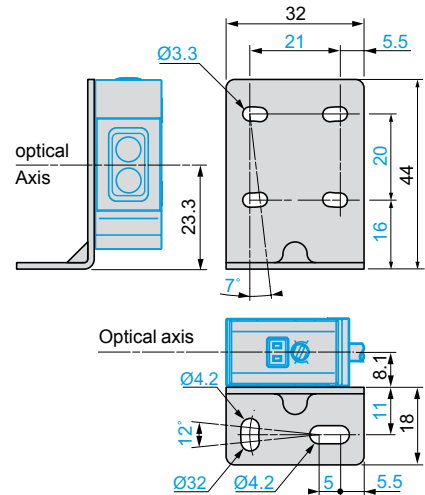


Photo-electric sensors



OsiSense XU Application, assembly series
Miniature design
with laser transmission and teach mode
Three-wire DC, solid-state output

Miniature design



Laser
class 2

Laser class 2, conforming to IEC 825-1.
Visible laser radiation: do not stare into beam.



| System | Polarised reflex | Diffuse with background suppression | Colour mark reader |
|-------------------------------|--|-------------------------------------|--------------------|
| Type of transmission | Red laser, pulsed, Class 2, wavelength: 655 nm | | |
| Nominal sensing distance (Sn) | 100...1000 mm (1) | 20...60 mm | 30...110 mm |

References

| | | | | | |
|--------------------|----------------------------|---------------|-----------------|-----------------|----------------|
| 4-wire, PNP output | NO/NC function, selectable | XUY BCO929LSP | XUY PSCO929L1SP | XUY PSCO929L2SP | XUY PCCO929LSP |
| Weight (kg) | | 0.056 | 0.056 | 0.056 | 0.056 |


Characteristics

| | | | | | |
|-----------------------------------|------------------------------|---|---------------|----------|--|
| Product certifications | | CE | | | |
| Ambient air temperature | For operation | - 20...+ 60 °C | | | |
| | For storage | - 20...+ 80 °C | | | |
| Degree of protection | Conforming to IEC 60529 | IP 67 | | | |
| Connection | | M8, 4-pin male connector | | | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1.5 mm (f = 10 to 55 Hz) | | | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | | | |
| Materials | Case | ABS | | | |
| Rated supply voltage | | --- 12...24 V with protection against reverse polarity | | | |
| Voltage limits (including ripple) | | --- 10...30 V | | | |
| Immunity to ambient light | | 5000 lux | | | |
| Laser transmission | | T pulse: 3 µs, pulse frequency: 5 kHz | | | |
| Spot diameter | | < 0.7 mm | < 0.3...40 mm | < 0.7 mm | |
| Switching capacity | | 100 mA with overload and short-circuit protection | | | |
| Voltage drop, closed state | | < 2.4 V | | | |
| Current consumption, no-load | | 25 mA | 30 mA | 25 mA | |
| Maximum switching frequency | | 1000 Hz | | | |
| Indicator lights | Supply on/Dirty | Green LED | | | |
| | Output signal | Yellow LED | | | |
| Adjustment | | Using teach mode button or remote teaching (external input) | | | |

(1) With 50 x 50 mm reflector, reference XUY 1111.

- Applications
- Monitoring of small parts on production machines
- Setting-up of sensors


Accessories



XUY 1111

| Description | Details | Length of cable | References | Weight |
|-----------------------------|----------------------|-----------------|-------------|--------|
| | | | | kg |
| Pre-wired M8 connector | Straight | 2 | XZC P0941L2 | 0.080 |
| | Elbowed (90°) | 2 | XZC P1041L2 | 0.080 |
| | Straight | 5 | XZC P0941L5 | 0.180 |
| | Elbowed (90°) | 5 | XZC P1041L5 | 0.180 |
| Reflector for XUY BCO929LSP | 50 x 50 mm | – | XUY 1111 | 0.018 |
| Fixing bracket | | | XUY 929 | 0.013 |
| Protection bracket | Vertical rear fixing | | XUY 9291 | 0.070 |
| | Lower side fixing | | XUY 9292 | 0.061 |

Description

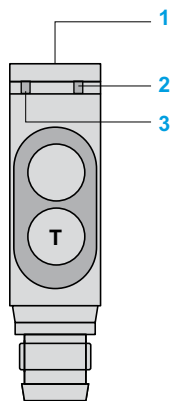

XUY BCO929LSP

- 1 Teach In (T.I.)
- 2 Yellow LED: Detection LED (1)
- 3 Green LED: Supply on or fault due to accumulation of dirt (if LED off)

- **Teach mode** (yellow and green LEDs are on)
 - Line up with reflector, press T.I. for 3 seconds: both LEDs flash
 - Insert the object, press T.I. for 1 second: the green LED flashes then remains on (teaching completed).

XUY PSCO929L●SP, XUY PCCO929LSP

- 1 Teach In (T.I.)
- 2 Yellow LED: Detection LED
- 3 (2) Green LED: Supply on or fault due to accumulation of dirt (if LED off)

- **Teach mode** (yellow and green LEDs are on)
 - Line-up with object, press T.I. for 3 seconds: both LEDs flash
 - Insert the object, press T.I. for 1 second: the green LED flashes then remains on (teaching completed)


R: Receiver
T: Transmitter

- NO/NC**
- Press T.I. for 13 seconds: the two LEDs alternatively flash (on the release of T.I., the green LED remains on).
 - Each press on T.I. changes the output state (NO, NC, NO, NC, ...). When T.I. is not pressed for 10 seconds, the green LED

(1) Whether the output is direct or inverse, the "detection" LED goes off only on beam break.
(2) Whether the output is direct or inverse, the "detection" LED comes on only when an object is present.

Dimensions


XUY BCO929LSP, XUY PSCO929L●SP

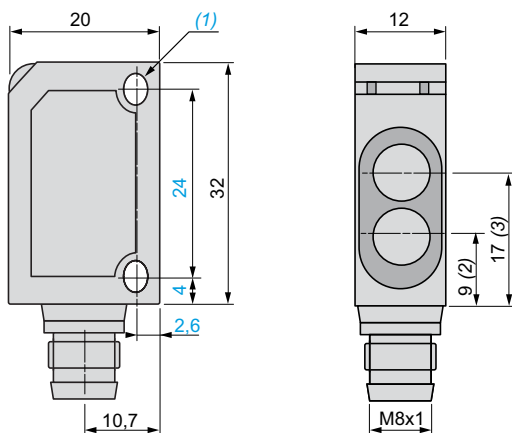

(1) 2 elongated holes $\varnothing 3.2 \times 4.2$.
(2) Transmitter optical axis.
(3) Receiver optical axis.

Wiring schemes

Pre-cabled



(1) - Connected to +: external teaching,
- Connected to -: locking of functions
(2) Output 100 mA max.

M8 connector




Pin n° - colour

- 1 BN: Brown
- 2 WH: White
- 3 BU: Blue
- 4 BK: Black

Application examples

Detection of pharmaceutical ampoules

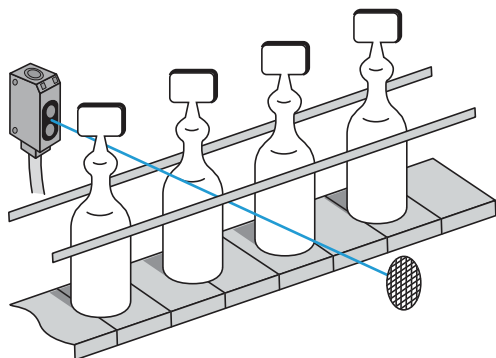

Detection of connection tags on integrated circuits passing on rail


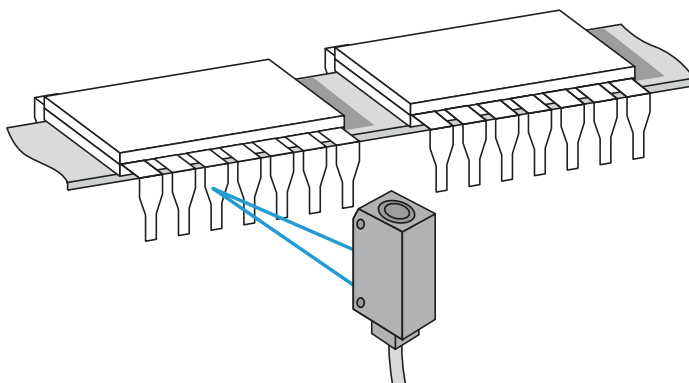



Photo-electric sensors

OsiSense XU Application, material handling series


Laser transmission. Design 18, plastic or metal
Three-wire DC. Solid-state output

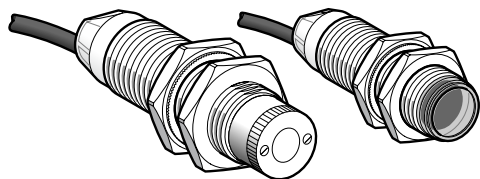


XUB L●●CNL2

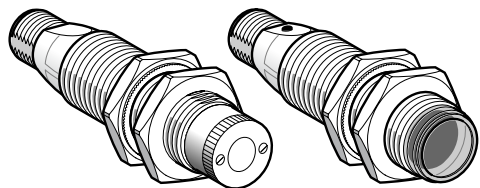


XUB L●●CNM12




XUB L●●CNM12T



XUB L●●CNL2R



XUZA318



XUZA218

Ø 18, plastic, thru-beam system with teach mode, laser transmission (Transmitter + receiver)

| Sensing distance (Sn) m | Function | Connection | Output | Reference | Weight kg |
|-------------------------|--------------------------|---------------|--------|--------------|-----------|
| 0...100 | NO or NC, by programming | Pre-cabled | PNP | XUB LAPCNL2 | 0.180 |
| | | | NPN | XUB LANCNL2 | 0.180 |
| | | M12 connector | PNP | XUB LAPCNM12 | 0.078 |
| | | | NPN | XUB LANCNM12 | 0.078 |

Ø 18, metal, thru-beam system with teach mode, laser transmission (Transmitter + receiver)

| Sensing distance (Sn) m | Function | Connection | Output | Reference | Weight kg |
|-------------------------|--------------------------|---------------|--------|--------------|-----------|
| 0...100 | NO or NC, by programming | Pre-cabled | PNP | XUB LBPCNL2 | 0.230 |
| | | | NPN | XUB LBNCNL2 | 0.230 |
| | | M12 connector | PNP | XUB LBPCNM12 | 0.130 |
| | | | NPN | XUB LBNCNM12 | 0.130 |

Separate components

Ø 18 transmitter

| Description | Connection | Output | For use with | Reference | Weight kg |
|-------------|---------------|--------|---------------|---------------|-----------|
| Plastic | Pre-cabled | – | XUB LA●●CNL2 | XUB LAKCNL2T | 0.090 |
| | M12 connector | – | XUB LA●●CNM12 | XUB LAKCNM12T | 0.040 |
| Metal | Pre-cabled | – | XUB LB●●CNL2 | XUB LBKCNL2T | 0.110 |
| | M12 connector | – | XUB LB●●CNM12 | XUB LBKCNM12T | 0.060 |

Ø 18 receiver


| Description | Connection | Output | For use with | Reference | Weight kg |
|-------------|---------------|--------|--------------|---------------|-----------|
| Plastic | Pre-cabled | PNP | XUB LAPCNL2 | XUB LAPCNL2R | 0.090 |
| | | NPN | XUB LANCNL2 | XUB LANCNL2R | 0.090 |
| | M12 connector | PNP | XUB LAPCNM12 | XUB LAPCNM12R | 0.040 |
| | | NPN | XUB LANCNM12 | XUB LANCNM12R | 0.040 |
| Metal | Pre-cabled | PNP | XUB LBPCNL2 | XUB LBPCNL2R | 0.120 |
| | | NPN | XUB LBNCNM12 | XUB LBNCNL2R | 0.120 |
| | M12 connector | PNP | XUB LBPCNM12 | XUB LBPCNM12R | 0.070 |
| | | NPN | XUB LBNCNM12 | XUB LBNCNM12R | 0.070 |

Fixing accessories for XUB L● (1)

| Description | Reference | Weight kg |
|--|-----------|-----------|
| Precision fixing bracket with micrometric adjustment | XUZA318 | 0.170 |
| Plastic fixing bracket with adjustable ball-joint | XUZA218 | 0.035 |

(1) For further information, see page 5/158

Dimensions



| | Pre-cabled (mm) | | Connector (mm) | |
|-----------------|-----------------|----|----------------|----|
| | a | b | a | b |
| Receiver (1) | 62 | 44 | 76 | 44 |
| Transmitter (2) | 52 | 28 | 66 | 28 |

(1) Yellow, green and red LED on receiver

(2) Green LED on transmitter

Note: fixing nut tightening torque: < 4 Nm

Characteristics



| Sensor type | | XUB L●●●●M12 | XUB L●●●●L2 |
|--|--------------------------------|---|-------------|
| Product certifications | | | |
| Connection | Connector | UL, CSA, CE | - |
| | Pre-cabled | M12 (suitable female connectors, including pre-wired versions, see page 9/44) | Length: 2 m |
| Nominal sensing distance Sn | | m 0...100, excess gain 70...3 | |
| Blind zone | | 0 | |
| Preferred object approach direction | | Any | |
| Type of transmission | | Red laser, wavelength 670 nm | |
| Transmission power | | Power < 1 mW, class 1 conforming to IEC 825-1 | |
| Degree of protection | Conforming to IEC 60529 | IP 67, double insulation □ | |
| Temperature | Storage | °C - 40... + 70 | |
| | Operation | °C - 10... + 45 | |
| Materials | Case | XUB LA●●●●●: PBT; XUB LB●●●●●: nickel plated brass | |
| | Lens | PMMA | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1.5 mm (f = 10 to 55 Hz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Indicator lights | Output state and alignment aid | Yellow LED | |
| | Supply on and teaching | Green LED | |
| | Stability | Red LED | |
| Rated supply voltage | V | --- 12...24 with protection against reverse polarity | |
| Voltage limits (including ripple) | V | --- 10...30 | |
| Current consumption, no-load | mA | 25 for transmitter or receiver | |
| Switching capacity per output | mA | ≤ 100 with overload and short-circuit protection | |
| Voltage drop, closed state | V | ≤ 1.5 | |
| Maximum switching frequency | Hz | 1500 | |
| Delays | First-up | ms | < 80 |
| | Response and recovery | ms | < 0.4 |

Wiring schemes

| | | | | |
|--|---|-------------------|-------------------|---|
| <p>M12 connector</p> <p>3 (-) 1 (+) 4 OUT/Output 2 Beam break input</p> | <p>Pre-cabled</p> <p>(-) BU (Blue) (+) BN (Brown) OUT/Output BK (Black) Beam break input VI (Violet)</p> | <p>PNP</p> | <p>NPN</p> | <p>Transmitter</p> <p>Input 2/VI: - not connected: beam made</p> |
|--|---|-------------------|-------------------|---|

See connection on page 9/44




Curves

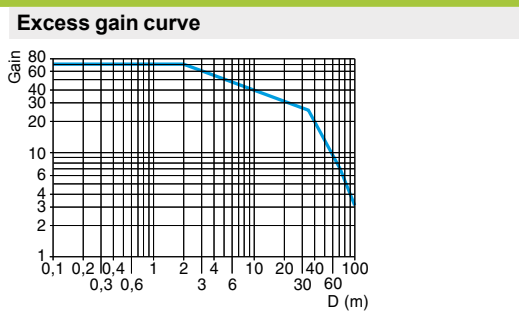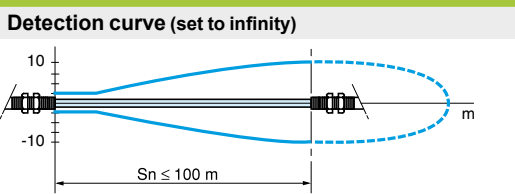

Operating precautions

Laser class 1
Laser class 1, conforming to IEC 825-1.

Adjustment

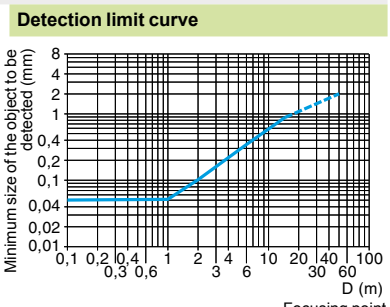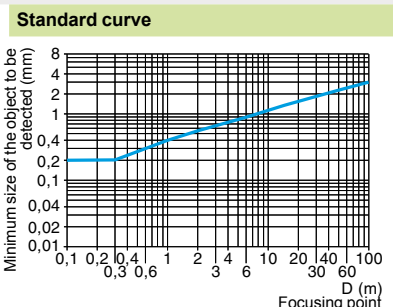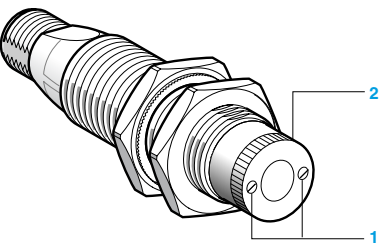

The adjustment of the focusing point enables the detection of objects down to a size of < 0.2 mm.
After slackening the fixing screws 1, adjust the focusing point of the laser beam by rotating the serrated sleeve 2 located on the face of the sensor. Re-tighten fixing screws.


Note: fixing clamp XUZ A218 with ball-joint and, in particular, bracket XUZ A318 with precise micrometric adjustment and locking by 6 screws, are specially suited for mounting the sensor and adjusting beam alignment when the sensing range is several tens of metres (see page 5/158).

Photo-electric sensors

OsiSense XU Application, material handling series

With analogue output signal 4...20 mA and 0...10 V ⁽¹⁾
DC supply. Solid-state output

Compact design



| | | |
|--|------------------------------|---|
| System | | Diffuse |
| Type of transmission | | Infrared |
| Nominal sensing distance (Sn) | | 20...80 cm |
| References | | |
| 3-wire | PNP | XUJ K803538 |
| Weight (kg) | | 0.200 |
| Characteristics | | |
| Product certifications | | CE, CSA, UL |
| Ambient air temperature | For operation | - 25...+ 60 °C |
| | For storage | - 40...+ 80 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1.5 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 20 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 67 |
| | Conforming to NF C 20-010 | IP 671 |
| Connection | | Screw terminals, maximum capacity: 2 x 1.5 mm ² or 1 x 2.5 mm ² |
| Materials | | Case: PEI (2) |
| Rated supply voltage | | ⎓ 24 V with protection against reverse polarity |
| Voltage limits (including ripple) | | ⎓ 20...30 V |
| Output current | Maximum | 20 mA |
| | Minimum | 4 mA |
| Output voltage (Vs) | | ⎓ 0...10 V |
| Output voltage drift in relation to temperature | | < 10% between - 25 and + 60 °C |
| Output voltage drift in relation to object colour | | < 10% |
| Current consumption, no-load | | ≤ 35 mA |
| Maximum switching frequency | | 10 Hz (for an output voltage variation of 1 V) |
| Delays | First-up | ≤ 150 ms |
| Indicator light | | The brightness of the LED is proportional to the output voltage |

(1) Applications: position control, monitoring concentricity or eccentricity, closed loop regulation, monitoring displacement, etc.


(2) PEI: high quality synthetic resin providing excellent withstand to mechanical shocks, vibration and the effects of external agents frequently encountered in industry: alcohol, salts, petroleum, oils, greases, washing agents (diluted sodium carbonate 4%, nitric acid 2%), formaldehyde vapour, splashing lactic acid, etc.

5

Curves


Output signal (related to distance of object). Test performed with 20 x 20 cm, white 90% object

Output current

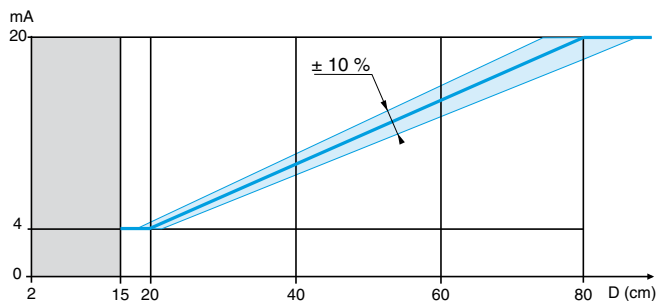


Forbidden zone

Output voltage

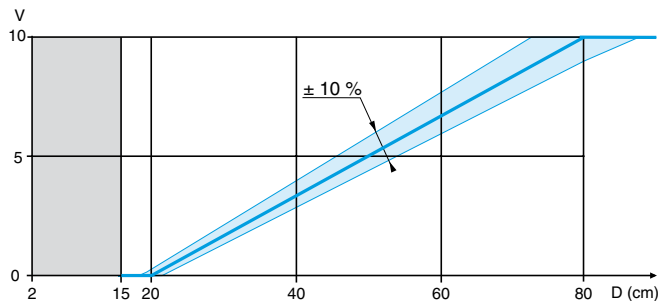

Dimensions

XUJ K803538

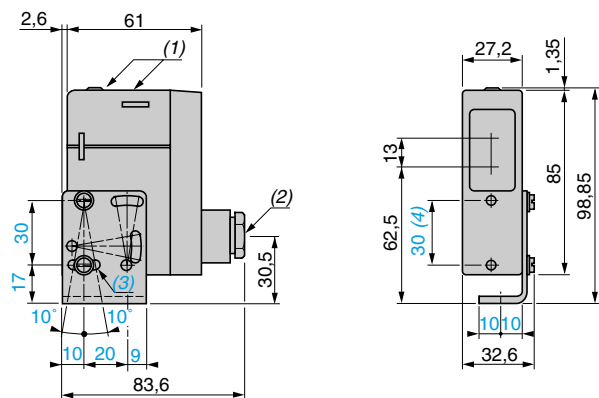

(1) LED.

(2) 11P cable gland.


(3) 1 elongated hole $\varnothing 4.2 \times 14$.

(4) Front fixing ($\varnothing 4$ screws and inserts included).


Wiring schemes

Diffuse system

Current output



Voltage output



Load characteristics

- Output current: the output current varies between 4 and 20 mA depending on the distance of the object and therefore, the load must be less than 1 k Ω .
- Voltage output: since the minimum rated output current of the sensor is 10 mA, the load must always have a resistive value of more than 1 k Ω

Terminal connections

- 1 \varnothing - (-)
- 2 \varnothing
- 3 \varnothing - (+)
- 4 \varnothing - Output voltage
- 5 \varnothing - Output current
- 6 \varnothing - (-)

Terminals 1 and 6 connected internally.


Photo-electric sensors

OsiSense XU Application, material handling series

With analogue output signal 4...20 mA (1)

DC supply

Design 18



| | |
|--------------------------------------|------------------|
| System | Diffuse |
| Type of transmission | Infrared |
| Nominal sensing distance (Sn) | 5...40 cm |

References

| | |
|--------------------|---------------------|
| 3-wire, PNP | XU5 M18AB20D |
| Weight (kg) | 0.075 |


Characteristics

| | |
|--|--|
| Product certifications | CE, CSA, UL |
| Ambient air temperature | For operation: - 25...+ 55 °C. For storage: - 40...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 25 gn, amplitude ± 2 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 30 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 IP 67 |
| Connection | M12 male connector, 4-pin (suitable female connectors, including pre-wired versions, see page 9/44) |
| Materials | Case: nickel plated brass, lens: PMAA |
| Rated supply voltage | DC 12...24 V with protection against reverse polarity |
| Voltage limits | DC 10...30 V (including ripple) |
| Output current | Maximum 20 mA Minimum 4 mA |
| Output current drift in relation to temperature | < 10% between - 25 and + 55 °C, < 5% between 0 and + 40 °C |
| Output current drift in relation to supply | < 3% |
| Current consumption, no-load | ≤ 30 mA |
| Maximum switching frequency | 20 Hz (for an output current variation of 10 mA) |
| Delays | First-up: ≤ 50 ms |
| Indicator light | The brightness of the green LED is proportional to the output current I _e = 20 mA: indicator light at maximum intensity I _e = 4 mA: indicator light at minimum intensity |

(1) Applications: position control, monitoring concentricity or eccentricity, closed loop regulation, monitoring displacement, etc.


Output signal (related to distance of object)

Potentiometer set at maximum

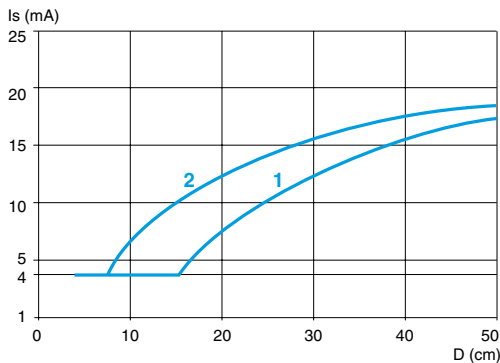


- 1 White 90% object
- 2 Grey 15% object

Potentiometer set at minimum

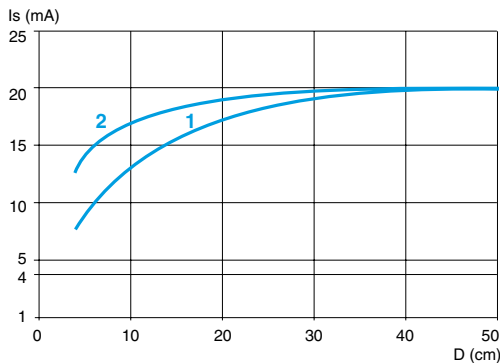

- 1 White 90% object
- 2 Grey 15% object

Dimensions

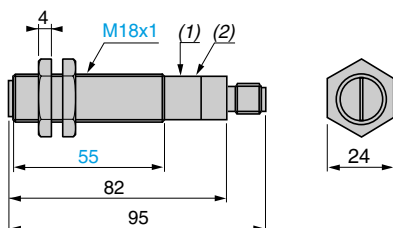

(1) Potentiometer.

(2) Green LED.


Fixing nut tightening torque: 15 N.m.

Connector tightening torque: 2 N.m.

Wiring schemes


Diffuse system

Output current

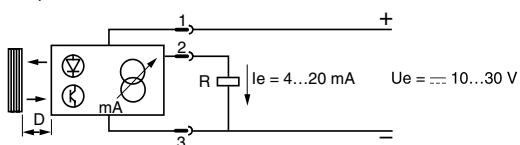

Connector scheme

Sensor connector pin view



See connection on page 9/44.

Load characteristics (R)


The output current varies between 4 and 20 mA, depending on the distance of the object, and therefore, the load must be less than 800 Ω for a 24 V supply and less than 300 Ω for a 12 V supply.

Photo-electric sensors

OsiSense XU Application, material handling series

Through beam system with high “excess gain” ⁽¹⁾
Solid-state output and analogue output 4...20 mA

Design 18



| | | |
|--|---|--|
| System | | Thru-beam |
| Type of transmission | | Infrared |
| Nominal sensing distance (Sn) / maximum | | 50 m / 70 m (transmitter + receiver) |
| References | | |
| 3-wire, PNP | NO (object detection) + analogue output | XU2 M18AP20D (2) |
| Weight (kg) | | 0.155 |
| Characteristics | | |
| Product certifications | | CE, CSA, UL |
| Ambient air temperature | For operation | - 25...+ 55 °C |
| | For storage | - 40...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 25 gn, amplitude ± 2 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 67 |
| Connection | | M12 male connector, 4-pin (suitable female connectors, including pre-wired versions, see page 9/44) |
| Materials | Case | Nickel plated brass |
| | Lenses | PMMA |
| Rated supply voltage | | --- 12...24 V with protection against reverse polarity |
| Voltage limits | | --- 10...30 V (including ripple) |
| Solid-state digital output | Switching capacity (sealed) | ≤ 100 mA with overload and short-circuit protection |
| | Voltage drop, closed state | ≤ 1.5 V |
| | Maximum switching frequency | 30 Hz |
| | First-up delay | ≤ 50 ms |
| | Response delay | ≤ 15 ms |
| | Recovery delay | ≤ 15 ms |
| Analogue output | Output current | 4...20 mA Drift < 5% for temperature between 0 and + 40 °C |
| | Delay | ≤ 15 ms |
| Current consumption, no-load | | ≤ 55 mA (transmitter + receiver) |
| Indicator lights | Transmitter | Green LED, supply on Yellow LED illuminated = beam transmission |
| | Receiver | Yellow LED illuminated = solid-state output ON = object detected within beam Green LED: the brightness of the LED is proportional to the output current: - for I = 20 mA, object slightly opaque, intensity at maximum, - for I = 4 mA, object completely opaque, intensity at minimum. |

(1) Applications: detection of objects in spite of a difficult environment (smoke, dust, mist, etc.), detection of objects inside packaging, etc.

Example of values

Object: white sheets of 80 gsm paper. Transmitter-receiver distance = 10 cm

| | | | | |
|------------------------------|------|----|----|----|
| Number of sheets | 1 | 11 | 27 | 31 |
| Analogue output current (mA) | 17.3 | 12 | 6 | 5 |

(2) Reference for both transmitter and receiver for thru-beam system.


(3) Accessories, see page 5/158.

Photo-electric sensors

OsiSense XU Application, material handling series

Through beam system with high "excess gain"
Solid-state output and analogue output 4...20 mA


Dimensions

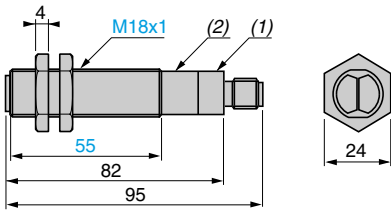

- (1) LEDs
 - (2) Potentiometer (only on receiver)
- Fixing nut tightening torque: 15 N.m
Connector tightening torque: 2 N.m


Wiring schemes

Receiver

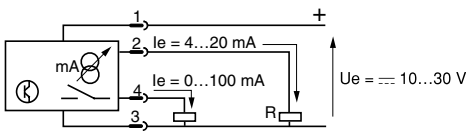


R max. < 800 Ω (Ue = 24 V), < 300 Ω (Ue = 12 V)

Beam break test (only on transmitter)

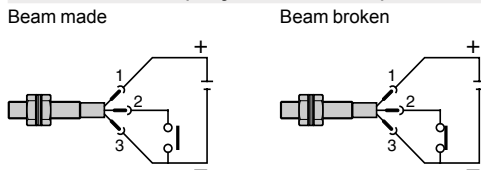

Connector scheme

Sensor connector pin view

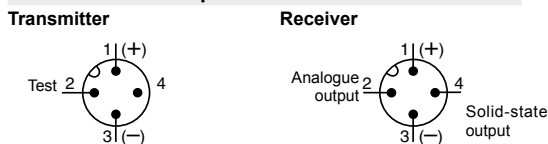


See connection on page 9/44

Curves


Detection curve

Thru-beam system

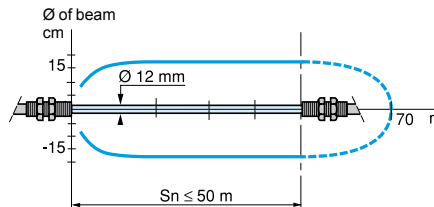

Excess gain curve (ambient temperature: + 25 °C)

Thru-beam system

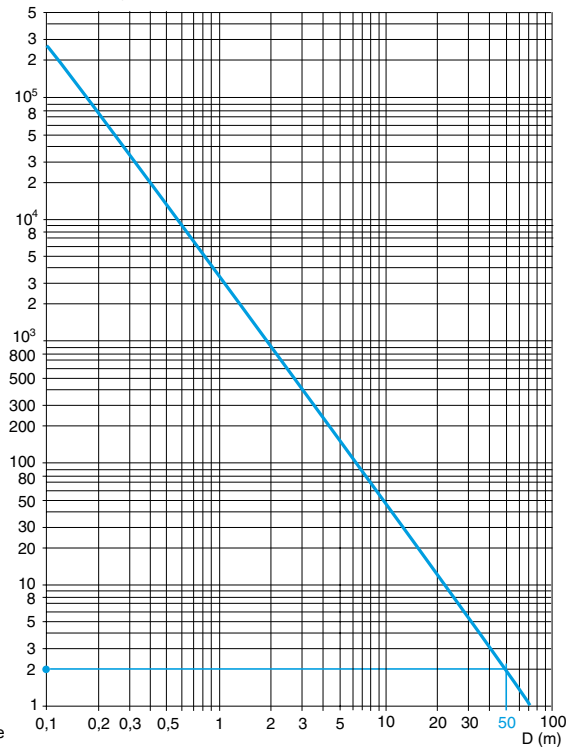

Operation, settings

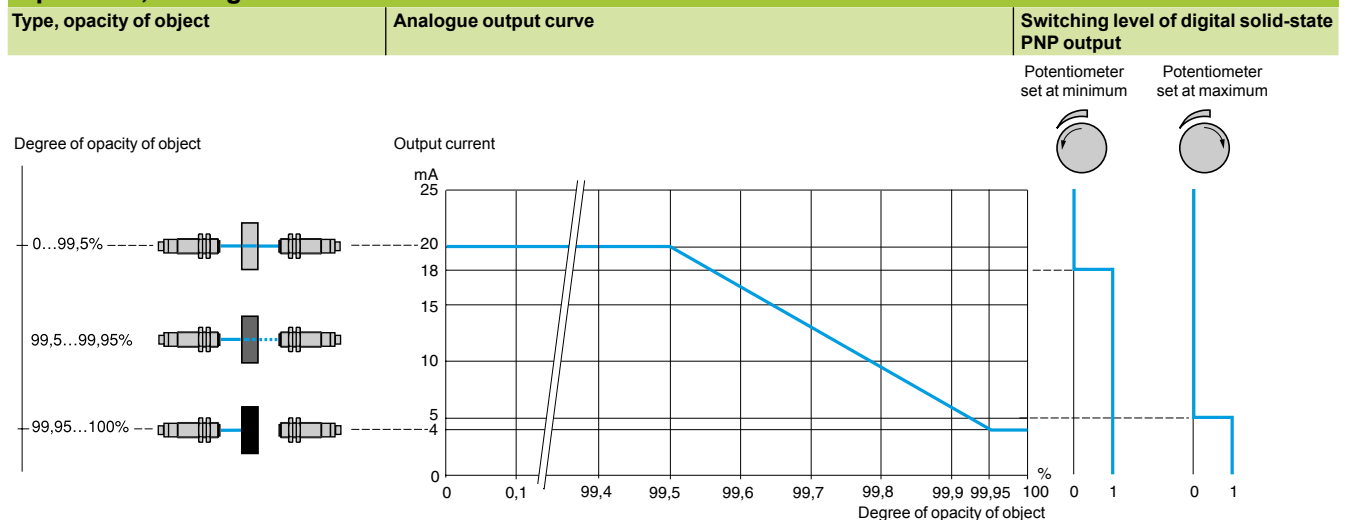



Photo-electric sensors

OsiSense XU Application, material handling series

With analogue output signal 0...10 V or 4...20 mA



Laser transmission

Compact design, 50 x 50



Laser class 2, conforming to IEC 825-1

Visible laser radiation: do not stare into beam.

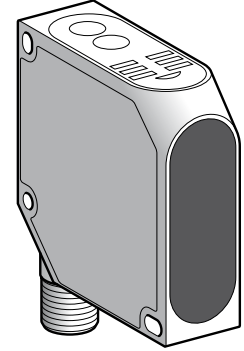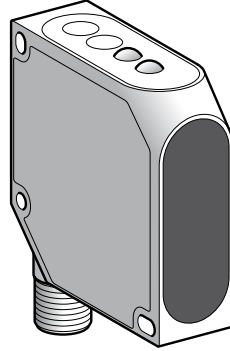

| | | | | |
|---|------------------------------|--|---|--------------------------|
| System | | Diffuse | | |
| Type of transmission | | Red laser, pulsed, Class 2, wavelength: 670 nm | | |
| Measuring distance | | 40...60 mm | 45...85 mm | 80...300 mm |
| References | | | | |
| 3-wire, PNP output | | XUY PCO925L1ANSP | XUY PCO925L2ANSP | XUY PCO925L3ANSP |
| Weight (kg) | | 0.057 | 0.057 | 0.057 |
| Characteristics | | | | |
| Product certifications | | CE | | |
| Ambient air temperature | For operation | 0...+45 °C | | |
| | For storage | -20...+60 °C | | |
| Degree of protection | Conforming to IEC 60529 | IP 67 | | |
| Resolution | | 7 µm | 20 µm | 200 µm |
| Linearity | | < 1% | | |
| Temperature stability | | 10 µm/K | 18 µm/K | 22 µm/K |
| Connection | | M12 male connector with alternative orientations | | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1.5 mm (f = 10 to 55 Hz) | | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | | |
| Materials | Case | ABS, anti-shock | | |
| Rated supply voltage | | 24 V with protection against reverse polarity | | |
| Voltage limits (including ripple) | | 18...28 V | | |
| Immunity to ambient light | | 5000 lux | | |
| Output signal | | 0...10 V | 4...20 mA | |
| Output activation time (from 10...90%) | | 30 ms | 0.4 ms (fast speed mode) 40 ms (medium speed mode) | |
| Laser transmission | | T pulse: 8 µs, pulse frequency: 6 kHz, time base: 250 ms | | |
| Spot diameter | | < 1 mm at 50 mm | < 0.8 mm at 65 mm | 1.5 x 3.5 mm at 80 mm |
| Switching capacity | | 3 mA with overload and short-circuit protection | | |
| Voltage drop, closed state | | < 2.4 V | | |
| Current consumption, no-load | | 35 mA | ≤ 40 mA on 24 V | |
| Maximum switching frequency | | 40 Hz | | |
| Indicator lights | Dirty | Red LED | | |
| | Supply on | Green LED | | |
| Parametering | | - | | By buttons |

■ Applications: position control of robot arm, measuring thickness of mechanical parts.

Accessories

| Description | Details | Length of cable m | References | Weight kg |
|--------------------------------|----------------------|----------------------|-------------|--------------|
| Pre-wired M12 connector | Straight, 4-pin | 2 | XZC P1141L2 | 0.090 |
| | | 5 | XZC P1141L5 | 0.190 |
| | Straight, 5-pin | 2 | XZC P1164L2 | 0.115 |
| | | 5 | XZC P1164L2 | 0.270 |
| Fixing bracket | | | XUY 925 | 0.033 |
| Protection bracket | Vertical rear fixing | | XUY 9251 | - |

Photo-electric sensors


OsiSense XU Application, material handling series

With analogue output signal 0...10 V or 4...20 mA

Laser transmission


Presentation

XUY PCO925L1ANSP, XUY PCO925L2ANSP

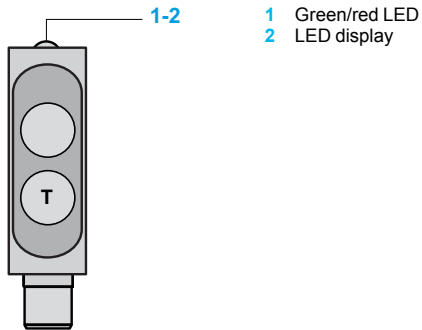

- 1 Green/red LED
- 2 LED display


XUY PCO925L3ANSP

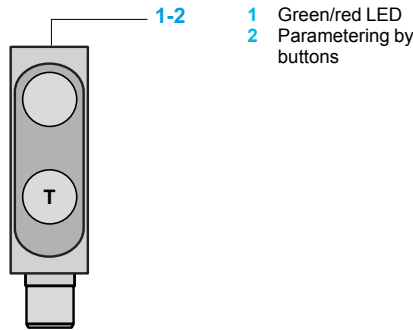

- 1 Green/red LED
- 2 Parametering by buttons

Application example

Monitoring dimensions in series




R: Receiver
T: Transmitter

Dimensions

XUY PCO925L1ANSP, XUY PCO925L2ANSP

XUY PCO925L3ANSP


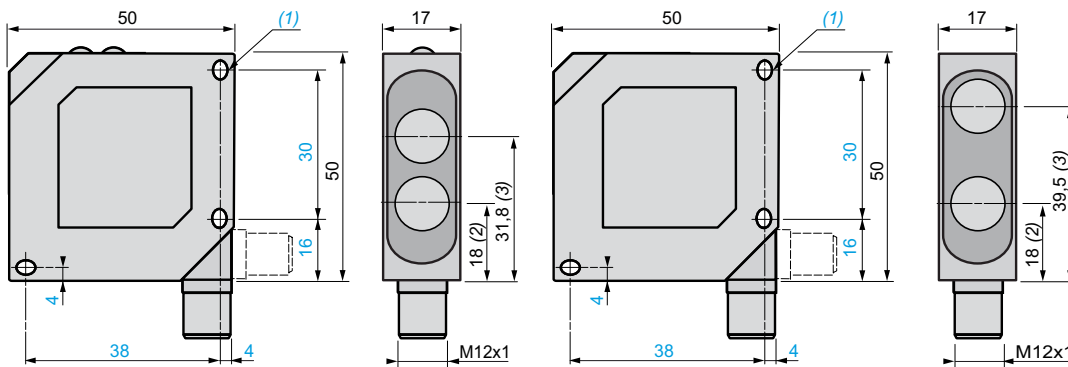


- (1) 2 elongated holes $\text{Ø} 4.3 \times 4$.
- (2) Transmitter optical axis.
- (3) Receiver optical axis.

Wiring schemes

XUY PCO925L1ANSP, XUY PCO925L2ANSP

XUY PCO925L3ANSP

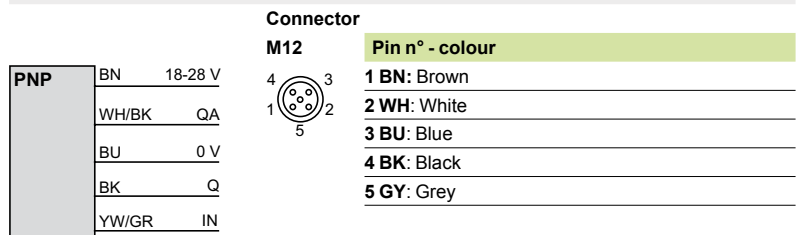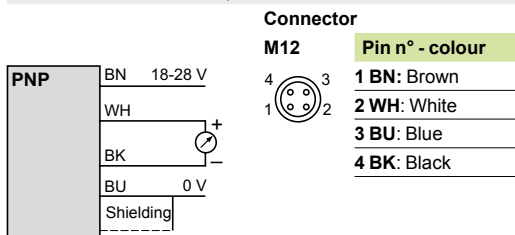


Note: Shielded cable recommended.

QA: 4-20 mA analogue output ($R \leq 500 \Omega$)
Q: Switching output
IN: Control input (YW/GR: Yellow/green)

Adjustment curves

XUY PCO925L1ANSP, XUY PCO925L2ANSP

XUY PCO925L3ANSP

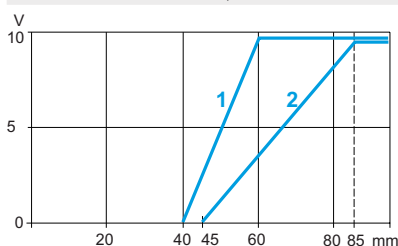

- 1 XUY PCO925L1ANSP
- 2 XUY PCO925L2ANSP

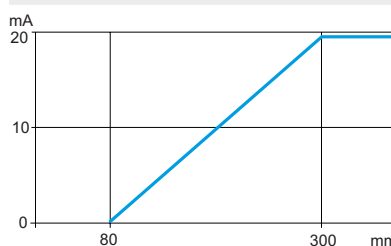


Photo-electric sensors


OsiSense XU Application, material handling series

Diffuse, with laser transmission

With background suppression


DC supply. Solid-state output

Compact design



Laser class 2, conforming to IEC 825-1

Visible laser radiation: do not stare into beam.

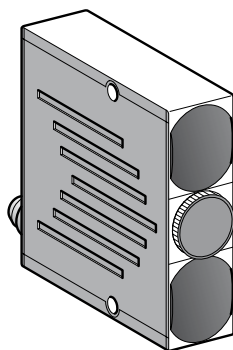

| | |
|-------------------------------|---|
| System | Diffuse with background suppression |
| Type of transmission | Red laser, pulsed, Class 2, wavelength: 675 nm |
| Detection distance | Adjustable from 50 to 300 mm |
| Minimum size of object | 0.5 mm |

References

| | | |
|-----------------------------------|---------------------------|-----------------------|
| 4-wire, PNP and NPN output | NO/NC depending on wiring | XUY PS1LC0965S |
| Weight (kg) | | 0.081 |

Characteristics

| | | |
|--|-------------------------|---|
| Product certifications | | CE, cULus (1) |
| Ambient air temperature | For operation | 0...+ 50 °C |
| | For storage | - 20...+ 80 °C |
| Degree of protection | Conforming to IEC 60529 | IP 65 |
| Connection | | M8, 4-pin male connector (for pre-cabled version please consult our Customer Care Centre) |
| Materials | Case | Glass impregnated nylon |
| | Lens | PMMA |
| Rated supply voltage | | --- 12...24 V with protection against reverse polarity |
| Voltage limits (including ripple) | | --- 10...30 V |
| Immunity to ambient light | Incandescent bulb | 500 lux |
| | Natural light | 10 000 lux |
| Laser transmission | Pulsed laser LED | T pulse: 6 µs, T period < 50 µs |
| Spot size | | Manual adjustment of focusing |
| Switching capacity | | 100 mA with overload and short-circuit protection |
| Voltage drop, closed state | | < 2 V |
| Current consumption, no-load | | 35 mA |
| Maximum switching frequency | | 5 kHz |
| Delays | Response and recovery | < 150 µs |
| Indicator lights | Time delay active | Red indicator |
| | Output state | Green indicator |
| | NO function | Red indicator |
| | NC function | Indicator off |
| Output signal time delay | | 40 ms, depending on wiring |

(1) This product is UL Listed if supplied by a class II or isolated supply delivering --- 30 V max. (isolated transformer for example) and protected by a UL fuse rated at 3 A max.

Applications: monitoring of small parts on production machine, detection of components on a printed circuit, monitoring for crack on a component, control of level, suppression of a background.

Accessories

| Description | Details | Length of cable | References | Weight |
|-------------------------------|---------------|-----------------|--------------------|--------|
| | | | | kg |
| Pre-wired M8 connector | Straight | 2 | XZC P0941L2 | 0.080 |
| | Elbowed (90°) | 2 | XZC P1041L2 | 0.080 |
| | Straight | 5 | XZC P0941L5 | 0.180 |
| | Elbowed (90°) | 5 | XZC P1041L5 | 0.180 |


Photo-electric sensors

OsiSense XU Application, material handling series
Diffuse, with laser transmission
With background suppression
DC supply. Solid-state output

Presentation


XUY PS1LCO965S

Rear view

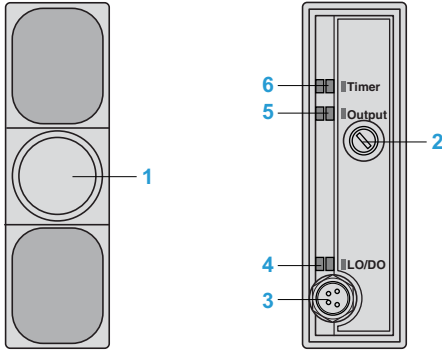

- 1 Adjustment of spot size
- 2 Detection distance adjustment screw
- 3 M8 connector
- 4 On: NO function
Off: NC function
- 5 Object detected
- 6 Time delay active

Dimensions

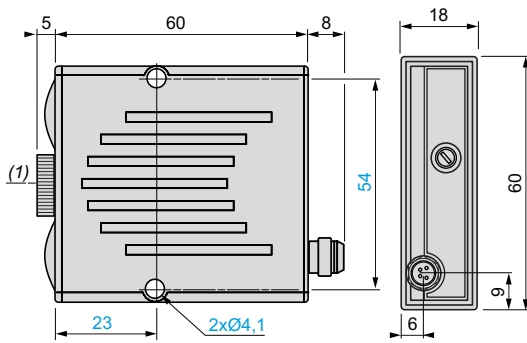


(1) Optical axis of laser


Wiring schemes

NO function

Without time delay




With 40 ms time delay




NC function

Without time delay



With 40 ms time delay



M8 connector




Pin n° - colour

- 1 BN: Brown
- 2 WH: White
- 3 BU: Blue
- 4 BK: Black

Application examples

Monitoring for crack in a component

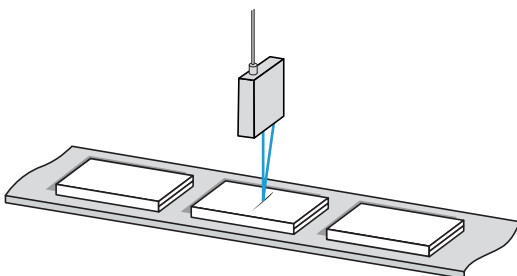

Monitoring for a broken punch on press tool


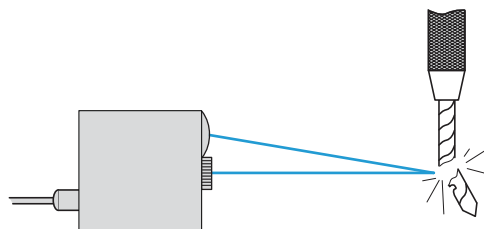


Photo-electric sensors

OsiSense XU Application, material handling series
Diffuse, with 2 channels using triangulation
with background suppression
DC supply. Solid-state output

Compact design

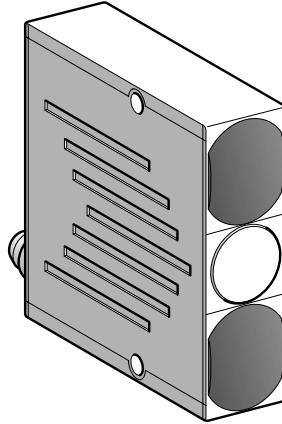

| | | | |
|--|-----------------------------|--|--------------------------|
| System | | Diffuse with background suppression | |
| Type of transmission | | Infrared LED, modulated, Ø 15 mm beam | |
| Detection distance | | Adjustable from 50 to 600 mm | |
| References | | | |
| 4-wire, PNP and NPN output | NO/NC programmable function | XUY PS2945S | XUY PS2C0945S |
| Weight (kg) | | 0.135 | 0.055 |
| Characteristics | | | |
| Product certifications | | CE, cULus (1) | |
| Ambient air temperature | For operation | 0...+ 50 °C | |
| | For storage | - 20...+ 80 °C | |
| Degree of protection | Conforming to IEC 60529 | IP 65 | |
| Connection | | Pre-cabled, length 2 m | M8, 4-pin male connector |
| Materials | Case | Glass impregnated nylon | |
| Rated supply voltage | | --- 12...24 V with protection against reverse polarity | |
| Voltage limits (including ripple) | | --- 10...30 V | |
| Immunity to ambient light | Incandescent bulb | 1300 lux | |
| | Natural light | 10 000 lux | |
| Switching capacity | | 100 mA with overload and short-circuit protection | |
| Voltage drop, closed state | | < 2 V | |
| Current consumption, no-load | | < 1.5 W | |
| Maximum switching frequency | | 370 Hz | |
| Delay | Response and recovery | < 1.8 ms | |
| Output signal time delay | For A and B/A or B (2) | Determined by wiring | |
| Indicator light | Output signal | Green LED | |

(1) This product is UL Listed if supplied by a class II or isolated supply delivering --- 30 V max. (isolated transformer for example) and protected by a UL fuse rated at 3 A max.

(2) See next page

■ Applications:

- Control of filling, detection of object on conveyor against reflective background.

Accessories

| Description | Details | Length of cable | References | Weight |
|-------------------------------|---------------|-----------------|--------------------|--------|
| | | m | | kg |
| Pre-wired M8 connector | Straight | 2 | XZC P0941L2 | 0.080 |
| | Elbowed (90°) | 2 | XZC P1041L2 | 0.080 |
| | Straight | 5 | XZC P0941L5 | 0.180 |
| | Elbowed (90°) | 5 | XZC P1041L5 | 0.180 |


Photo-electric sensors

OsiSense XU Application, material handling series
Diffuse, with 2 channels using triangulation
with background suppression
DC supply. Solid-state output

Presentation

XUY PS2945S, XUY PS2C0945S

Rear view




- 1 Adjustment of zone A detection distance
- 2 Adjustment of zone B detection distance
- 3 Pre-cabled connection (XUY PS2945S) or M8 connector (XUY PS2C0945S)
- 4 On in direct mode
Illuminates when the "exclusive OR" function between the two zones A and B is obtained
- 5 On when the object is present in zone B
- 6 On when the object is present in zone A
- 7 Illuminates when the "AND" object logic function between the two zones A and B is obtained
- 8 Indicates time delay mode
- 9 Simultaneously on when the "OR" logic function between the 2 zones A or B is obtained

Description (4 operating modes)


Two independent sensors with triangulation: A, B




Immunity to reflection: A and B



Detection of contrasting objects: A or B




Monitoring of distance: A xor B




Dimensions

XUY PS2945S, XUY PS2C0945S

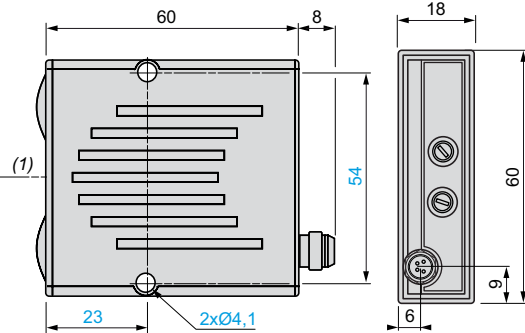

Detection curves (typical)

XUY PS2945S, XUY PS2C0945S

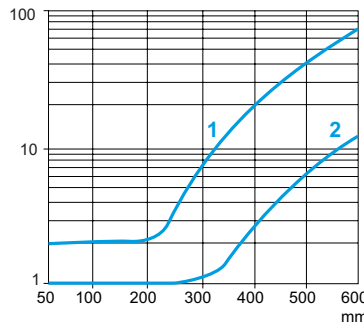


- 1 Black 6%
- 2 Grey 18% - Distance (mm) set on 92% (Kodak 1527795)

(1) Optical axis.


Wiring schemes and outputs

Two independent sensors with triangulation: A, B

NO output




NC output




Immunity to reflection: A and B

Without time delay

NO output




NC output




With 40 ms time delay

NO output




NC output




Detection of contrasting objects: A or B

NO output




NC output




Monitoring of distance: A xor B

Without time delay

NO output




NC output




With 40 ms time delay

NO output



NC output



BR: Brown
BU: Blue
BK: Black
WH: White


Photo-electric sensors

OsiSense XU Application


Fibre design, amplifiers

Three-wire DC, solid-state output

Teach mode



XUD A2



XUD A1

Amplifiers with fine adjustment and 4-digit screen




| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|-------------------------|--------------------|--------|--------------|--------------------|-----------|
| Depending on fibre | NO/NC Programmable | PNP | Pre-cabled | XUD A2PSML2 | 0.040 |
| | | | M8 connector | XUD A2PSMM8 | 0.040 |
| | | NPN | Pre-cabled | XUD A2NSML2 | 0.040 |
| | | | M8 connector | XUD A2NSMM8 | 0.040 |

Amplifiers using teach mode




| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|-------------------------|--------------------|--------|--------------|--------------------|-----------|
| Depending on fibre | NO/NC Programmable | PNP | Pre-cabled | XUD A1PSML2 | 0.040 |
| | | | M8 connector | XUD A1PSMM8 | 0.040 |
| | | NPN | Pre-cabled | XUD A1NSML2 | 0.040 |
| | | | M8 connector | XUD A1NSMM8 | 0.040 |

| Characteristics | | XUD A1●●SMM8, XUD A2●●SMM8 | XUD A1●●SML2, XUD A2●●SML2 |
|--|------------------------------|---|---|
| Sensor type | | | |
| Product certifications | | CE, cULus | |
| Connection | Connector | M8 | – |
| | Pre-cabled | – | Length: 2 m |
| Sensing distance (Sn) | | Depending on fibre used, see page 5/118. Sensing distance halved for XUD A2 configured for fast frequency | |
| Sensitivity adjustment | | Teach mode on XUD A1 , Teach mode and fine adjustment (+/- button) plus 4-digit screen on XUD A2 | |
| Type of transmission | | Red | |
| Degree of protection | Conforming to IEC 60529 | IP 65 with Ø 2 mm fibre (IP 64 with Ø 1 mm fibre) | |
| Storage temperature | | °C | - 30...+ 70 |
| Operating temperature | | °C | - 10...+ 55 |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 0.5 mm (f = 10 to 55 Hz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Indicator lights | Output state | Yellow LED | |
| | Stability | Red LED for XUD A1 | |
| | Stability | Green LED for XUD A2 | |
| Signal level | | By 7 segment/4-digit display for XUD A2 | |
| Rated supply voltage | | V | --- 12...24 with protection against reverse polarity |
| Voltage limits (including ripple) | | V | --- 10.8...26.4 |
| Current consumption, no-load | | mA | ≤ 50 |
| Switching capacity | | mA | ≤ 100 with overload and short-circuit protection |
| Alarm output | | mA | ≤ 50 for XUD A2 with overload and short-circuit protection |
| Protection against mutual interference | | Yes for XUD A2 | |
| Voltage drop, closed state | | V | ≤ 2 for XUD A●P●●●●● , ≤ 1 for XUD A●N●●●●● |
| Maximum switching frequency | | kHz | 1 kHz for XUD A1 , 1 or 5 kHz configurable for XUD A2 |
| Output time delay | | ms | 0 or 40 on recovery for XUD A2 |
| Delays | First-up | ms | < 120 |
| | Response | ms | < 0.5 (0.1 for XUD A2 in fast frequency mode) |
| | Recovery | ms | < 0.5 (0.1 for XUD A2 in fast frequency mode) |

XUD A2 wiring schemes


| M8 connector | Pre-cabled | PNP | NPN |
|---|---|---|--|
|  <p>1(+) 3(-) 4 (OUT/output) 2 (alarm)</p> | <p>BN Brown (+) BU Blue (-) BK Black (output) WH White (alarm) (WH only on XUD A2)</p> |  |  |


XUD A1 wiring schemes

| M8 connector | Pre-cabled | PNP | NPN |
|---|---|---|--|
|  <p>1(+) 3(-) 4 (OUT/output) 2</p> | <p>BN Brown (+) BU Blue (-) BK Black (Output)</p> |  |  |


See connection on page 9/44

Dimensions

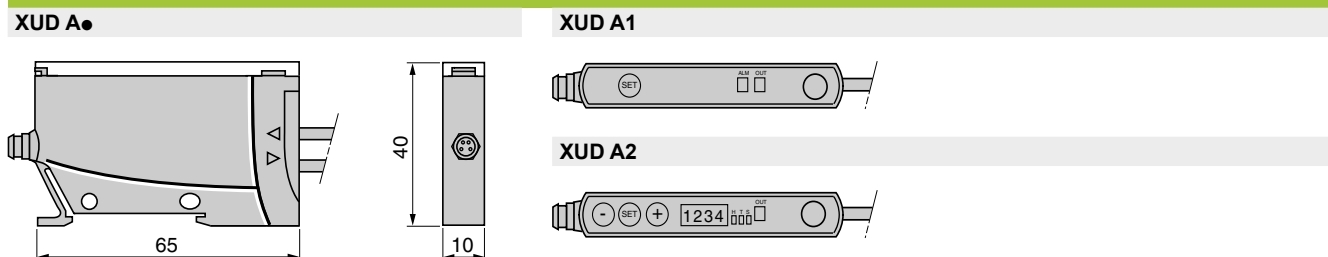



R = minimum bend radius
Fibre of ext. Ø 2.2 mm, R = 25 mm
Fibre of ext. Ø 1 mm, R = 10 mm
XUF N2S01L●, R = 4 mm

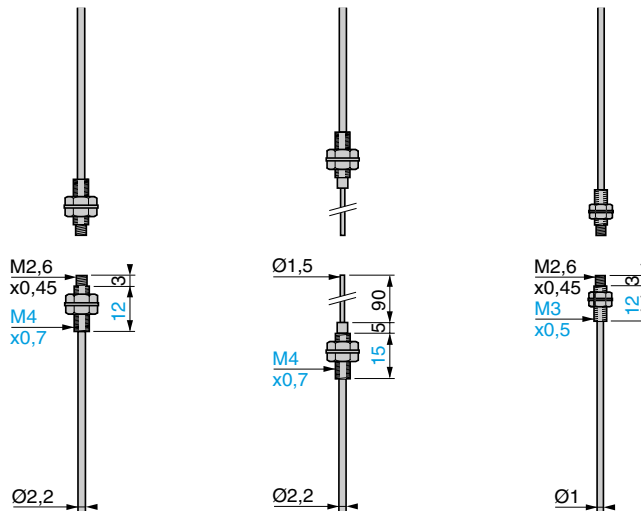

| | | | | |
|-------------------------------|--------------------|-----------------|--------|----------------------|
| Nominal sensing distance (Sn) | With fibre L = 2 m | 200 mm (1) | 180 mm | 50 mm (1) |
| | With lens | 1500 mm (2) | – | 1000 mm (2) |
| Application, features | | General purpose | | Accurate positioning |


References (complete assembly - 2 fibres)

| | | | | |
|---|----------|-----------------|------------|------------|
| With standard end fittings | L = 2 m | XUF N12301 | – | XUF N35301 |
| | L = 10 m | XUF N12301L10 | – | – |
| With 90 mm flexible end fittings, L = 2 m | | – | XUF N12311 | – |
| Weight (kg) | | 0.058 (L = 2 m) | 0.030 | 0.045 |


Characteristics

| | | | |
|---|--|---------|-----------|
| Fibre (view on sensing face) | | | |
| Core (Ø mm) | 1 x Ø 1 | 1 x Ø 1 | 1 x Ø 0.5 |
| Trimnable to required length (trimmer XUF Z11 included) | Yes | Yes | Yes |
| Ambient air temperature | For operation: - 25...+ 60 °C. For storage: - 40...+ 80 °C | | |
| Vibration resistance | 7 gn, amplitude ± 1.5 mm (f = 10...55 Hz), conforming to IEC 60068-2-6 | | |
| Shock resistance | 30 gn, duration 11 ms, conforming to IEC 60068-2-27 | | |
| Degree of protection | IP 64 conforming to IEC 60529 and IP 641 conforming to NF C 20-010 | | |
| Materials | Fibres: PMMA; sheath: PE | | |

Detection curves

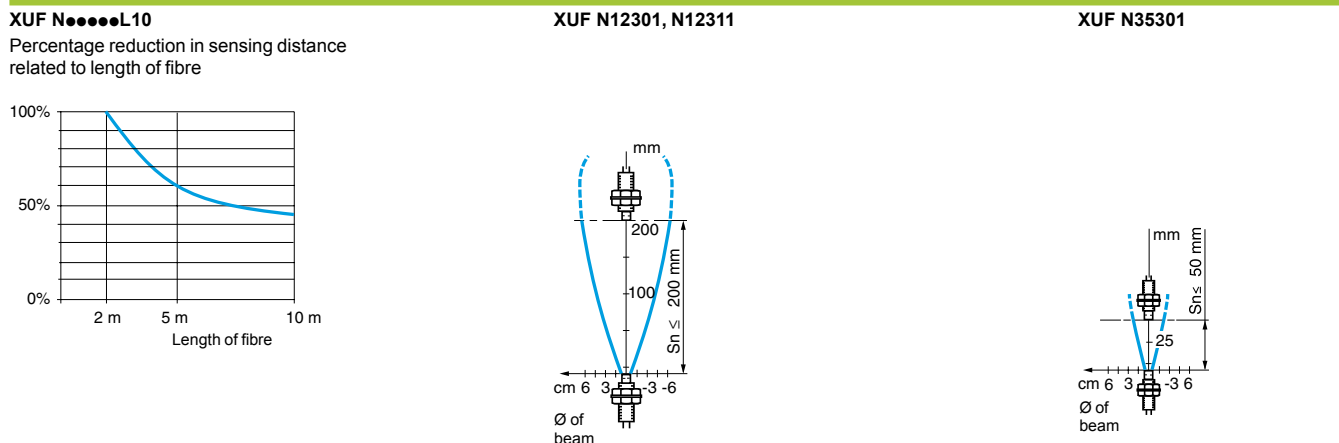

(1) Can be used with 90° mirror XUF Z02, see page 5/125.
(2) With lens accessory XUF Z01, see page 5/125.

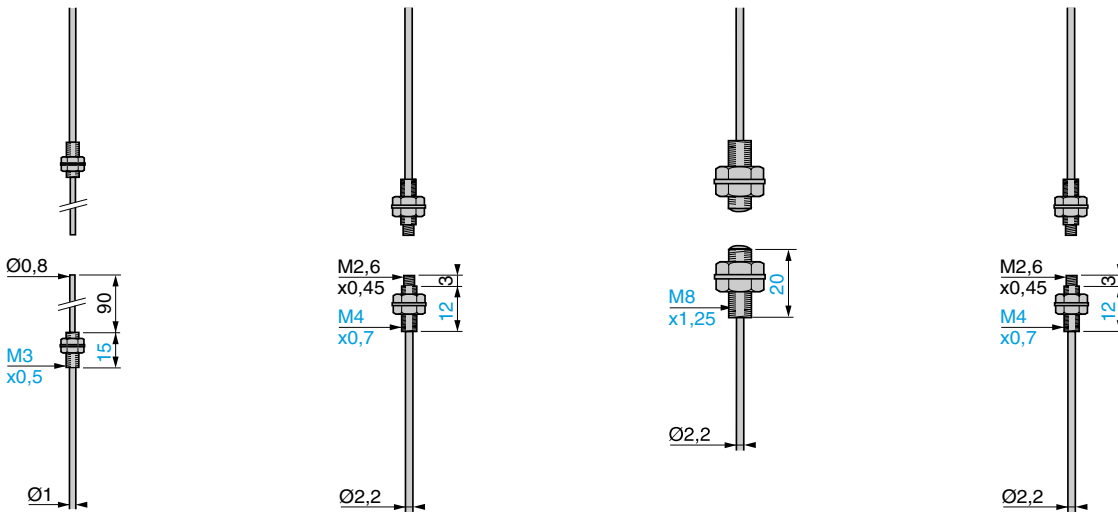


| 30 mm | 300 mm (1) 2000 mm (2) | 2500 mm | 100 mm (1) 750 mm (2) |
|--|------------------------------|--|---|
| - | - | - | - |
| Accurate positioning | Long sensing distance fibres | Fibres with integral lens Resistant to accumulation of dirt | Flexible fibres for cyclic movements, areas with restricted access |
| - | XUF N2P01L2 | XUF N2L01L2 | XUF N2S01L2 |
| - | XUF N2P01L10 | XUF N2L01L10 | XUF N2S01L10 |
| XUF N35311 | - | - | - |
| 0.045 | 0.058 (L = 2 m) | 0.060 (L = 2 m) | 0.062 (L = 2 m) |
| ○ | ○ | ● | ● |
| 1 x $\varnothing 0.5$ | 1 x $\varnothing 1.5$ | 1 x $\varnothing 1$ | 1 x $\varnothing 1$ |
| Yes | Yes | Yes | Yes |
| For operation: - 25...+ 60 °C. For storage: - 40...+ 80 °C | | | |
| 7 gn, amplitude ± 1.5 mm (f = 10...55 Hz), conforming to IEC 60068-2-6 | | | |
| 30 gn, duration 11 ms, conforming to IEC 60068-2-27 | | | |
| IP 64 conforming to IEC 60529 and IP 641 conforming to NF C 20-010 | | | |
| Fibres: PMMA; sheath: PE | | | |


XUF N35311

XUF N2P01L2




XUF N2L01L2

XUF N2S01L2

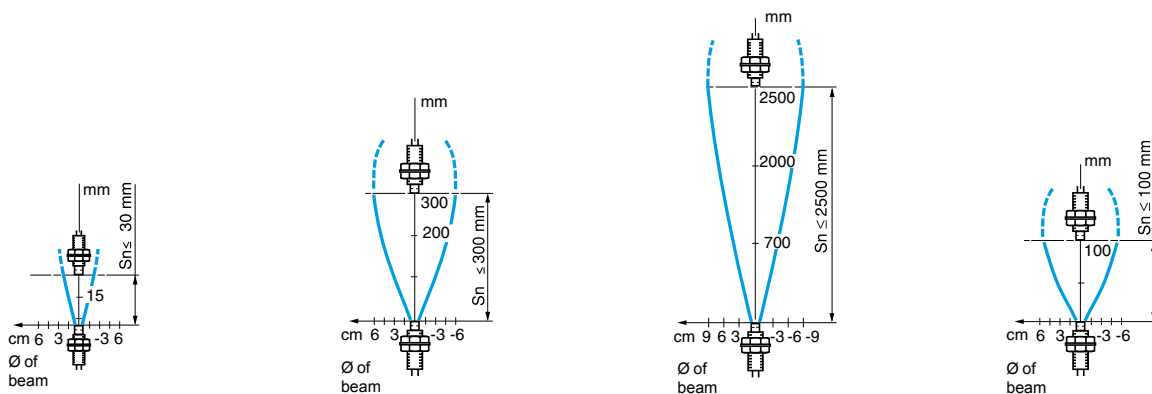



R = minimum bend radius
Fibre of ext. Ø 2.2 mm, R = 25 mm
Fibre of ext. Ø 1 mm, R = 10 mm
XUF N5S01L, R = 4 mm



| | | | |
|-------------------------------|-----------------|-------|-------------|
| Nominal sensing distance (Sn) | 70 mm | 60 mm | 60 mm |
| Application, features | General purpose | | Positioning |

References

| | | | | |
|---|---------------------|-----------------------------|------------|-----------------|
| With standard end fittings | L = 2 m L = 10 m | XUF N05321 XUF N05321L10 | - - | XUF N05323 - |
| With 90 mm flexible end fittings, L = 2 m | | - | XUF N05331 | - |
| Weight (kg) | 0.058 (L = 2 m) | 0.030 | | 0.060 |


Characteristics

| | | | |
|---|---|---------|------------------------|
| Fibre (view on sensing face) | | | |
| Core (Ø mm) | 2 x Ø 1 | 2 x Ø 1 | 1 x Ø 1 + 16 x Ø 0.265 |
| Trimmable to required length (trimmer XUF Z11 included) | Yes | Yes | Yes |
| Ambient air temperature | For operation: -25...+60 °C. For storage: -40...+80 °C | | |
| Vibration resistance | 7 gn, amplitude ± 1.5 mm (f = 10...55 Hz), conforming to IEC 60068-2-27 | | |
| Shock resistance | 30 gn, duration 11 ms, conforming to IEC 60068-2-27 | | |
| Degree of protection | IP 64 conforming to IEC 60529 and IP 641 conforming to NF C 20-010 | | |
| Materials | Fibres: PMMA; sheath: PE | | |


Detection curves (object 10 x 10 cm, white 90%)

XUF N●●●●L10


Percentage reduction in sensing distance related to length of fibre



XUF N05321



XUF N05331, XUF N05323



(1) Fixing clamps included with fibre optic.


**Dimensions,
references,
characteristics,
curves**

Photo-electric sensors

OsiSense XU Application

Fibre optics for amplifiers

“PLASTIC” fibres with end fittings, diffuse system

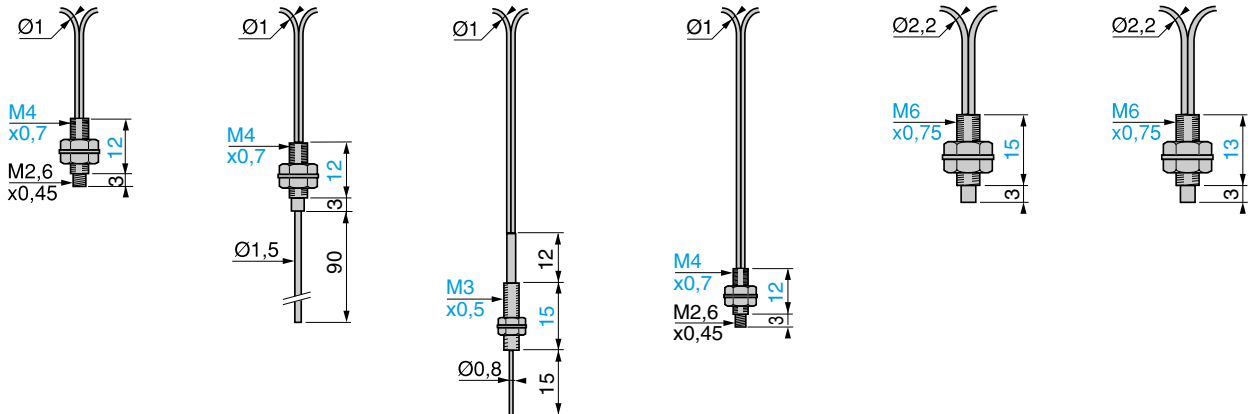

| | | | | | |
|---|-----------------------------|--|---|--|--|
| 18 mm Positioning | 18 mm Positioning | 6 mm Areas with restricted access | 15 mm Positioning | 95 mm Long sensing distance fibres | 55 mm Flexible fibres for cyclic movements, areas with restricted access |
| XUF N01321 | – | XUF N04331 | XUF N02323 | XUF N5P01L2 | XUF N5S01L2 |
| – | – | – | – | XUF N5P01L10 | XUF N5S01L10 |
| – | XUF N01331 | – | – | – | – |
| 0.045 | 0.045 | 0.045 | 0.040 | 0.058 (L = 2 m) | 0.062 (L = 2 m) |
| | | | | | |
| 2 x $\text{Ø} 0.5$ | 2 x $\text{Ø} 0.5$ | 2 x $\text{Ø} 0.265$ | 1 x $\text{Ø} 0.5 + 4 \times \text{Ø} 0.25$ | 2 x $\text{Ø} 1.5$ | 2 x $\text{Ø} 1$ |
| Yes | Yes | Yes | Yes | Yes | Yes |
| For operation: $-25 \dots +60 \text{ °C}$. For storage: $-40 \dots +80 \text{ °C}$ | | | | | |
| 7 gn, amplitude $\pm 1.5 \text{ mm}$ ($f = 10 \dots 55 \text{ Hz}$), conforming to IEC 60068-2-27 | | 7 gn, amplitude $\pm 1.5 \text{ mm}$ ($f = 10 \dots 55 \text{ Hz}$), conforming to IEC 60068-2-6 | | | |
| 30 gn, duration 11 ms, conforming to IEC 60068-2-27 | | | | | |
| IP 64 conforming to IEC 60529 and IP 641 conforming to NF C 20-010 | | | | | |
| Fibres: PMMA; sheath: PE | | | | | |


XUF N01321, N01331

XUF N04331


XUF N02323

XUF N5P01L2


XUF N5S01L2

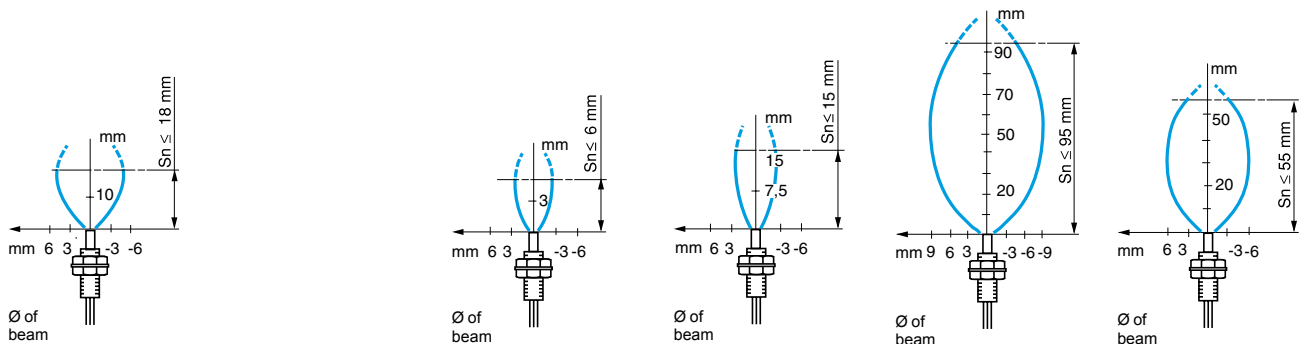

5



R = minimum bend radius
R = 40 mm

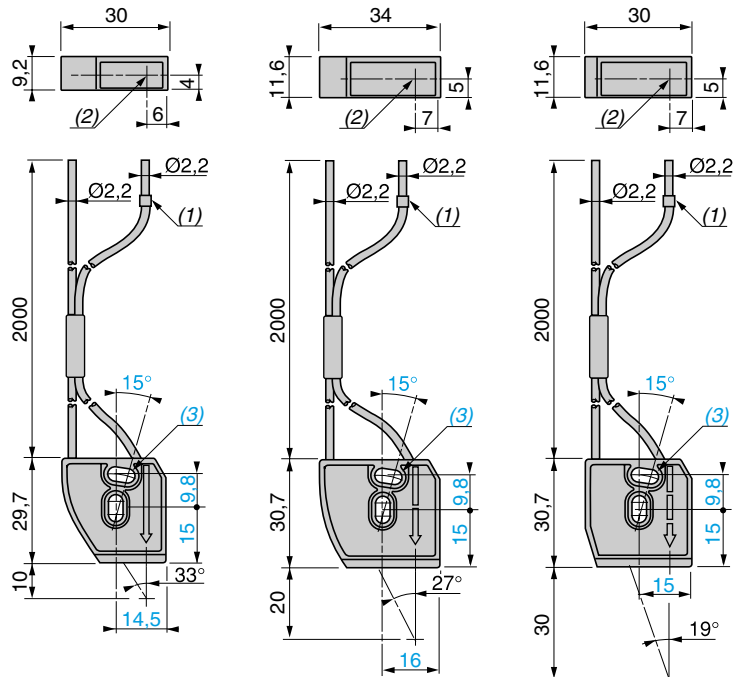

- (1) Fibre reference ring for transmitter
- (2) Transmitter
- (3) 2 elongated holes $\varnothing 3.2 \times 6.7$ for M3 screws
Maximum tightening torque: 0.3 N.m


| Nominal sensing distance (Sn) with fibre L = 2 m | 10 mm | 20 mm | 30 mm |
|---|---|-------|-------|
| Application, features | Focused fibres, specially suited to OsiSense XU “Full colour” sensors XUR C4●PML2 | | |

References


| With specific end fittings for detection of colours | L = 2 m | XUF N5L01L2 | XUF N5L02L2 | XUF N5L03L2 |
|--|---------|-------------|-------------|-------------|
| Weight (kg) | | 0.030 | 0.030 | 0.030 |

Characteristics

| | | | |
|------------------------------|--|---|---|
| Fibre (view on sensing face) | | | |
| Core (\varnothing mm) | Transmitter: 1 x $\varnothing 1$ Receiver: 1 x $\varnothing 1.5$ | Transmitter: 1 x $\varnothing 1.5$ Receiver: 1 x $\varnothing 1.5$ | Transmitter: 1 x $\varnothing 1.5$ Receiver: 1 x $\varnothing 1.5$ |
| Trimmable to required length | No | No | No |
| Spot diameter | 2.5 mm | 5 mm | 8 mm |
| Ambient air temperature | For operation: - 10...+ 55 °C. For storage: - 20...+ 70 °C | | |
| Vibration resistance | 7 gn, amplitude ± 1.5 mm (f = 10...55 Hz), conforming to IEC 60068-2-6 | | |
| Shock resistance | 30 gn, duration 11 ms, conforming to IEC 60068-2-27 | | |
| Degree of protection | IP 65 conforming to IEC 60529 and IP 651 conforming to NF C 20-010 | | |
| Materials | Fibres: PMMA; sheath: PE. Head: PA 66, lens: PC | | |



R = minimum bend radius
Metal sheath, R = 90 mm

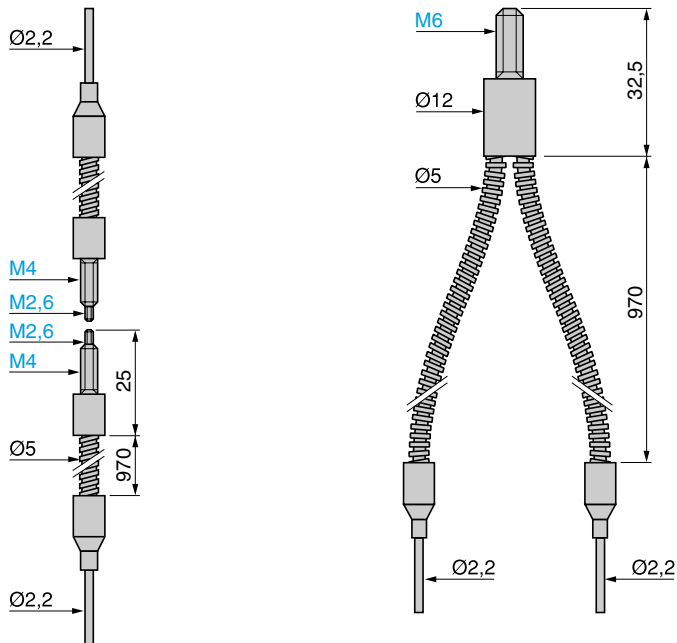



| System | Thru-beam | Diffuse |
|---|---------------------------|---------|
| Nominal sensing distance (Sn) with fibre L = 1 m | 200 mm (1) 1500 mm (2) | 70 mm |
| Application | High temperatures | |



References (complete assembly - 2 fibres for thru-beam system)

| With standard end fittings | L = 1 m | XUF S2020 | XUF S0520 |
|----------------------------|---------|-----------|-----------|
| Weight (kg) | | 0.070 | 0.075 |


Characteristics

| Fibre (view on sensing face) |  |  |
|------------------------------|---|---|
| Core (Ø mm) | 1 x Ø 1 | 2 x Ø 1 |
| Ambient air temperature | For operation and storage: - 40...+ 180 °C | |
| Vibration resistance | 7 gn, amplitude ± 1.5 mm (f = 10...55 Hz), conforming to IEC 60068-2-6 | |
| Shock resistance | 30 gn, duration 11 ms, conforming to IEC 60068-2-27 | |
| Degree of protection | IP 64 conforming to IEC 60529 and IP 641 conforming to NF C 20-010 | |
| Materials | Fibres: glass; sheath: metal | |


Detection curves

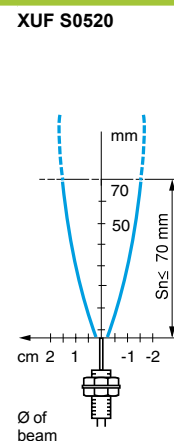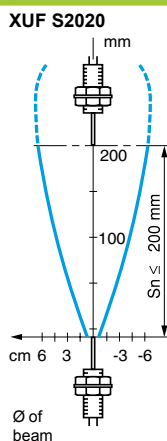

(1) Can be used with 90° mirror XUF Z02, see page 5/125.
(2) With lens accessory XUF Z01, see page 5/125.



R = minimum bend radius
Fibre of ext. Ø 2.2 mm, R = 25 mm

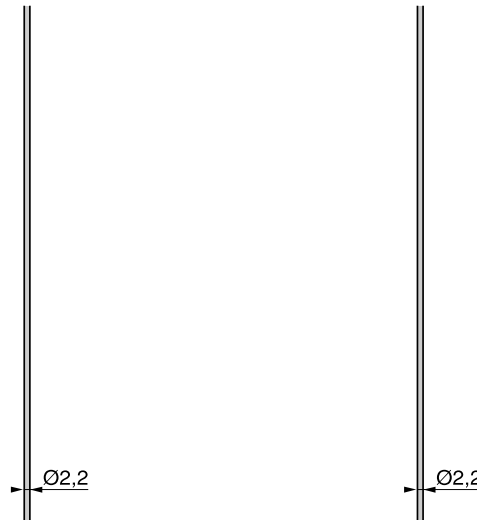

| | |
|---------------------------------------|--------------------------------|
| Nominal sensing distance (Sn) L = 2 m | See detection curves below (1) |
| Application | General purpose |

References

| | | | | |
|---------------------------|----------|----------|----------|----------|
| Fibre without end fitting | XUF Z910 | XUF Z920 | XUF Z911 | XUF Z921 |
| Weight (kg) | 0.020 | 0.040 | 0.040 | 0.080 |

Characteristics


| | | | | |
|--|--|------|-----------|------|
| Fibre | | | | |
| Core (Ø mm) | 1 x Ø 1 | | 1 x Ø 1.4 | |
| Length | 10 m | 20 m | 10 m | 20 m |
| Trimable to required length (trimmer XUF Z11 included) | Yes | | Yes | |
| Ambient air temperature | For operation: - 25... + 60 °C. For storage: - 40... + 80 °C | | | |
| Vibration resistance | 7 gn, amplitude ± 1.5 mm (f = 10...55 Hz), conforming to IEC 60068-2-6 | | | |
| Shock resistance | 30 gn, duration 11 ms, conforming to IEC 60068-2-27 | | | |
| Degree of protection | IP 64 conforming to IEC 60529 and IP 641 conforming to NF C 20-010 | | | |
| Materials | Fibres: PMMA; sheath: PE | | | |

Detection curves

XUF Z911, Z921
XUF Z910, Z920



XUF Z910, Z920

XUF Z911, Z921



- 1 XUF Z911, Z921
- 2 XUF Z910, Z920

Total length = sum of the 2 strands used to constitute a thru-beam system

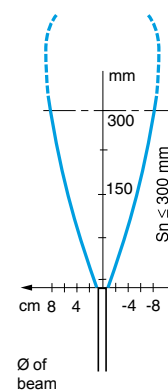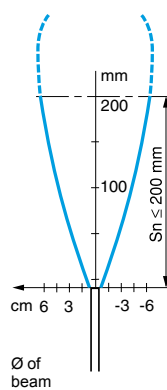


(1) It is possible to increase the sensing distance of fibres without end fittings by using fixing clamps with lens (XUF Z03, Z04 or Z05), see page 5/125.




XUF Z02




XUF Z01




XUF Z06




XUF Z13, XUF Z03




XUF Z14, XUF Z04




XUF Z15, XUF Z05

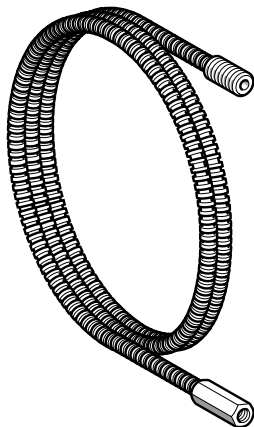

XUF Z10



XUF Z11



XUF Z08

Accessories for fibres with threaded end fittings

| Description | For use with | Reference | Weight kg |
|--|--|----------------|-----------|
| 90° mirror (set of 2) | Fibre optics XUF N1●30●, XUF N35301 and XUF S2020 (thru-beam system) XUF N2●01L●● | XUF Z02 | 0.005 |
| Lenses for increasing sensing distance (set of 2) | Fibre optics XUF N1●30●, XUF N35301 and XUF S2020 (thru-beam system) | XUF Z01 | 0.005 |
| Focusing lens for high precision detection. Detection of 0.5 mm objects at a distance of 7 mm. Also enables detection of objects against a background (1) | Fibre optics XUF N02323 (diffuse system) | XUF Z06 | 0.001 |

Accessories for plastic fibres without end fittings

| Description | Mounting plane | For use with | Reference | Weight kg |
|--|----------------|-------------------------------|----------------|-----------|
| Fixing clamps (set of 2) | Axial | Plastic fibre optics XUF Z | XUF Z13 | 0.002 |
| | Frontal | Plastic fibre optics XUF Z | XUF Z14 | 0.002 |
| | Lateral | Plastic fibre optics XUF Z | XUF Z15 | 0.002 |
| Fixing clamps with lens (set of 2) | Axial | Plastic fibre optics XUF Z | XUF Z03 | 0.002 |
| | Frontal | Plastic fibre optics XUF Z | XUF Z04 | 0.002 |
| | Lateral | Plastic fibre optics XUF Z | XUF Z05 | 0.002 |

Protection accessories

| Description | For use with | Reference | Weight kg |
|--|--|-----------------|-----------|
| Protective tubing Length 1 m | Plastic fibre optic light guides with M4 threaded end fittings | XUF Z210 | 0.040 |
| | Plastic fibre optic light guides with M6 threaded end fittings | XUF Z310 | 0.065 |

Other accessories

| Description | Sold in lots of | Unit reference | Weight kg |
|---|-----------------|----------------|-----------|
| Fibre trimmer | 1 | XUF Z11 | 0.006 |
| Plastic end adaptor , for connecting Ø 1 mm fibres to amplifiers XUD A | 2 | XUF Z08 | 0.002 |

(1) Characteristics obtained when the fibre is fully screwed into the lens (screwing depth = 4 mm).

Detection curves for plastic fibre optic light guides with fixing clamps

Sensing distance of fibres XUF Z9●●● fitted with fixing clamps XUF Z●●

| Fibre type | Clamp type | | | | |
|--------------------------------------|------------|--------------|---------|--------------|---------------|
| | XUF Z13 | XUF Z14, Z15 | XUF Z03 | XUF Z04, Z05 | Without clamp |
| XUF Z910, Z920 (2 fibres L = 2 m) Sn | 150 mm | 100 mm | 800 mm | 600 mm | 200 mm |
| XUF Z911, Z921 (2 fibres L = 2 m) Sn | 220 mm | 150 mm | 1200 mm | 900 mm | 300 mm |

Other fibre lengths:

5 m fibres: reduce the sensing distance by a factor of 0.7.

10 m fibres: reduce the sensing distance by a factor of 0.5.

20 m fibres: reduce the sensing distance by a factor of 0.3.

Detection curves with lens





Fixing clamp XUF Z03, Z04 or Z05 + fibre XUF Z910 or Z920

Fixing clamp XUF Z03, Z04 or Z05 + fibre XUF Z911 or Z921

Detection curves without lens


Fixing clamp XUF Z13, Z14 or Z15 + fibre XUF Z910 or Z920

Fixing clamp XUF Z13, Z14 or Z15 + fibre XUF Z911 or Z921




Dimensions


XUF Z01




XUF Z210

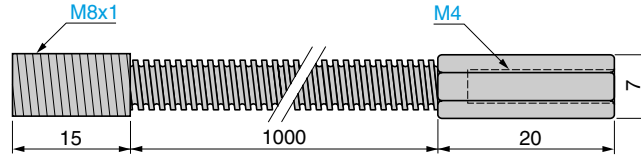


XUF Z06




XUF Z02




XUF Z310

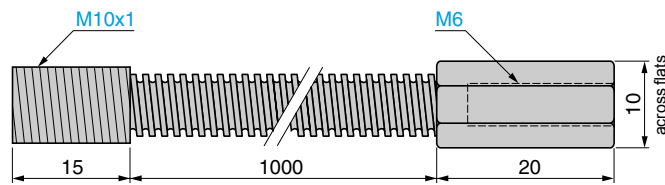





XUF Z03, XUF Z13

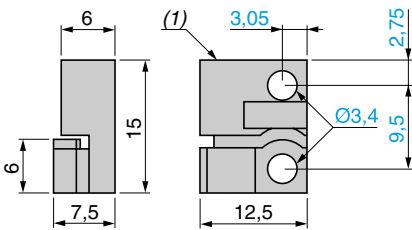

XUF Z04, XUF Z14

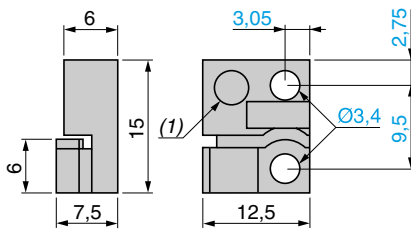


XUF Z05, XUF Z15

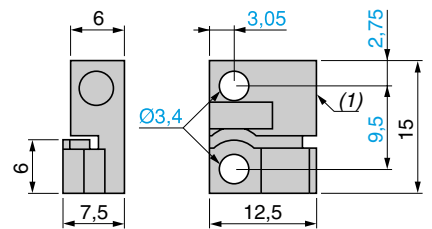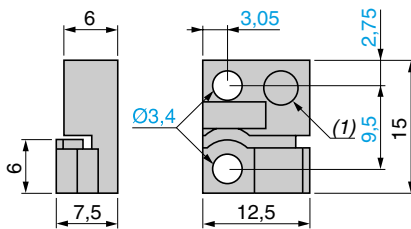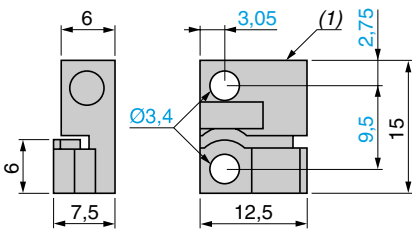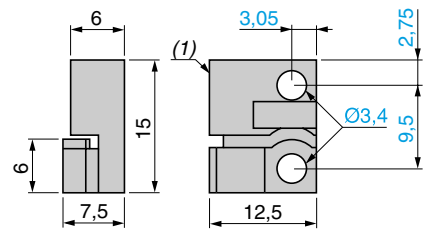


(1) Light beam window.


“GLASS” fibre optics for diffuse system



Standard sheath
External Ø
XUY FVP: 5 mm
XUY FVER: 3 mm





Metal reinforced sheath
XUY FVP: 5 mm
XUY FVER: 3.5 mm



High temperature sheath
XUY FVP: 5 mm
XUY FVER: 5 mm

R = minimum bend radius

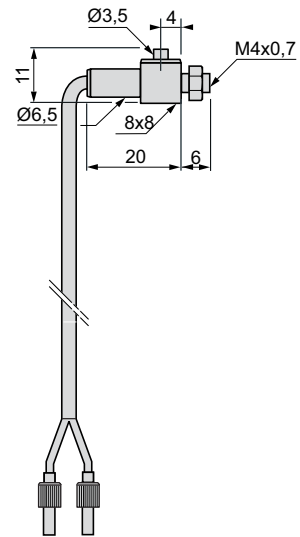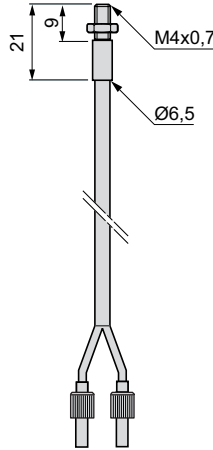

Applications

- Detection in high temperature environment (up to 200 °C)
- Detection in aggressive environment
- Application requiring high level of performance

References

| Type of end fitting | Straight | | | Lateral | | |
|---------------------------------------|--------------------|-------------------|--------------------|--------------------|-------------------|--------------------|
| | Standard | Metal reinforced | High temperature | Standard | Metal reinforced | High temperature |
| Sheath | | | | | | |
| References with 0.60 m long fibre (1) | XUY FVPSD61 | XUY FVPM61 | XUY FVPTD61 | XUY FVPSL61 | XUY FVPM61 | XUY FVPTL61 |
| Nominal sensing distance Sn (mm) | 80 | 80 | 80 | 80 | 80 | 80 |
| Weight (kg) | 0.040 | 0.045 | 0.052 | 0.042 | 0.056 | 0.056 |


Characteristics

| | |
|---------------------------------|--|
| Fibre | 400 strands per mm ² |
| Usable diameter of fibre | 1.2 mm |
| Ambient air temperature | For operation Standard: - 25...+ 60 °C Metal reinforced: - 25...+ 120 °C High temperature: -25...+ 200 °C |
| Detection end fitting | Nickel plated brass |
| Materials | Fibre: 50 µ glass Sheath: Standard: PVC + thermo polyolefine, Metal reinforced: spiralled metal + polyolefine High temperature: flexible stainless steel |


(1) For 1 m long fibre, replace 61 in the reference by 101. Example: XUY FVPSD61 becomes XUY FVPSD101 for a 1 m long fibre.
For 1.5 m long fibre, replace 61 in the reference by 151. Example: XUY FVPM61 becomes XUY FVPM151 for a 1.5 m long fibre.
For 2 m long fibre, replace 61 in the reference by 201. Example: XUY FVPTD61 becomes XUY FVPTD201 for a 2 m long fibre.

Detection and attenuation curves


XUY FVP●●61



Attenuation related to length



Bending influence



Material influence

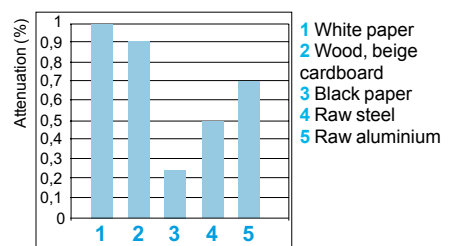




Photo-electric sensors

OsiSense XU Application

Fibre optics for amplifier

“GLASS” fibres with end fittings


For diffuse and thru-beam systems

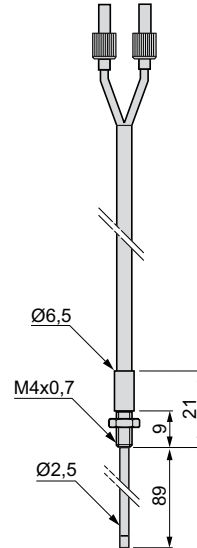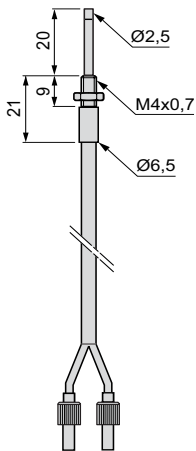


| Extended | | | Pliable | | |
|--|------------------------|------------------------|------------------------|------------------------|------------------------|
| Standard | Metal reinforced | High temperature | Standard | Metal reinforced | High temperature |
| XUY FVPSA61 (1) | XUY FVPMA61 (1) | XUY FVPTA61 (1) | XUY FVPSC61 (1) | XUY FVPMC61 (1) | XUY FVPTC61 (1) |
| 80 | 80 | 80 | 80 | 80 | 80 |
| 0.041 | 0.046 | 0.053 | 0.043 | 0.057 | 0.057 |
| 400 strands per mm ² | | | | | |
| 1.2 mm | | | | | |
| Standard: - 25...+ 60 °C | | | | | |
| Metal reinforced: - 25...+ 120 °C | | | | | |
| High temperature: - 25...+ 200 °C | | | | | |
| Nickel plated brass | | | | | |
| 50 µ glass | | | | | |
| Standard: PVC + thermo polyolefine, | | | | | |
| Metal reinforced: spiralled metal + polyolefine | | | | | |
| High temperature: flexible stainless steel | | | | | |

(1) For 1 m long fibre, replace 61 in the reference by **101**. Example: XUY FVPSA61 becomes **XUY FVPSA101** for a 1 m long fibre.
For 1.5 m long fibre, replace 61 in the reference by **151**. Example: XUY FVPMA61 becomes **XUY FVPMA151** for a 1.5 m long fibre.
For 2 m long fibre, replace 61 in the reference by **201**. Example: XUY FVPTA61 becomes **XUY FVPTA201** for a 2 m long fibre.


“GLASS” fibre optics for thru-beam system



Standard sheath
External Ø
XUY FVP: 5 mm
XUY FVER: 3 mm






Metal reinforced sheath
XUY FVP: 5 mm
XUY FVER: 3.5 mm



High temperature sheath
XUY FVP: 5 mm
XUY FVER: 5 mm

R = minimum bend radius

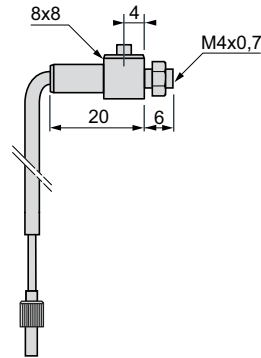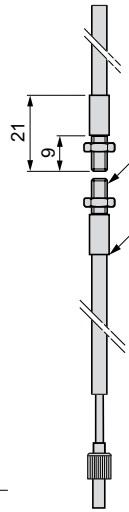

Applications

- Detection in high temperature environment (up to 200 °C)
- Detection in aggressive environment
- Application requiring high level of performance

References

| Type of end fitting | Straight | | | Lateral | | |
|--------------------------------------|--------------|------------------|------------------|--------------|------------------|------------------|
| | Standard | Metal reinforced | High temperature | Standard | Metal reinforced | High temperature |
| Sheath | | | | | | |
| References with 0.6 m long fibre (1) | XUY FVERSD61 | XUY FVERMD61 | XUY FVERTD61 | XUY FVERSL61 | XUY FVERML61 | XUY FVERTL61 |
| Nominal sensing distance Sn (mm) | 200 | 200 | 200 | 200 | 200 | 200 |
| Weight (kg) | 0.042 | 0.046 | 0.060 | 0.052 | 0.061 | 0.075 |


Characteristics

| | | |
|--------------------------|---------------|--|
| Fibre | | 400 strands per mm ² |
| Usable diameter of fibre | | 1.2 mm |
| Ambient air temperature | For operation | Standard: - 25...+ 60 °C, Metal reinforced: - 25...+ 120 °C High temperature: - 25...+ 200 °C |
| Detection end fitting | | Nickel plated brass |
| Materials | Fibre | 50 µ glass |
| | Sheath | Standard: PVC + thermo polyolefine Metal reinforced: spiralled metal + polyolefine High temperature: flexible stainless steel |


(1) For 1 m long fibre, replace 61 in the reference by 101. Example: XUY FVERSD61 becomes XUY FVERSD101 for a 1 m long fibre.
For 1.5 m long fibre, replace 61 in the reference by 151. Example: XUY FVERMD61 becomes XUY FVERMD151 for a 1.5 m long fibre.
For 2 m long fibre, replace 61 in the reference by 201. Example: XUY FVERTD61 becomes XUY FVERTD201 for a 2 m long fibre.

Detection and attenuation curves


XUY FVER●●61



Attenuation related to length



Bending influence



Material influence

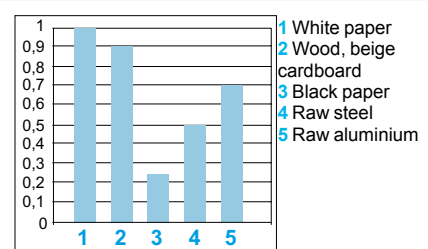




Photo-electric sensors

OsiSense XU Application

Fibre optics for amplifier

“GLASS” fibres with end fittings

For diffuse and thru-beam systems

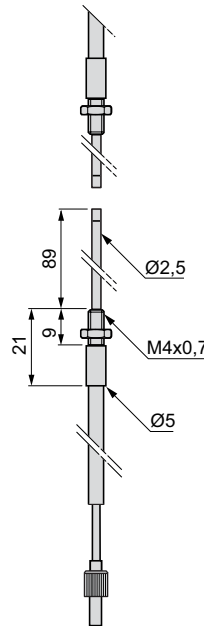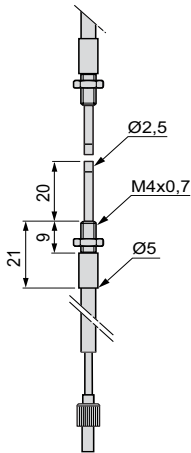

| Extended | | | Pliable | | |
|--|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Standard | Metal reinforced | High temperature | Standard | Metal reinforced | High temperature |
| XUY FVERSA61 (1) | XUY FVERMA61 (1) | XUY FVERTA61 (1) | XUY FVERSC61 (1) | XUY FVERMC61 (1) | XUY FVERTC61 (1) |
| 80 | 80 | 80 | 80 | 80 | 80 |
| 0.043 | 0.047 | 0.061 | 0.053 | 0.061 | 0.076 |
| 400 strands per mm ² | | | | | |
| 1.2 mm | | | | | |
| Standard: - 25...+ 60 °C, | | | | | |
| Metal reinforced: - 25...+ 120 °C | | | | | |
| High temperature: - 25...+ 200 °C | | | | | |
| Nickel plated brass | | | | | |
| 50 µ glass | | | | | |
| Standard: PVC + thermo polyolefine | | | | | |
| Metal reinforced: spiralled metal + polyolefine | | | | | |
| High temperature: flexible stainless steel | | | | | |

(1) For 1 m long fibre, replace 61 in the reference by 101. Example: XUY FVERSA61 becomes XUY FVERSA101 for a 1 m long fibre.
For 1.5 m long fibre, replace 61 in the reference by 151. Example: XUY FVERMA61 becomes XUY FVERMA151 for a 1.5 m long fibre.
For 2 m long fibre, replace 61 in the reference by 201. Example: XUY FVERTA61 becomes XUY FVERTA201 for a 2 m long fibre.

Photo-electric sensors

OsiSense XU Application

Fibre optics for amplifier

“GLASS” fibres with end fittings

For diffuse and thru-beam systems

Accessories

Focusers for diffuse system fibre optics

| Description | For use with | Nominal sensing distance (Sn) | Unit reference | Weight |
|--|--------------|-------------------------------|-----------------|--------|
| | | mm | | kg |
| Focusers for pinpoint reading of reference marks, contrasts, faults, etc. | XUY FVERSD61 | 10 | XUY 1120 | 0.003 |
| | XUY FVERMD61 | 30 | XUY 1125 | 0.004 |
| | XUY FVERTD61 | | | |

Focusers for thru-beam system fibre optics


| Description | For use with | Nominal sensing distance (Sn) | Unit reference | Weight |
|--|--------------|-------------------------------|---------------------|--------|
| | | mm | | kg |
| Focusers for increasing sensing distances (sold in lots of 2) | XUY FVERSD61 | 800 | XUY 1121 (1) | 0.004 |
| | XUY FVERMD61 | 3000 | XUY 1124 (2) | 0.012 |
| | XUY FVERTD61 | 800 | XUY 1122 (1) | 0.006 |
| | | | | |

(1) 70° max.


(2) 250° max.

Focusers


XUY 1120




XUY 1125




XUY 1121



XUY 1124




XUY 1122R






Ecofibre concept

Assemble your own fibre optics.

Fibres without end fitting



End fittings

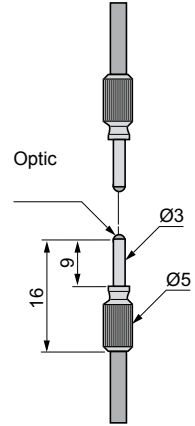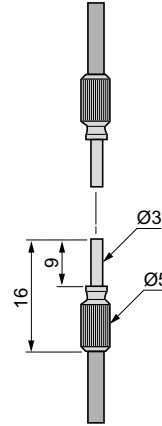

5

End fittings

| | | | |
|----------------------------------|----------|----------|----------|
| Nominal sensing distance Sn (mm) | 70 | 200 | 800 |
| Reference | XUY A110 | XUY A210 | XUY A211 |
| Weight (kg) | 0.009 | 0.004 | 0.004 |

Fibres without end fitting

Type of fibre




Single fibre, plastic, single strand




| | | | |
|------------------------|----------|------------|------------|
| Length (m) | 1 | 10 | 50 |
| Usable diameter (mm) | 1 | 1 | 1 |
| External diameter (mm) | 2.2 | 2.2 | 2.2 |
| Reference | XUY A005 | XUY A00510 | XUY A00550 |
| Weight (kg) | 0.006 | 0.042 | 0.220 |

Curves

| End fittings | XUY A110 | XUY A210 | XUY A211 |
|--------------|----------|----------|----------|
|--------------|----------|----------|----------|



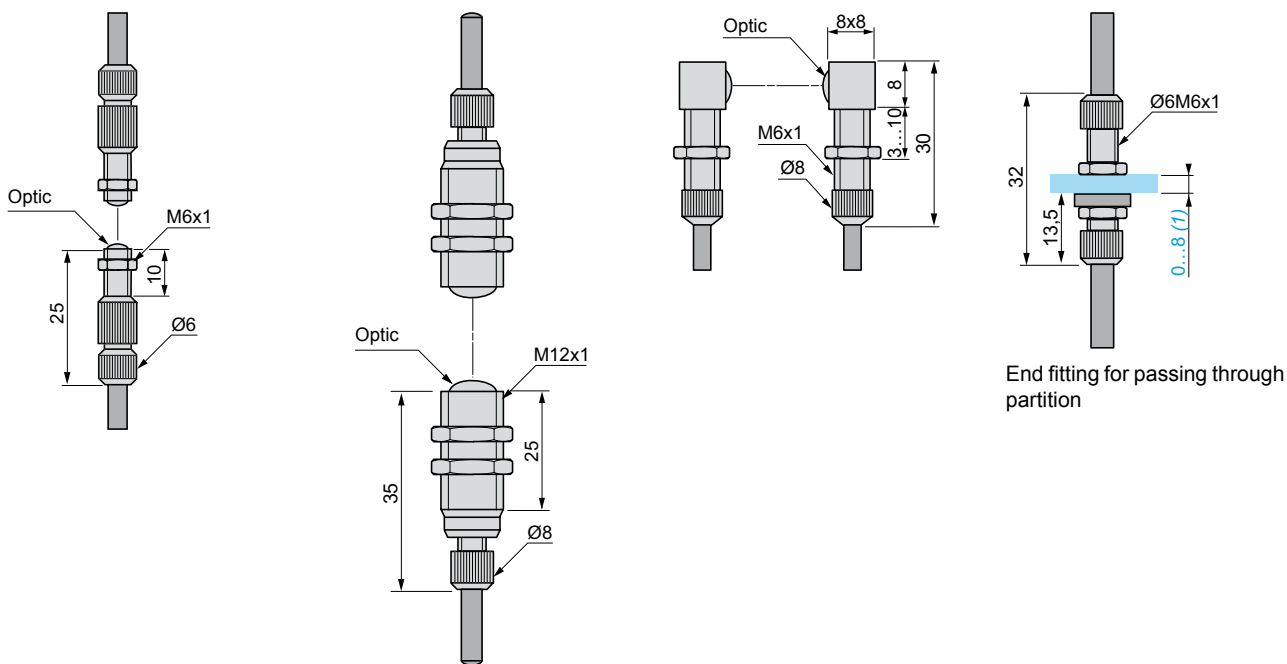

(1) Ø 6.2 cut-out

| | | | |
|-----------------|-----------------|-----------------|-----------------|
| 1200 | 4000 | 1200 | - |
| XUY A212 | XUY A213 | XUY A220 | XUY A310 |
| 0.011 | 0.045 | 0.018 | 0.017 |

5

Single fibre, plastic, multistrand





| |
|------------------|
| 1 |
| 1 |
| 2.2 |
| XUY AU005 |
| 0.006 |

Dual fibre, plastic, single strand




| |
|-------------------------|
| 1 |
| 1 |
| 2.2 |
| XUY FP2BRINA005B |
| 0.080 |

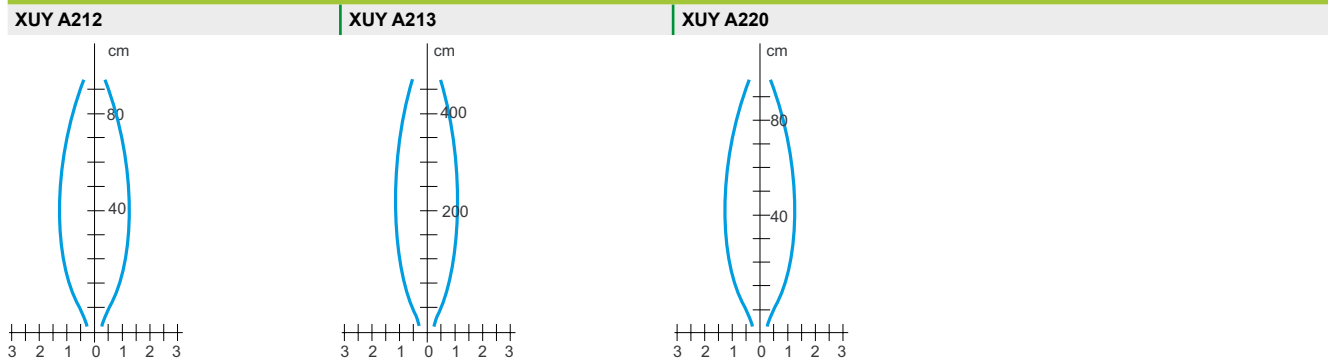


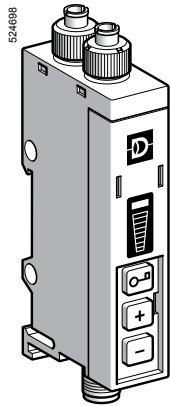


XUY AFP966S

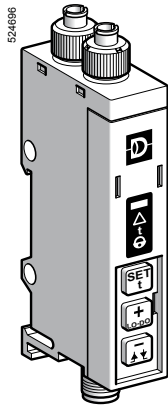

XUY AFP946S

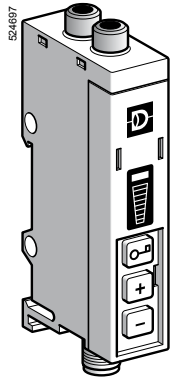

XUY AFV966S

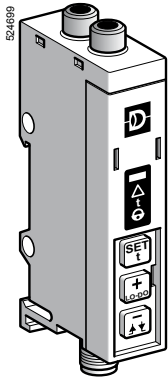

XUY AFV946S

Amplifiers for plastic fibre optics (1)

| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|--|----------------|---------|--------------|----------------------|--------------|
| Adjustment using +/- button (2) | | | | | |
| Depending on fibre | NO/NC | PNP/NPN | Pre-cabled | XUY AFP966S | 0.124 |
| | dpg. on wiring | | M8 connector | XUY AFPCO966S | 0.056 |

Adjustment using teach mode (3)

| | | | | | |
|--------------------|--------------------|---------|-------------------------|----------------------|-------|
| Depending on fibre | NO/NC programmable | PNP/NPN | Pre-cabled M8 connector | XUY AFP946S | 0.124 |
| | | | | XUY AFPCO946S | 0.056 |

Amplifiers for glass fibre optics

| Sensing distance (Sn) m | Function | Output | Connection | Reference | Weight kg |
|--|----------------|---------|--------------|----------------------|--------------|
| Adjustment using +/- button (2) | | | | | |
| Depending on fibre | NO/NC | PNP/NPN | Pre-cabled | XUY AFV966S | 0.116 |
| | dpg. on wiring | | M8 connector | XUY AFVCO966S | 0.047 |

Adjustment using teach mode (3)

| | | | | | |
|--------------------|--------------------|---------|-------------------------|----------------------|-------|
| Depending on fibre | NO/NC programmable | PNP/NPN | Pre-cabled M8 connector | XUY AFV946S | 0.124 |
| | | | | XUY AFVCO946S | 0.047 |

Accessories

| Description | Details | Length of cable m | Reference | Weight kg |
|------------------------|---------------|----------------------|--------------------|--------------|
| Pre-wired M8 connector | Straight | 2 | XZC P0941L2 | 0.080 |
| | Elbowed (90°) | 2 | XZC P1041L2 | 0.080 |
| | Straight | 5 | XZC P0941L5 | 0.180 |
| | Elbowed (90°) | 5 | XZC P1041L5 | 0.180 |

(1) Fibre trimmer included

(2) Indication of level by bargraph, adjustment by pressing button

(3) Fine mode or standard mode, adjustment using teach

Characteristics

| Sensor type | | XUY AF●9●6S | XUY AFCO●6S |
|-----------------------------------|----------------------------|--|--|
| Product certifications | | CE, cULus (4) | |
| Connection | Connector | – | M8, 4-pin |
| | Pre-cabled | Length: 2 m | – |
| Nominal sensing distance (Sn) | | Depending on fibre optic used | |
| Type of transmission | LED | Red LED | |
| | Modulation frequency | 8 kHz | |
| Sensitivity adjustment | | Using teach (fine mode or standard mode) and/or +/- button, depending on model | |
| Degree of protection | | Conforming to IEC 60529 IP 65 | |
| Ambient air temperature | For storage | °C | - 20...+ 80 |
| | For operation | °C | 0...+ 60 |
| Materials | | Polycarbonate | |
| Immunity to ambient light | Incandescent bulb | Lux | 10 000 |
| | Natural light | Lux | 20 000 |
| Rated supply voltage | | V --- 12...24 with protection against reverse polarity | |
| Voltage limits (including ripple) | | V --- 10...30 | |
| Current consumption, no-load | | mA < 40 | |
| Switching capacity | | mA 100 with overload and short-circuit protection | |
| Voltage drop, closed state | | V < 2 | |
| Maximum switching frequency | | kHz < 1 | |
| External input (5) | Active | V | < 1.4 |
| | Inactive | V | > 3 |
| Delays | | Response and recovery ms < 0.5 | |
| Output time delay (5) | Range | s | 0...5 in 11 adjustment increments |
| | Duration of each increment | ms | First increment 40 ms then 500 ms for each press |

(4) This product is UL Listed if supplied by a class II or isolated supply delivering --- 30 V max. (isolated transformer for example) and protected by a UL fuse rated at 3 A max.

(5) Only for models with teach mode.

■ Applications using plastic fibre optics


- Monitoring position or presence of parts on an assembly or packing machine
- Detection of objects on small conveyor
- Use of fibre optics in vibratory environments (robot arms)
- Detection of reference and colour marks in packaging

■ Applications with glass fibre optics

- Monitoring position or presence of parts on an assembly or packing machine
- Detection of presence of parts in a plastic mould
- Detection in aggressive environments
- Detection of items exiting an oven (high temperature fibres)


Presentation

XUY AF_●, adjustment using button

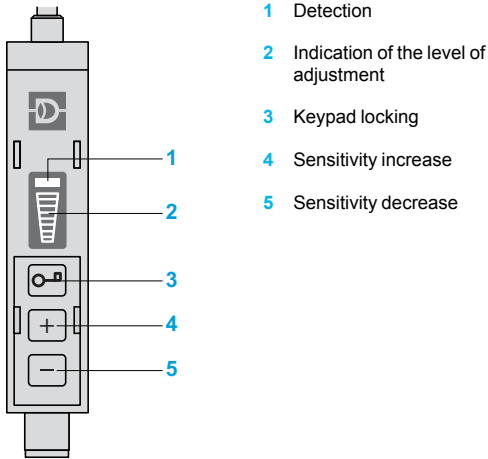

- 1 Detection
- 2 Indication of the level of adjustment
- 3 Keypad locking
- 4 Sensitivity increase
- 5 Sensitivity decrease

XUY AF_●, adjustment using teach mode

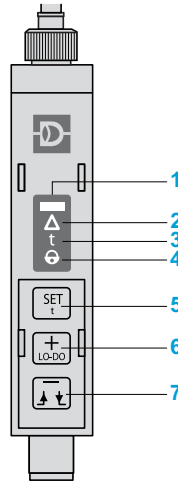


- 1 Detection
- 2 Dirty optics, limit of detection, alignment assistance
- 3 Time delay active
- 4 Action keypad, keypad locking
- 5 Automatic adjustment of the threshold, access to special functions
- 6 Sensitivity increase, direct/inverse output, time delay increase
- 7 Sensitivity decrease, On-delay, Off-delay inversion, time delay decrease

Dimensions

XUY AFP966S/AFPCO966S


Mounting on 35 mm rail

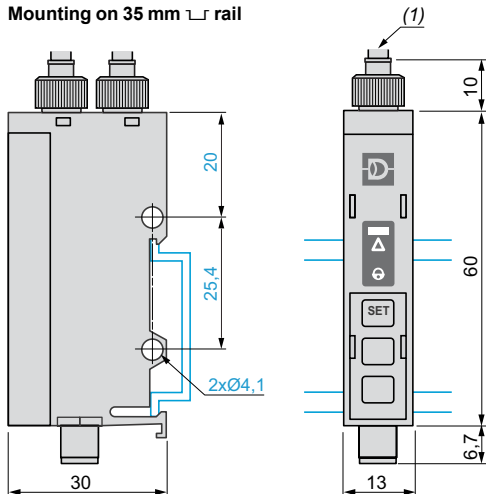

(1) Plastic fibre optic: \varnothing 2.2 mm

XUY AFV966S/AFVCO966S


Mounting on 35 mm rail

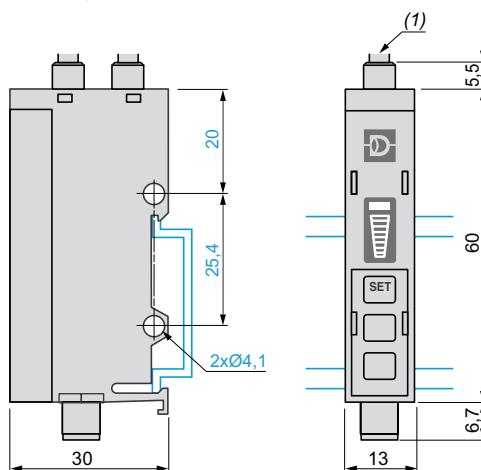


(1) Glass fibre optic: \varnothing 3 mm

Wiring schemes

XUY AFP966/AFV966

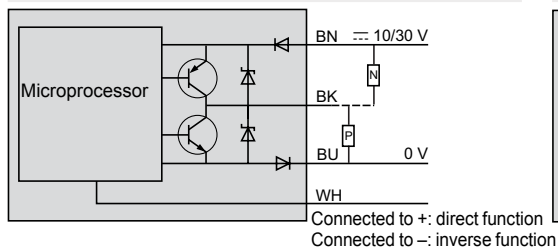

XUY AFP946/AFV946

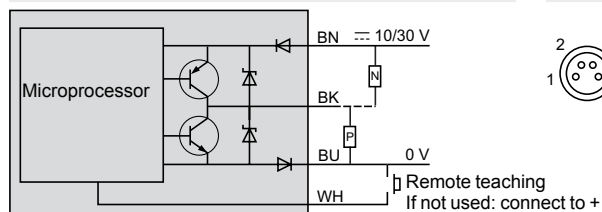


M8 connector

| Pin N° | Colour |
|--------|----------|
| 1 | BN Brown |
| 2 | WH White |
| 3 | BU Blue |
| 4 | BK Black |

Application examples

Thru-beam and diffuse system detection

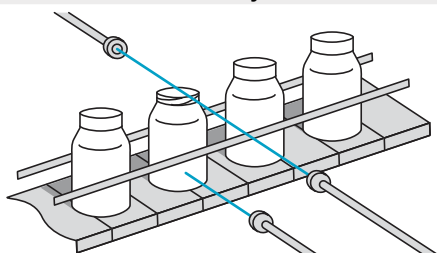

Thru-beam system detection


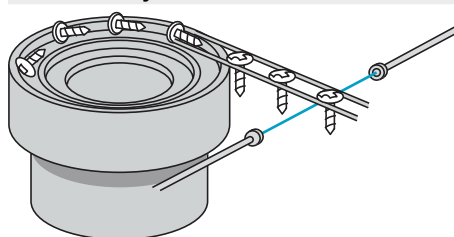


Photo-electric sensors

OsiSense XU, general purpose
DC supply. Solid-state output
With stability LED and alarm output (1)

Compact design

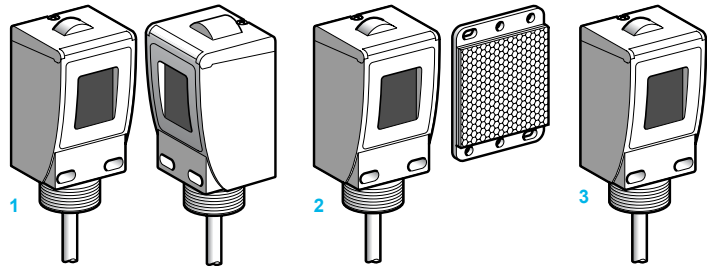

| | | | |
|--|-------------|--|---------------------------------------|
| System | Thru-beam 1 | Polarised reflex 2 | Diffuse with background suppression 3 |
| Type of transmission | Infrared | Red | Infrared |
| Nominal sensing distance (Sn) / maximum | 50 m / 60 m | 6 m / 9 m (with 50 x 50 mm reflector) | 1.2 m / 1.2 m |

References of sensors

Pre-cabled versions

| | | | | |
|---------------------------------|--------------------------------|------------------------|------------------------|--------------------|
| 3-wire, PNP or NPN programmable | NO or NC programmable function | XUC 2AKSAL2 (2) | XUC 9AKSAL2 (3) | XUC 8AKSNL2 |
| Weight (kg) | | 0.520 | 0.280 | 0.260 |

Connector versions

| | | | | |
|---------------------------------|--------------------------------|-------------------------|-------------------------|---------------------|
| 3-wire, PNP or NPN programmable | NC or NO programmable function | XUC 2AKSAM12 (2) | XUC 9AKSAM12 (3) | XUC 8AKSNM12 |
| Weight (kg) | | 0.400 | 0.220 | 0.200 |

Characteristics

| | | |
|-------------------------------------|------------------------------|---|
| Product certifications | | CE, UL, CSA |
| Ambient air temperature | For operation | - 25...+ 55 °C |
| | For storage | - 40...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 20 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 67 (IP 30 with cover open). NEMA 3, 4, 4X, 6, 6P, 12, 13 |
| Materials | | Case: PC, lenses: PMMA, cable: PvR |
| Connection | Pre-cabled | Diameter 6 mm cable, length 2 m (4), wire c.s.a.: 5 x 0.34 mm ² |
| | Connector | M12 male connector, 4-pin (suitable female connectors, including pre-wired versions, see page 9/44) |
| Rated supply voltage | | ~ 12...24 V with protection against reverse polarity |
| Voltage limits | | ~ 10...38 V (including ripple) |
| Switching capacity (sealed) | | ≤ 100 mA with overload and short-circuit protection |
| Voltage drop, closed state | | ≤ 1.5 V |
| Current consumption, no-load | | Thru-beam (transmitter and receiver): ≤ 50 mA, reflex and diffuse: 35 mA |
| Maximum switching frequency | | 500 Hz |
| Delays | | First-up: ≤ 15 ms; response: ≤ 1 ms; recovery: ≤ 1 ms |

| Function table | Function | Thru-beam and reflex systems | | Function | Diffuse | |
|--|----------|-------------------------------|----------------------------|----------|-------------------------------|----------------------------|
| | | No object present in the beam | Object present in the beam | | No object present in the beam | Object present in the beam |
| Output state (PNP or NPN) indicator: yellow LED (illuminated when sensor output is ON) | NC | | | NO | | |
| | NO | | | NC | | |

(1) Alarm output only applicable to thru-beam and reflex system sensors.


(2) Reference for both transmitter and receiver for thru-beam system sensors.

(3) 50 x 50 mm reflector included with reflex system sensors.

(4) Sensors available with 5 m cable. To order, change the reference suffix L2 to L5.

Example: Transmitter + receiver **XUC 2AKSAL2** with 2 m cable becomes **XUC 2AKSAL5** with 5 m cable.

Description




Yellow LED, output
Red LED, stability
Sensing distance adjustment potentiometer
NC/NO programming switch
PNP/NPN programming switch


Curves

Detection curves


Thru-beam system



Reflex system




Diffuse




Object 20 x 20 cm 1 White 90% 2 Black 6%

Excess gain curves (ambient temperature: + 25 °C)

Thru-beam system




Reflex system




Variation of usable sensing distance

Diffuse with background suppression

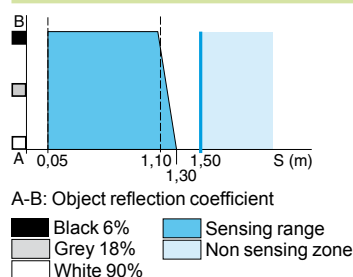


Dimensions


XUC ●AKS●L●

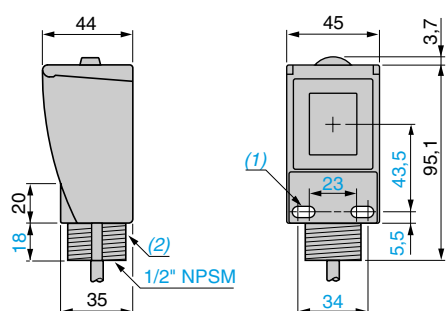

XUC●AKS●M12

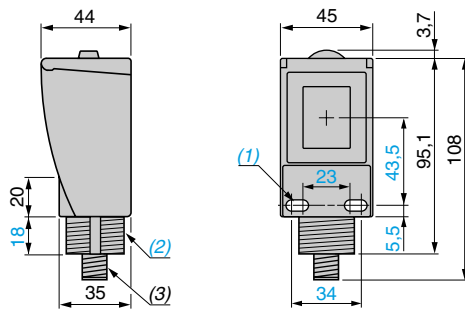

Side view, cover hinged open




(1) 2 elongated holes ∅ 5.5 x 11 for fixing by front face (M5 screws included)

(2) M30 x 1.5 threaded boss (and 1/2" NPSM inside for XUC ●AKS●L●), for direct mounting. Max. tightening torque: 25 N.m.


(3) M12 connector.

Tightening torque ≤ 2 N.m.


Wiring schemes (3-wire ---)

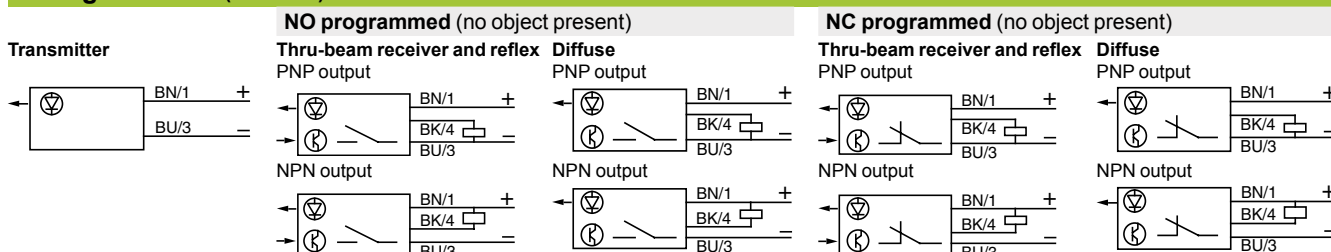

Alarm output, alarm signal and verification of correct operation (for thru-beam and reflex systems only)

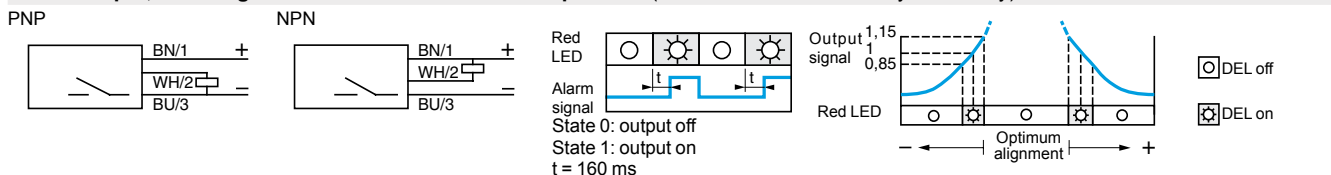

Beam break test (for thru-beam transmitter only)

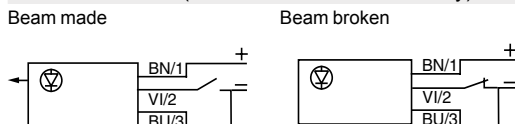


Cable connections and connector schemes (see connections on page 9/44)

XUC ●AKS●L●

(-) BU (Blue)
(+) BN (Brown)
(OUT) BK (Black)
Alarm WH (White)
Test VI (Violet)

XUC●AKS●M12

Thru-beam transmitter



Thru-beam receiver, reflex and diffuse




Photo-electric sensors


OsiSense XU, general purpose

AC or DC supply

1 CO time delay relay output

With stability LED

Compact design

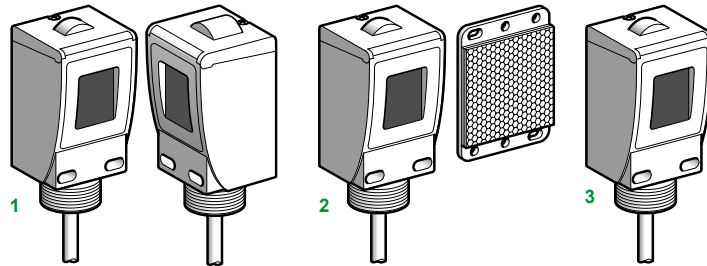

| | | | |
|---|-------------|--|---------------------------------------|
| System | Thru-beam 1 | Polarised reflex 2 | Diffuse with background suppression 3 |
| Type of transmission | Infrared | Red | Infrared |
| Nominal sensing distance (Sn) / maximum | 50 m / 60 m | 6 m / 9 m (with 50 x 50 mm reflector) | 1.2 m / 1.2 m |

References of sensors

Pre-cabled versions

| | | | | |
|-------------|--------------------------------|-----------------|-----------------|-------------|
| 5-wire | NO or NC programmable function | XUC 2ARCTL2 (1) | XUC 9ARCTL2 (2) | XUC 8ARCTL2 |
| Weight (kg) | | 0.520 | 0.280 | 0.260 |

Connector versions

| | | | | |
|-------------|--------------------------------|------------------|------------------|--------------|
| 5-wire | NO or NC programmable function | XUC 2ARCTU78 (1) | XUC 9ARCTU78 (2) | XUC 8ARCTU78 |
| Weight (kg) | | 0.400 | 0.220 | 0.200 |

Characteristics

| | |
|--|---|
| Product certifications | CE, UL, CSA |
| Ambient air temperature | For operation: -25...+55 °C For storage: -40...+70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6: 7 gn (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27: 20 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529: IP 67 (IP 30 with cover open). NEMA 3, 4, 4X, 6, 6P, 12, 13 |
| Materials | Case: PC, lenses: PMMA, cable: PvR |
| Connection | Pre-cabled: Diameter 6 mm cable, length 2 m (3), wire c.s.a.: 5 x 0.34 mm ² Connector: 7/8"-16UN male connector, 5-pin (suitable female pre-wired connectors XZ CP1764L●) (4) |
| Rated supply voltage | ~ 24...240 V |
| Voltage limits | ~ 20...264 V |
| Switching capacity | 3 A (cos φ = 1) for a contact life of 0.5 million operating cycles at an operating rate of 1 operating cycle per second, at 250 V |
| Maximum voltage on output relay contacts | ~ 250 V |
| Power consumption | 2 W |
| Maximum switching frequency | 20 Hz |
| Electrical durability | > 5 x 10 ⁵ operating cycles (cos φ = 1) |
| Time delay | Monostable, on-delay or off-delay (programmable). 2 adjustable ranges, covering 0 to 15 seconds |
| Delays | First-up: ≤ 60 ms; response: ≤ 25 ms; recovery: ≤ 25 ms |

Function table

| Output state of relay contacts indicator: yellow LED (illuminated when relay energised) | Function | Thru-beam and reflex systems | | Function | Diffuse | |
|---|--------------------|-------------------------------|----------------------------|----------|-------------------------------|----------------------------|
| | | No object present in the beam | Object present in the beam | | No object present in the beam | Object present in the beam |
| NC | Relay energised | BK — GY ⊗ | BK — GY ⊗ | NO | BK — GY ⊗ | BK — GY ⊗ |
| | | WH — ⊗ | WH — ⊗ | | WH — ⊗ | WH — ⊗ |
| NO | Relay de-energised | BK — GY ⊗ | BK — GY ⊗ | NC | BK — GY ⊗ | BK — GY ⊗ |
| | | WH — ⊗ | WH — ⊗ | | WH — ⊗ | WH — ⊗ |

(1) Reference for both transmitter and receiver for thru-beam system sensors.


(2) 50 x 50 mm reflector included with reflex system sensors.

(3) Sensors available with 5 m cable. To order, change the reference suffix L2 to L5.

Example: Transmitter + receiver XUC 2ARCTL2 with 2 m cable becomes XUC 2ARCTL5 with 5 m cable.

(4) To complete the reference for a pre-wired female connector with a 2 m, 5 m or 10 m cable, replace the ● by 2, 5 or 10 respectively. Example, pre-wired connector with 2 m cable: XZ CP1764L2.

Description

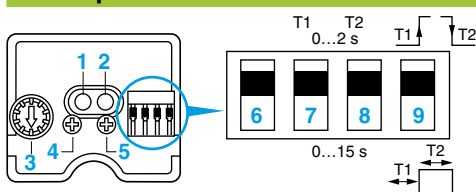

LED

- 1 Yellow LED, output
- 2 Red LED, stability

Potentiometers

- 3 Sensing distance adjustment
- 4 T1 time delay adjustment
- 5 T2 time delay adjustment


Switches

- 6 NC/NO programming
- 7 T1 setting range
- 8 T2 setting range
- 9 Normal time delay (on-delay or off-delay) or monostable


Curves

Detection curves


Thru-beam system



Reflex system




Diffuse




Excess gain curves (ambient temperature: + 25 °C)


Thru-beam system

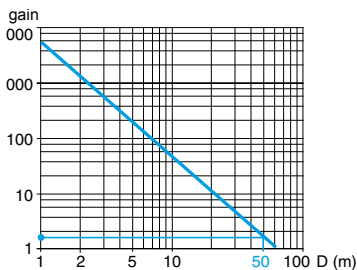

Reflex system




Variation of usable sensing distance
Diffuse with background suppression

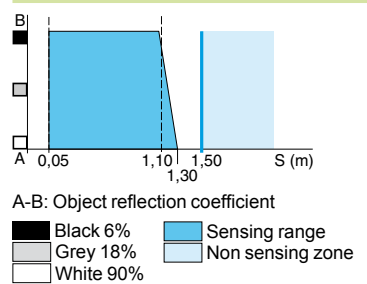


Dimensions


XUC ●ARCTL●

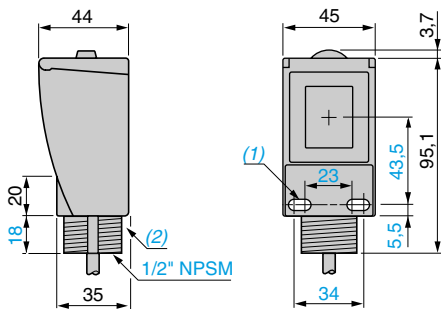

XUC●ARCTU78

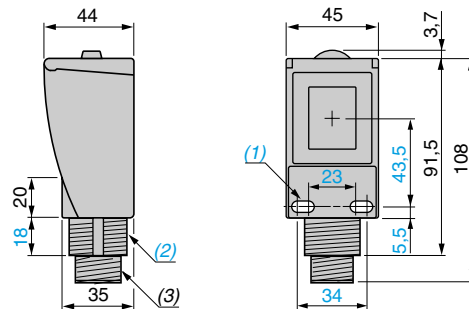


Side view, cover hinged open




- (1) 2 elongated holes Ø 5.5 x 11 for fixing by front face (M5 screws included)
- (2) M30 x 1.5 threaded boss (and 1/2" NPSM inside for XUC ●ARCTL●), for direct mounting. Max. tightening torque: 25 N.m.
- (3) 7/8" connector. Tightening torque ≤ 3 N.m.

Wiring schemes (5-wire)

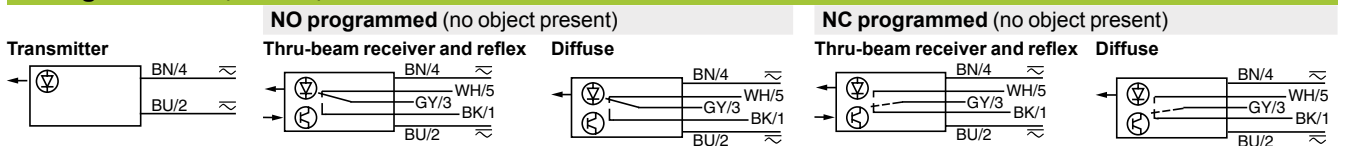


Verification of correct operation

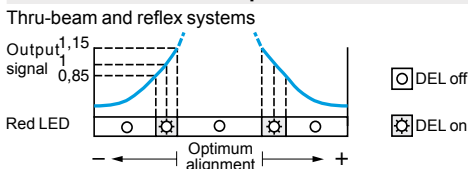

Cable connections

- XUC ●ARCTL●**
- BU (Blue)
 - BN (Brown)
 - Relay common
 - GY (Grey)
 - NK (Black)
 - NC contact
 - WH (White)

Connector scheme

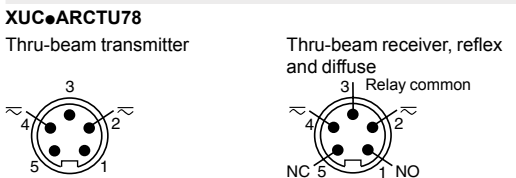


Time delays

Normal time delay

T1 = time delay on trip "On-delay"
T2 = time delay on reset "Off-delay"


Monostable time delay

T1 = time delay on trip "On-delay"
T2 = monostable period

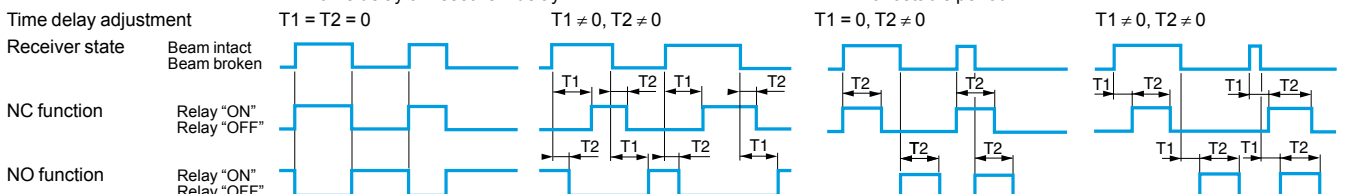

Compact design

Pre-cabled and connector versions

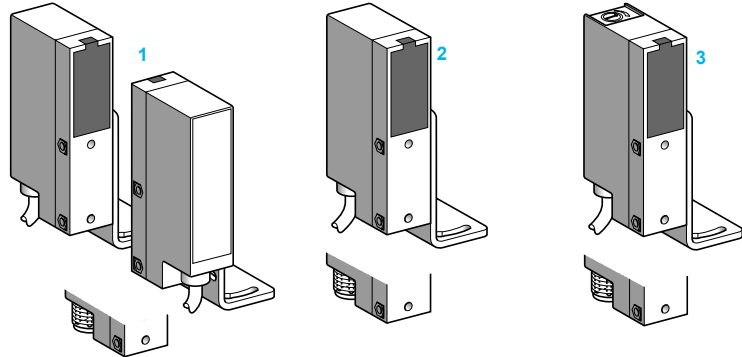

| System | Thru-beam 1 | Reflex 2 | Polarised reflex 2 | Diffuse 3 |
|-------------------------------|-------------|---------------------------------|---------------------------------|-----------|
| Type of transmission | Infrared | Infrared | Red | Infrared |
| Nominal sensing distance (Sn) | 8 m | 6 m (with Ø 80 mm reflector) | 4 m (with Ø 80 mm reflector) | 0.7 m |

References

| | | | | | | | |
|-------------|--------------------------------|------------|------------|---------------------|--------------------|---------------------|---------------------|
| 3-wire, PNP | NO or NC programmable function | Connection | Pre-cabled | XUL H083534 | XUL H06353 | XUL H043539 | XUL H703535 |
| | | | Connector | XUL H083534D | XUL H06353D | XUL H043539D | XUL H703535D |
| 3-wire, NPN | NO or NC programmable function | Connection | Pre-cabled | XUL J083534 | XUL J06353 | XUL J043539 | XUL J703535 |
| | | | Connector | XUL J083534D | XUL J06353D | XUL J043539D | XUL J703535D |
| Transmitter | | Connection | Pre-cabled | XUL K0830 | - | | |
| | | | Connector | XUL K0830D | - | | |
| Weight (kg) | | Connection | Pre-cabled | 0.195 | | | |
| | | | Connector | 0.135 | | | |

Characteristics


| | | |
|------------------------------|--|---|
| Product certifications | CE. Special H7 version: UL, CSA | |
| Ambient air temperature | For operation | - 25...+ 55 °C |
| | For storage | - 40...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 2 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 20 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 67 |
| | Conforming to NF C 20-010 | IP 671 |
| Connection | Pre-cabled | Diameter 6 mm, length 2 m (1) Wire c.s.a.: 4 x 0.34 mm ² (2 x 0.34 mm ² for thru-beam transmitter) |
| | Connector | M12 |
| Materials | Case | ABS |
| | Lenses | PMMA |
| | Cable | PVC |
| | | |
| Rated supply voltage | --- 12...24 V with protection against inversion of the 3 wires | |
| Voltage limits | --- 10...30 V (including ripple) | |
| Switching capacity (sealed) | ≤ 200 mA with overload and short-circuit protection | |
| Voltage drop, closed state | ≤ 1.5 V | |
| Current consumption, no-load | ≤ 35 mA | |
| Maximum switching frequency | 250 Hz | |
| Delays | First-up | ≤ 15 ms |
| | Response | ≤ 2 ms |
| | Recovery | ≤ 2 ms |

| Function table | Function | Thru-beam and reflex systems | | Function Diffuse system | | |
|---|----------|-------------------------------|----------------------------|-------------------------------|----------------------------|--|
| | | No object present in the beam | Object present in the beam | No object present in the beam | Object present in the beam | |
| Output state (PNP or NPN) indicator (illuminated when sensor output is ON) | NC | | | NO | | |
| | NO | | | NC | | |

(1) For a sensor with a 5 m long cable add L05 to the end of the reference; for a 10 m long cable add L10 to the end of the reference.
Example: sensor XUL H083534 with 5 m cable becomes XUL H083534L05

Compact design

Pre-cabled and connector versions

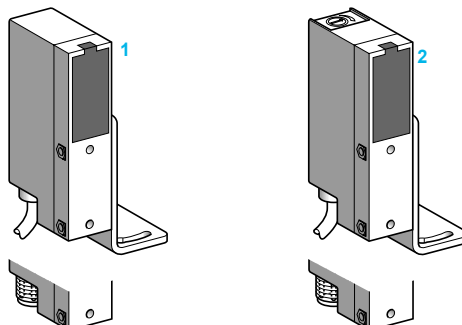

| System | Reflex 1 | Polarised reflex 1 | Diffuse 2 |
|-------------------------------|---------------------------------|---------------------------------|-----------|
| Type of transmission | Infrared | Red | Infrared |
| Nominal sensing distance (Sn) | 6 m (with Ø 80 mm reflector) | 4 m (with Ø 80 mm reflector) | 0.7 m |

References

| | | | | | | |
|-------------|-------------|------------|------------|--------------------|---------------------|---------------------|
| 2-wire | NC function | Connection | Pre-cabled | XUL A06021 | XUL A040219 | XUL A700115 |
| | | | Connector | XUL A06021K | XUL A040219K | XUL A700115K |
| | NO function | Connection | Pre-cabled | XUL A06011 | XUL A040119 | XUL A700215 |
| | | | Connector | XUL A06011K | XUL A040119K | XUL A700215K |
| Weight (kg) | | Connection | Pre-cabled | 0.195 | | |
| | | | Connector | 0.135 | | |

Characteristics

| | | | |
|------------------------------|--|--|--|
| Product certifications | CE. Special H7 version: UL, CSA | | |
| Ambient air temperature | For operation | - 25...+ 60 °C | |
| | For storage | - 40...+ 80 °C | |
| Vibration resistance | Conforming to IEC 60068-2-6 7 gn, amplitude ± 2 mm (f = 10...55 Hz) | | |
| Shock resistance | Conforming to IEC 60068-2-27 20 gn, duration 11 ms | | |
| Degree of protection | Conforming to IEC 60529 | IP 65 | |
| | Conforming to NF C 20-010 | IP 651 | |
| Connection | Pre-cabled | Diameter 6 mm, length 2 m (1), wire c.s.a.: 2 x 0.34 mm ² | |
| | Connector | 1/2"-20UNF | |
| Materials | Case | ABS/PC | |
| | Lenses | PMMA | |
| | Cable | PVC | |
| Rated supply voltage | ~ or --- 24...240 V | | |
| Voltage limits | ~ or --- 20...264 V | | |
| Switching capacity (2) | Sealed | Maximum | ~ 12 or --- 12 (resistive load): 0.5 A/240 V ~ 140 (inductive load): 0.3 A/240 V --- 13 (inductive load): 0.1 A/240 V; 0.2 A/110 V; 0.5 A/48 V |
| | | Minimum | 5 mA |
| Inrush | 3000 mA | | |
| Voltage drop, closed state | ≤ 3 V (I = 0,1...0.5 A); ≤ 5.5 V (I = 10 mA); ≤ 10 V (I = 5 mA) | | |
| Residual current, open state | ≤ 1.7 mA (on ~); ≤ 1.5 mA (on ---) | | |
| Maximum switching frequency | 20 Hz | | |
| Delays | First-up | ≤ 300 ms | |
| | Response | ≤ 20 ms | |
| | Recovery | ≤ 20 ms | |

| Function table | Function | Reflex system | | Function | Diffuse system | |
|--|----------|-------------------------------|----------------------------|----------|-------------------------------|----------------------------|
| | | No object present in the beam | Object present in the beam | | No object present in the beam | Object present in the beam |
| Output state indicator (illuminated when sensor output is ON) | NC | | | NO | | |
| | NO | | | NC | | |

(1) For a sensor with a 5 m long cable add L05 to the end of the reference; for a 10 m long cable add L10 to the end of the reference.

Example: sensor XUL A06021 with 5 m cable becomes XUL A06021L05


(2) These sensors do not incorporate overload or short-circuit protection and therefore, it is strongly advised to connect a "quick-blow" fuse in series with the load (see page 2/106).

Photo-electric sensors


OsiSense XU Application, conveying series
AC and DC supply
Solid-state output
Pre-cabled and connector versions

Detection curves


Thru-beam system



Reflex system




Diffuse system




Excess gain curves (ambient temperature: + 25 °C)



Thru-beam system






Reflex system

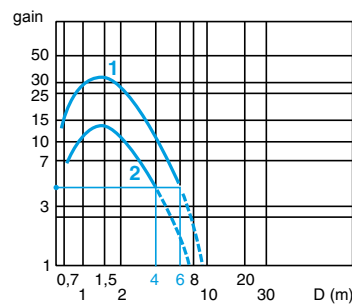

Diffuse system

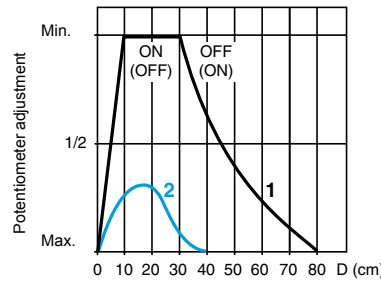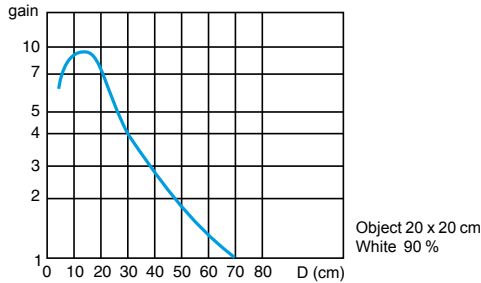

Dimensions

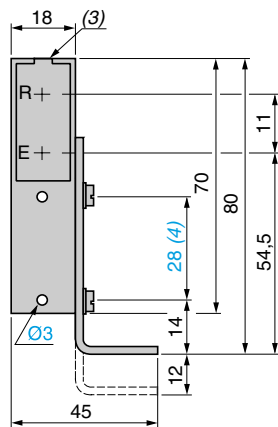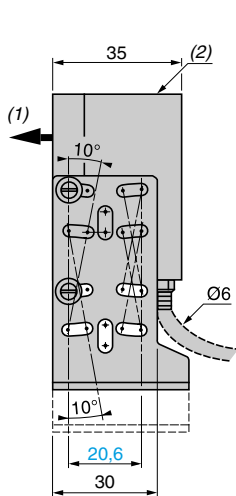


- (1) Optical axis
(2) Sensitivity potentiometer (diffuse model)
(3) Output LED indicator

- (4) Front fixing (Ø 3 screws and inserts included)
(5) 1 elongated hole Ø 4.1 x 10 and 1 x Ø 4.1
(6) 1 elongated hole Ø 3.1 x 10 and 1 x Ø 3.1

Schemes

Wiring schemes (3-wire ~)


Transmitter



NO programmed (no object present)


Thru-beam receiver and reflex

PNP output



Diffuse


PNP output



NC programmed (no object present)


Thru-beam receiver and reflex

PNP output




Diffuse


PNP output




NPN output




NPN output




NPN output



NPN output




Connector scheme (sensor connector pin view)




Wiring schemes (2-wire ~ or ~)

NO function (no object present)

Reflex




Diffuse




NC function (no object present)

Reflex



Diffuse



Attention: it is essential to connect a load in series with the sensor

Connector scheme (sensor connector pin view)

Solid-state output (reflex and diffuse system)





Photo-electric sensors

OsiSense XU Application, conveying series

Compact design

5-wire AC or DC, 1 CO relay output

Compact design

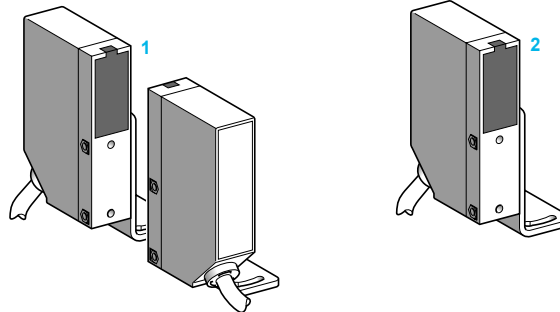

| System | Thru-beam 1 | Reflex 2 | Polarised reflex 2 | Diffuse with background suppression 2 |
|-------------------------------|-------------|---------------------------------|---------------------------------|---------------------------------------|
| Type of transmission | Infrared | | Red | Infrared |
| Nominal sensing distance (Sn) | 8 m | 6 m (with Ø 80 mm reflector) | 4 m (with Ø 80 mm reflector) | 0.25 m (fixed sensing distance) |

References

| | | | | | |
|-------------|-------------|--------------------|-------------------|--------------------|--------------------|
| 5-wire | NC function | XUL M080314 | XUL M06031 | XUL M040319 | XUL M300318 |
| Transmitter | | XUL M0600 | – | | |
| Weight (kg) | | 0.195 | | | |

Characteristics

| | | | | | |
|--|------------------------------|--|-------------|--|--|
| Product certifications | | CE. Special H7 version: UL, CSA | | | |
| Ambient air temperature | For operation | - 25...+ 55 °C | | | |
| | For storage | - 40...+ 70 °C | | | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 2 mm (f = 10...55 Hz) | | | |
| Shock resistance | Conforming to IEC 60068-2-27 | 20 gn, duration 11 ms | | | |
| Degree of protection | Conforming to IEC 60529 | IP 67 | | | |
| | Conforming to NF C 20-010 | IP 671 | | | |
| Connection | | Pre-cabled: diameter 6 mm, length 2 m (1), wire c.s.a.: 5 x 0.34 mm ² (2 x 0.34 mm ² for thru-beam transmitter) | | | |
| Materials | Case | ABS | | | |
| | Lenses | PMMA | | | |
| | Cable | PVC | | | |
| Rated supply voltage | | ~ or ~~~ 24...240 V | | | |
| Voltage limits | | ~ or ~~~ 20...264 V | | | |
| Switching capacity | | 2000 mA (cos φ = 1), 500 mA (cos φ = 0.4) for a contact life of 0.5 million operating cycles at an operating rate of 1 operating cycle per second, at 250 V | | | |
| Maximum voltage on output relay contacts | | 250 V | | | |
| Current consumption, no-load | | Transmitter: ≤ 5 mA | ≤ 40 mA (2) | | |
| | | Receiver: ≤ 40 mA (2) | | | |
| Maximum switching frequency | | 20 Hz | | | |
| Delays | First-up | ≤ 60 ms | | | |
| | Response | ≤ 25 ms | | | |
| | Recovery | ≤ 25 ms | | | |

| Function table | Function | Thru-beam and reflex systems | |
|---|----------|-------------------------------|----------------------------|
| Output state of relay contact indicator (illuminated when relay energised) | NC | No object present in the beam | Object present in the beam |
| | | | |
| | NO | No object present in the beam | Object present in the beam |
| | | | |


(1) For a sensor with a 5 m long cable add L05 to the end of the reference; for a 10 m long cable add L10 to the end of the reference.

Example: sensor **XUL M080314** with 5 m cable becomes **XUL M080314L05**


(2) No-load current consumption at 220 V: ≤ 25 mA

Detection curves

Thru-beam system




Reflex system ~ or ☰



(1) Polarised
(2) Infrared


Diffuse system with background suppression




Object 20 x 20 cm
White 90%
2 black 6%

Excess gain curves (ambient temperature: + 25 °C)

Thru-beam system




Reflex system ~ or ☰

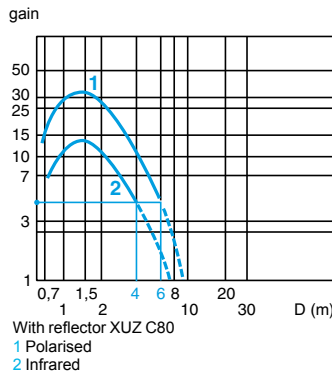


Variation of usable sensing distance Su

Diffuse system with background suppression

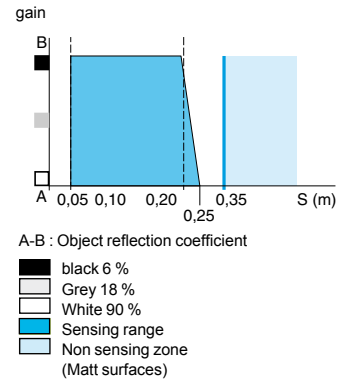

Dimensions

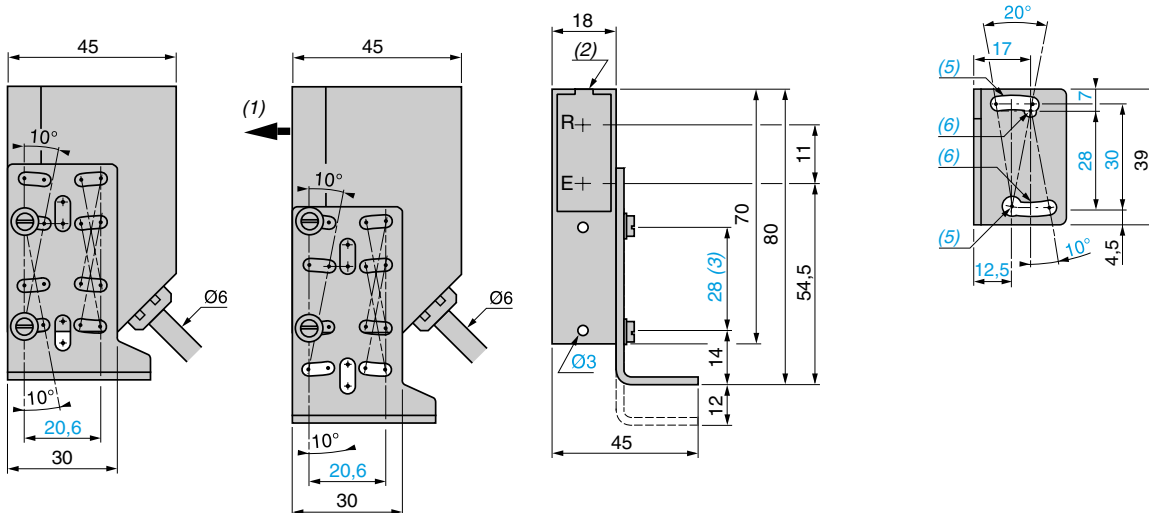


(1) Optical axis
(2) Output LED indicator
(3) Front fixing (Ø 3 screws and inserts included)

(4) 1 elongated hole Ø 4.1 x 10 and 1 x Ø 4.1
(5) 1 elongated hole Ø 3.1 x 10 and 1 x Ø 3.1

Schemes

Wiring schemes (5-wire, ~ or ☰)

1 CO output Transmitter



NC function (object present) Thru-beam receiver and reflex



NO function (no object present) Diffuse



Photo-electric sensors


OsiSense XU Application

Conveying and access control series

Compact design with teach mode adjustment

Five-wire AC or DC, 1 CO relay output

Three-wire DC, solid-state output

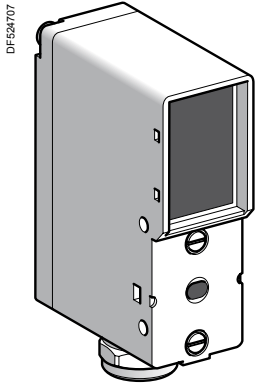

XUY 95

| Diffuse system (1) | | | | |
|-----------------------------|--------------------|---------|-----------|-----------|
| Sensing distance (Sn) m | Function | Output | Reference | Weight kg |
| DC | | | | |
| 1.5 | NO/NC programmable | PNP/NPN | XUY P954S | 0.130 |
| 4 | NO/NC programmable | PNP/NPN | XUY P952S | 0.130 |
| AC or DC | | | | |
| 1.5 | NO/NC programmable | Relay | XUY P954R | 0.150 |
| 4 | NO/NC programmable | Relay | XUY P952R | 0.150 |
| Polarised reflex system (2) | | | | |
| Sensing distance (Sn) m | Function | Output | Reference | Weight kg |
| DC | | | | |
| 6 | NO/NC programmable | PNP/NPN | XUY B954S | 0.130 |
| 10 | NO/NC programmable | PNP/NPN | XUY B952S | 0.130 |
| AC or DC | | | | |
| 6 | NO/NC programmable | Relay | XUY B954R | 0.150 |
| 10 | NO/NC programmable | Relay | XUY B952R | 0.150 |

(1) On 300 x 300 mm white paper

(2) With Ø 84 mm reflector

Characteristics

| | | XUY P954S | XUY P954R | XUY P952S | XUY P952R | XUY B954S | XUY B954R | XUY B952S | XUY B952R |
|--|-----|--|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Product certifications | | CE, cULus for XUY P954S/952S and XUY B954S/952S | | | | | | | |
| Connection | | Screw terminals | | | | | | | |
| Nominal sensing distance (Sn) | m | 1.5 | 4 | | 6 | | 10 | | |
| Adjustment using teach (fine or standard mode) | | | | | | | | | |
| Type of transmission | LED | Infrared | | | Red | | | | |
| Degree of protection | | Conforming to IEC 60529 | | | | | | | |
| Ambient air temperature | | For storage °C - 20...+ 80 | | | | | | | |
| | | For operation °C 0...+ 60 | | | | | | | |
| Materials | | Polycarbonate | | | | | | | |
| Immunity to ambient light | | Incandescent bulb Lux 10 000 at 5° to the optical axis | | | | | | | |
| | | Natural light Lux 20 000 at 5° to the optical axis | | | | | | | |
| Indicator lights | | Green LED Output signal | | | | | | | |
| | | Red LED Dirty optics, limit of detection, alignment assistance, time delay active, time function indicator | | | | | | | |
| Voltage limits | | • — • — • — • — • — | | | | | | | |
| (including ripple) | | V — • — • — • — • — • — | | | | | | | |
| Current consumption, no-load | | mA 50 — 50 — 50 — 50 — | | | | | | | |
| | | VA — 2 — 2 — 2 — 2 | | | | | | | |
| Type of output | | PNP/NPN Relay PNP/NPN Relay PNP/NPN Relay PNP/NPN Relay | | | | | | | |
| Switching capacity | | mA 100 with overload and short-circuit protection | | | | | | | |
| | | A 3 (max. continuous) | | | | | | | |
| Voltage drop, closed state | | V At 100 mA: < 2; at 10 mA: < 1 | | | | | | | |
| Maximum switching frequency | | Hz 1000 25 60 25 1000 25 60 25 | | | | | | | |
| Delays | | ms Response and recovery 0.5 20 8 20 0.5 20 8 20 | | | | | | | |
| Test input | | Active V < 1.4 — < 1.4 — < 1.4 — < 1.4 — | | | | | | | |
| | | Inactive V > 3 — > 3 — > 3 — > 3 — | | | | | | | |
| Output time delay | | Type Retriggerable: leading edge and/or trailing edge | | | | | | | |
| | | Duration of each increment ms 0 to 11 s in 23 adjustment increments of 50 ms, then 0.5 s per press | | | | | | | |
| Adjustment | | Using teach mode and/or fine manual adjustment | | | | | | | |

- Applications
- Detection of belt breakage
- Material handling
- Access control

Photo-electric sensors

OsiSense XU Application

Conveying and access control series


Compact design with teach mode adjustment

Five-wire AC or DC, 1 CO relay output

Three-wire DC, solid-state output

Presentation

Rear view

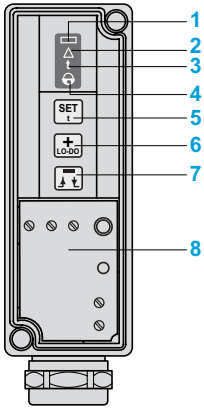

Indicator lights

- 1 - Output signal: Green LED
- 2 - Dirty optics: Red LED
- Limit of detection: Red LED
- Alignment assistance: flashing red LED
- 3 - Activation/adjustment of time delay: Red LED
- 4 - Action keypad
- Keypad: Action/Locking



Controls

- 5 - Automatic adjustment of threshold
- Access to special functions
- Zero reset of time delay
- 6 - Sensitivity increase
- NO/NC programming
- Time delay increase
- 7 - Sensitivity decrease
- Inversion of time delay setting: On-delay, Off-delay
- Time delay decrease
- 8 - Access to terminals

Note: Both the red and green LEDs flash in the event of a short-circuit on the output (for XUY P●95●S/XUY B●95●S versions).

Dimensions


XUY ●95●S/XUY ●95●R

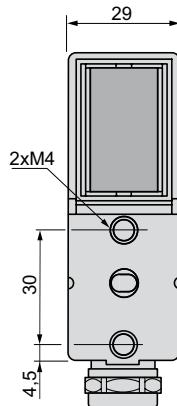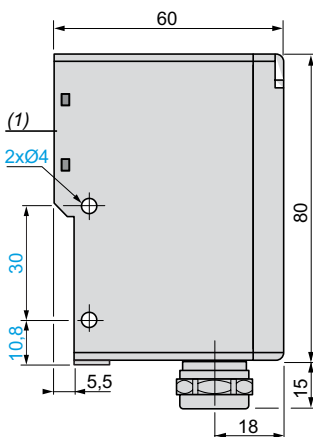


(1) Optical axis.

Wiring schemes

XUY ●95●S




XUY ●95●R



250 V, 1.5 mm² terminals.

Application examples

Monitoring for blockages on a baggage conveyor



Monitoring of gluing, fastening or labelling operations


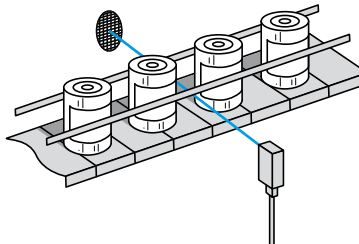


Photo-electric sensors


OsiSense XU Application

Design 18


Two-wire AC ⁽¹⁾ or DC, solid-state output with adjustable sensitivity

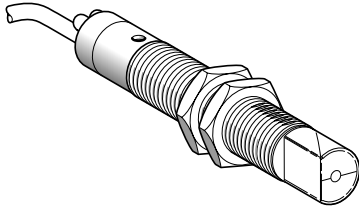


XU5 M18M•230W
XU8 M18M•230W

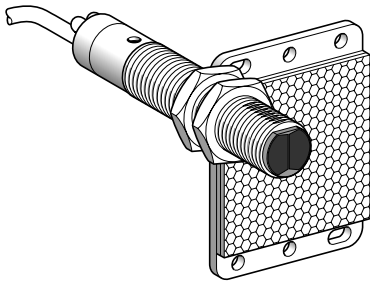


XU9 M18M•230




XU2 M18M•230




XUZ B2003




XUZ A118



XUZ A218



XUZ 2001



XUZ 2003

Diffuse system with adjustable background suppression

| Sensing distance (Sn) m | Function | Line of sight | Connection | Reference | Weight kg |
|-------------------------|----------|------------------|-------------------------------------|---------------|-----------|
| 0.12 | NO | Along case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU8 M18MA230 | 0.150 |
| | | | | XU8 M18MA230K | 0.075 |
| | | 90° to case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU8 M18MA230W | 0.150 |
| | NC | Along case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU8 M18MB230 | 0.150 |
| | | | | XU8 M18MB230K | 0.075 |
| | | 90° to case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU8 M18MB230W | 0.150 |
| | | | XU8 M18MB230WK | 0.075 | |

Diffuse system

| Sensing distance (Sn) m | Function | Line of sight | Connection | Reference | Weight kg |
|-------------------------|----------|------------------|-------------------------------------|---------------|-----------|
| 0.40 | NO | Along case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU5 M18MA230 | 0.150 |
| | | | | XU5 M18MA230K | 0.075 |
| | | 90° to case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU5 M18MA230W | 0.150 |
| | NC | Along case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU5 M18MB230 | 0.150 |
| | | | | XU5 M18MB230K | 0.075 |
| | | 90° to case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU5 M18MB230W | 0.150 |
| | | | XU5 M18MB230WK | 0.075 | |

Polarised reflex system ⁽³⁾

| Sensing distance (Sn) m | Function | Line of sight | Connection | Reference | Weight kg |
|-------------------------|----------|------------------|-------------------------------------|---------------|-----------|
| 2 | NO | Along case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU9 M18MA230 | 0.170 |
| | | | | XU9 M18MA230K | 0.090 |
| | | 90° to case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU9 M18MA230W | 0.170 |
| | NC | Along case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU9 M18MB230 | 0.170 |
| | | | | XU9 M18MB230K | 0.095 |
| | | 90° to case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU9 M18MB230W | 0.170 |
| | | | XU9 M18MB230WK | 0.090 | |

Thru-beam system ⁽⁴⁾

| Sensing distance (Sn) m | Function | Line of sight | Connection | Reference | Weight kg |
|-------------------------|----------|------------------|-------------------------------------|----------------|-----------|
| 15 | NO | Along case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU2 M18MA230 | 0.285 |
| | | | | XU2 M18MA230K | 0.155 |
| | | 90° to case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU2 M18MA230W | 0.285 |
| | NC | Along case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU2 M18MA230WK | 0.155 |
| | | | | XU2 M18MB230 | 0.285 |
| | | 90° to case axis | Pre-cabled (L = 2 m) (2) 1/2"-20UNF | XU2 M18MB230K | 0.155 |
| | | | XU2 M18MB230W | 0.285 | |
| | | | XU2 M18MB230WK | 0.155 | |

Fixing accessories ⁽⁵⁾

| Description | Reference | Weight kg |
|--|-----------|-----------|
| 3D fixing kit for use on M12 rod, for XU• M18 or XUZ C50 | XUZ B2003 | 0.170 |
| M12 rod | XUZ 2001 | 0.050 |
| Support for M12 rod | XUZ 2003 | 0.150 |
| Stainless steel fixing bracket | XUZ A118 | 0.045 |
| Plastic fixing bracket with adjustable ball-joint | XUZ A218 | 0.035 |

⁽¹⁾ These sensors do not incorporate overload or short-circuit protection and therefore, it is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

⁽²⁾ For a 5 m long cable add L5.

Example: XU2 M18MA230 becomes XU2 M18MA230L5.

⁽³⁾ 50 x 50 mm reflector XUZ C50 included with polarised reflex system.


⁽⁴⁾ Comprising both thru-beam transmitter and receiver.

⁽⁵⁾ For further information, see page 5/158.

| Characteristics | | XU2 M, XU5 M, XU8 M, XU9 M | XU2 M, XU5 M, XU8 M, XU9 M ●●●●●●●●K |
|---|------------------------------|---|--------------------------------------|
| Sensor type | | | |
| Product certifications | | UL, CSA, CE | |
| Connection | Connector | - | 1/2"-20UNF |
| | Pre-cabled | Length: 2 m | - |
| Sensing distance nominal Sn / maximum (excess gain = 2) (excess gain = 1) | m | 0.12 / 0.12 diffuse with background suppression | |
| | m | 0.4 / 0.6 diffuse | |
| | m | 2 / 3 polarised reflex | |
| | m | 15 / 20 thru-beam | |
| Type of transmission | | Infrared, except XU9 (red) | |
| Degree of protection | Conforming to IEC 60529 | IP 67, double insulation \square | IP 67 |
| Storage temperature | | °C -40...+70 | |
| Operating temperature | | °C -25...+55 | |
| Materials | | Case: nickel plated brass; Lens: PMMA; Cable: PvR | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude \pm 1.5 mm (f = 10 to 55 Hz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Indicator lights | Output state | Yellow LED | |
| | Stability | Red LED (for reflex and thru-beam only) | |
| Rated supply voltage | | V \sim 24...240 | |
| Voltage limits (including ripple) | | V \sim 20...264 | |
| Residual current, open state | | mA < 1.5 | |
| Switching capacity | | mA 10...200 (1) | |
| Voltage drop, closed state | | V 6 | |
| Maximum switching frequency | | Hz 25 | |
| Delays | First-up | ms < 300 | |
| | Response | ms < 20 | |
| | Recovery | ms < 20 | |


(1) These sensors do not incorporate overload or short-circuit protection and therefore, it is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes

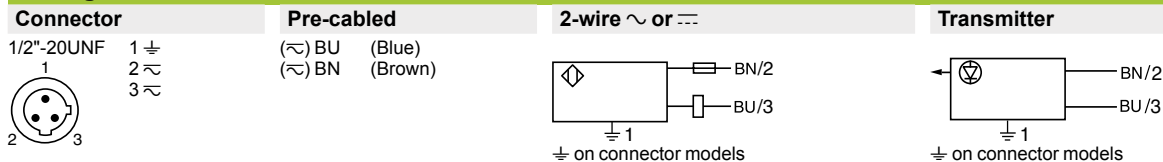

See connection on page 9/44.

Detection curves

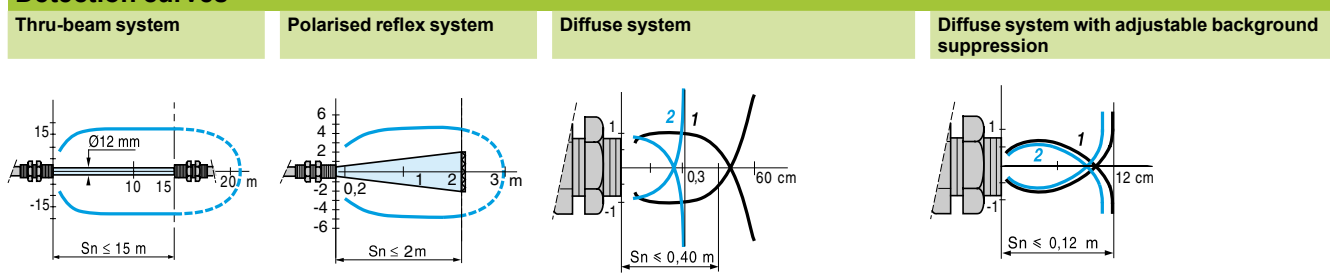



With reflector XUZ C50

Object 10 x 10 cm; 1 White 90%; 2 Grey 18%

Variation of usable sensing distance Su

Potentiometer set at minimum

Potentiometer set at maximum




A-B: object reflection coefficient

- Black 6%
- Grey 18%
- White 90%
- Sensing range
- Non sensing zone (matt surfaces)

Dimensions

XU●




| Pre-cabled (mm) | | Connector (mm) | |
|--|----|----------------|----|
| a | b | a | b |
| \varnothing 18, line of sight along case axis | 82 | 95 | 55 |
| \varnothing 18, line of sight 90° to case axis | 97 | 110 | 55 |

Photo-electric sensors

OsiSense XU Application, tertiary sector series
For monitoring flow
AC or DC supply
1 CO relay output

Compact design



| | |
|--------------------------------------|---------------------------------|
| System | Reflex |
| Type of transmission | Infrared |
| Nominal sensing distance (Sn) | 7 m (with 50 x 50 mm reflector) |

References

| | | |
|--------------------|-------------|--|
| 5-wire | NC function | XUK 1ARCNL2H60 (supplied as kit comprising: sensor, fixing bracket, 50 x 50 mm reflector and mounting instructions) |
| Weight (kg) | | 0.300 |

Characteristics

| | | |
|---|------------------------------|--|
| Product certifications | | UL, CSA, CE |
| Ambient air temperature | | For operation: - 25... + 55 °C. For storage: - 40... + 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 1.5 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 65, double insulation □ |
| Connection | | Pre-cabled: diameter 6 mm, length 2 m, wire c.s.a.: 5 x 0.34 mm ² |
| Materials | | Case: PBT; lenses: PMMA; cable: PVC |
| Rated supply voltage | | ~ or --- 24...240 V |
| Voltage limits | | ~ or --- 20...264 V |
| Switching capacity | | 3 A |
| Maximum voltage on output relay contacts | | ~ 250 V |
| Power consumption, no-load | | 2 W (1) |
| Maximum switching frequency | | 20 Hz |
| Delays | | First-up: ≤ 60 ms; response: ≤ 25 ms; recovery: ≤ 25 ms |

| Function table | Function | Reflex system | |
|--|----------|-------------------------------|----------------------------|
| | | No object present in the beam | Object present in the beam |
| Output state of relay contact indicator (illuminated when relay energised) | NC | Relay energised | Relay de-energised |

(1) No-load current consumption at ~ 220 V: ≤ 25 mA.

5

Photo-electric sensors

OsiSense XU Application, tertiary sector series

For monitoring flow

AC or DC supply

1 CO relay output


Contents of kit XUK 1ARCNL2H60

- reflex system photo-electric sensor,
- fixing bracket,
- 50 x 50 mm reflector,
- mounting instructions.




Detection curve

Reflex system ~ or ---



Excess gain curve (ambient temperature: +25 °C)


Reflex system ~ or ---

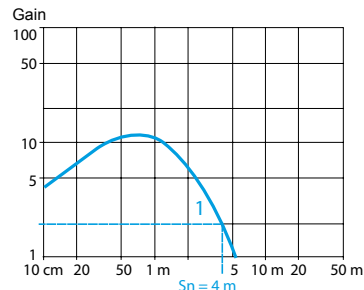


With reflector XUZ C50

Dimensions


XUK 1ARCNL2



XUZ A51

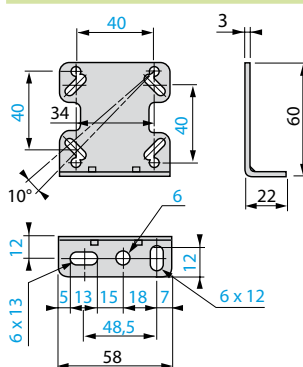


Wiring scheme (5-wire ~ or ---)




Mounting precautions

Rigid fixing

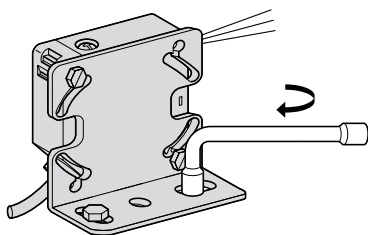

Fix securely for trouble free detection.

Outdoor mounting

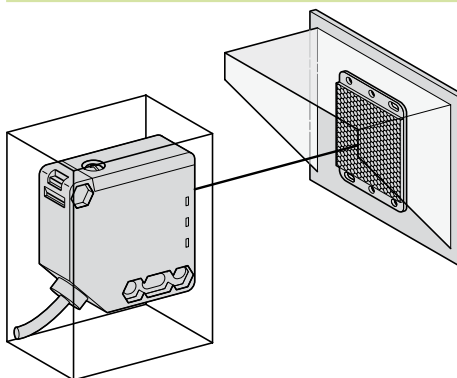


Use protective covers and mount on thermal insulators to avoid frost or condensation forming on the optical parts.

Photo-electric sensors

OsiSense XU Application, tertiary sector series
For monitoring flow
AC or DC supply
1 CO relay output

Compact design



| | |
|-------------------------------|---------------------------------|
| System | Reflex |
| Type of transmission | Infrared |
| Nominal sensing distance (Sn) | 6 m (with 50 x 50 mm reflector) |

References

| | | |
|-------------|-------------|---|
| 5-wire | NC function | XUL M06031H60 (supplied as kit comprising: sensor, fixing bracket, 50 x 50 mm reflector and mounting instructions) |
| Weight (kg) | | 0.300 |

Characteristics

| | | |
|--|------------------------------|--|
| Product certifications | | CE |
| Ambient air temperature | | For operation: - 25... + 55 °C. For storage: - 40... + 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 | 7 gn, amplitude ± 2 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 | 20 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 | IP 67 (Indoor use) |
| Connection | | Pre-cabled: diameter 6 mm, length 2 m, wire c.s.a.: 5 x 0.34 mm ² |
| Materials | | Case: ABS; lenses: PMMA; cable: PVC |
| Rated supply voltage | | ~ or --- 24...240 V |
| Voltage limits | | ~ or --- 20...264 V |
| Switching capacity | | 2000 mA (cos φ = 1), 500 mA (cos φ = 0.4) for a contact life of 0.5 million operating cycles at an operating rate of 1 operating cycle per second, at 250 V |
| Maximum voltage on output relay contacts | | ~ 250 V |
| Current consumption, no-load | | ≤ 40 mA (1) |
| Maximum switching frequency | | 20 Hz |
| Delays | | First-up: ≤ 60 ms; response: ≤ 25 ms; recovery: ≤ 25 ms |

| Function table | Function | Reflex system | |
|---|----------|-------------------------------|----------------------------|
| | | No object present in the beam | Object present in the beam |
| Output state of relay contact indicator (illuminated when relay energised) | NC | Relay energised | Relay de-energised |

(1) No-load current consumption at ~ 220 V: ≤ 25 mA.

Photo-electric sensors

OsiSense XU Application, tertiary sector series

For monitoring flow

AC or DC supply

1 CO relay output


Contents of kit XUL M06031H60

- reflex system photo-electric sensor,
- fixing bracket,
- 50 x 50 mm reflector,
- mounting instructions.




Detection curve

Reflex system ~ or ...






Excess gain curve (ambient temperature: + 25

Reflex system ~ or ...




With reflector XUZ C50

Dimensions

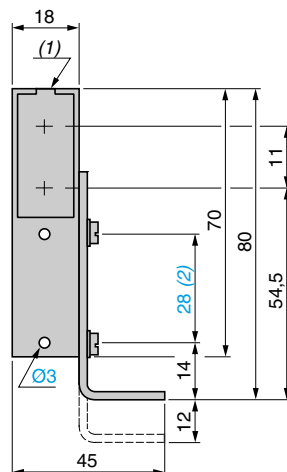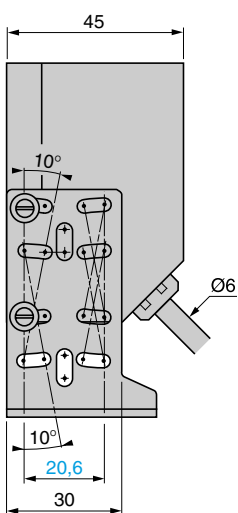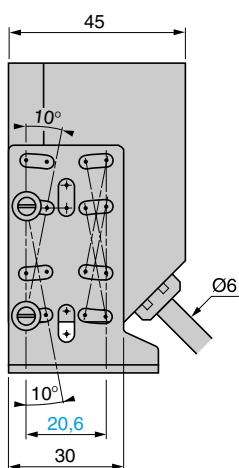

Bracket fixing



(1) LED

(2) Front fixing ($\varnothing 3$ screws and inserts).


(3) 1 elongated hole $\varnothing 4.1 \times 10$ and 1 $\times \varnothing 4.1$

(4) 1 elongated hole $\varnothing 3.1 \times 10$ and 1 $\times \varnothing 3.1$

Wiring scheme (5-wire ~ or ...)

1 CO output


NC function (object present)




Mounting precautions

Rigid fixing

Outdoor mounting



Fix securely for trouble free detection.

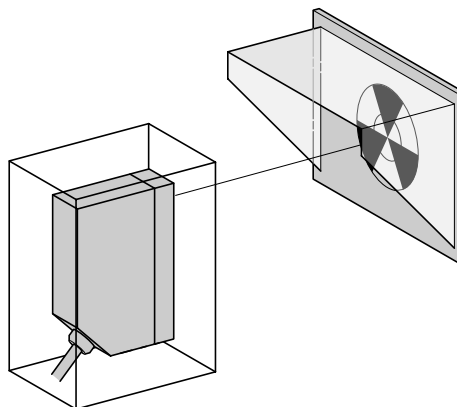


Use protective covers and mount on thermal insulators to avoid frost or condensation forming on the optical parts.

Photo-electric sensors

OsiSense XU Application, tertiary sector series
With integral buzzer
AC or DC supply
1 NO relay output

Compact design







| | |
|--------------------------------------|-------------------------------------|
| System | Reflex |
| Type of transmission | Infrared |
| Nominal sensing distance (Sn) | 6 m (with Ø 80 mm reflector) |
| Cable gland | 9P, mounted in base |

References

| | |
|--------------------|--|
| NO function | XUJ B06031H60 (supplied as kit comprising: sensor, fixing bracket, Ø 80 mm reflector and mounting instructions) |
| Weight (kg) | 0.330 |

Characteristics

| | |
|---|--|
| Product certifications | CE |
| Ambient air temperature | For operation: - 25...+ 55 °C. For storage: - 40...+ 70 °C |
| Vibration resistance | Conforming to IEC 60068-2-6 7 gn, amplitude ± 1.5 mm (f = 10...55 Hz) |
| Shock resistance | Conforming to IEC 60068-2-27 30 gn, duration 11 ms |
| Degree of protection | Conforming to IEC 60529 IP 40, double insulation □ |
| Connection | Screw terminals, maximum capacity: 1 x 1.5 mm ² |
| Materials | Case: PEI (1) |
| Rated supply voltage | ~ 24...240 V or ~ 24...48 V |
| Voltage limits | ~ 20...264 V or ~ 20...60 V (including ripple) |
| Switching capacity | 2000 mA (cos φ = 1), 500 mA (cos φ = 0.4) for a contact life of 1 million operating cycles at an operating rate of 1 operating cycle per second, at 250 V |
| Maximum voltage on output relay contacts | ~ 250 V or ~ 30 V |
| Current consumption, no-load | ≤ 30 mA |
| Maximum switching frequency | 20 Hz |
| Delays | First-up: ≤ 60 ms; response: ≤ 25 ms; recovery: ≤ 25 ms |
| Time delay | Adjustable from 0.3 to 3 seconds |

| Function table | Function | Reflex system | |
|---|----------|---|--|
| | | No object present in the beam | Object present in the beam |
| Output state of relay contacts indicator: yellow LED (illuminated when relay energised) | NO |  Relay de-energised |  yellow Relay energised |
| | |  Relay energised |  yellow |

(1) PEI: high quality synthetic resin providing excellent withstand to mechanical shocks, vibration and the effects of external agents frequently encountered in industry: alcohol, salts, petroleum, oils, greases, washing agents (diluted sodium carbonate 4%, nitric acid 2%), formaldehyde vapour, splashing lactic acid, etc.

Photo-electric sensors

OsiSense XU Application, tertiary sector series


With integral buzzer

AC or DC supply

1 NO relay output


Detection curve

Reflex system



Excess gain curve (ambient temperature: + 25 °C)

Infrared reflex system

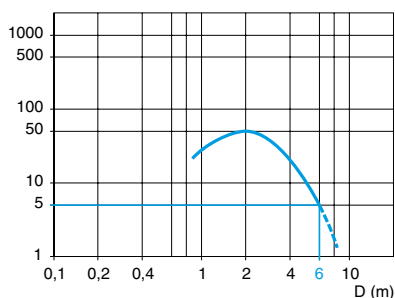

With reflector XUJ C80

Contents of kit XUJ B06031H60


- reflex system photo-electric sensor,
- fixing bracket,
- Ø 80 mm reflector,
- mounting instructions.




Dimensions

XUJ B06031H60

Face view

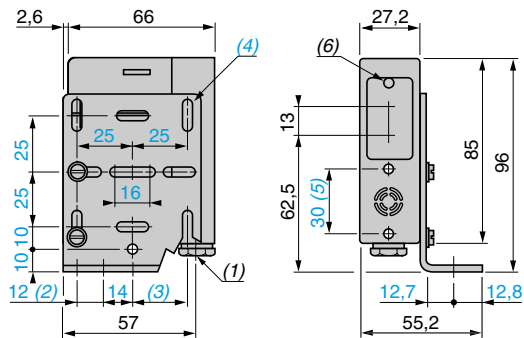

Bracket fixing




- (1) 9P cable gland.
 (2) 2 elongated holes Ø 6.5 x 10.
 (3) 1 elongated hole Ø 6.5 x 24.
 (4) 8 elongated holes Ø 4.2 x 10.
 (5) Front fixing (Ø 4 screws and inserts included).
 (6) Yellow LED.

- (7) 2 elongated holes Ø 6.5 x 16.5.
 (8) 1 elongated hole Ø 6.5 x 30.5.

Wiring schemes (~ or ---)

NO function


Object present



Terminal connections

1 NO relay output

- 1 Ø - A1 (~/-)
 2 Ø - A2 (~/+)
 3 Ø -
 4 Ø - ~ 250 V, 100 VA max.
 5 Ø - --- 30 V, 2 A max.



XUZ B2003



XUZ M2003



XUZ K2003




XUZ X2003



XUZ M2004



XUZ K2004




XUZ X2004



XUZ 2003



XUZ 2001



3D fixing kit example

3D fixing kit ⁽¹⁾

| Description | For use with sensor type | Reference | Weight kg |
|--|--------------------------|------------------|-----------|
| Ball-joint mounted fixing bracket for mounting on M12 rod | XUB or XUZ C50 | XUZ B2003 | 0.170 |
| | XUM 0 or XUZ C50 | XUZ M2003 | 0.140 |
| | XUK or XUZ C50 | XUZ K2003 | 0.170 |
| | XUX or XUZ C50 | XUZ X2003 | 0.220 |
| Ball-joint mounted fixing bracket with protective cover for mounting on M12 rod | XUM 0 | XUZ M2004 | 0.155 |
| | XUK | XUZ K2004 | 0.270 |
| | XUX | XUZ X2004 | 0.420 |
| Support for M12 rod | – | XUZ 2003 | 0.150 |
| M12 rod (adjustment possible over complete height) | – | XUZ 2001 | 0.050 |


(1) To obtain a 3D fixing kit, order:

- rod support **XUZ 2003**
- M12 rod **XUZ 2001**
- ball-joint mounted fixing bracket **XUZ ●200●**

5




XUZ A118




XUZ A50




XUZ A51




XUZ X2000



XUL Z41



XUZ A41



XUZ A49



XUZ A218



XUZ A318



XSA Z1●●




XSZ B1●●




XUZ B2005

Fixing accessories


| Description | For use with sensor type | Reference | Weight kg | |
|---|---------------------------------------|--------------------|-----------------|-------|
| Stainless steel fixing bracket | XUB | XUZ A118 | 0.045 | |
| Metal fixing brackets | XUM | XUZ A50 | 0.025 | |
| | XUK | XUZ A51 | 0.050 | |
| | XUX | XUZ X2000 | 0.065 | |
| | XUL | XUL Z41 | 0.050 | |
| | XUJ | XUZ A41 | 0.050 | |
| | XUJ B | XUZ A49 | 0.120 | |
| Plastic fixing bracket with adjustable ball-joint | XU● (Ø 18 mm) | XUZ A218 | 0.035 | |
| Precision fixing bracket with micrometric adjustment | XU2 (Ø 18 mm) with laser transmission | XUZ A318 | 0.170 | |
| Plastic fixing clamps with locking screw | XUA (Ø 8 mm) | XSA Z108 | 0.007 | |
| | XU● (Ø 18 mm) | With lug | XSZ B108 | 0.006 |
| | | With indexing pin | XSA Z118 | 0.020 |
| | | With 24.1 mm ctrs. | XSA B118 | 0.010 |
| | Glass fibre optics XUF S0810 | XUZ B2005 | 0.007 | |
| Fibre optics XUF S2510 | XSA Z145 | 0.005 | | |
| Fibre optics XUF S0210 | XSA Z155 | 0.005 | | |
| Set of 2 plastic nuts | XU● (Ø 18 mm) | XSA Z185 | 0.005 | |
| Set of 2 metal nuts | XU● (Ø 18 mm) | XSZ E218 | 0.004 | |
| Set of 2 metal nuts | XU● (Ø 18 mm) | XSZ E118 | 0.015 | |
| Set of 2 stainless steel nuts | XU● (Ø 18 mm) | XSZ E318 | 0.015 | |




XUZ C●●




XUZ C50




XUZ C24




XUZ C100




XUZ B0●



XUZ D15



XUZ D25




XUJ Z01




XUZ X2001



XUR Z01



XUR Z02



XUF Z08

Reflectors

| Description | Dimensions (mm) | Length (m) | Reference | Weight kg |
|--|-----------------|------------|-----------|-----------|
| Standard reflectors | Ø 16 | – | XUZ C16 | 0.002 |
| | Ø 21 | – | XUZ C21 | 0.002 |
| | Ø 31 | – | XUZ C31 | 0.005 |
| | Ø 39 | – | XUZ C39 | 0.008 |
| | Ø 80 | – | XUZ C80 | 0.029 |
| Universal reflector (without blind zone) | 50 x 50 | – | XUZ C50 | 0.020 |
| Reflector for short sensing distances | 24 x 21 | – | XUZ C24 | 0.007 |
| Reflector for long sensing distances | 100 x 100 | – | XUZ C100 | 0.062 |
| Standard reflective adhesive tape (1) | Width: 22 | 1 | XUZ B01 | 0.015 |
| | Thickness: 0.4 | 5 | XUZ B05 | 0.075 |
| Reflective adhesive tape (1) (specifically for polarised reflex systems) | Width: 22 | 1 | XUZ B11 | 0.020 |
| | Thickness: 0.4 | 5 | XUZ B15 | 0.085 |

Protective covers

| Description | For use with | Reference | Weight kg |
|--------------------------------|-------------------------------|-----------|-----------|
| Protective covers | Sensors XUX and XUJ | XUZ D25 | 0.920 |
| | Reflectors XUZ C80 or XUZ C24 | XUZ D15 | 0.270 |
| Potentiometer protective cover | Sensors XUJ | XUJ Z01 | 0.015 |

Cabling accessories

| Description | Reference | Weight kg |
|----------------------------|-----------|-----------|
| Adaptor, ISO 16 - 1/2" NPT | XUZ X2001 | 0.050 |
| Adaptor, ISO 16 - ISO 20 | XUZ X2002 | 0.050 |

Lenses

| Description | For use with | Reference | Weight kg |
|-----------------------------------|--------------|-----------|-----------|
| Lens for spot enlargement | Sensors XUR | XUR Z01 | 0.010 |
| Lens accessory for spot reduction | Sensors XUR | XUR Z02 | 0.015 |

Spare parts

| Description | For use with | Sold in lots of | Unit reference | Weight kg |
|--|------------------|-----------------|----------------|-----------|
| Plastic end adaptor for connecting Ø 1 mm fibre optics | Amplifiers XUD A | 2 | XUF Z08 | 0.002 |


Protection fuses

| Description | For use with | Sold in lots of | Unit reference | Weight kg |
|--|--|-----------------|----------------|-----------|
| Cartridge fuse 5 x 20 0.4 A "quick-blow" | Sensors without short-circuit protection | 10 | XUZ E04 | 0.001 |
| Fuse terminal block | Cartridge fuses XUZ E0● | 50 | AB1 FU10135U | 0.040 |

(1) Suitable for use at maximum ambient temperature of + 50 °C.


XUZ B2003

Ball-joint mounted fixing bracket for XUB or XUZ C50

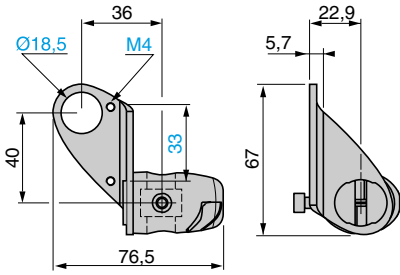


XUZ 2001

M12 rod

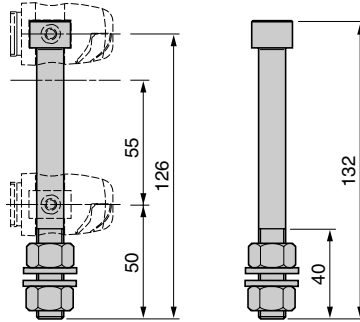


XUZ 2003

Support for M12 rod

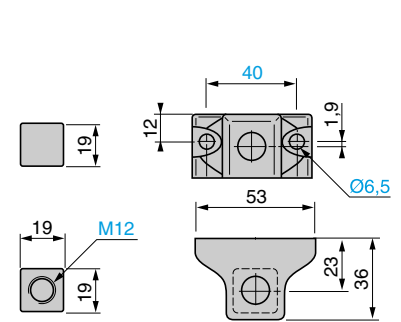


XUZ M2003

Ball-joint mounted fixing bracket for XUM (1) or XUZ C50

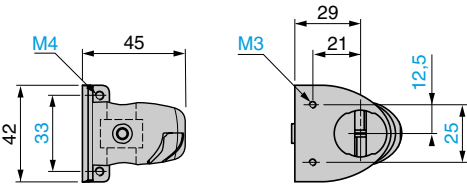


XUZ M2004

Ball-joint mounted fixing bracket with protective cover for XUM (1)

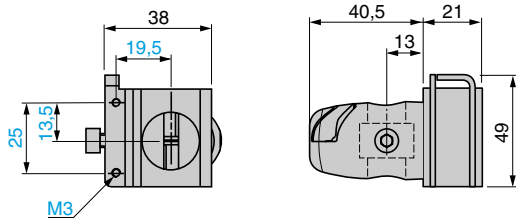


XUZ K2003

Ball-joint mounted fixing bracket for XUK (1) or XUZ C50

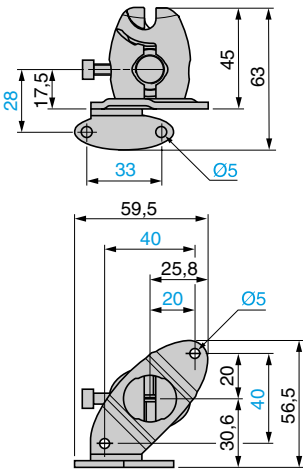


XUZ K2004

Ball-joint mounted fixing bracket with protective cover for XUK (1)

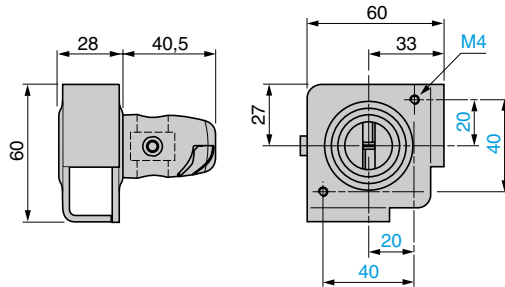


XUZ X2003

Ball-joint mounted fixing bracket for XUX (1) or XUZ C50

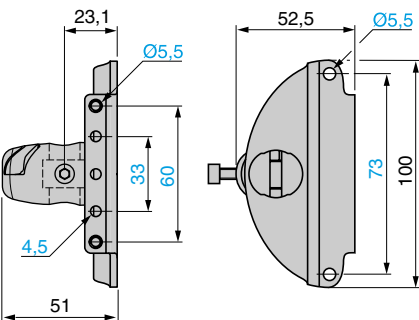

XUZ X2004


Ball-joint mounted fixing bracket with protective cover for XUX (1)

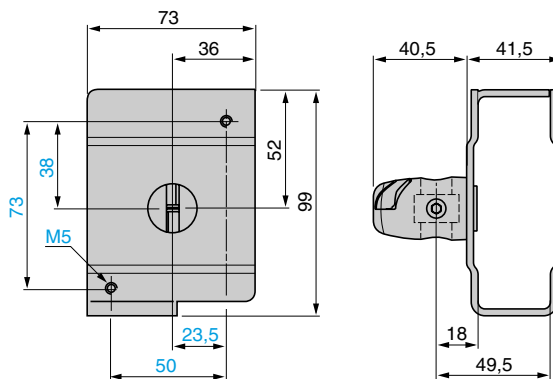

(1) Accessory fixing screws included.


XUZ B2003 + XUZ 2001 + XUZ 2003

3D fixing kit for XUB or reflector XUZ C50

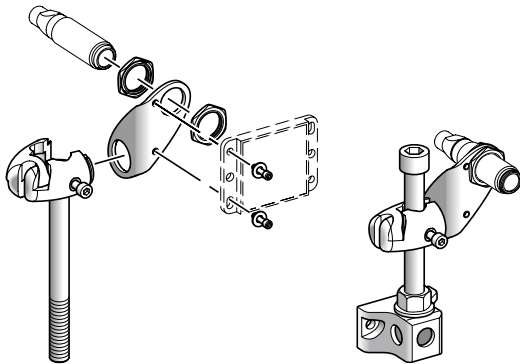


XUZ 2001 + XUZ 2003

M12 rod + rod support

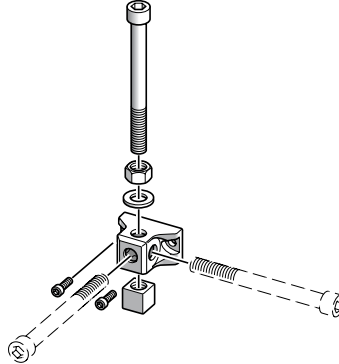


XUZ M2003 + XUZ 2001

3D fixing kit for XUM or reflector XUZ C50




XUZ M2004 + XUZ 2001

3D fixing kit with protective cover for XUM




XUZ K2003 + XUZ 2001

3D fixing kit for XUK or reflector XUZ C50

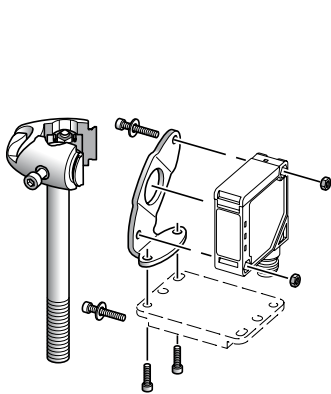

XUZ K2004 + XUZ 2001 + XUZ 2003


3D fixing kit with protective cover for XUK

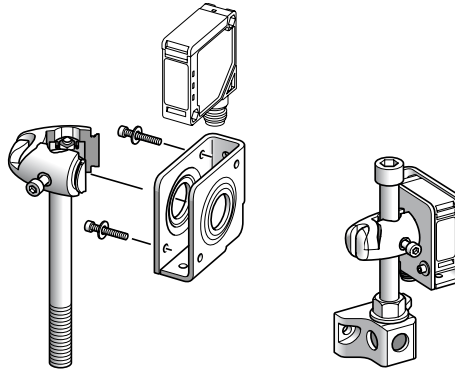

Mounting example


XUZ X2003 + XUZ 2001

3D fixing kit for XUX or reflector XUZ C50

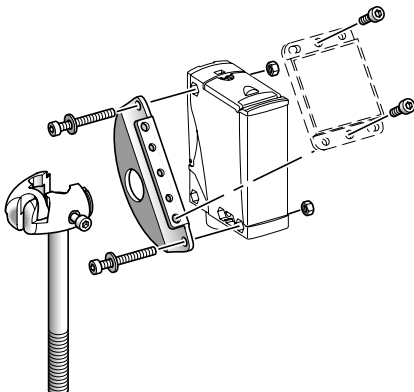


XUZ X2004 + XUZ 2001

3D fixing kit with protective cover for XUX

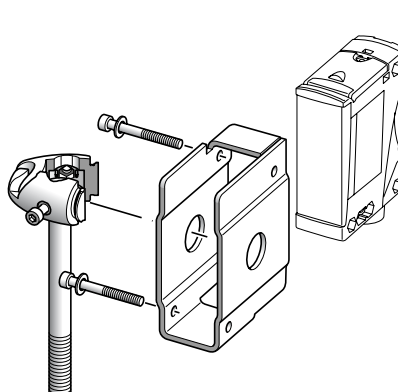


XUZ A118

Fixing bracket for XUB




XUZ A218

Fixing bracket with adjustable ball-joint for XU● (Ø 18)

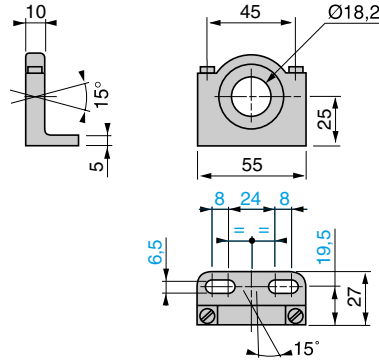


XUZ A50

Fixing bracket for XUM (2)

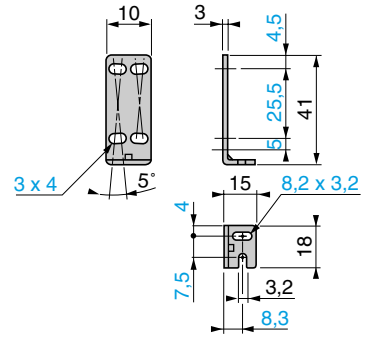


XUZ A51

Fixing bracket for XUK (2)

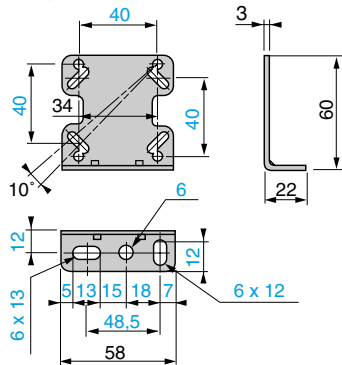


XUZ X2000

Fixing bracket for XUX (2)

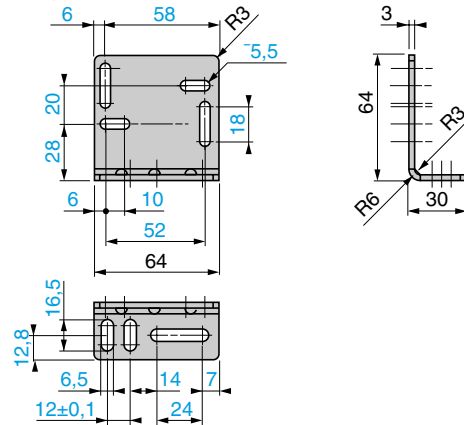


XUZ A318

Fixing bracket with micrometric adjustment for XU2 (Ø 18) with laser transmission

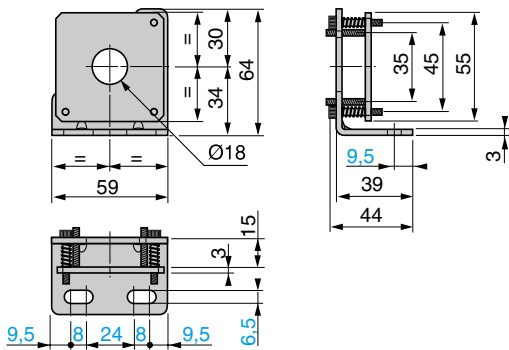

XSZ B108, XSZ B118

Fixing clamps for XUA and XU● (Ø 18)

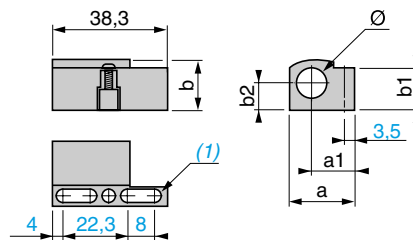


| XCZ | a | a1 | b | b1 | b2 | Ø |
|------|------|------|------|------|------|----|
| B108 | 21.1 | 14.5 | 14.2 | 12.8 | 7.5 | 8 |
| B118 | 26 | 15.7 | 22.3 | 20.1 | 11.5 | 18 |

(1) 2 elongated holes Ø 4 x 8.


XUZ B2005

Fixing clamps with 24.1 mm centres for XU● (Ø 18)



XSA Z1●●

Fixing clamps for XUA, XU● (Ø 18), XUF

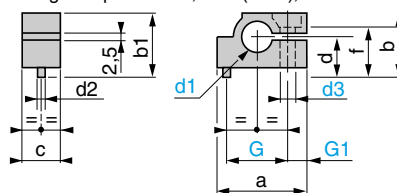


| XSA | a | b | b1 | c | d | Ød1 | Ød2 | Ød3 | f | G | G1 |
|------|------|------|------|----|----|------|-----|-----|------|----|----|
| Z108 | 23.5 | 14.2 | 16.7 | 10 | 8 | 8.1 | 2 | 4 | 10.5 | 16 | 5 |
| Z118 | 41 | 30 | 33 | 17 | 18 | 18.1 | 3.9 | 6 | 24 | 30 | 7 |
| Z145 | 23.5 | 14.2 | 16.7 | 10 | 8 | 4.7 | 2 | 4 | 10.5 | 16 | 5 |
| Z155 | 23.5 | 14.2 | 16.7 | 10 | 8 | 5.7 | 2 | 4 | 10.5 | 16 | 5 |
| Z185 | 23.5 | 14.2 | 16.7 | 10 | 8 | 8.6 | 2 | 4 | 10.5 | 16 | 5 |

(2) Accessory fixing screws included.


XUZ D15

Protective cover for XUZ C80 or XUZ C24

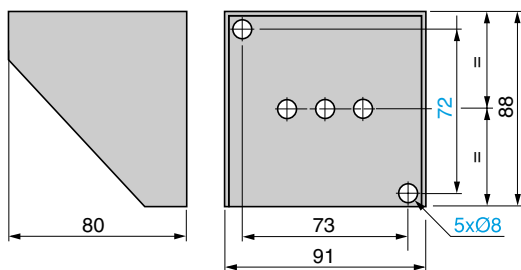


XUZ D25

Protective cover for XUX or XUJ

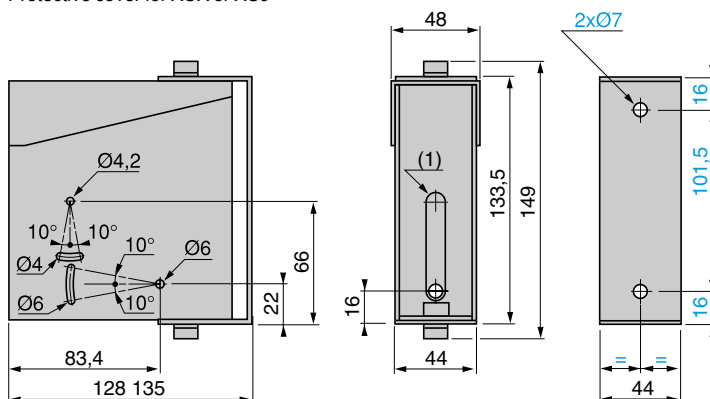


XUZ C●●



| XUZ | Ø | c | d |
|-----|------|-----|------|
| C16 | 21 | 5.5 | 17 |
| C21 | 25.5 | 6 | 20.5 |
| C31 | 35 | 7.5 | 30.5 |
| C39 | 46 | 6.5 | 37 |


XUZ C50

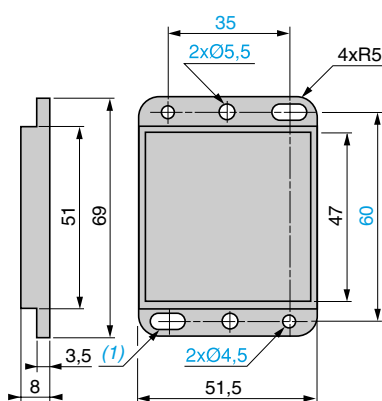


(1) 2 elongated holes Ø 4.5 x 8

XUZ M2003 + XUZ 2001 + XUZ 2003 + XUZ C50


Mounting example

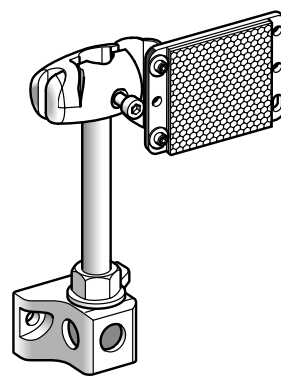


XUZ C24

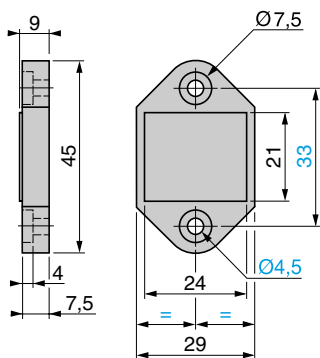


XUZ C100

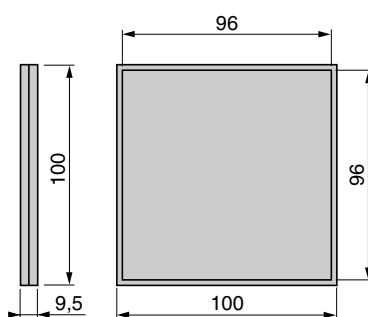


XUZ X2001

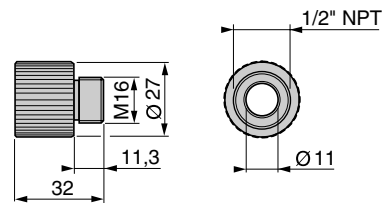

XUZ C80

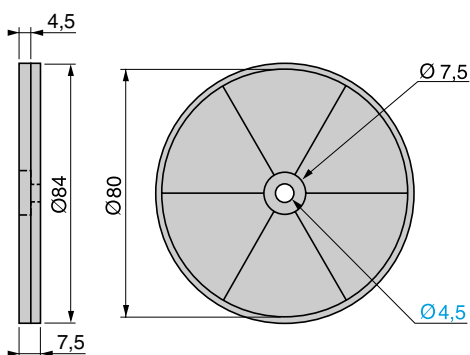


XUZ X2002




Sensing distance and operating margin

Background suppression mode




Without accessory

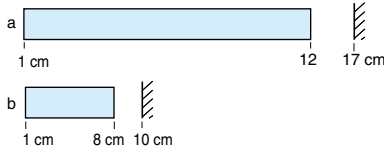

Background

a: with background teaching at maximum recommended distance.
b: with background teaching at minimum recommended distance.

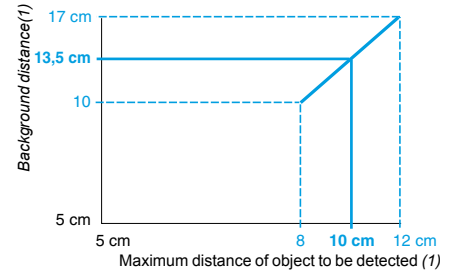


Example: teaching against a background located at 13.5 cm enables detection of an object at 1 to 10 cm.

(1) From white 90% to black 6%.

Diffuse mode




Without accessory

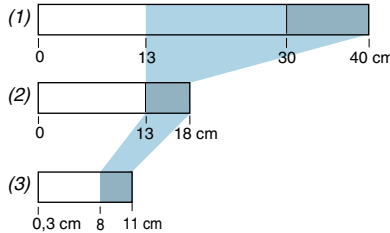

(1) White 90%. (2) Grey 18%. (3) Black 6%.


Object teaching zone

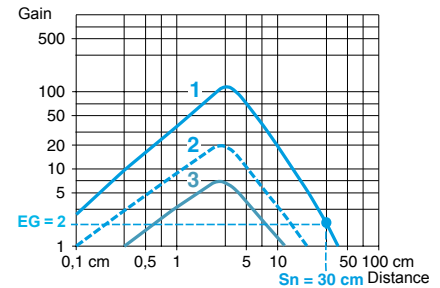



- 1 White object
- 2 Grey object
- 3 Black object

In diffuse mode, teaching of the position of the object to be detected, located between 0 and 12 cm, automatically configures the product to "background suppression" mode. This provides a constant usable sensing distance, whatever the colour of the object.

Polarised reflex mode




With reflector

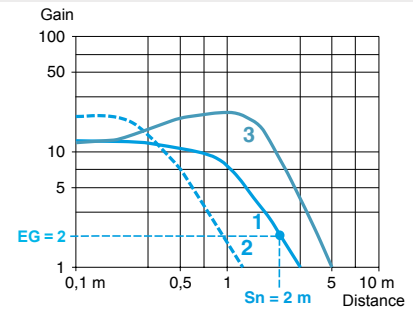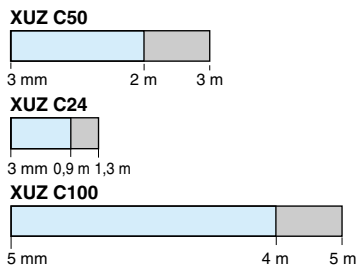


- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Thru-beam mode



With thru-beam accessory

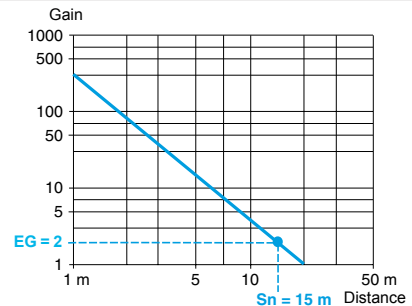


Nominal sensing distance. $EG \geq 2$.
Maximum sensing distance. The maximum sensing distances indicated are average values.


EG: Excess gain, operating margin.

Sensing distance and operating margin

Background suppression mode




Without accessory

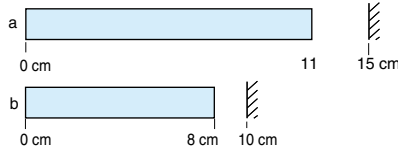


Background

a: with background teaching at maximum recommended distance.
 b: with background teaching at minimum recommended distance.

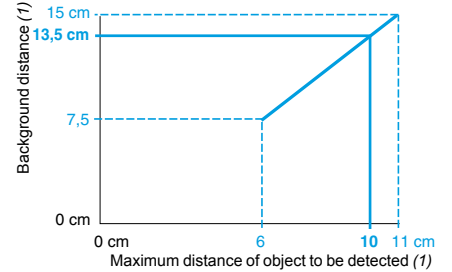


Example: teaching against a background located at 13.5 cm enables detection of an object at 0 to 10 cm.
 (1) From white 90% to black 6%.

Diffuse mode




Without accessory

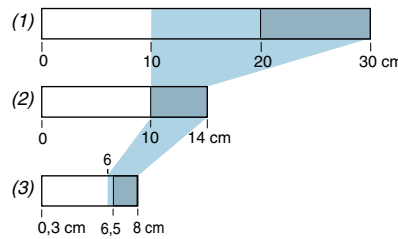

(1) White 90%. (2) Grey 18%. (3) Black 6%.


Object teaching zone

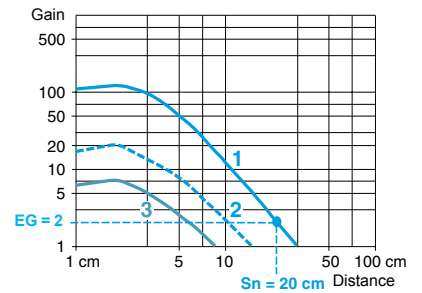



- 1 White object
- 2 Grey object
- 3 Black object

In diffuse mode, teaching of the position of the object to be detected, located between 0 and 11 cm, automatically configures the product to "background suppression" mode. This provides a constant usable sensing distance, whatever the colour of the object.

Polarised reflex mode




With reflector

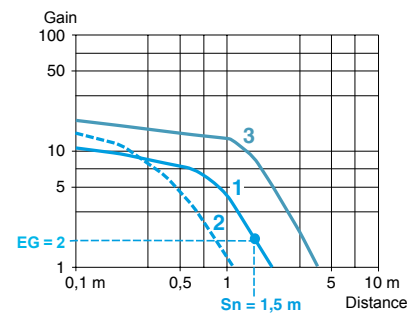
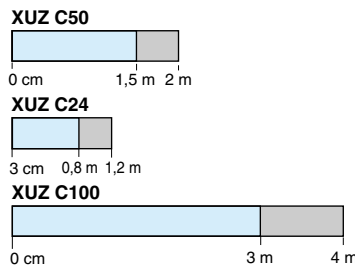


- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Thru-beam mode



With thru-beam accessory

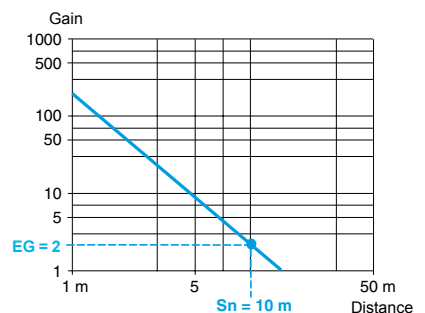

Legend: Nominal sensing distance. EG ≥ 2.
 Maximum sensing distance. The maximum sensing distances indicated are average values.
 EG: Excess gain, operating margin.


Photo-electric sensors

OsiSense XU, general purpose, single mode function




XUB ●●●●● with line of sight along or at 90° to case axis

Sensing distance and operating margin


Diffuse sensor XUB 4●●●●● with line of sight along case axis



0,001...0,15 m max.




(1) White 90%. (2) Grey 18%. (3) Black 6%.


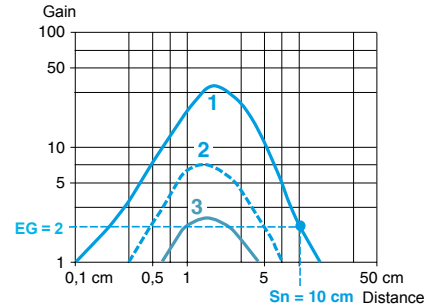


- 1 White object
- 2 Grey object
- 3 Black object


Diffuse sensor XUB 4●●●●● with line of sight 90° to case axis



0...0,15 m max.




(1) White 90%. (2) Grey 18%. (3) Black 6%.



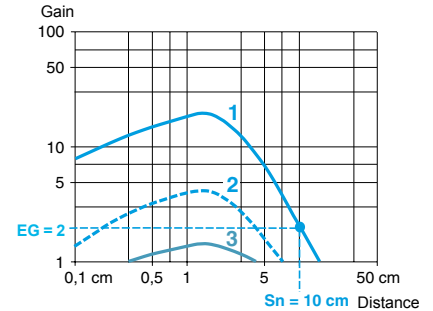


- 1 White object
- 2 Grey object
- 3 Black object


Diffuse sensor XUB 5●●●●● with line of sight along or at 90° to case axis



0,001...0,8 m max.



(1) White 90%. (2) Grey 18%. (3) Black 6%.
(4) No detection.

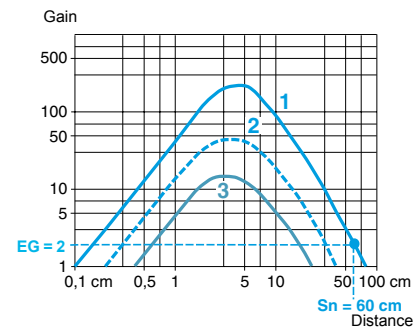

- 1 White object
- 2 Grey object
- 3 Black object

Light blue box: Nominal sensing distance. $EG \geq 2$.
Grey box: Maximum sensing distance. The maximum sensing distances indicated are average values.

EG: Excess gain, operating margin.
a: Potentiometer set at maximum.
b: Potentiometer set at minimum.


Photo-electric sensors

OsiSense XU, general purpose, single mode function





XUB ●●●●● with line of sight along or at 90° to case axis

Sensing distance and operating margin

Polarised reflex sensor XUB 9●●●●●● with line of sight along or at 90° to case axis




With reflector

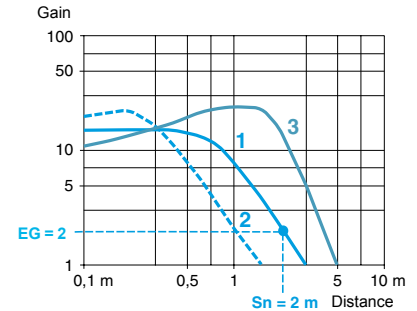





- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Reflex sensor XUB 1●●●●●● with line of sight along or at 90° to case axis




With reflector

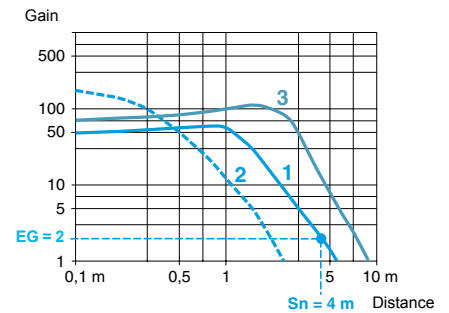



- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Thru-beam sensor XUB 2●●●●●● with line of sight along or at 90° to case axis



With thru-beam accessory

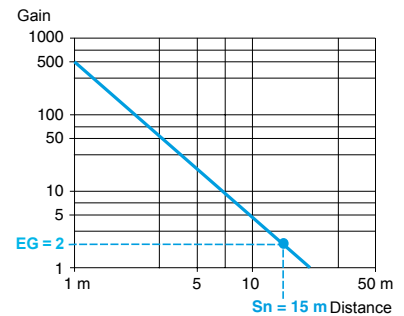


Nominal sensing distance. $EG \geq 2$.

Maximum sensing distance. The maximum sensing distances indicated are average values.


EG: Excess gain, operating margin.

Sensing distance and operating margin


Background suppression mode



0...0,11 m max.

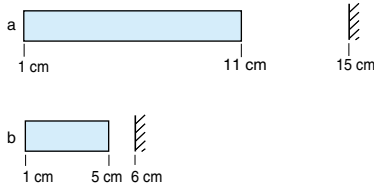


Background

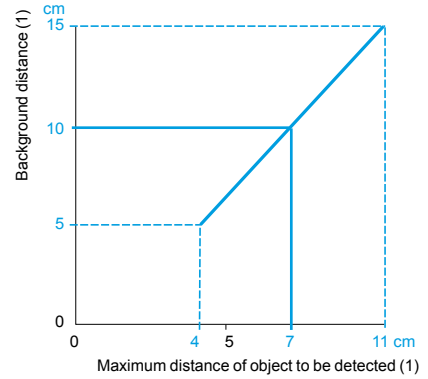


Example: teaching against a background located at 10 cm enables detection of an object at 1 to 7 cm.

(1) From white 90% to black 6%.

Diffuse mode




0...0,55 m max.

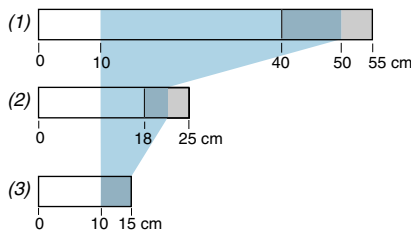

(1) White 90%. (2) Grey 18%. (3) Black 6%.

Object teaching zone

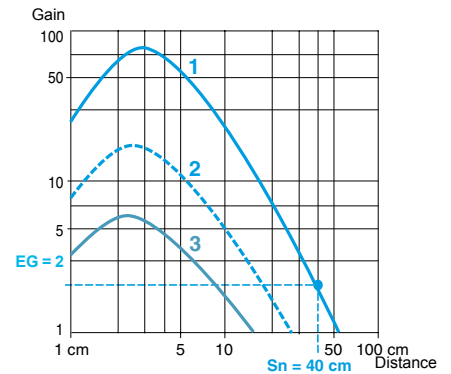

- 1 White object
- 2 Grey object
- 3 Black object

In diffuse mode, teaching of the position of the object to be detected, located between 0 and 10 cm, automatically configures the product to "background suppression" mode. This provides a constant usable sensing distance, whatever the colour of the object.

Nominal sensing distance. $EG \geq 2$.


Maximum sensing distance. The maximum sensing distances indicated are average values.

EG: Excess gain, operating margin.

5

Sensing distance and operating margin (continued)

Polarised reflex mode

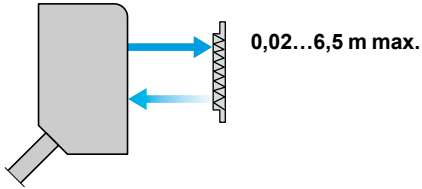


With reflector



XUZ C50



XUZ C24




XUZ C100

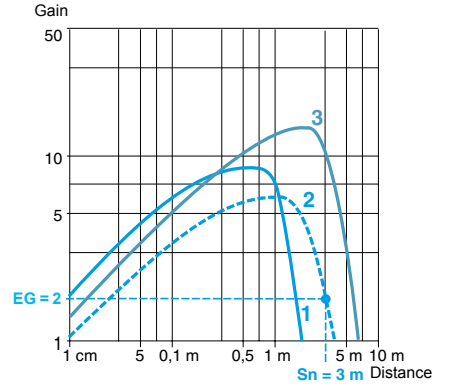



- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Thru-beam mode

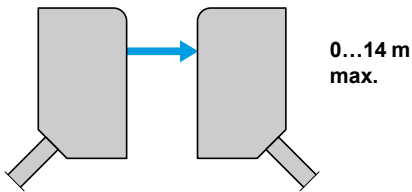

With thru-beam accessory

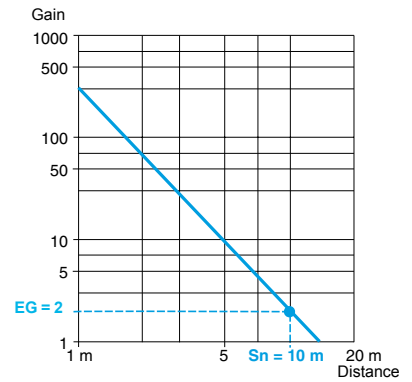


Light blue bar: Nominal sensing distance. $EG \geq 2$.
 Grey bar: Maximum sensing distance. The maximum sensing distances indicated are average values.



EG: Excess gain, operating margin.

Sensing distance and operating margin

Background suppression mode




0...28 cm max.

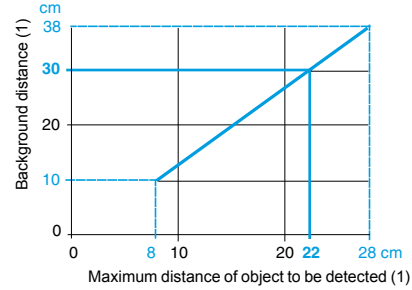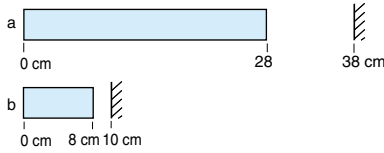

Example: teaching against a background located at 30 cm enables detection of an object at 0 to 22 cm.


(1) From white 90% to black 6%.

Without accessory





Background
a: with background teaching at maximum recommended distance.
b: with background teaching at minimum recommended distance.

Diffuse mode



0...1,2 m max.

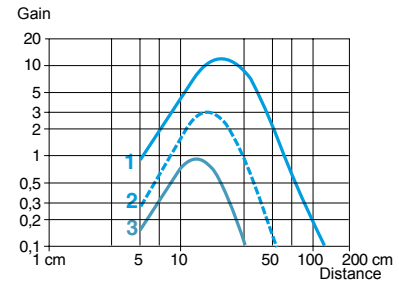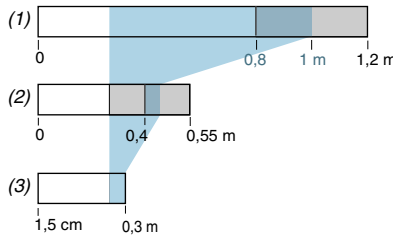

- 1 White object
- 2 Grey object
- 3 Black object

(1) White 90%. (2) Grey 18%. (3) Black 6%.


Object teaching zone

In diffuse mode, teaching of the position of the object to be detected, located between 0 and 0.3 m, automatically configures the product to "background suppression" mode. This provides a constant usable sensing distance, whatever the colour of the object.



Without accessory

5

Polarised reflex mode




0,02...11 m max.

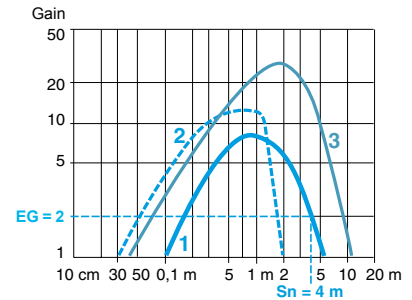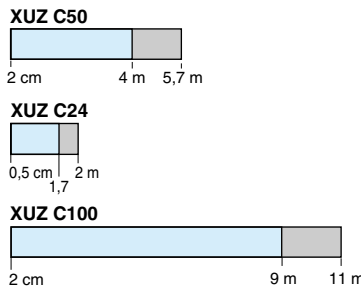



- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

With reflector

Thru-beam mode



0...45 m max.

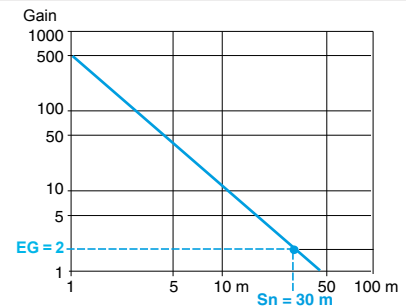


With thru-beam accessory


Nominal sensing distance. $EG \geq 2$.
Maximum sensing distance. The maximum sensing distances indicated are average values.
EG: Excess gain, operating margin.

Sensing distance and operating margin


Diffuse sensor XUK 5A●●●



Without accessory

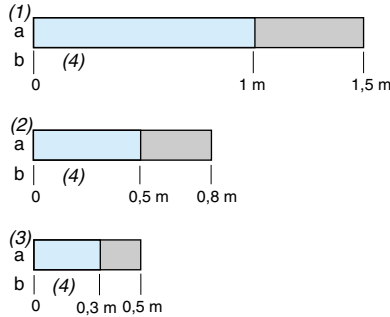


(1) White 90%. (2) Grey 18%. (3) Black 6%.
(4) No detection.


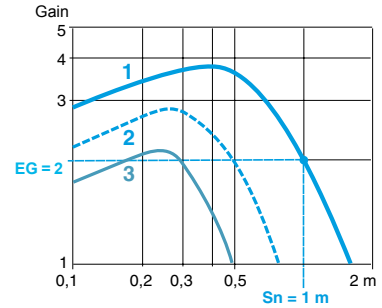


- 1 White object
- 2 Grey object
- 3 Black object

Polarised reflex sensor XUK 9A●●●

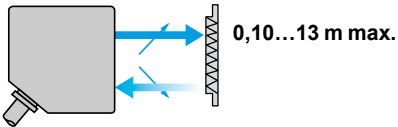


With reflector

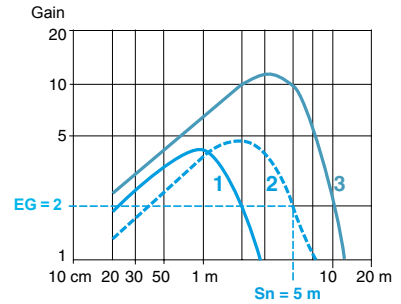
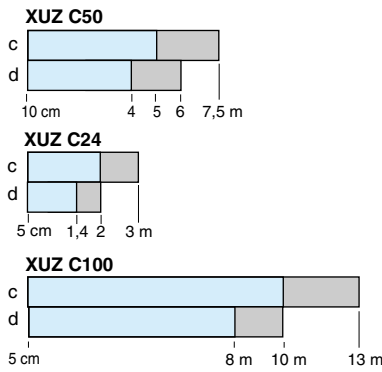


- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Reflex sensor XUK 1A●●●

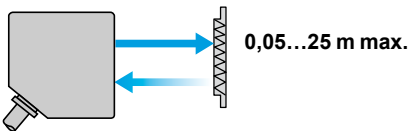


With reflector

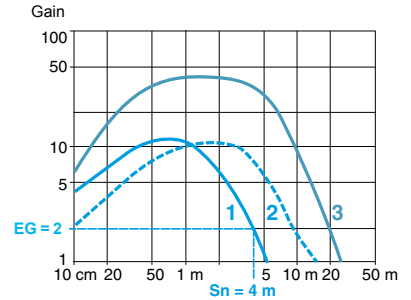
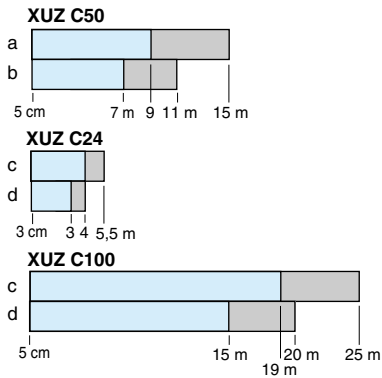


- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Thru-beam sensor XUK 2A●●●

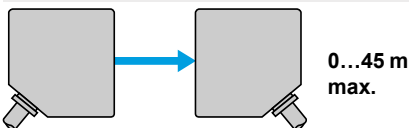

With thru-beam accessory

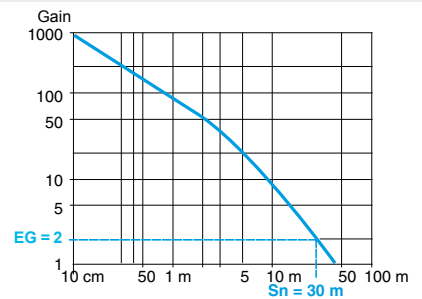

Nominal sensing distance. EG ≥ 2.


Maximum sensing distance. The maximum sensing distances indicated are average values.

a: Potentiometer set at maximum.
b: Potentiometer set at minimum.
EG: Excess gain, operating margin.


c: XUK●AP●●●● or XUK●AN●●●●, DC solid-state output version.
d: XUK●AR●●●●, AC/DC relay output version.

Sensing distance and operating margin

Background suppression mode

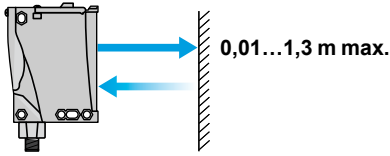


Without accessory

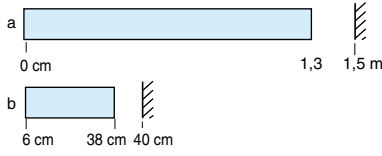

Background


a: with background teaching at maximum recommended distance.
b: with background teaching at minimum recommended distance.

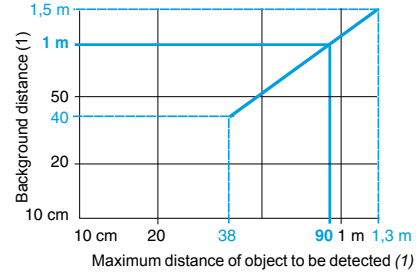


Example: teaching against a background located at 1 m enables detection of an object at 0 to 90 cm.

(1) From white 90% to black 6%.

Diffuse mode




Without accessory

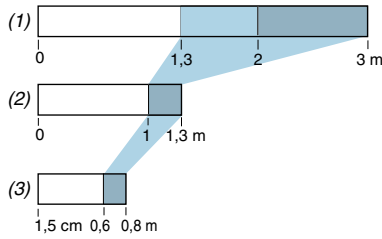

(1) White 90%. (2) Grey 18%. (3) Black 6%.


Object teaching zone

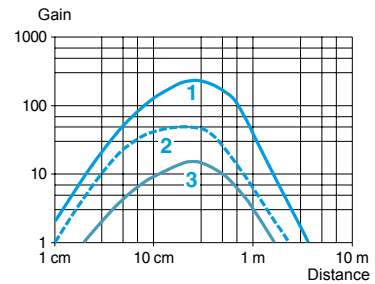



- 1 White object
- 2 Grey object
- 3 Black object

In diffuse mode, teaching of the position of the object to be detected, located between 0 and 1.3 m, automatically configures the product to "background suppression" mode. This provides a constant usable sensing distance, whatever the colour of the object.

Polarised reflex mode

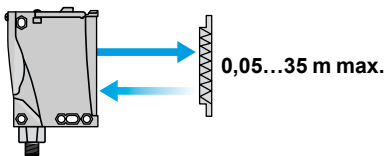


With reflector

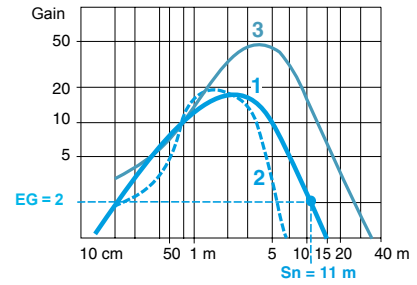
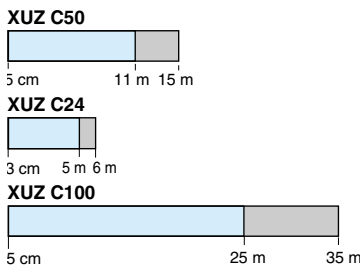


- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Thru-beam mode

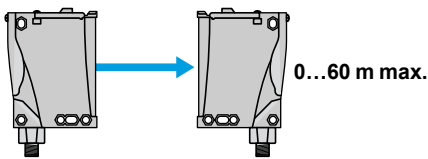

With thru-beam accessory


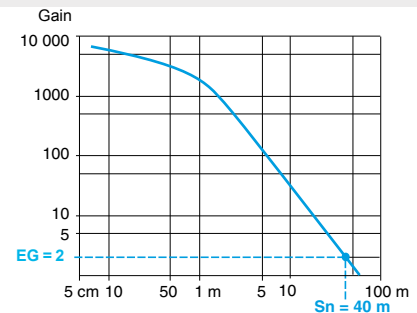



Nominal sensing distance. $EG \geq 2$.
Maximum sensing distance. The maximum sensing distances indicated are average values.

EG: Excess gain, operating margin.

Sensing distance and operating margin


Diffuse sensor XUX 5A●●●●●●

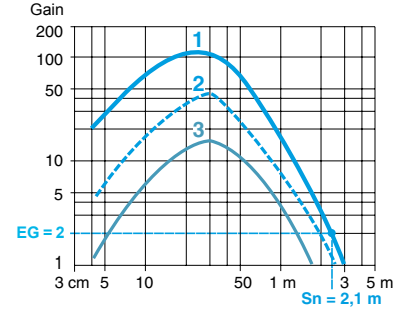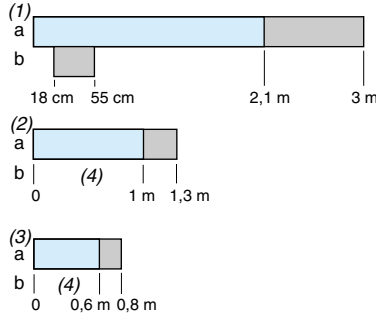



- 1 White object
- 2 Grey object
- 3 Black object

(1) White 90%. (2) Grey 18%. (3) Black 6%.
(4) No detection.

Polarised reflex sensor XUX 9A●●●●●●

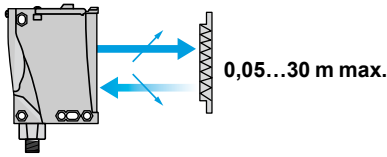


With reflector

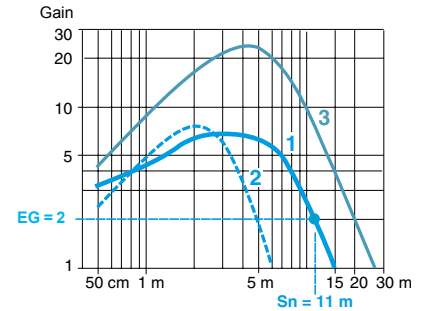
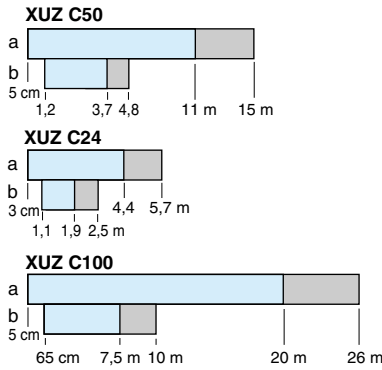


- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Reflex sensor XUX 1A●●●●●●

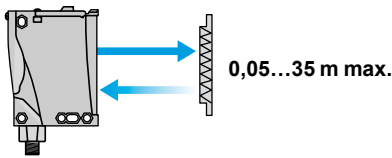


With reflector

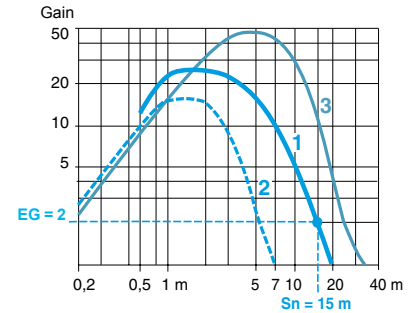
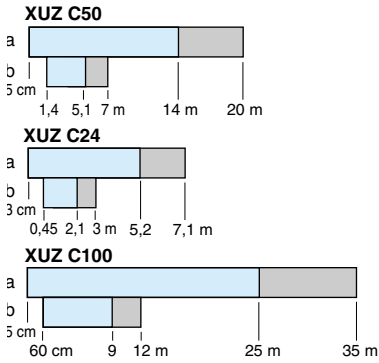


- 1 With reflector XUZ C50
- 2 With reflector XUZ C24
- 3 With reflector XUZ C100

Thru-beam sensor XUX 2A●●●●●●

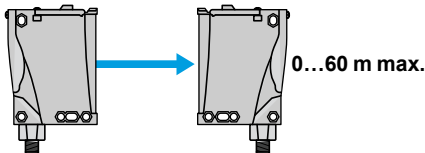

With thru-beam accessory

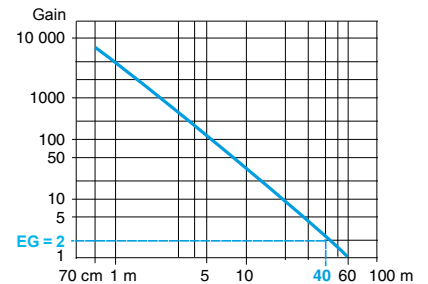

Nominal sensing distance. EG ≥ 2.

Maximum sensing distance. The maximum sensing distances indicated are average values.

a: Potentiometer set at maximum.

b: Potentiometer set at minimum.

EG: Excess gain, operating margin.

| Old sensor | New OsiSense XU sensor | Old sensor | New OsiSense XU sensor | Old sensor | New OsiSense XU sensor |
|-------------------------------|----------------------------|----------------|--|----------------|--|
| Diameter 18 mm sensors | | | | | |
| XU1B18NP340 | XUB0ANSNL2+XUZC50 (1) | XU2B18NP340D | XUB0ANSNM12 +XUB0AKSNM12T | XU2N18PP340WD | XUB2BPAWM12R +XUB2BKAWM12T (4) |
| XU1B18NP340D | XUB0ANSNM12+XUZC50 (1) | XU2B18PP340 | XUB0APSNL2 +XUB0AKSNL2T | | XUB2BPBWM12R +XUB2BKAWM12T (5) |
| XU1B18PP340 | XUB0APSNL2+XUZC50 (1) | XU2B18PP340D | XUB0APSNM12 +XUB0AKSNM12T | XU2N18PP340WL5 | XUB2BPAWL5R +XUB2BKSWL5T (4) |
| XU1B18PP340D | XUB0APSNM12+XUZC50 (1) | XU2M18NP340 | XUB0BNSNL2 +XUB0BKSNL2T (6) | | XUB2BPBWL5R +XUB2BKSWL5T (5) |
| XU1N18NP340 | XUB1BANANL2+XUZC50 (2) | XU2M18NP340D | XUB0BNSNM12 +XUB0BKSNM12T (6) | XU2P18NP340 | XUB2ANANL2R +XUB2AKSNL2T (2) |
| | XUB1BNBNL2+XUZC50 (3) | XU2M18NP340WD | XUB2BNAWM12R +XUB2BKSWM12T (2) (6) | | XUB2ANBNL2R +XUB2AKSNL2T (3) |
| XU1N18NP340D | XUB1BANANM12+XUZC50 (2) | | XUB2BNBWM12R +XUB2BKSWM12T (3) (6) | XU2P18NP340D | XUB2ANANM12R +XUB2AKSNM12T (2) |
| | XUB1BNBNM12+XUZC50 (3) | XU2M18NP340WD | XUB0BPSNL2 +XUB0BKSNL2T (6) | | XUB2ANBNM12R +XUB2AKSNM12T (3) |
| XU1N18NP340L5 | XUB1BANANL5+XUZC50 (2) | XU2M18PP340 | XUB0BPSNM12 +XUB0BKSNM12T (6) | XU2P18NP340W | XUB2ANAWL2R +XUB2AKSNL2T (2) |
| | XUB1BNBNL5+XUZC50 (3) | XU2M18PP340D | XUB0BPSNM12 +XUB0BKSNM12T (6) | | XUB2ANBWL2R +XUB2AKSNL2T (3) |
| XU1N18NP340W | XUB1BANAWL2+XUZC50 (2) | XU2M18PP340L10 | XUB0BPSNM12 +XUB0BKSNM12T +XZCP1141L10 (6) (7) | XU2P18NP340WD | XUB2ANAWM12R +XUB2AKSNL2T (2) |
| | XUB1BNBNL2+XUZC50 (3) | XU2M18PP340L5 | XUB0BPSNL5 +XUB0BKSNL5T (6) | | XUB2ANBWM12R +XUB2AKSNL2T (3) |
| XU1N18NP340WD | XUB1BANAWM12+XUZC50 (2) | XU2M18PP340W | XUB2BPAWL2R +XUB2BKSWL2T (4) (6) | XU2P18NP340W | XUB2ANANM12R +XUB2AKSNM12T (2) |
| | XUB1BNBNM12+XUZC50 (3) | XU2M18PP340D | XUB2BPBWL2R +XUB2BKSWL2T (5) (6) | | XUB2ANBWL2R +XUB2AKSNL2T (3) |
| XU1N18PP340 | XUB1BPANL2+XUZC50 (4) | XU2M18PP340L5 | XUB2BPAWM12R +XUB2BKSWM12T (4) (6) | XU2P18PP340 | XUB2APANL2R +XUB2AKSNL2T (4) |
| | XUB1BPBNL2+XUZC50 (5) | XU2M18PP340W | XUB2BPBWM12R +XUB2BKSWM12T (5) (6) | | XUB2APBNL2R +XUB2AKSNL2T (5) |
| XU1N18PP340D | XUB1BPANM12+XUZC50 (4) | XU2M18PP340WD | XUB2BPAWL5R +XUB2BKSWL5T (4) (6) | XU2P18PP340D | XUB2APANM12R +XUB2AKSNM12T (4) |
| | XUB1BPBNM12+XUZC50 (5) | XU2M18PP340WL5 | XUB2BPBWL5R +XUB2BKSWL5T (5) (6) | | XUB2APBNM12R +XUB2AKSNM12T (5) |
| XU1N18PP340L5 | XUB1BPANL5+XUZC50 (4) | | XUB2BPAWL5R +XUB2BKSWL5T (4) (6) | XU2P18PP340L10 | XUB0APSNM12 +XUB0AKSNM12T +XZCP1141L10 (6) (7) |
| | XUB1BPBNL5+XUZC50 (5) | XU2N18NP340 | XUB2BNANL2R +XUB2BKSNL2T (2) | XU2P18PP340L5 | XUB2APANL5R +XUB2AKSNL5T (4) |
| XU1N18PP340W | XUB1BPANL2+XUZC50 (4) | | XUB2BNBNL2R +XUB2BKSNL2T (3) | | XUB2APBNL5R +XUB2AKSNL5T (5) |
| | XUB1BPBWL2+XUZC50 (5) | XU2N18NP340D | XUB2BNANM12R +XUB2BKSNM12T (2) | XU2P18PP340W | XUB2APAWL2R +XUB2AKSNL2T (4) |
| XU1N18PP340WD | XUB1BPBWM12+XUZC50 (5) | | XUB2BNBNM12R +XUB2BKSNM12T (3) | | XUB2APBWL2R +XUB2AKSNL2T (5) |
| XU1N18PP340WL5 | XUB1BPANL5+XUZC50 (4) | XU2N18NP340WD | XUB2BNAWM12R +XUB2BKSWM12T (2) | XU2P18PP340WD | XUB2APANM12R +XUB2AKSNM12T (4) |
| | XUB1BPBNL5+XUZC50 (5) | | XUB2BNBWM12R +XUB2BKSWM12T (3) | | XUB2APBNM12R +XUB2AKSNM12T (5) |
| XU1P18NP340 | XUB1ANANL2+XUZC50 (2) | XU2N18PP340 | XUB2BPAWL2R +XUB2BKSNL2T (4) | XU5B18NP340 | XUB0ANSNL2 (8) |
| | XUB1ANBNL2+XUZC50 (3) | | XUB2BPBWL2R +XUB2BKSNL2T (5) | XU5B18NP340D | XUB0ANSNM12 (8) |
| XU1P18NP340D | XUB1ANANM12+XUZC50 (2) | XU2N18PP340D | XUB2BPAWM12R +XUB2BKSNM12T (4) | XU5B18PP340 | XUB0APSNL2 (8) |
| | XUB1ANBNM12+XUZC50 (3) | | XUB2BPBWM12R +XUB2BKSNM12T (5) | XU5B18PP340D | XUB0APSNM12 (8) |
| XU1P18NP340L5 | XUB1ANANL5+XUZC50 (2) | XU2N18PP340D | XUB2BPAWL5R +XUB2BKSNL5T (4) | XU5B18PP340L5 | XUB0APSNL5 (8) |
| | XUB1ANBNL5+XUZC50 (3) | | XUB2BPBNM12R +XUB2BKSNM12T (5) | XU5M18NP340 | XUB0BNSNL2 (8) |
| XU1P18NP340W | XUB1ANAWL2+XUZC50 (2) | XU2N18PP340L5 | XUB2BPAWL2R +XUB2BKSWL2T (4) | XU5M18NP340D | XUB0BNSNM12 (8) |
| | XUB1ANBNL2+XUZC50 (3) | | XUB2BPBWL2R +XUB2BKSWL2T (5) | XU5M18NP340L5 | XUB0BNSNL5 (8) |
| XU1P18NP340WD | XUB1ANAWM12+XUZC50 (2) | XU2N18PP340W | XUB2BPAWL5R +XUB2BKSWL5T (4) | XU5M18NP340W | XUB5BNAWL2 (2) |
| | XUB1ANBNM12+XUZC50 (3) | | XUB2BPBWL5R +XUB2BKSWL5T (5) | | XUB5BNBWL2 (3) |
| XU1P18PP340 | XUB1APANL2+XUZC50 (4) | XU2N18PP340WD | XUB2BPAWL2R +XUB2BKSWL2T (4) | XU5M18NP340WL5 | XUB5BNAWL5 (2) |
| | XUB1APBNL2+XUZC50 (5) | | XUB2BPBWL2R +XUB2BKSWL2T (5) | | XUB5BNBWL5 (3) |
| XU1P18PP340D | XUB1APANM12+XUZC50 (4) | XU2N18PP340L5 | XUB2BPAWL5R +XUB2BKSWL5T (4) | XU5M18PP340 | XUB0BPSNL2 (8) |
| | XUB1APBNM12+XUZC50 (5) | | XUB2BPBWL5R +XUB2BKSWL5T (5) | XU5M18PP340D | XUB0BPSNM12 (8) |
| XU1P18PP340L5 | XUB1APANL5+XUZC50 (4) | XU2N18PP340W | XUB2BPAWL2R +XUB2BKSWL2T (4) | | |
| | XUB1APBNL5+XUZC50 (5) | | XUB2BPBWL2R +XUB2BKSWL2T (5) | | |
| XU1P18PP340W | XUB1APAWL2+XUZC50 (4) | | XUB2BPBWL5R +XUB2BKSWL5T (5) | | |
| | XUB1APBWL2+XUZC50 (5) | | XUB2BPAWL2R +XUB2BKSWL2T (4) | | |
| XU1P18PP340WD | XUB1APAWM12+XUZC50 (4) | | XUB2BPBWL5R +XUB2BKSWL5T (5) | | |
| | XUB1APBWM12+XUZC50 (5) | | XUB2BPAWL5R +XUB2BKSWL5T (4) | | |
| XU1P18PP340WL5 | XUB1APAWL5+XUZC50 (4) | | XUB2BPBWL2R +XUB2BKSWL2T (5) | | |
| | XUB1APBWL5+XUZC50 (5) | | XUB2BPAWL2R +XUB2BKSWL2T (4) | | |
| XU2B18NP340 | XUB0ANSNL2 +XUB0AKSNL2T | | XUB2BPBWL5R +XUB2BKSWL5T (5) | | |

Note: XUZX50 is a 50 x 50 mm reflector, XUZA5 and XUZX2000 are metal fixing brackets and XUZX2001 is an M16 to 1/2" NPT adaptor (see pages 5/158 and 5/159).

(1) Sn = 2 m instead of 4 m.

(2) Sensor output NO, PNP connection.

(3) Sensor output NC, NPN connection.

(4) Sensor output NO, PNP connection.

(5) Sensor output NC, PNP connection.

(6) M18 threaded length = 44 mm instead of 50/55 mm.

(7) For a cable length = 10 m, the use of an M12 connector version sensor combined with an XZCP1141L10 jumper cable (M12 with 10 m cable) is recommended.

(8) Sn = 0.3 m instead of 0.4 m. For a sensing distance Sn greater than 0.3 m, see references XUB5●●●●● on page 5/26.

| Old sensor | New OsiSense XU sensor | Old sensor | New OsiSense XU sensor | Old sensor | New OsiSense XU sensor |
|---|-------------------------------------|----------------|---|--|--|
| Diameter 18 mm sensors (continued) | | | | | |
| XU5M18PP340L5 | XUB0BPSNL5 (8) | XU5P18PP340W | XUB4APAWL2 (4) XUB4APBWL2 (5) | XU9P18NP340 | XUB0ANSNL2+XUZC50 (6) |
| XU5M18PP340W | XUB5BPAWL2 (4) XUB5BPBWL2 (5) | XU5P18PP340WD | XUB4APAWM12 (4) XUB4APBWM12 (5) | XU9P18NP340D | XUB0ANSNM12+XUZC50 (6) |
| XU5M18PP340WD | XUB5BPAWM12 (4) XUB5BPBWM12 (5) | XU5P18PP340WL5 | XUB4APAWL5 (4) XUB4APBWL5 (5) | XU9P18NP340L5 | XUB0ANSNL5+XUZC50 (6) |
| XU5M18PP340WL5 | XUB5BPAWL5 (4) XUB5BPBWL5 (5) | XU8B18NP340 | XUB0ANSNL2 | XU9P18NP340W | XUB0ANSWL2+XUZC50 (6) |
| XU5N18NP340 | XUB4BANAL2 (2) XUB4BNBNL2 (3) | XU8B18NP340D | XUB0ANSNM12 | XU9P18NP340WD | XUB0ANSWM12+XUZC50 (6) |
| XU5N18NP340D | XUB4BANANL2 (2) XUB4BNBNL2 (3) | XU8B18PP340 | XUB0APSNL2 | XU9P18PP340 | XUB0APSNL2+XUZC50 (6) |
| XU5N18NP340L5 | XUB4BANANM12 (2) XUB4BNBNM12 (3) | XU8B18PP340D | XUB0APSNM12 | XU9P18PP340D | XUB0APSNM12+XUZC50 (6) |
| XU5N18NP340W | XUB4BANANL5 (2) XUB4BNBNL5 (3) | XU8B18PP340D | XUB0APSNM12 | XU9P18PP340W | XUB0APSNL2+XUZC50 (6) |
| XU5N18NP340WD | XUB4BANAWL2 (2) XUB4BNBWL2 (3) | XU8B18PP340D | XUB0APSNM12 | XU9P18PP340WD | XUB0APSNM12+XUZC50 (6) |
| XU5N18NP340WL5 | XUB4BANAWM12 (2) XUB4BNBWM12 (3) | XU8B18PP340L10 | XUB0APSNM12 +XZCP1141L10 (7) | XU9P18PP340WL5 | XUB0APSNM12+XUZC50 (6) |
| XU5N18PP340 | XUB4BPANL2 (4) XUB4BPBNL2 (5) | XU8M18NP340 | XUB0BNSNL2 (6) | Amplifiers for fibre optics | |
| XU5N18PP340D | XUB4BPANM12 (4) XUB4BPBNM12 (5) | XU8M18NP340D | XUB0BNSNM12 (6) | XUDH003537 | XUDA1PSML2 |
| XU5N18PP340L5 | XUB4BPANL5 (4) XUB4BPBNL5 (5) | XU8M18NP340L5 | XUB0BNSNL5 (6) | XUDH003537S | XUDA1PSMM8 |
| XU5N18PP340W | XUB4BPAWL2 (4) XUB4BPBWL2 (5) | XU8M18NP340W | XUB0BNSWL2 (6) | XUDH003937 | XUDA2PSML2 |
| XU5N18PP340WD | XUB4BPAWM12 (4) XUB4BPBWM12 (5) | XU8M18NP340WD | XUB0BNSWM12 (6) | XUDH003937S | XUDA2PSMM8 |
| XU5N18PP340WL5 | XUB4BPANL5 (4) XUB4BPBNL5 (5) | XU8M18PP340 | XUB0BPSNL2 (6) | XUDJ003537 | XUDA1NSML2 |
| XU5P18NP340 | XUB4ANANL2 (2) XUB4ANBNL2 (3) | XU8M18PP340D | XUB0BPSNM12 (6) | XUDJ003537S | XUDA1NSMM8 |
| XU5P18NP340D | XUB4ANANM12 (2) XUB4ANBNM12 (3) | XU8M18PP340L5 | XUB0BPSNL5 (6) | XUDJ003937 | XUDA2NSML2 |
| XU5P18NP340L5 | XUB4ANANL5 (2) XUB4ANBNL5 (3) | XU8M18PP340W | XUB0BPSWL2 (6) | XUDJ003937S | XUDA2NSMM8 |
| XU5P18NP340W | XUB4ANAWL2 (2) XUB4ANBWL2 (3) | XU8M18PP340WD | XUB0BPSWM12 (6) | Compact design sensors type XUE | |
| XU5P18NP340WD | XUB4ANAWM12 (2) XUB4ANBWM12 (3) | XU9B18NP340 | XUB0ANSNL2+XUZC50 | XUEF010315 | XUX0ARCTT16+XUZX2000 (10) |
| XU5P18PP340 | XUB4APANL2 (2) XUB4APBNL2 (3) | XU9B18NP340D | XUB0ANSNM12+XUZC50 | XUEF010315H7 | XUX0ARCTT16 +XUZX2000+XUZC50 |
| XU5P18PP340D | XUB4APANM12 (2) XUB4APBNM12 (3) | XU9B18PP340 | XUB0APSNL2+XUZC50 | XUEF080319 | XUX0ARCTT16+XUZC50 (10) |
| XU5P18PP340L10 | XUB4APANM12 +XZCP1141L10 (4) (7) | XU9B18PP340D | XUB0APSNM12+XUZC50 | XUEF080319H4 | XUX0ARCTT16 +XUZC50 +XUZC50 (10) |
| XU5P18PP340L5 | XUB4APBNM12 +XZCP1141L10 (5) (7) | XU9B18PP340L5 | XUB0APSNL5+XUZC50 | XUEF10031 | XUX0ARCTT16 +XUZC50 +XUZC50 (10) (11) |
| XU5P18PP340W | XUB4APANL5 (4) XUB4APBNL5 (5) | XU9M18NP340 | XUB0BNSNL2+XUZC50 (6) | XUEF10031H7 | XUX0ARCTT16 +XUZC50 +XUZC50 (11) |
| XU5P18PP340WD | XUB4APANM12 (2) XUB4ANBWM12 (3) | XU9M18NP340D | XUB0BNSNM12+XUZC50 (6) | XUEF300314 | XUX0ARCTT16+XUZC50 (10) (12) |
| XU5P18PP340L5 | XUB4ANANL5 (2) XUB4ANBNL5 (3) | XU9M18NP340L5 | XUB0BNSNL5+XUZC50 (6) | XUEF300314H7 | XUX0ARCTT16+XUZC50 +XUZC50 (12) |
| XU5P18PP340W | XUB4ANAWL2 (2) XUB4ANBWL2 (3) | XU9M18NP340W | XUB9BNAWL2+XUZC50 (2) (9) XUB9BNBWL2+XUZC50 (3) (9) | XUEH017535 | XUX0AKSAT16+XUZC50 (10) (13) |
| XU5P18PP340WD | XUB4ANAWM12 (2) XUB4ANBWM12 (3) | XU9M18NP340WD | XUB9BNAWL2+XUZC50 (2) (9) XUB9BNBWL2+XUZC50 (3) (9) | XUEH017535H7 | XUX0AKSAT16+XUZC50 +XUZC50 (13) |
| XU5P18PP340 | XUB4APANL2 (2) XUB4APBNL2 (3) | XU9M18PP340 | XUB9BPBWL2+XUZC50 (5) (9) XUB9BPBWM12+XUZC50 (5) (9) | XUEH10753 | XUX0AKSAT16+XUZC50 (10) (13) |
| XU5P18PP340D | XUB4APANM12 (2) XUB4APBNM12 (3) | XU9M18PP340D | XUB9BPBWL2+XUZC50 (5) (9) XUB9BPBWM12+XUZC50 (5) (9) | XUEH10753H7 | XUX0AKSAT16+XUZC50 +XUZC50 (13) |
| XU5P18PP340L5 | XUB4APANL5 (4) XUB4APBNL5 (5) | XU9M18PP340L5 | XUB9BPBWL5+XUZC50 (4) (9) XUB9BPBWM12+XUZC50 (4) (9) | XUEH10753 | XUX0AKSAT16+XUZC50 (10) (13) |
| XU5P18PP340W | XUB4APANM12 (2) XUB4ANBWM12 (3) | XU9M18PP340WD | XUB9BPBWL5+XUZC50 (4) (9) XUB9BPBWM12+XUZC50 (5) (9) | XUEH10753H7 | XUX0AKSAT16+XUZC50 +XUZC50 (13) |
| XU5P18PP340WD | XUB4APANM12 (2) XUB4ANBWM12 (3) | XU9N18NP340 | XUB0BNSNL2+XUZC50 (6) | XUEH3000 | XUX0ARCTT16T+XUZC50 (10) (12) |
| XU5P18PP340L5 | XUB4ANANL5 (2) XUB4ANBNL5 (3) | XU9N18NP340D | XUB0BNSNM12+XUZC50 (6) | XUEH3000H7 | XUX0ARCTT16T+XUZC50 +XUZC50 (12) |
| XU5P18PP340W | XUB4ANAWL2 (2) XUB4ANBWL2 (3) | XU9N18NP340L5 | XUB0BNSNL5+XUZC50 (6) | XUEH307534 | XUX0AKSAT16+XUZC50 (10) (12) (13) |
| XU5P18PP340WD | XUB4ANAWM12 (2) XUB4ANBWM12 (3) | XU9N18NP340W | XUB0BNSWL2+XUZC50 (6) | XUEH307534H7 | XUX0AKSAT16+XUZC50 +XUZC50 (12) (13) |
| XU5P18PP340 | XUB4APANL2 (2) XUB4APBNL2 (3) | XU9N18NP340D | XUB0BNSWM12+XUZC50 (6) | XUEH753538 | XUX8AKSAT16+XUZC50 (10) (13) |
| XU5P18PP340D | XUB4APANM12 (2) XUB4APBNM12 (3) | XU9N18PP340 | XUB0BPSNL2+XUZC50 (6) | XUEH753538H4 | XUX8AKSAT16+XUZC50 +XUZC50 (13) |
| XU5P18PP340L5 | XUB4APANM12 +XZCP1141L10 (4) (7) | XU9N18PP340D | XUB0BPSNM12+XUZC50 (6) | XUET010315 | XUX0ARCTT16+XUZC50 (10) (14) |
| XU5P18PP340W | XUB4APANM12 +XZCP1141L10 (5) (7) | XU9N18PP340L5 | XUB0BPSNL5+XUZC50 (6) | | |
| XU5P18PP340WD | XUB4APANL5 (4) XUB4APBNL5 (5) | XU9N18PP340W | XUB0BPSWL2+XUZC50 (6) | | |
| | | XU9N18PP340WD | XUB0BPSWM12+XUZC50 (6) | | |
| | | XU9N18PP340WL5 | XUB0BPSWL5+XUZC50 (6) | | |

Note: XUZC50 is a 50 x 50 mm reflector, XUZA5● and XUZX2000 are metal fixing brackets and XUZC50 is an M16 to 1/2" NPT adaptor (see pages 5/158 and 5/159)

(2) Sensor output NO, PNP connection.
 (3) Sensor output NC, NPN connection.
 (4) Sensor output NO, PNP connection.
 (5) Sensor output NC, PNP connection.
 (6) M18 threaded length = 44 mm instead of 50/55 mm.
 (7) For a cable length = 10 m, the use of an M12 connector version sensor combined with an XZCP1141L10 jumper cable (M12 with 10 m cable) is recommended.
 (8) Sn = 0.3 m instead of 0.4 m. For a sensing distance Sn greater than 0.3 m, see references XUB5●●●●● on page 5/26.
 (9) M18 threaded length = 28 mm instead of 55 mm.
 (10) Sensor with M16 threaded cable entry instead of Pg 13.5.
 (11) Sn = 11 m instead of 15 m.
 (12) Sn = 40 m instead of 50 m.
 (13) Output current switching capacity = 100 mA instead of 200 mA.
 (14) Time delay relay output 0.02...15 s instead of 0.03...60 s.



| Old sensor | New OsiSense XU sensor | Old sensor | New OsiSense XU sensor | Old sensor | New OsiSense XU sensor |
|--|--|--------------|----------------------------------|--|--|
| Compact design sensors type XUE (continued) | | | | | |
| XUET010315H7 | XUX0ARCTT16+XUZX2000+XUZC50 (14) | XUJLM0619H7 | XUX9ARCNT16+XUZX2000+XUZC50 | XUJLM700318D1 | XUX8ARCTT16+XUZX2000 |
| XUET080319 | XUX0ARCTT16+XUZX2000+XUZC50 (10) (14) | XUJLM0619P9 | XUX9ARCNT16+XUZX2000+XUZC50 (16) | XUJLM700318D2 | XUX8ARCTT16+XUZX2000 |
| XUET080319H4 | XUX0ARCTT16+XUZX2000+XUZC50 (14) | XUJLM0811 | XUX1ARCNT16+XUZX2000+XUZC50 (15) | XUJLM700318H7 | XUX8ARCTT16+XUZX2000+XUZC50 |
| XUET10031 | XUX0ARCTT16+XUZX2000+XUZC50 (10) (11) (14) | XUJLM0811H7 | XUX1ARCNT16+XUZX2000+XUZC50 | XUJLM700318P9 | XUX8ARCTT16+XUZX2000 (16) |
| XUET10031H7 | XUX0ARCTT16+XUZX2000+XUZC50 (11) (14) | XUJLM0811P9 | XUX1ARCNT16+XUZX2000+XUZC50 (16) | XUJT06031 | XUX0ARCTT16+XUZX2000+XUZC50 (15) |
| XUET300314 | XUX0ARCTT16+XUZX2000 (10) (12) (14) | XUJLM1503 | XUX0ARCTT16T+XUZX2000 (15) | XUJT060319 | XUX0ARCTT16+XUZX2000+XUZC50 (15) |
| XUET300314H7 | XUX0ARCTT16+XUZX2000+XUZC50 (12) (14) | XUJLM1503H7 | XUX0ARCTT16T+XUZX2000+XUZC50 | XUJT060319D1 | XUX0ARCTT16+XUZX2000+XUZC50 |
| Compact design sensors type XUJ | | | | | |
| XUJK06353 | XUX0AKSAT16+XUZX2000+XUZC50 (13) (15) | XUJLM1514 | XUX2ARCNT16R+XUZX2000 (15) | XUJT060319D2 | XUX0ARCTT16+XUZX2000+XUZC50 |
| XUJK063539 | XUX0AKSAT16+XUZX2000+XUZC50 (13) (15) | XUJLM1514H7 | XUX2ARCNT16R+XUZX2000+XUZC50 | XUJT060319H7 | XUX0ARCTT16+XUZX2000+XUZC50+XUZX2001 |
| XUJK063539D1 | XUX0AKSAM12+XUZX2000+XUZC50 (13) | XUJLM1514P9 | XUX2ARCNT16R+XUZX2000 (16) | XUJT060319P9 | XUX0ARCTT16+XUZX2000+XUZC50 (16) |
| XUJK063539D2 | XUX0AKSAM12+XUZX2000+XUZC50 (13) | XUJM06031 | XUX1ARCNT16+XUZX2000+XUZC50 (15) | XUJT06031D1 | XUX0ARCTT16+XUZX2000+XUZC50 |
| XUJK063539H7 | XUX0AKSAT16+XUZX2000+XUZC50+XUZX2001 (13) | XUJM060319 | XUX9ARCNT16+XUZX2000+XUZC50 (16) | XUJT06031D2 | XUX0ARCTT16+XUZX2000+XUZC50 |
| XUJK063539P9 | XUX0AKSAT16+XUZX2000+XUZC50 (13) (16) | XUJM060319D1 | XUX9ARCNT16+XUZX2000+XUZC50 | XUJT06031H7 | XUX0ARCTT16+XUZX2000+XUZC50+XUZX2001 |
| XUJK06353D1 | XUX0AKSAM12+XUZX2000+XUZC50 (13) | XUJM060319D2 | XUX9ARCNT16+XUZX2000+XUZC50 | XUJT06031P9 | XUX0ARCTT16+XUZX2000+XUZC50 (16) |
| XUJK06353D2 | XUX0AKSAM12+XUZX2000+XUZC50 (13) | XUJM060319H7 | XUX9ARCNT16+XUZX2000+XUZC50 | XUJT100314 | XUX0ARCTT16+XUZX2000 (15) |
| XUJK06353H7 | XUX0AKSAT16+XUZX2000+XUZC50+XUZX2001 (13) | XUJM060319P9 | XUX9ARCNT16+XUZX2000+XUZC50 (16) | XUJT100314D1 | XUX0ARCTT16+XUZX2000 |
| XUJK06353P9 | XUX0AKSAT16+XUZX2000+XUZC50 (13) (16) | XUJM06031D1 | XUX1ARCNT16+XUZX2000+XUZC50 | XUJT100314D2 | XUX0ARCTT16+XUZX2000 |
| XUJK103534 | XUX0AKSAT16+XUZX2000 (13) (15) | XUJM06031D2 | XUX1ARCNT16+XUZX2000+XUZC50 | XUJT100314H7 | XUX0ARCTT16+XUZX2000+XUZC50 |
| XUJK103534D1 | XUX0AKSAM12+XUZX2000 (13) | XUJM06031H7 | XUX1ARCNT16+XUZX2000+XUZC50 | XUJT100314P9 | XUX0ARCTT16+XUZX2000 (16) |
| XUJK103534D2 | XUX0AKSAM12+XUZX2000 (13) | XUJM06031P9 | XUX1ARCNT16+XUZX2000+XUZC50 (16) | XUJT120318 | XUX8ARCTT16+XUZX2000 (15) |
| XUJK103534H7 | XUX0AKSAT16+XUZX2000+XUZC50 (13) | XUJM1000 | XUX0AKSAT16T+XUZX2000 (15) | XUJT120318D1 | XUX8ARCTT16+XUZX2000 |
| XUJK103534P9 | XUX0AKSAT16+XUZX2000 (13) (16) | XUJM1000D1 | XUX0AKSAM12T+XUZX2000 | XUJT120318D2 | XUX8ARCTT16+XUZX2000 |
| XUJK123538 | XUX8AKSAT16+XUZX2000 (13) (15) | XUJM1000D2 | XUX0AKSAM12T+XUZX2000 | XUJT120318H7 | XUX8ARCTT16+XUZX2000+XUZC50 |
| XUJK123538D1 | XUX8AKSAM12+XUZX2000 (13) | XUJM1000H7 | XUX0AKSAT16T+XUZX2000+XUZC50 | XUJT120318P9 | XUX8ARCTT16+XUZX2000 (16) |
| XUJK123538D2 | XUX8AKSAM12+XUZX2000 (13) | XUJM1000P9 | XUX0AKSAT16T+XUZX2000 (16) | XUJT700318 | XUX8ARCTT16+XUZX2000 (15) |
| XUJK123538H7 | XUX8AKSAT16+XUZX2000+XUZC50 (13) | XUJM100314 | XUX0ARCTT16+XUZX2000 (15) | XUJT700318D1 | XUX8ARCTT16+XUZX2000 |
| XUJK123538P9 | XUX8AKSAT16+XUZX2000 (13) (16) | XUJM100314D1 | XUX0ARCTT16+XUZX2000 | XUJT700318D2 | XUX8ARCTT16+XUZX2000 |
| XUJK703538 | XUX8AKSAT16+XUZX2000 (13) (15) | XUJM100314D2 | XUX0ARCTT16+XUZX2000 | XUJT700318H7 | XUX8ARCTT16+XUZX2000+XUZC50 |
| XUJK703538D1 | XUX8AKSAM12+XUZX2000 (13) | XUJM100314H7 | XUX0ARCTT16+XUZX2000+XUZC50 | XUJT700318P9 | XUX8ARCTT16+XUZX2000 (16) |
| XUJK703538D2 | XUX8AKSAM12+XUZX2000 (13) | XUJM100314P9 | XUX0ARCTT16+XUZX2000 (16) | Compact design sensors type XUK | |
| XUJK703538H7 | XUX8AKSAT16+XUZX2000+XUZC50 (13) | XUJM120318 | XUX8ARCTT16+XUZX2000 (15) | XUK1ARCTL10 | XUK1ARCNT10+XUZA51+XUZC50 |
| XUJK703538P9 | XUX8AKSAT16+XUZX2000+XUZC50 (13) | XUJM120318D1 | XUX8ARCTT16+XUZX2000 | XUK1ARCTL2 | XUK1ARCNT2+XUZA51+XUZC50 |
| XUJK703538H7 | XUX8AKSAT16+XUZX2000+XUZC50 (13) | XUJM120318D2 | XUX8ARCTT16+XUZX2000 | XUK2AKSAL10 | XUK2APANL10R+XUK0AKSNL10T+2 x XUZA51 (4) |
| XUJK703538P9 | XUX8AKSAT16+XUZX2000 (13) (16) | XUJM120318H7 | XUX8ARCTT16+XUZX2000+XUZC50 | | XUK2APBNL10R+XUK0AKSNL10T+2 x XUZA51 (5) |
| XUJLM0619 | XUX9ARCNT16+XUZX2000+XUZC50 (15) | XUJM120318P9 | XUX8ARCTT16+XUZX2000 (16) | | XUK2ANANL10R+XUK0AKSNL10T+2 x XUZA51 (2) |
| | | XUJM700318 | XUX8ARCTT16+XUZX2000 (15) | | XUK2ANBNL10R+XUK0AKSNL10T+2 x XUZA51 (3) |

Note: XUZX50 is a 50 x 50 mm reflector, XUZA5 and XUZX2000 are metal fixing brackets and XUZX2001 is an M16 to 1/2" NPT adaptor (see pages 5/158 and 5/159).

(2) Sensor output NO, PNP connection.

(3) Sensor output NC, NPN connection.

(4) Sensor output NO, PNP connection.

(5) Sensor output NC, PNP connection.

(10) Sensor with M16 threaded cable entry instead of Pg 13.

(11) Sn = 11 m instead of 15 m.

(12) Sn = 40 m instead of 50 m.

(13) Output current switching capacity = 100 mA instead of 200 mA.

(14) Time delay relay output 0.02...15 s instead of 0.03...60 s.

(15) Sensor with M16 threaded cable entry instead of Pg 11.

(16) Sensor with M16 threaded cable entry instead of Pg 9.

| <i>Old sensor</i> | New OsiSense XU sensor | <i>Old sensor</i> | New OsiSense XU sensor | <i>Old sensor</i> | New OsiSense XU sensor | |
|--|--|--|---|-------------------|--------------------------------|------------------|
| Compact design sensors type XUK (continued) | | | | | | |
| XUK2AKSAL2 | XUK2APANL2R +XUK0AKSNL2T +2 x XUZA51 (4) XUK2APBNL2R +XUK0AKSNL2T +2 x XUZA51 (5) XUK2ANANL2R +XUK0AKSNL2T +2 x XUZA51 (2) XUK2ANBNL2R +XUK0AKSNL2T +2 x XUZA51 (3) | XUK9AKSAM12 | XUK9APANM12+XUZA51 +XUZC50 (4) XUK9APBNM12+XUZA51 +XUZC50 (5) XUK9ANANM12+XUZA51 +XUZC50 (2) XUK9ANBNM12+XUZA51 +XUZC50 (3) XUK9ARCTL10 | XUM2ANBNL2R | XUM2ANCNL2R (17) | |
| XUK2AKSAM12 | XUK2APANM12R +XUK0AKSNM12T +2 x XUZA51 (4) XUK2APBNM12R +XUK0AKSNM12T +2 x XUZA51 (5) XUK2ANANM12R +XUK0AKSNM12T +2 x XUZA51 (2) XUK2ANBNM12R +XUK0AKSNM12T +2 x XUZA51 (3) | XUK9ARCTL2 | XUK9ARCNL2+XUZA51 +XUZC50 | XUM2ANBNM8R | XUM2ANCNM8R (17) | |
| XUK2ARCTL10 | XUK0ARCTL10 +XUK0ARCTL10T +2 x XUZA51 | Compact design sensors type XUL | | | XUM2APANL2R | XUM2APCNL2R (17) |
| XUK2ARCTL2 | XUK0ARCTL2 +XUK0ARCTL2T +2 x XUZA51 | XULH153538 | XUK8AKSNL2+XUZA51 (13) | XUM2APANL5R | XUM2APCNM8R+XZCP0941L5 (17) | |
| XUK5AKSAL10 | XUK5APANL10+XUZA51 (4) XUK5APBNL10+XUZA51 (5) XUK5ANANL10+XUZA51 (2) XUK5ANBNL10+XUZA51 (3) | XULH153538D | XUK8AKSNM12+XUZA51 (13) | XUM2APANM8R | XUM2APCNM8R (17) | |
| XUK5AKSAL2 | XUK5APANL2+XUZA51 (4) XUK5APBNL2+XUZA51 (5) XUK5ANANL2+XUZA51 (2) XUK5ANBNL2+XUZA51 (3) | XULH153538H7 | XUK8AKSNM12+XUZA51 (13) | XUM2APBNL2R | XUM2APCNL2R (17) | |
| XUK5AKSAM12 | XUK5APANM12+XUZA51 (4) XUK5APBNM12+XUZA51 (5) XUK5ANANM12+XUZA51 (2) XUK5ANBNM12+XUZA51 (3) | XULH153538L05 | XUK8AKSNL5+XUZA51 (13) | XUM2APBNL5R | XUM2APCNM8R+XZCP0941L5 (17) | |
| XUK5ARCTL10 | XUK5ARCNL10+XUZA51 | XULH153538L10 | XUK8AKSNL10+XUZA51 (13) | XUM2APBNM8R | XUM2APCNM8R (17) | |
| XUK5ARCTL2 | XUK5ARCNL2+XUZA51 | XULH303538 | XUK8AKSNL2+XUZA51 (13) | XUM5ANANL2 | XUM5ANCNL2 (17) | |
| XUK9AKSAL10 | XUK9APANL10+XUZA51 +XUZC50 (4) XUK9APBNL10+XUZA51 +XUZC50 (5) XUK9ANANL10+XUZA51 +XUZC50 (2) XUK9ANBNL10+XUZA51 +XUZC50 (3) XUK9APANL2+XUZA51 +XUZC50 (4) XUK9APBNL2+XUZA51 +XUZC50 (5) XUK9ANANL2+XUZA51 +XUZC50 (2) XUK9ANBNL2+XUZA51 +XUZC50 (3) | XULH303538DH7 | XUK8AKSNM12+XUZA51 (13) | XUM5ANANM8 | XUM5ANCNM8 (17) | |
| | | XULH303538L05 | XUK8AKSNL5+XUZA51 (13) | XUM5ANBNL2 | XUM5ANCNL2 (17) | |
| | | XULH303538L10 | XUK8AKSNL10+XUZA51 (13) | XUM5APANL2 | XUM5APCNL2 (17) | |
| | | XULH303538D | XUK8AKSNM12+XUZA51 (13) | XUM5APANL5 | XUM5APCNM8+XZCP0941L5 (17) | |
| | | XULH303538DH7 | XUK8AKSNM12+XUZA51 (13) | XUM5APANM8 | XUM5APCNM8 (17) | |
| | | XULH303538L05 | XUK8AKSNL5+XUZA51 (13) | XUM5APBNL2 | XUM5APCNL2 (17) | |
| | | XULH303538L10 | XUK8AKSNL10+XUZA51 (13) | XUM5APBNL5 | XUM5APCNM8+XZCP0941L5 (17) | |
| | | XULJ153538 | XUK8AKSNL2+XUZA51 (13) | XUM5APBNM8 | XUM5APCNM8 (17) | |
| | | XULJ153538D | XUK8AKSNM12+XUZA51 (13) | XUM6ANANL2 | XUM5ANCNL2 (17) | |
| | | XULJ153538H7 | XUK8AKSNM12+XUZA51 (13) | XUM6ANANM8 | XUM5ANCNM8 (17) | |
| | | XULJ153538L05 | XUK8AKSNL5+XUZA51 (13) | XUM6ANBNL2 | XUM5ANCNL2 (17) | |
| | | XULJ303538 | XUK8AKSNL2+XUZA51 (13) | XUM6APBNM8 | XUM5APCNL2 (17) | |
| | | XULJ303538D | XUK8AKSNM12+XUZA51 (13) | XUM6APANL2 | XUM5APCNM8+XZCP0941L5 (17) | |
| | | XULJ303538L05 | XUK8AKSNL5+XUZA51 (13) | XUM6APANM8 | XUM5APCNM8 (17) | |
| | | Compact design sensors type XUM | | | XUM6APBNL2 | XUM5APCNL2 (17) |
| | | XUM1ANANL2 | XUM9ANCNL2 (17) | XUM6APBNL5 | XUM5APCNM8+XZCP0941L5 (17) | |
| | | XUM1ANANL5 | XUM9ANCNM8+XZCP0941L5 (17) | XUM6APBNM8 | XUM5APCNM8 (17) | |
| | | XUM1ANANM8 | XUM9ANCNM8 (17) | XUM6APBNL2 | XUM5APCNL2 (17) | |
| | | XUM1ANBNL2 | XUM9ANCNL2 (17) | XUM6APANL2 | XUM5APCNM8+XZCP0941L5 (17) | |
| | | XUM1ANBNM8 | XUM9ANCNM8 (17) | XUM6APANM8 | XUM5APCNM8 (17) | |
| | | XUM1APANL10 | XUM9APCNM8+XZCP0941L10 (17) | XUM6APBNL5 | XUM5APCNL2 (17) | |
| | | XUM1APANL2 | XUM9APCNL2 (17) | XUM9ANANL2 | XUM9ANCNL2 (17) | |
| | | XUM1APANL5 | XUM9APCNM8+XZCP0941L5 (17) | XUM9ANANM8 | XUM9ANCNM8 (17) | |
| | | XUM1APANM8 | XUM9APCNM8 (17) | XUM9ANBNL2 | XUM9ANCNL2 (17) | |
| | | XUM1APBNL10 | XUM9APCNM8+XZCP0941L10 (17) | XUM9ANBNM8 | XUM9ANCNM8 (17) | |
| | | XUM1APBNL2 | XUM9APCNL2 (17) | XUM9APANL2 | XUM9APCNL2 (17) | |
| | | XUM1APBNL5 | XUM9APCNM8+XZCP0941L5 (17) | XUM9APANL5 | XUM9APCNM8+XZCP0941L5 (17) | |
| | | XUM1APBNM8 | XUM9APCNM8 (17) | XUM9APANM8 | XUM9APCNM8 (17) | |
| | | XUM2AKSNL2T | XUM2AKCNL2T (17) | XUM9APBNL2 | XUM9APCNL2 (17) | |
| | | XUM2AKSNL5T | XUM2AKCNM8T+XZCP0941L5 (17) | XUM9APBNL5 | XUM9APCNM8+XZCP0941L5 (17) | |
| | | XUM2AKSNM8T | XUM2AKCNM8T (17) | XUM9APBNM8 | XUM9APCNM8 (17) | |
| | | XUM2ANANL2R | XUM2ANCNL2R (17) | | | |
| | | XUM2ANANL5R | XUM2ANCNM8R+XZCP0941L5 (17) | | | |
| | | XUM2ANANM8R | XUM2ANCNM8R (17) | | | |

Note: XUZC50 is a 50 x 50 mm reflector, XUZA5● and XUZX2000 are metal fixing brackets and XUZX2001 is an M16 to 1/2" NPT adaptor (see pages 5/158 and 5/159).

(2) Sensor output NO, PNP connection.
(3) Sensor output NC, NPN connection.
(4) Sensor output NO, PNP connection.

(5) Sensor output NC, PNP connection.
(13) Output current switching capacity = 100 mA instead of 200 mA.

(17) Sensor with NO/NC outputs.