

HANDSET HB50

Features:

- Handset for up to 4 actuators
- Ergonomic and universal design
- High-strength plastic housing
- Easy-touch buttons
- Hook for easy placement
- Protection class: IP 51
- 2.4 m straight cable
- Colour: black


Options:

- Customised front cover
- Protection class IP 65
- 0.6 m coiled cable or extra long cable, see ordering example
- Anti-slip rubber tip for placement on a flat surface (replaces hook)
- Colour: grey

Usage:

- Ambient temperature: +5° to +40°C
- HB50B is compatible with CBJ2
- HB50E is compatible with CB9P..Px types (except..PMIPN) and CB14 with memory
- HB50L is compatible with CB18 MKII and newer versions
- HB50J is compatible with CBJ1
- HB50M is compatible with CB18 MKI
- HB50N for CB18 with customised software and front cover
- HB50V is for OPENBUS™ control boxes e.g. CB20
- HB50Y is for Jumbo Home (CBJH)

MEDLINE®
IMPROVING EFFICIENCY
TECHLINE™
IMPROVING FLEXIBILITY

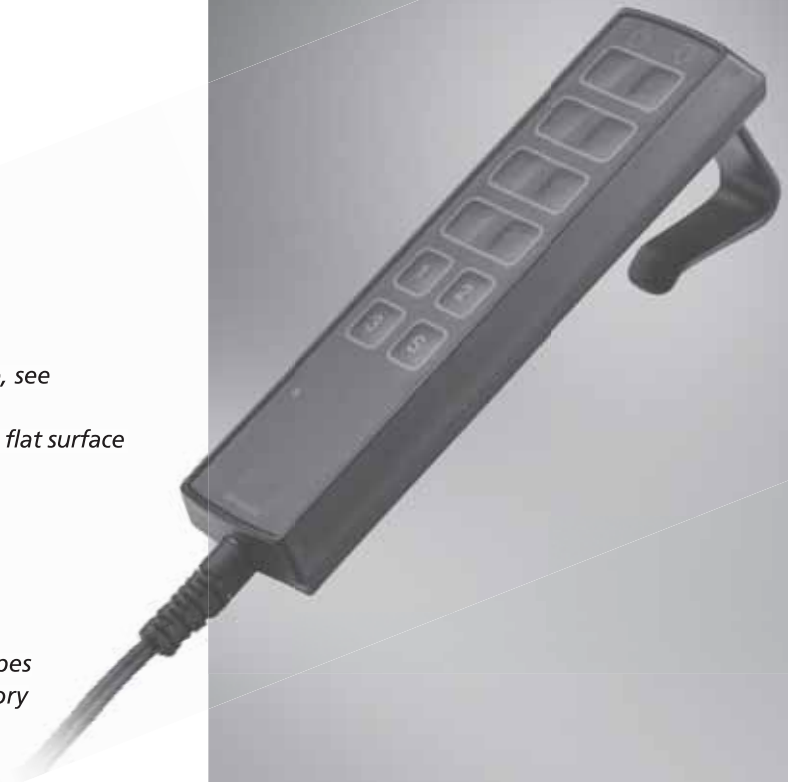

The HB50 is primarily designed for the LINAK JUMBO system and LINAK control boxes with memory functions. The HB50 gives the user access to a range of memory functions, allowing present positions to be stored.

For use in a wide variety of hospital, patient care and industrial applications.

HB50 standard front covers:



HB54-000



HB53M-000



HB53-000



HB53-003



HB52M-000



HB52-004



HB51M-000



HB51-002



HB51-000

HB50

Ordering example:

HB50	Black	Grey
HB5 1 0 00 - 00 0 0 0		
Cable: 0 = Straight cable, 8 pole DIN plug: 2.4m	0015751	0015752
1 = 9-Core coiled cable, 8-pole DIN plug: 0.6m	0015761	0015762
2 = 6-Core coiled cable, 8-pole DIN plug: 0.5m only HB51B and HB52J	0015763	0015764
5 = 9-Core coiled cable with extra long - straight end (0.6m/1.6m)	0015766	0015767
6 = Straight cable, 8 pole Modular Jack (1.6m)	0567008	0567011
IP - rating: 0 = IP51 1 = IP65		
Colour: 0 = black 1 = grey		
Front plate no. Customer designed front cover		
Special code no., if any		
M = for use with CB10M and CB18M MKI J = Jumbo (CBJ1) B = Jumbo (CBJ2) L = for CB18M, MKII and newer versions, low power N = for CB18M, MKII and newer versions, low power without memory (only with customer designed front cover) E = for CB14M and CB9..Px (Not CB9..PM/PN)		
No. of rows: 1 - 4 1 - 6 for HB50N		

Option: rubber tip - to be specified separately (replaces hook)

Specifications subject to change without prior notice.
It is the responsibility of the product user to determine the suitability of LINAK A/S products for a specific application. LINAK will at point of delivery replace/repair defective products covered by the warranty if promptly returned to the factory. No liability is assumed beyond such replacement/repair.