


LS / LSD

Features:


- *The LS/LSD system can be mounted on the actuators LA22, LA30 and LA30S*
- *The micro-switches are individually adjustable*
- *Weather resistant design made from anodised aluminium, rubber and stainless steel*
- *The micro-switches of the LSD system cuts off the current to the motor in end position and have diodes for return stroke.*
- *The LSD system is factory installed*
- *The LS system is delivered separately for customer assembly*
- *Storage temperature: -40° to +70°C*



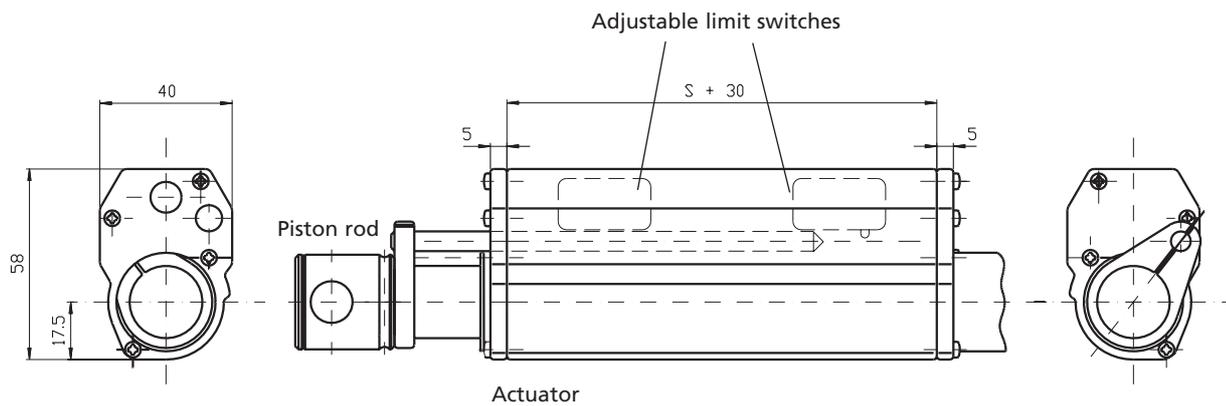

LS/LSD

Ordering example:

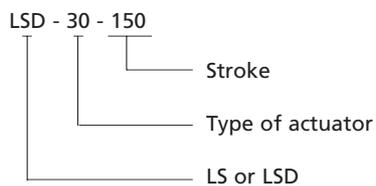

Specifications subject to change without prior notice.
 It is the responsibility of the product user to determine the suitability of LINAK A/S products for a specific application. LINAK will at point of delivery replace/repair defective products covered by the warranty if promptly returned to the factory. No liability is assumed beyond such replacement/repair.