

Automation systems Drive solutions

Controls

Inverters

Motors

Gearboxes

Engineering Tools

Motors: MCS synchronous servo motors, MCA asynchronous servo motors

Gearboxes: MPR/MPG planetary gearboxes

Contents of the L-force catalogue

About Lenze	Lenze makes many things easy for you. A matter of principle: the right products for every application. L-force product portfolio		
Automation systems	Controller-based Automation Drive-based automation	1.1 1.2	
Drive solutions	HighLine tasks StateLine tasks BaseLine tasks	2.1 2.2 2.3	
Controls	Cabinet Controller Panel Controller I/O system 1000 Monitor Panel	3.1 3.2 3.3 3.4 3.5 3.6	
Inverters	Decentralised Cabinet	Inverter Drives 8400 protec Inverter Drives 8400 motec Servo Drives 9400 HighLine Inverter Drives 8400 TopLine Servo Inverters i700 Inverter Drives 8400 HighLine Inverter Drives 8400 StateLine Inverter Drives 8400 BaseLine	4.1 4.2 4.4 4.5 4.6 4.7 4.8 4.10
Motors	Servo motors Three-phase AC motors	MCS synchronous servo motors MD/KS synchronous servo motors MQA asynchronous servo motors MCA asynchronous servo motors MF three-phase AC motors MH three-phase AC motors MD three-phase AC motors m300 Lenze Smart Motor MD/MH basic three-phase AC motors	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9
Gearboxes	Axial gearbox Right-angle gearbox Motor data	g700-P planetary gearbox MPR/MPG planetary gearboxes g500-H helical gearbox GST helical gearboxes g500-S shaft-mounted helical gearbox GFL shaft-mounted helical gearboxes g500-B bevel gearbox GKR bevel gearboxes GKS helical-bevel gearboxes GSS helical-worm gearboxes Assignment see above	6.1 6.2 6.3 6.4 6.5 6.6 6.7 6.8 6.9 6.10 6.11
Engineering Tools	Navigator Drive Solution Designer Drive Solution Catalogue Engineer PLC Designer VisiWinNET® EASY Starter	7.1 7.2 7.3 7.4 7.5 7.6 7.7	

 Selected portfolio

 Additional portfolio

Lenze makes many things easy for you.

With our motivated and committed approach, we work together with you to create the best possible solution and set your ideas in motion - whether you are looking to optimise an existing machine or develop a new one. We always strive to make things easy and seek perfection therein. This is anchored in our thinking, in our services and in every detail of our products. It's as easy as that!

1

Developing ideas

Are you looking to build the best machine possible and already have some initial ideas? Then get these down on paper together with us, starting with small innovative details and stretching all the way to completely new machines. Working together, we will develop an intelligent and sustainable concept that is perfectly aligned with your specific requirements.

2

Drafting concepts

We see welcome challenges in your machine tasks, supporting you with our comprehensive expertise and providing valuable impetus for your innovations. We take a holistic view of the individual motion and control functions here and draw up consistent, end-to-end drive and automation solutions for you - keeping everything as easy as possible and as extensive as necessary.

3

Implementing solutions

Our easy formula for satisfied customers is to establish an active partnership with fast decision-making processes and an individually tailored offer. We have been using this simple principle to meet the ever more specialised customer requirements in the field of mechanical engineering for many years.

4

Manufacturing machines

Functional diversity in perfect harmony: as one of the few full-range providers in the market, we can provide you with precisely those products that you actually need for any machine task – no more and no less. Our L-force product portfolio, a consistent platform for implementing drive and automation tasks, is invaluable in this regard.

5

Ensuring productivity

Productivity, reliability and new performance peaks on a daily basis – these are our key success factors for your machine. After delivery, we offer you cleverly devised service concepts to ensure continued safe operation. The primary focus here is on technical support, based on the excellent application expertise of our highly-skilled and knowledgeable after-sales team.

A matter of principle: the right products for every application.


Lenze's extensive L-force product portfolio follows a very simple principle. The functions of our finely scaled products are assigned to the three lines Base-Line, State-Line or High-Line.

But what does this mean for you? It allows you to quickly recognise which products represent the best solution for your own specific requirements.

Powerful products with a major impact:


- Easy handling
- High quality and durability
- Reliable technologies in tune with the latest developments

Lenze products undergo the most stringent testing in our own laboratory. This allows us to ensure that you will receive consistently high quality and a long service life. In addition to this, five logistics centres ensure that the Lenze products you select are available for quick delivery anywhere across the globe. It's as easy as that!

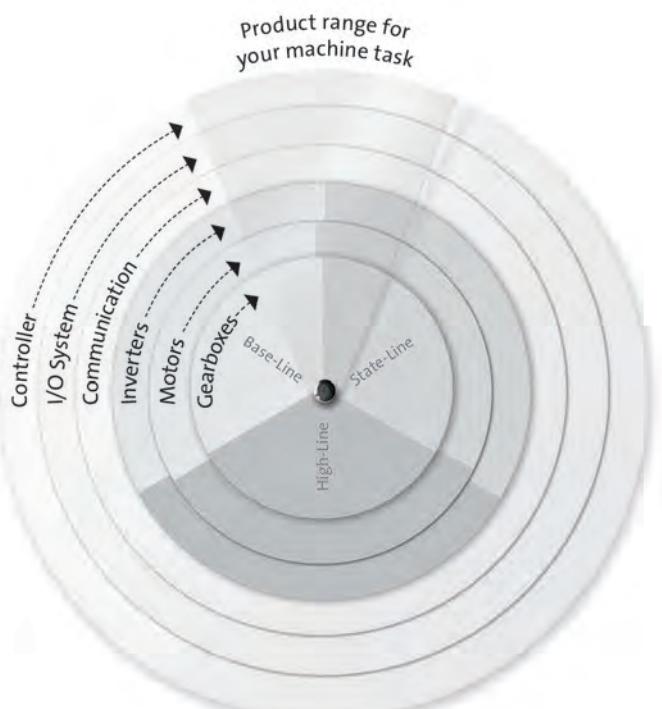


L-force product portfolio

Controls

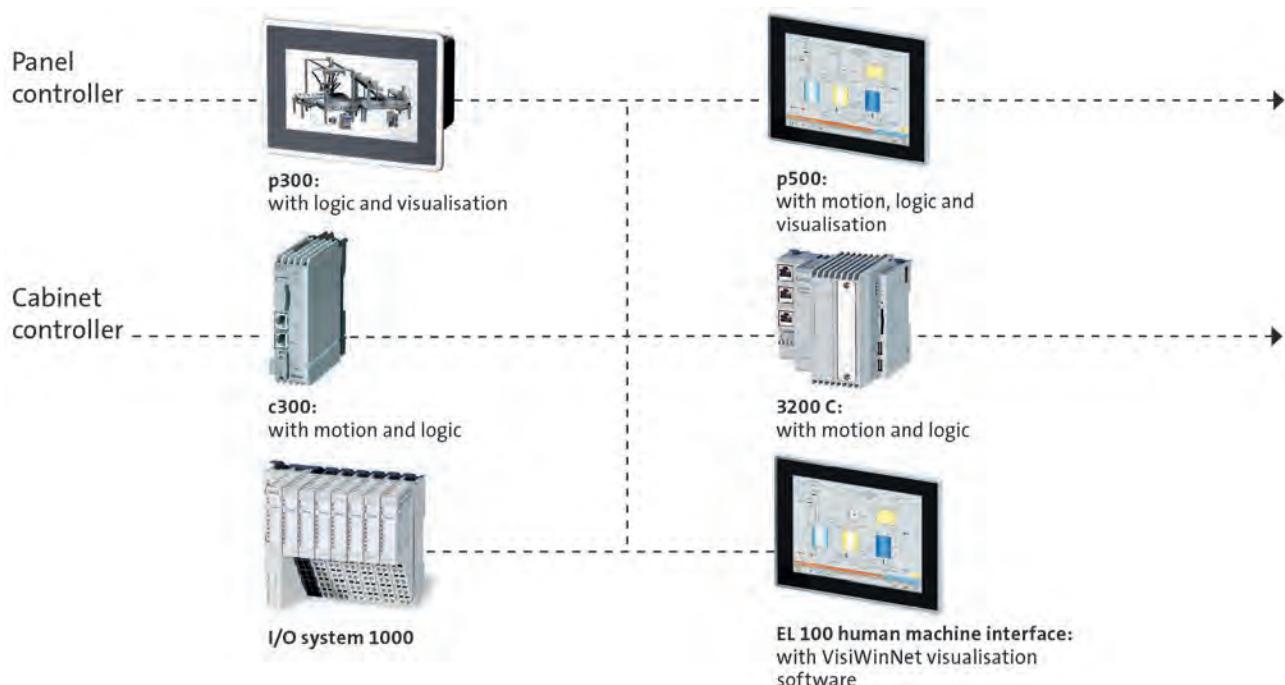


Engineering Tools

Navigator
All Lenze engineering tools at a glance

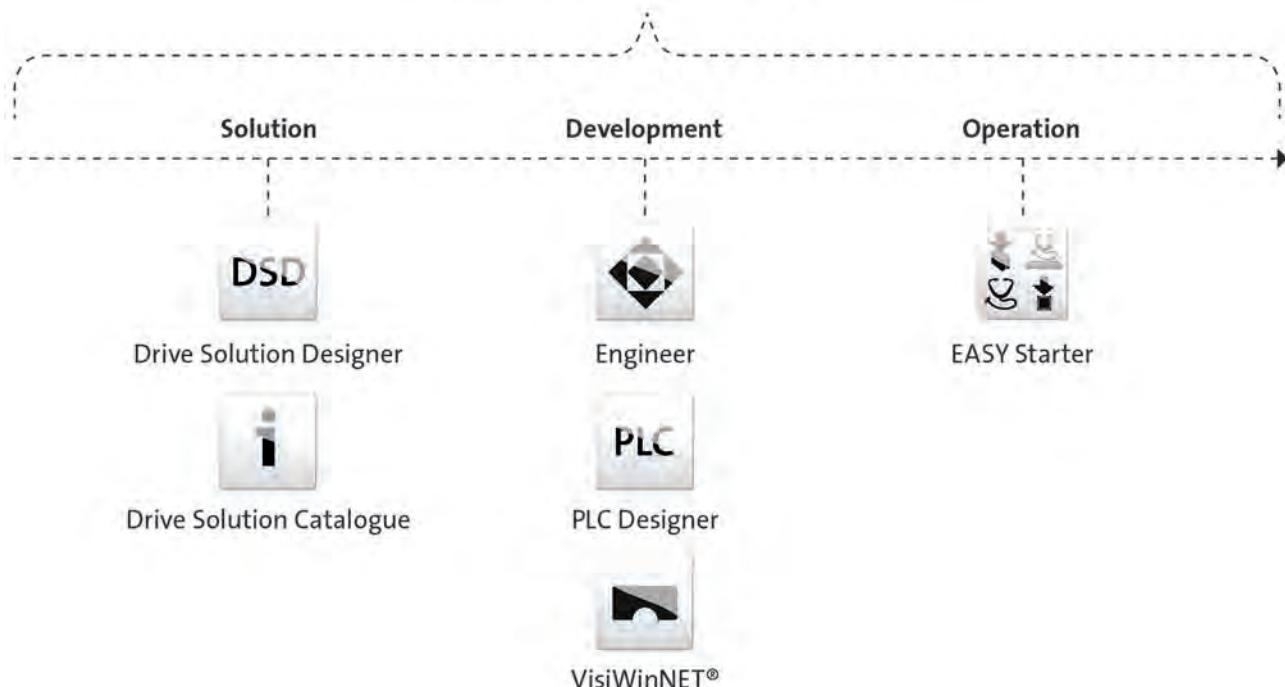

L-force product portfolio

Inverters

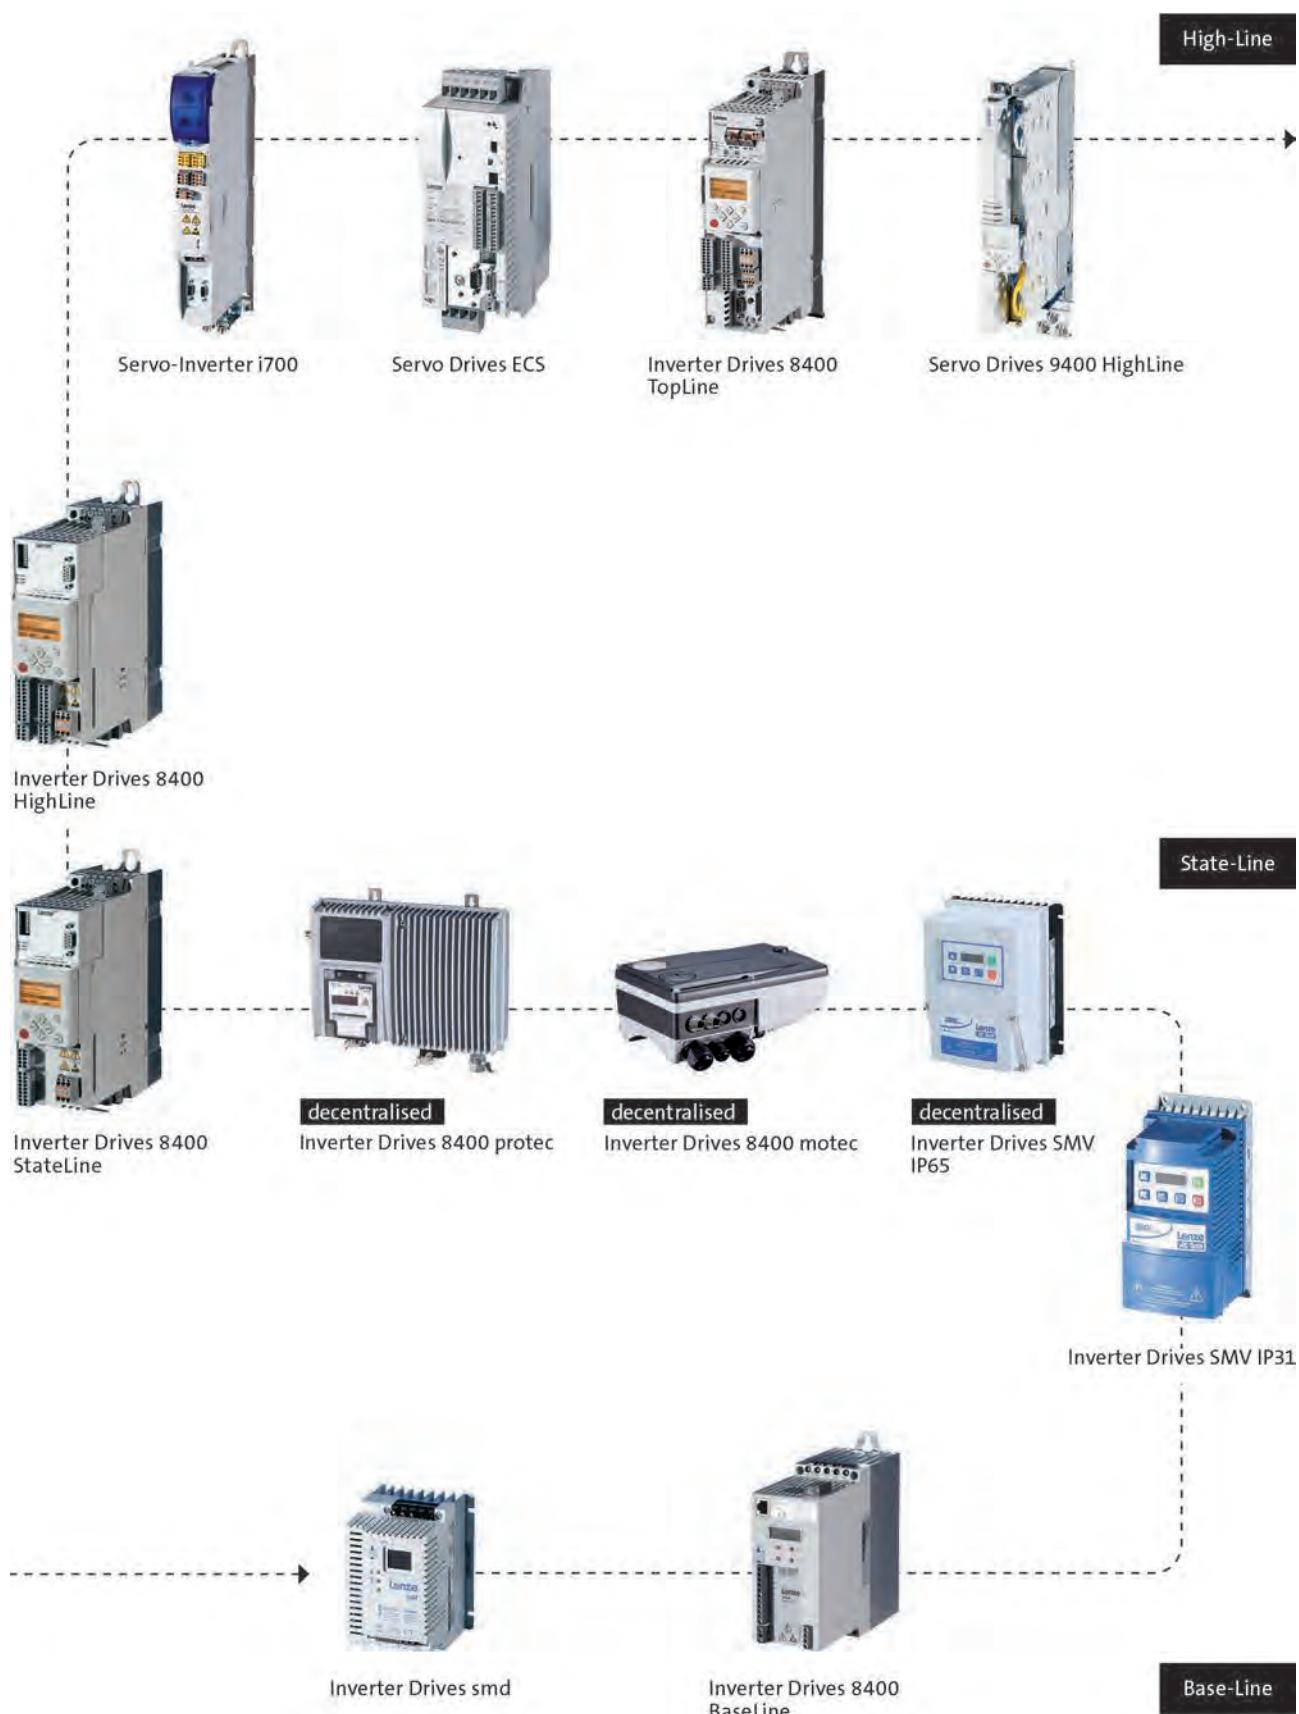

L-force product portfolio

Motors

High-Line



MQA asynchronous servo motors



SDSGS synchronous servo motors



MDXKS synchronous servo motors



Synchronous servo motors MCS



Asynchronous servo motors
MCA



Asynchronous servo motors
SDSGA

State-Line



MF three-phase AC motors



MH three-phase AC motors



MD three-phase
AC motors



Basic MD/MH three-phase
AC motors

Base-Line

L-force product portfolio

Gearboxes

High-Line



Planetary gearboxes




Shaft-mounted helical
gearboxes

State-Line



Helical-bevel gearboxes

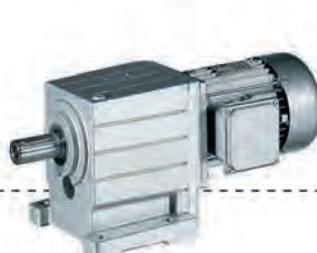

Helical gearboxes



Bevel gearboxes



Helical-worm gearboxes



Worm gearboxes

Base-Line

Gearboxes

MPR planetary-geared motors

9 ... 387 Nm (synchronous servo motors)



MPR planetary geared motors



Contents

General information	List of abbreviations	6.2.1 - 5
	Product information	6.2.1 - 6
	Equipment	6.2.1 - 7
	The gearbox kit	6.2.1 - 9
	Dimensioning	6.2.1 - 14
Technical data	Selection tables, notes	6.2.1 - 17
	Selection tables	6.2.1 - 18
	Dimensions, notes	6.2.1 - 37
	Dimensions, self-ventilated motors	6.2.1 - 38
	Dimensions, forced ventilated motors	6.2.1 - 53
	Weights, self-ventilated motors	6.2.1 - 61
	Weights, forced ventilated motors	6.2.1 - 61
	Surface and corrosion protection	6.2.1 - 62

MPR planetary geared motors

Contents



6.2.1

MPR planetary geared motors



General information

List of abbreviations

c		Load capacity
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass
M ₂	[Nm]	Output torque
M _{2, max}	[Nm]	Max. output torque
n _{2, eto}	[r/min]	Transition speed
n _{2, th}	[r/min]	Thermal limit speed

CCC	China Compulsory Certificate
CE	Communauté Européenne
CSA	Canadian Standards Association
cURus	Combined certification marks of UL for the USA and Canada
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

6.2.1

MPR planetary geared motors



General information

Product information

The combination of Vogel MPR/MPG planetary gearboxes and Lenze servo motors is the optimum solution for dynamic or highly dynamic applications requiring the highest precision. These solutions cater to the requirements such as those encountered on a daily basis in the printing and packaging industry, as well as in the fields of handling and robot technology, filling and materials handling technology and, in many cases, also general engineering.

The MPR/MPG planetary gearboxes feature a higher-than-average torsional stiffness combined with a backlash down to one angular minute. Their combination with MCS synchronous servo motors and MCA asynchronous servo motors creates flexible and particularly energy-efficient solutions which cover virtually every application.

Version

- Robust planetary gearbox with solid shaft (MPR) or flanged shaft (MPG)
- High precision for the application thanks to low backlash (min. <=1 angular minutes)
- Efficient drive solutions with high efficiency (95 ... 97 %)
- Any mounting position which can be changed subsequently as well
- Enclosure IP65 (dust-tight, protection against water jets under any angle)

The product name

Gearbox type	Product range	Rated torque [Nm]	Product
Planetary gearbox	MPR	29	MPR050
		83	MPR100
		200	MPR200
		390	MPR300

MPR planetary geared motors




General information

Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

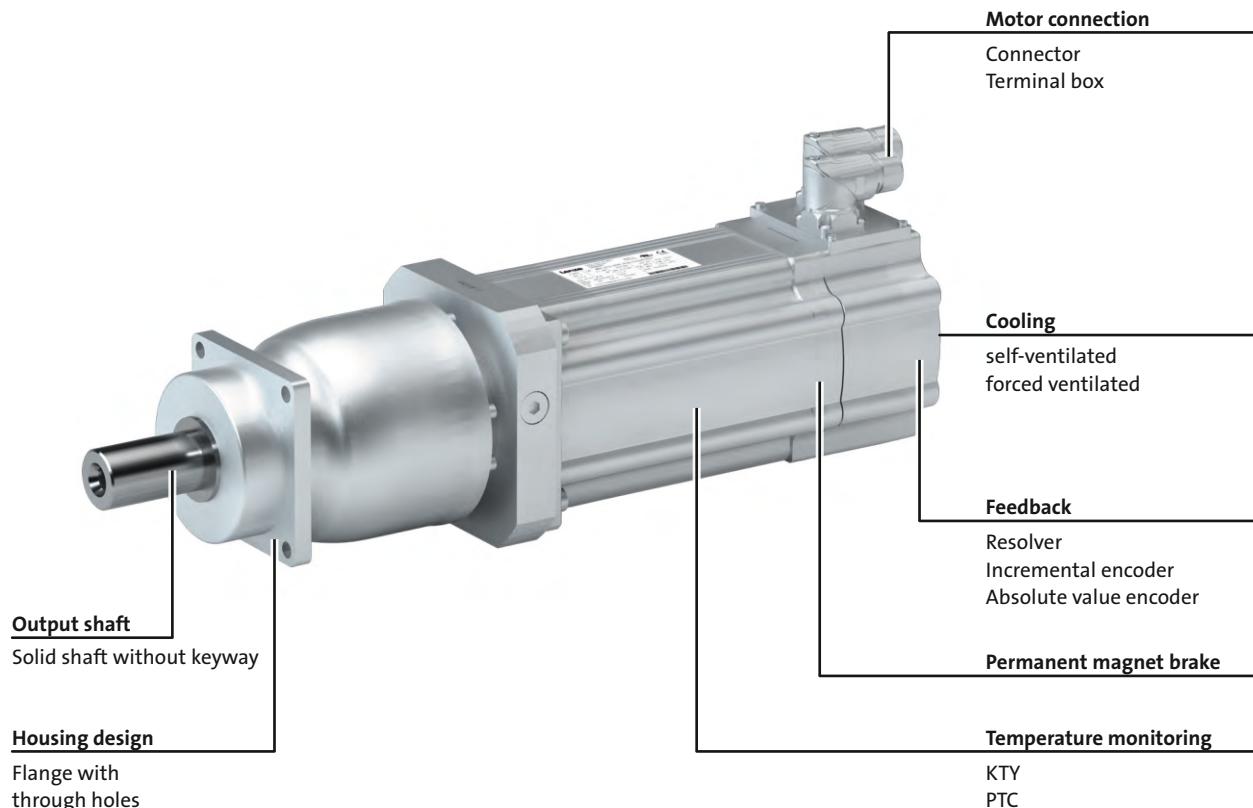

MPR planetary geared motors

General information



6.2.1

MPR planetary geared motors



General information

The gearbox kit

Geared motor

Product	MPR050	MPR100	MPR200	MPR300
Motor type				Synchronous servo motor
Servo motor				
0.6 - 1.5 Nm	MCS06			
2.3 - 4.5 Nm		MCS09		
5.5 - 17 Nm			MCS12	
9.2 - 42 Nm				MCS14
27 - 72 Nm				MCS19
Technical data				
Output torque		See selection table		
Output speed		See selection table		
Ratio		See selection table		
Load capacity		See selection table		
Moment of inertia		See selection table		
Mounting position				
Standard		Any		
Colour		primed (RAL 9005M, matt jet black)		
Surface and corrosion protection		Without OKS(uncoated) OKS-G (primed)		

6.2.1

MPR planetary geared motors



General information

The gearbox kit

Motor details

Product	MCS				
	06C41	09L41	12H14	14D14	19F12
	06C60	09D41	12L17	14L14	19P12
	06F41	09L51	12D17	14H12	19J12
	06F60	09D60	12L20	14P11	19P14
	06I41	09F38	12H15	14P14	19J14
	06I60	09F60	12D20	14D15	19F14
		09H41	12D35	14H15	19J29
		09H60	12H34	14L15	19P29
			12L39	14H28	19F29
			12D41	14P26	19J30
			12H35	14L30	19F30
			12L41	14D30	19P30
				14H32	
				14P32	
				14D36	
				14L32	
Connection type	Plug connectors		Plug connectors Terminal box		
Permanent magnet holding brake					
Rated torque [Nm]	2.2	8.0	12	22	37
Brake voltage [V]			DC 24		
Feedback			With absolute value encoder With incremental encoder With resolver		
Cooling	Self-ventilated		Self-ventilated Forced-ventilated		
Temperature monitoring	KTY83-110 thermal detector		KTY83-110 thermal detector PTC thermistor		
Approval			cURus GOST_R UkrSepro		
Degree of protection			IP54 IP65		

- Further information and installation feasibilities can be found in the Motors chapter.

MPR planetary geared motors

General information



The gearbox kit

Motor details

Connection type
 Plug connectors
 Terminal box
Cooling: self-ventilated
 With resolver
 With permanent magnet brake
 With feedback With feedback and permanent magnet brake
Cooling: forced ventilated
 With resolver
 With permanent magnet brake
 With feedback With feedback and permanent magnet brake

6.2.1

MPR planetary geared motors



General information

The gearbox kit

Gearbox details

Product	MPR050	MPR100	MPR200	MPR300
Driven shaft				
Solid shaft without keyway [mm]	16x28	22x36	32x58	40x82
Design		Standard		
Gasket		NBR		
Bearing		Standard		
Housing				
Housing version		Without foot with centering		
Output flange				
Flange square [mm]	62	76	101	141
Lubricant				
Type		Mobil SHC 629		
Breather element		Without		
Backlash				
Backlash		Standard Reduced		

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.


MPR planetary geared motors

General information



The gearbox kit

Gearbox details

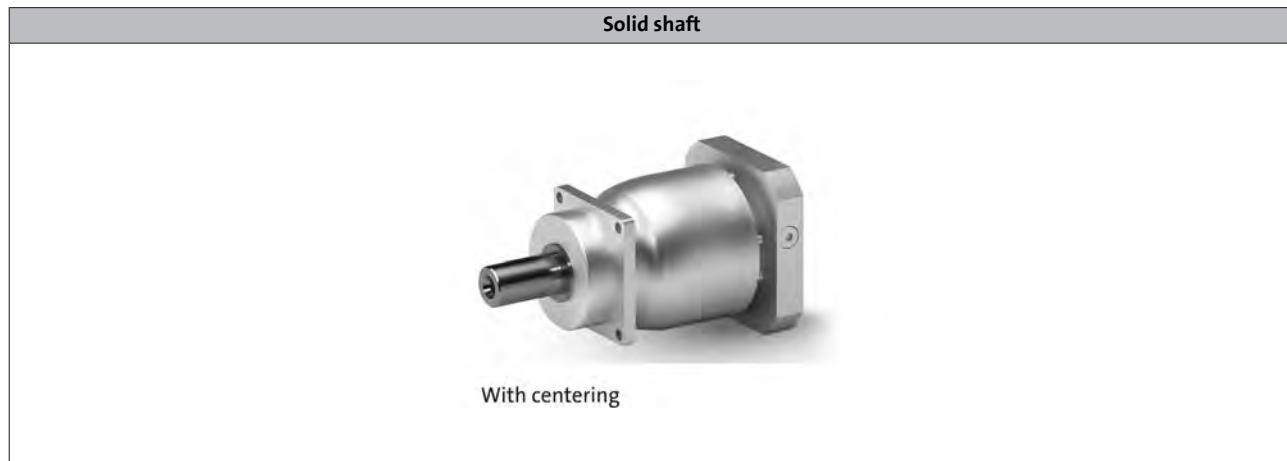

6.2.1

MPR planetary geared motors



General information

Dimensioning

General information about the data provided in this catalogue

The powers, torques and speeds specified in this catalogue are rounded values and are valid under the following conditions:

- Operating time/day = 8 h (100% OT)
- Duty class I for up to 10 switching operations/h
- Mounting positions and designs in this catalogue
- Standard lubricant
- $T_{amb} = 30 \text{ }^{\circ}\text{C}$ for gearboxes,
 $T_{amb} = 40 \text{ }^{\circ}\text{C}$ for motors (in accordance with EN 60034)
- Site altitude $< = 1000 \text{ m amsl}$
- The selection tables provide the permissible mechanical powers and torques. For notes on the thermal power limit, see chapter drive dimensioning.
- The rated power specified for motors and geared motors applies to operating mode S1 (in accordance with EN 60034).

Under different operating conditions, the values obtained may vary from those listed here.

In the case of extreme operating conditions, please consult your Lenze sales office.

MPR planetary geared motors



General information

Dimensioning

Load capacity and application factor

Load capacity c of gearbox

Rated value for the load capacity of Lenze geared motors.

- c is the ratio of the permissible rated torque of the gearbox to the rated torque supplied by the drive component (e.g. the built-in Lenze motor).
- The value of c must always be greater than the value of the application factor k calculated for the application.


Application factor k (according to DIN 3990)

Takes into account the influence of temporally variable loads which are actually present during the anticipated operating time of gearboxes and geared motors.

k is determined by:

- the type of load
- the load intensity
- temporal influences

Duty class	Load type
I	Smooth operation, small or light jolts
II	Uneven operation, average jolts
III	Uneven operation, severe jolts and/or alternating load

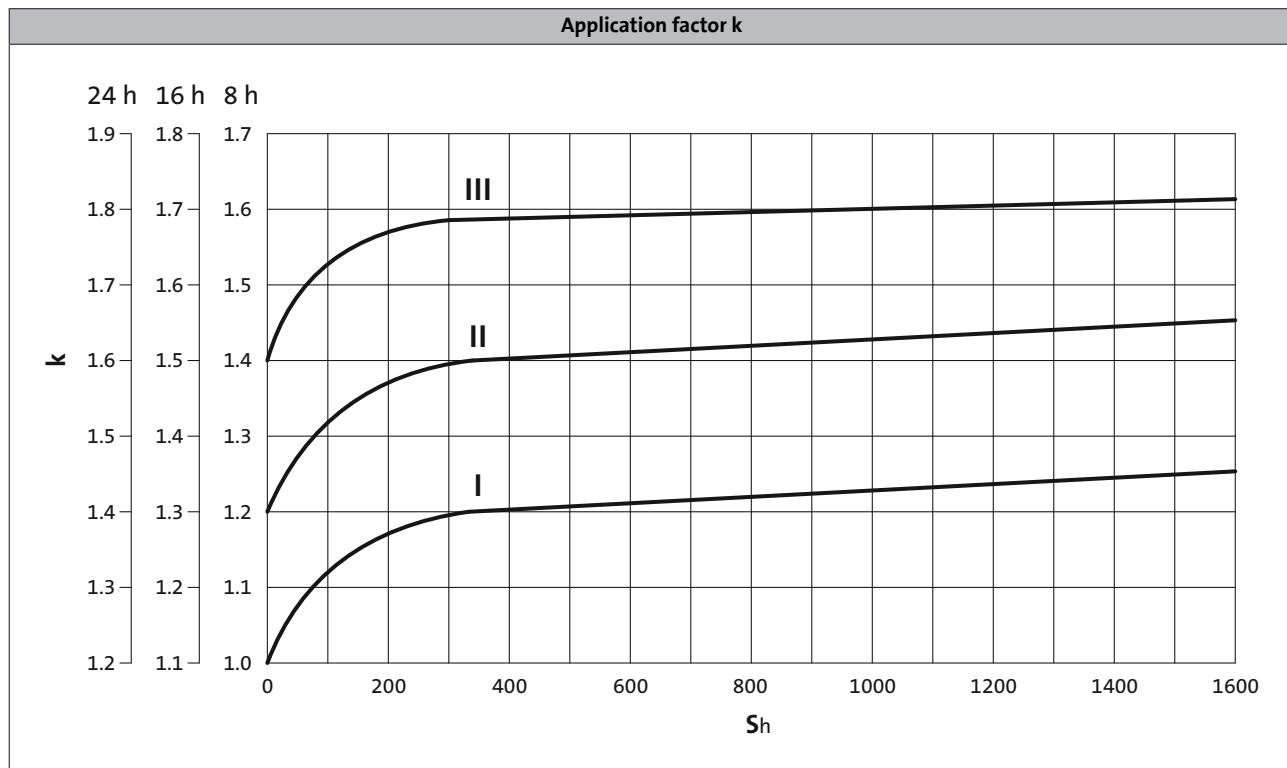

► S_h = switchings/h

MPR planetary geared motors



General information

Dimensioning

Weights

The values given in the tables consider the following gearbox/motor combination:

- Gearbox with solid shaft including lubricant amount
- Motor with feedback

For versions deviating from this, additional weights have to be considered.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data
- Motor options: Brake
 - > Chapter: Motors/Accessories

Moments of inertia

The given moments of inertia of the gearbox refer to the drive shaft. The influence of the ratio (i^2) has been considered in the data.

When the total moment of inertia of the geared motor is calculated, the values of the geared motors and the brake have to be added.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data/Selection tables
- Motor options: Brake
 - > Chapter: Motors/Accessories

MPR planetary geared motors



Technical data

Selection tables, notes

Notes on the selection tables

The selection tables show the available combinations of gearbox type, number of stages, ratio and motor. They are used only to provide basic orientation.

The following legend indicates the structure of the selection tables.

Number of the gear stage of the gearbox



2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		MPR	MCS		
20	333	6	333	3.6	0.300	12.000	050	06C60	Selbst	40
20	333	7	333	3.0	0.300	12.000	050	06C41	Selbst	40
20	333	10	333	1.9	0.400	12.000	050	06F60	Selbst	40
20	333	14	333	1.5	0.400	12.000	050	06F41	Selbst	40

For operating mode S1
Torque M₂ and
thermal output speed n_{2, th}

For operating mode S2, S3 und S6
Max. permissible acceleration torque of geared
motor M_{2, max} and
output speed n_{2, eto}

Load capacity of the gearbox

c is the ratio between the permissible rated torque of the gearbox and the rated torque of the three-phase AC motor (converted to the driven shaft).

c must be always higher than the service factor k determined for the application k.

$$c = \frac{M_{2, zul}}{M_{1,N} \cdot i \cdot \eta_{Getr}} > k$$

Page number
for dimensions

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
13	1100	3	1100	5.7	0.600	3.000	050	06F41	natural	38
18	1100	3	1100	5.8	0.600	3.000	050	06I60	natural	38
18	1100	4	1100	4.5	0.600	3.000	050	06I41	natural	38
19	400	5	400	4.0	0.300	10.000	050	06C60	natural	38
19	400	6	400	3.3	0.300	10.000	050	06C41	natural	38
19	400	9	400	2.2	0.400	10.000	050	06F60	natural	38
19	400	12	400	1.6	0.400	10.000	050	06F41	natural	38
19	400	12	400	1.6	0.500	10.000	050	06I60	natural	38
19	400	15	400	1.3	0.500	10.000	050	06I41	natural	38
19	400	17	400	1.1	1.300	10.000	050	09D60	natural	38
20	1100	5	1100	3.9	1.500	3.000	050	09D60	natural	38
20	1100	7	1100	2.9	1.900	3.000	050	09F60	natural	38
20	1100	7	1100	2.9	1.500	3.000	050	09D41	natural	38
20	1100	9	1100	2.3	1.900	3.000	050	09F38	natural	38
20	1100	9	1100	2.3	2.300	3.000	050	09H60	natural	38
20	1100	10	1100	1.9	3.200	3.000	050	09L51	natural	38
20	1100	11	1100	1.8	2.300	3.000	050	09H41	natural	38
20	1100	12	1100	1.6	4.500	3.000	050	12D41	natural	38
20	1100	13	1100	1.5	3.200	3.000	050	09L41	natural	38
20	1100	17	1100	1.1	4.500	3.000	050	12D35	forced	53
20	650	16	650	1.3	4.500	3.000	050	12D20	natural	38
21	660	6	660	5.0	0.400	5.000	050	06F41	natural	38
24	825	6	825	5.0	0.500	4.000	050	06I41	natural	38
29	825	7	825	4.3	1.400	4.000	050	09D60	natural	38
29	825	9	825	3.1	1.800	4.000	050	09F60	natural	38
29	825	9	825	3.2	1.400	4.000	050	09D41	natural	38
29	825	12	825	2.5	1.800	4.000	050	09F38	natural	38
29	825	12	825	2.5	2.200	4.000	050	09H60	natural	38
29	825	14	825	2.1	3.100	4.000	050	09L51	natural	38
29	825	15	825	2.0	2.200	4.000	050	09H41	natural	38
29	825	16	825	1.8	4.400	4.000	050	12D41	natural	38
29	825	17	825	1.7	3.100	4.000	050	09L41	natural	38
29	825	23	825	1.3	4.400	4.000	050	12D35	forced	53
29	660	6	660	5.0	0.500	5.000	050	06I60	natural	38
29	660	7	660	4.0	0.500	5.000	050	06I41	natural	38
29	660	8	660	3.4	1.300	5.000	050	09D60	natural	38
29	660	11	660	2.5	1.300	5.000	050	09D41	natural	38
29	660	12	660	2.5	1.700	5.000	050	09F60	natural	38
29	660	15	660	2.0	1.700	5.000	050	09F38	natural	38
29	660	15	660	2.0	2.100	5.000	050	09H60	natural	38

6.2.1

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
29	660	17	660	1.7	3.000	5.000	050	09L51	natural	38
29	660	18	660	1.6	2.100	5.000	050	09H41	natural	38
29	660	21	660	1.4	4.400	5.000	050	12D41	natural	38
29	660	22	660	1.3	3.000	5.000	050	09L41	natural	38
29	660	29	660	1.0	4.400	5.000	050	12D35	forced	53
29	529	6	529	4.7	0.400	7.000	050	06F60	natural	38
29	529	8	529	3.5	0.400	7.000	050	06F41	natural	38
29	529	8	529	3.6	0.500	7.000	050	06I60	natural	38
29	529	10	529	2.8	0.500	7.000	050	06I41	natural	38
29	529	12	529	2.4	1.300	7.000	050	09D60	natural	38
29	529	16	529	1.8	1.700	7.000	050	09F60	natural	38
29	529	16	529	1.8	1.300	7.000	050	09D41	natural	38
29	529	21	529	1.4	1.700	7.000	050	09F38	natural	38
29	529	21	529	1.4	2.100	7.000	050	09H60	natural	38
29	529	24	529	1.2	3.000	7.000	050	09L51	natural	38
29	529	26	529	1.1	2.100	7.000	050	09H41	natural	38
29	529	29	529	1.0	4.300	7.000	050	12D41	natural	38
29	488	21	488	1.4	4.400	4.000	050	12D20	natural	38
29	413	27	413	1.1	4.400	4.000	050	12D17	forced	53
29	390	26	390	1.1	4.400	5.000	050	12D20	natural	38
52	933	12	933	4.5	5.200	3.000	100	12D41	natural	41
52	933	17	933	3.2	5.200	3.000	100	12D35	forced	54
52	650	16	650	3.6	5.200	3.000	100	12D20	natural	41
52	550	20	550	2.8	5.200	3.000	100	12D17	forced	54
56	933	10	933	5.4	3.900	3.000	100	09L51	natural	41
56	933	11	933	5.1	3.000	3.000	100	09H41	natural	41
56	933	13	933	4.3	3.900	3.000	100	09L41	natural	41
56	933	22	933	2.5	8.500	3.000	100	12H35	natural	41
56	933	22	933	2.6	10.000	3.000	100	14D36	natural	41
56	933	23	933	2.4	8.500	3.000	100	12H30	natural	41
56	933	30	933	1.8	8.500	3.000	100	12H34	forced	54
56	933	31	933	1.8	10.000	3.000	100	14D30	forced	54
56	933	32	933	1.7	12.000	3.000	100	12L41	natural	41
56	933	41	933	1.4	12.000	3.000	100	12L39	forced	54
56	650	40	650	1.4	12.000	3.000	100	12L20	natural	41
56	550	49	550	1.1	12.000	3.000	100	12L17	forced	54
56	500	27	500	2.1	10.000	3.000	100	14D15	natural	41
56	500	30	500	1.9	8.500	3.000	100	12H15	natural	41
56	450	35	450	1.6	8.500	3.000	100	12H14	forced	54
56	450	35	450	1.6	10.000	3.000	100	14D14	forced	54

6.2.1

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
58	310	17	310	3.4	1.600	10.000	100	09D60	natural	41
58	310	23	310	2.5	1.600	10.000	100	09D41	natural	41
58	310	23	310	2.5	2.000	10.000	100	09F60	natural	41
58	310	29	310	2.0	2.400	10.000	100	09H60	natural	41
58	310	30	310	2.0	2.000	10.000	100	09F38	natural	41
58	310	35	310	1.7	3.300	10.000	100	09L51	natural	41
58	310	37	310	1.6	2.400	10.000	100	09H41	natural	41
58	310	41	310	1.4	4.600	10.000	100	12D41	natural	41
58	310	43	310	1.3	3.300	10.000	100	09L41	natural	41
58	310	58	310	1.0	4.600	10.000	100	12D35	forced	54
58	195	52	195	1.1	4.600	10.000	100	12D20	natural	41
65	400	16	400	5.2	1.600	7.000	100	09D41	natural	41
69	700	23	700	3.6	4.900	4.000	100	12D35	forced	54
69	413	27	413	3.1	4.900	4.000	100	12D17	forced	54
70	700	16	700	5.0	4.900	4.000	100	12D41	natural	41
70	488	21	488	4.0	4.900	4.000	100	12D20	natural	41
73	560	15	560	5.6	2.100	5.000	100	09F38	natural	41
78	700	15	700	5.7	2.600	4.000	100	09H41	natural	41
83	700	17	700	4.8	3.500	4.000	100	09L41	natural	41
83	700	29	700	2.8	8.200	4.000	100	12H35	natural	41
83	700	29	700	2.9	9.700	4.000	100	14D36	natural	41
83	700	31	700	2.7	8.200	4.000	100	12H30	natural	41
83	700	41	700	2.0	8.200	4.000	100	12H34	forced	54
83	700	41	700	2.0	9.700	4.000	100	14D30	forced	54
83	700	43	700	1.9	11.000	4.000	100	12L41	natural	41
83	700	54	700	1.5	11.000	4.000	100	12L39	forced	54
83	560	15	560	5.7	2.500	5.000	100	09H60	natural	41
83	560	17	560	4.8	3.400	5.000	100	09L51	natural	41
83	560	18	560	4.5	2.500	5.000	100	09H41	natural	41
83	560	21	560	4.0	4.800	5.000	100	12D41	natural	41
83	560	22	560	3.8	3.400	5.000	100	09L41	natural	41
83	560	29	560	2.9	4.800	5.000	100	12D35	forced	54
83	560	36	560	2.3	9.600	5.000	100	14D36	natural	41
83	560	37	560	2.3	8.100	5.000	100	12H35	natural	41
83	560	39	560	2.1	8.100	5.000	100	12H30	natural	41
83	560	51	560	1.6	8.100	5.000	100	12H34	forced	54
83	560	51	560	1.6	9.600	5.000	100	14D30	forced	54
83	560	54	560	1.5	11.000	5.000	100	12L41	natural	41
83	560	68	560	1.2	11.000	5.000	100	12L39	forced	54
83	488	53	488	1.6	11.000	4.000	100	12L20	natural	41

6.2.1

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
83	413	65	413	1.3	11.000	4.000	100	12L17	forced	54
83	400	16	400	5.1	2.000	7.000	100	09F60	natural	41
83	400	21	400	4.0	2.400	7.000	100	09H60	natural	41
83	400	21	400	4.0	2.000	7.000	100	09F38	natural	41
83	400	24	400	3.4	3.300	7.000	100	09L51	natural	41
83	400	26	400	3.2	2.400	7.000	100	09H41	natural	41
83	400	29	400	2.9	4.700	7.000	100	12D41	natural	41
83	400	30	400	2.7	3.300	7.000	100	09L41	natural	41
83	400	40	400	2.0	4.700	7.000	100	12D35	forced	54
83	400	50	400	1.6	9.500	7.000	100	14D36	natural	41
83	400	52	400	1.6	8.000	7.000	100	12H35	natural	41
83	400	54	400	1.5	8.000	7.000	100	12H30	natural	41
83	400	71	400	1.2	8.000	7.000	100	12H34	forced	54
83	400	71	400	1.2	9.500	7.000	100	14D30	forced	54
83	400	75	400	1.1	11.000	7.000	100	12L41	natural	41
83	390	26	390	3.2	4.800	5.000	100	12D20	natural	41
83	390	67	390	1.3	11.000	5.000	100	12L20	natural	41
83	375	36	375	2.3	9.700	4.000	100	14D15	natural	41
83	375	40	375	2.1	8.200	4.000	100	12H15	natural	41
83	338	47	338	1.8	8.200	4.000	100	12H14	forced	54
83	338	47	338	1.8	9.700	4.000	100	14D14	forced	54
83	330	34	330	2.5	4.800	5.000	100	12D17	forced	54
83	330	81	330	1.0	11.000	5.000	100	12L17	forced	54
83	300	45	300	1.9	9.600	5.000	100	14D15	natural	41
83	300	49	300	1.7	8.100	5.000	100	12H15	natural	41
83	279	37	279	2.3	4.700	7.000	100	12D20	natural	41
83	270	58	270	1.4	8.100	5.000	100	12H14	forced	54
83	270	58	270	1.4	9.600	5.000	100	14D14	forced	54
83	236	47	236	1.8	4.700	7.000	100	12D17	forced	54
83	214	63	214	1.3	9.500	7.000	100	14D15	natural	41
83	214	69	214	1.2	8.000	7.000	100	12H15	natural	41
83	193	82	193	1.0	8.000	7.000	100	12H14	forced	54
83	193	82	193	1.0	9.500	7.000	100	14D14	forced	54
84	833	23	833	5.8	12.000	3.000	200	12H30	natural	45
84	833	30	833	4.4	12.000	3.000	200	12H34	forced	55
84	833	31	833	4.4	13.000	3.000	200	14D30	forced	55
84	500	27	500	5.0	13.000	3.000	200	14D15	natural	45
84	500	30	500	4.5	12.000	3.000	200	12H15	natural	45
84	450	35	450	3.9	12.000	3.000	200	12H14	forced	55
84	450	35	450	3.9	13.000	3.000	200	14D14	forced	55

6.2.1

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
86	330	34	330	5.8	6.800	5.000	200	12D17	forced	55
113	625	41	625	4.9	11.000	4.000	200	12H34	forced	55
113	625	41	625	4.9	12.000	4.000	200	14D30	forced	55
113	375	36	375	5.6	12.000	4.000	200	14D15	natural	45
113	375	40	375	5.1	11.000	4.000	200	12H15	natural	45
113	338	47	338	4.3	11.000	4.000	200	12H14	forced	55
113	338	47	338	4.3	12.000	4.000	200	14D14	forced	55
120	400	40	400	4.7	6.400	7.000	200	12D35	forced	55
120	236	47	236	4.0	6.400	7.000	200	12D17	forced	55
122	279	37	279	5.2	6.400	7.000	200	12D20	natural	45
135	833	32	833	4.2	15.000	3.000	200	12L41	natural	45
135	833	40	833	3.3	19.000	3.000	200	14H32	natural	45
135	833	41	833	3.3	15.000	3.000	200	12L39	forced	55
135	833	50	833	2.7	28.000	3.000	200	14L32	natural	45
135	833	60	833	2.3	19.000	3.000	200	14H28	forced	55
135	833	61	833	2.2	72.000	3.000	200	19F30	natural	45
135	833	61	833	2.2	40.000	3.000	200	14P32	natural	45
135	833	74	833	1.8	28.000	3.000	200	14L30	forced	55
135	833	84	833	1.6	112.000	3.000	200	19J30	natural	45
135	833	95	833	1.4	72.000	3.000	200	19F29	forced	55
135	833	96	833	1.4	40.000	3.000	200	14P26	forced	55
135	650	40	650	3.4	15.000	3.000	200	12L20	natural	45
135	550	49	550	2.8	15.000	3.000	200	12L17	forced	55
135	500	46	500	2.9	19.000	3.000	200	14H15	natural	45
135	500	67	500	2.0	28.000	3.000	200	14L15	natural	45
135	475	78	475	1.7	72.000	3.000	200	19F14	natural	45
135	475	117	475	1.1	112.000	3.000	200	19J14	natural	45
135	450	86	450	1.6	40.000	3.000	200	14P14	natural	45
135	450	89	450	1.5	28.000	3.000	200	14L14	forced	55
135	400	69	400	1.9	19.000	3.000	200	14H12	forced	55
135	400	111	400	1.2	72.000	3.000	200	19F12	forced	55
135	350	122	350	1.1	40.000	3.000	200	14P11	forced	55
135	280	41	280	3.3	6.200	10.000	200	12D41	natural	45
135	280	58	280	2.3	6.200	10.000	200	12D35	forced	55
135	280	72	280	1.9	11.000	10.000	200	14D36	natural	45
135	280	74	280	1.8	9.500	10.000	200	12H35	natural	45
135	280	77	280	1.8	9.500	10.000	200	12H30	natural	45
135	280	102	280	1.3	9.500	10.000	200	12H34	forced	55
135	280	102	280	1.3	11.000	10.000	200	14D30	forced	55
135	280	107	280	1.3	13.000	10.000	200	12L41	natural	45

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
135	280	135	280	1.0	17.000	10.000	200	14H32	natural	45
135	195	52	195	2.6	6.200	10.000	200	12D20	natural	45
135	195	133	195	1.0	13.000	10.000	200	12L20	natural	45
135	165	67	165	2.0	6.200	10.000	200	12D17	forced	55
135	150	90	150	1.5	11.000	10.000	200	14D15	natural	45
135	150	99	150	1.4	9.500	10.000	200	12H15	natural	45
135	135	117	135	1.2	9.500	10.000	200	12H14	forced	55
135	135	117	135	1.2	11.000	10.000	200	14D14	forced	55
141	500	36	500	5.4	11.000	5.000	200	14D36	natural	45
141	500	37	500	5.3	10.000	5.000	200	12H35	natural	45
141	500	39	500	5.0	10.000	5.000	200	12H30	natural	45
141	500	51	500	3.8	10.000	5.000	200	12H34	forced	55
141	500	51	500	3.8	11.000	5.000	200	14D30	forced	55
141	300	45	300	4.4	11.000	5.000	200	14D15	natural	45
141	300	49	300	4.0	10.000	5.000	200	12H15	natural	45
141	270	58	270	3.3	10.000	5.000	200	12H14	forced	55
141	270	58	270	3.3	11.000	5.000	200	14D14	forced	55
159	700	60	700	4.8	28.000	3.000	300	14H28	forced	58
159	400	69	400	4.2	28.000	3.000	300	14H12	forced	58
190	400	50	400	3.8	11.000	7.000	200	14D36	natural	45
190	400	52	400	3.7	9.700	7.000	200	12H35	natural	45
190	400	54	400	3.5	9.700	7.000	200	12H30	natural	45
190	400	71	400	2.7	9.700	7.000	200	12H34	forced	55
190	400	71	400	2.7	11.000	7.000	200	14D30	forced	55
190	400	75	400	2.5	13.000	7.000	200	12L41	natural	45
190	400	94	400	2.0	17.000	7.000	200	14H32	natural	45
190	400	95	400	2.0	13.000	7.000	200	12L39	forced	55
190	400	117	400	1.6	26.000	7.000	200	14L32	natural	45
190	400	143	400	1.3	70.000	7.000	200	19F30	natural	45
190	400	143	400	1.3	38.000	7.000	200	14P32	natural	45
190	400	173	400	1.1	26.000	7.000	200	14L30	forced	55
190	396	140	396	1.4	17.000	7.000	200	14H28	forced	55
190	279	93	279	2.0	13.000	7.000	200	12L20	natural	45
190	236	114	236	1.7	13.000	7.000	200	12L17	forced	55
190	214	63	214	3.0	11.000	7.000	200	14D15	natural	45
190	214	69	214	2.8	9.700	7.000	200	12H15	natural	45
190	214	108	214	1.8	17.000	7.000	200	14H15	natural	45
190	214	156	214	1.2	26.000	7.000	200	14L15	natural	45
190	204	182	204	1.0	70.000	7.000	200	19F14	natural	45
190	193	82	193	2.3	9.700	7.000	200	12H14	forced	55

6.2.1

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
190	193	82	193	2.3	11.000	7.000	200	14D14	forced	55
190	171	162	171	1.2	17.000	7.000	200	14H12	forced	55
195	500	54	500	3.6	13.000	5.000	200	12L41	natural	45
195	500	67	500	2.9	18.000	5.000	200	14H32	natural	45
195	500	68	500	2.9	13.000	5.000	200	12L39	forced	55
195	500	83	500	2.3	27.000	5.000	200	14L32	natural	45
195	500	100	500	1.9	18.000	5.000	200	14H28	forced	55
195	500	102	500	1.9	70.000	5.000	200	19F30	natural	45
195	500	102	500	1.9	38.000	5.000	200	14P32	natural	45
195	500	124	500	1.6	27.000	5.000	200	14L30	forced	55
195	500	140	500	1.4	110.000	5.000	200	19J30	natural	45
195	500	158	500	1.2	70.000	5.000	200	19F29	forced	55
195	500	161	500	1.2	38.000	5.000	200	14P26	forced	55
195	390	67	390	2.9	13.000	5.000	200	12L20	natural	45
195	330	81	330	2.4	13.000	5.000	200	12L17	forced	55
195	300	77	300	2.5	18.000	5.000	200	14H15	natural	45
195	300	111	300	1.8	27.000	5.000	200	14L15	natural	45
195	285	130	285	1.5	70.000	5.000	200	19F14	natural	45
195	270	144	270	1.4	38.000	5.000	200	14P14	natural	45
195	270	148	270	1.3	27.000	5.000	200	14L14	forced	55
195	240	116	240	1.7	18.000	5.000	200	14H12	forced	55
195	240	185	240	1.1	70.000	5.000	200	19F12	forced	55
197	329	71	329	5.3	15.000	7.000	300	14D30	forced	58
197	193	82	193	4.7	15.000	7.000	300	14D14	forced	58
200	625	43	625	4.7	14.000	4.000	200	12L41	natural	45
200	625	54	625	3.7	14.000	4.000	200	12L39	forced	55
200	625	54	625	3.7	18.000	4.000	200	14H32	natural	45
200	625	67	625	3.0	27.000	4.000	200	14L32	natural	45
200	625	80	625	2.5	18.000	4.000	200	14H28	forced	55
200	625	82	625	2.5	71.000	4.000	200	19F30	natural	45
200	625	82	625	2.5	38.000	4.000	200	14P32	natural	45
200	625	99	625	2.0	27.000	4.000	200	14L30	forced	55
200	625	112	625	1.8	111.000	4.000	200	19J30	natural	45
200	625	126	625	1.6	71.000	4.000	200	19F29	forced	55
200	625	128	625	1.6	38.000	4.000	200	14P26	forced	55
200	488	53	488	3.8	14.000	4.000	200	12L20	natural	45
200	413	65	413	3.1	14.000	4.000	200	12L17	forced	55
200	375	62	375	3.2	18.000	4.000	200	14H15	natural	45
200	375	89	375	2.3	27.000	4.000	200	14L15	natural	45
200	356	104	356	1.9	71.000	4.000	200	19F14	natural	45

MPR planetary geared motors

Technical data



Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
200	356	156	356	1.3	111.000	4.000	200	19J14	natural	45
200	338	115	338	1.7	38.000	4.000	200	14P14	natural	45
200	338	118	338	1.7	27.000	4.000	200	14L14	forced	55
200	300	93	300	2.2	18.000	4.000	200	14H12	forced	55
200	300	148	300	1.4	71.000	4.000	200	19F12	forced	55
200	263	162	263	1.2	38.000	4.000	200	14P11	forced	55
213	525	80	525	4.9	24.000	4.000	300	14H28	forced	58
213	300	93	300	4.2	24.000	4.000	300	14H12	forced	58
224	700	50	700	5.8	37.000	3.000	300	14L32	natural	49
224	700	74	700	3.9	37.000	3.000	300	14L30	forced	58
224	500	67	500	4.3	37.000	3.000	300	14L15	natural	49
224	450	89	450	3.3	37.000	3.000	300	14L14	forced	58
245	260	72	260	3.4	15.000	10.000	300	14D36	natural	49
245	260	102	260	2.4	15.000	10.000	300	14D30	forced	58
245	260	135	260	1.8	21.000	10.000	300	14H32	natural	49
245	260	167	260	1.5	30.000	10.000	300	14L32	natural	49
245	260	200	260	1.2	21.000	10.000	300	14H28	forced	58
245	260	204	260	1.2	41.000	10.000	300	14P32	natural	49
245	260	204	260	1.2	73.000	10.000	300	19F30	natural	49
245	150	90	150	2.7	15.000	10.000	300	14D15	natural	49
245	150	154	150	1.6	21.000	10.000	300	14H15	natural	49
245	150	222	150	1.1	30.000	10.000	300	14L15	natural	49
245	135	117	135	2.1	15.000	10.000	300	14D14	forced	58
245	120	232	120	1.1	21.000	10.000	300	14H12	forced	58
250	700	61	700	4.7	80.000	3.000	300	19F30	natural	49
250	700	95	700	3.1	80.000	3.000	300	19F29	forced	58
250	475	78	475	3.7	80.000	3.000	300	19F14	natural	49
250	400	111	400	2.6	80.000	3.000	300	19F12	forced	58
266	420	100	420	3.9	22.000	5.000	300	14H28	forced	58
266	240	116	240	3.4	22.000	5.000	300	14H12	forced	58
267	420	67	420	5.8	22.000	5.000	300	14H32	natural	49
267	300	77	300	5.0	22.000	5.000	300	14H15	natural	49
290	700	61	700	4.7	48.000	3.000	300	14P32	natural	49
290	700	84	700	3.4	120.000	3.000	300	19J30	natural	49
290	700	93	700	3.1	175.000	3.000	300	19P30	natural	49
290	700	96	700	3.0	48.000	3.000	300	14P26	forced	58
290	700	147	700	2.0	120.000	3.000	300	19J29	forced	58
290	700	154	700	1.9	175.000	3.000	300	19P29	forced	58
290	475	117	475	2.5	120.000	3.000	300	19J14	natural	49
290	450	86	450	3.4	48.000	3.000	300	14P14	natural	49

6.2.1

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
290	450	148	450	2.0	175.000	3.000	300	19P14	natural	49
290	400	183	400	1.6	120.000	3.000	300	19J12	forced	58
290	400	208	400	1.4	175.000	3.000	300	19P12	forced	58
290	350	122	350	2.4	48.000	3.000	300	14P11	forced	58
299	525	67	525	5.8	33.000	4.000	300	14L32	natural	49
299	525	99	525	4.0	33.000	4.000	300	14L30	forced	58
299	375	89	375	4.4	33.000	4.000	300	14L15	natural	49
299	338	118	338	3.3	33.000	4.000	300	14L14	forced	58
334	525	82	525	4.8	76.000	4.000	300	19F30	natural	49
334	525	126	525	3.1	76.000	4.000	300	19F29	forced	58
334	356	104	356	3.8	76.000	4.000	300	19F14	natural	49
334	300	148	300	2.6	76.000	4.000	300	19F12	forced	58
372	329	140	329	2.7	21.000	7.000	300	14H28	forced	58
372	171	162	171	2.3	21.000	7.000	300	14H12	forced	58
373	420	83	420	4.7	32.000	5.000	300	14L32	natural	49
373	329	94	329	4.0	21.000	7.000	300	14H32	natural	49
373	300	111	300	3.5	32.000	5.000	300	14L15	natural	49
373	214	108	214	3.5	21.000	7.000	300	14H15	natural	49
374	420	124	420	3.2	32.000	5.000	300	14L30	forced	58
374	270	148	270	2.6	32.000	5.000	300	14L14	forced	58
380	329	117	329	3.3	31.000	7.000	300	14L32	natural	49
380	329	143	329	2.7	42.000	7.000	300	14P32	natural	49
380	329	143	329	2.7	74.000	7.000	300	19F30	natural	49
380	329	173	329	2.2	31.000	7.000	300	14L30	forced	58
380	329	197	329	1.9	114.000	7.000	300	19J30	natural	49
380	329	216	329	1.8	169.000	7.000	300	19P30	natural	49
380	329	221	329	1.7	74.000	7.000	300	19F29	forced	58
380	329	225	329	1.7	42.000	7.000	300	14P26	forced	58
380	329	344	329	1.1	114.000	7.000	300	19J29	forced	58
380	329	359	329	1.1	169.000	7.000	300	19P29	forced	58
380	214	156	214	2.4	31.000	7.000	300	14L15	natural	49
380	204	182	204	2.1	74.000	7.000	300	19F14	natural	49
380	204	273	204	1.4	114.000	7.000	300	19J14	natural	49
380	193	202	193	1.9	42.000	7.000	300	14P14	natural	49
380	193	207	193	1.8	31.000	7.000	300	14L14	forced	58
380	193	346	193	1.1	169.000	7.000	300	19P14	natural	49
380	171	259	171	1.5	74.000	7.000	300	19F12	forced	58
380	150	284	150	1.3	42.000	7.000	300	14P11	forced	58
390	525	82	525	4.8	44.000	4.000	300	14P32	natural	49
390	525	112	525	3.5	116.000	4.000	300	19J30	natural	49

6.2.1

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
390	525	124	525	3.2	171.000	4.000	300	19P30	natural	49
390	525	128	525	3.0	44.000	4.000	300	14P26	forced	58
390	525	196	525	2.0	116.000	4.000	300	19J29	forced	58
390	525	205	525	1.9	171.000	4.000	300	19P29	forced	58
390	420	102	420	3.8	43.000	5.000	300	14P32	natural	49
390	420	102	420	3.8	75.000	5.000	300	19F30	natural	49
390	420	140	420	2.8	115.000	5.000	300	19J30	natural	49
390	420	154	420	2.5	170.000	5.000	300	19P30	natural	49
390	420	158	420	2.5	75.000	5.000	300	19F29	forced	58
390	420	161	420	2.4	43.000	5.000	300	14P26	forced	58
390	420	245	420	1.6	115.000	5.000	300	19J29	forced	58
390	420	257	420	1.5	170.000	5.000	300	19P29	forced	58
390	356	156	356	2.5	116.000	4.000	300	19J14	natural	49
390	338	115	338	3.4	44.000	4.000	300	14P14	natural	49
390	338	198	338	2.0	171.000	4.000	300	19P14	natural	49
390	300	244	300	1.6	116.000	4.000	300	19J12	forced	58
390	300	278	300	1.4	171.000	4.000	300	19P12	forced	58
390	285	130	285	3.0	75.000	5.000	300	19F14	natural	49
390	285	195	285	2.0	115.000	5.000	300	19J14	natural	49
390	270	144	270	2.7	43.000	5.000	300	14P14	natural	49
390	270	247	270	1.6	170.000	5.000	300	19P14	natural	49
390	263	162	263	2.4	44.000	4.000	300	14P11	forced	58
390	240	185	240	2.1	75.000	5.000	300	19F12	forced	58
390	240	305	240	1.3	115.000	5.000	300	19J12	forced	58
390	240	347	240	1.1	170.000	5.000	300	19P12	forced	58
390	210	203	210	1.9	43.000	5.000	300	14P11	forced	58

6.2.1

MPR planetary geared motors



Technical data

Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
20	333	6	333	3.6	0.300	12.000	050	06C60	natural	40
20	333	7	333	3.0	0.300	12.000	050	06C41	natural	40
20	333	10	333	1.9	0.400	12.000	050	06F60	natural	40
20	333	14	333	1.5	0.400	12.000	050	06F41	natural	40
20	333	14	333	1.5	0.500	12.000	050	06I60	natural	40
20	333	17	333	1.2	0.500	12.000	050	06I41	natural	40
20	333	20	333	1.0	1.400	12.000	050	09D60	natural	40
29	275	7	275	3.9	0.300	16.000	050	06C60	natural	40
29	275	14	275	2.1	0.400	16.000	050	06F60	natural	40
29	275	18	275	1.6	0.500	16.000	050	06I60	natural	40
29	275	27	275	1.1	1.300	16.000	050	09D60	natural	40
29	253	9	253	3.2	0.300	16.000	050	06C41	natural	40
29	253	18	253	1.6	0.400	16.000	050	06F41	natural	40
29	253	23	253	1.3	0.500	16.000	050	06I41	natural	40
29	220	9	220	3.1	0.300	20.000	050	06C60	natural	40
29	220	17	220	1.7	0.400	20.000	050	06F60	natural	40
29	220	23	220	1.3	0.500	20.000	050	06I60	natural	40
29	203	11	203	2.6	0.300	20.000	050	06C41	natural	40
29	203	23	203	1.3	0.400	20.000	050	06F41	natural	40
29	203	29	203	1.0	0.500	20.000	050	06I41	natural	40
29	176	12	176	2.5	0.300	25.000	050	06C60	natural	40
29	176	22	176	1.4	0.400	25.000	050	06F60	natural	40
29	176	28	176	1.0	0.500	25.000	050	06I60	natural	40
29	162	14	162	2.1	0.300	25.000	050	06C41	natural	40
29	162	29	162	1.0	0.400	25.000	050	06F41	natural	40
29	157	13	157	2.2	0.300	28.000	050	06C60	natural	40
29	157	24	157	1.2	0.400	28.000	050	06F60	natural	40
29	145	16	145	1.9	0.300	28.000	050	06C41	natural	40
29	126	16	126	1.8	0.300	35.000	050	06C60	natural	40
29	116	20	116	1.5	0.300	35.000	050	06C41	natural	40
29	110	19	110	1.6	0.300	40.000	050	06C60	natural	40
29	101	22	101	1.3	0.300	40.000	050	06C41	natural	40
29	96	23	96	1.2	0.300	50.000	050	06C60	natural	40
29	81	28	81	1.0	0.300	50.000	050	06C41	natural	40
50	258	10	258	5.4	0.500	12.000	100	06F60	natural	43
50	258	14	258	4.1	0.500	12.000	100	06F41	natural	43
56	258	14	258	4.1	0.600	12.000	100	06I60	natural	43
56	258	17	258	3.3	0.600	12.000	100	06I41	natural	43
56	258	20	258	2.8	1.400	12.000	100	09D60	natural	43
56	258	27	258	2.1	1.800	12.000	100	09F60	natural	43

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
56	258	27	258	2.1	1.400	12.000	100	09D41	natural	43
56	258	34	258	1.6	2.200	12.000	100	09H60	natural	43
56	258	35	258	1.6	1.800	12.000	100	09F38	natural	43
56	258	41	258	1.4	3.100	12.000	100	09L51	natural	43
56	258	43	258	1.3	2.200	12.000	100	09H41	natural	43
56	258	51	258	1.1	3.100	12.000	100	09L41	natural	43
57	140	14	140	5.9	0.300	25.000	100	06C41	natural	43
58	45	47	45	1.2	0.300	100.000	100	06C60	natural	43
58	41	56	41	1.0	0.300	100.000	100	06C41	natural	43
64	125	16	125	5.3	0.300	28.000	100	06C41	natural	43
67	219	18	219	4.5	0.500	16.000	100	06F41	natural	43
76	88	19	88	4.0	0.300	40.000	100	06C60	natural	43
76	88	22	88	3.4	0.300	40.000	100	06C41	natural	43
76	88	34	88	2.2	0.400	40.000	100	06F60	natural	43
76	88	45	88	1.7	0.500	40.000	100	06I60	natural	43
76	88	46	88	1.7	0.400	40.000	100	06F41	natural	43
76	88	57	88	1.3	0.500	40.000	100	06I41	natural	43
76	88	67	88	1.1	1.300	40.000	100	09D60	natural	43
80	100	16	100	5.1	0.300	35.000	100	06C60	natural	43
80	100	20	100	4.2	0.300	35.000	100	06C41	natural	43
83	219	18	219	4.6	0.500	16.000	100	06I60	natural	43
83	219	23	219	3.6	0.500	16.000	100	06I41	natural	43
83	219	27	219	3.1	1.400	16.000	100	09D60	natural	43
83	219	36	219	2.3	1.800	16.000	100	09F60	natural	43
83	219	36	219	2.3	1.400	16.000	100	09D41	natural	43
83	219	46	219	1.8	1.800	16.000	100	09F38	natural	43
83	219	46	219	1.8	2.200	16.000	100	09H60	natural	43
83	219	54	219	1.5	3.100	16.000	100	09L51	natural	43
83	219	57	219	1.4	2.200	16.000	100	09H41	natural	43
83	219	68	219	1.2	3.100	16.000	100	09L41	natural	43
83	175	17	175	4.8	0.400	20.000	100	06F60	natural	43
83	175	23	175	3.7	0.500	20.000	100	06I60	natural	43
83	175	23	175	3.6	0.400	20.000	100	06F41	natural	43
83	175	29	175	2.9	0.500	20.000	100	06I41	natural	43
83	175	33	175	2.5	1.300	20.000	100	09D60	natural	43
83	175	45	175	1.8	1.700	20.000	100	09F60	natural	43
83	175	45	175	1.9	1.300	20.000	100	09D41	natural	43
83	175	57	175	1.4	2.100	20.000	100	09H60	natural	43
83	175	58	175	1.4	1.700	20.000	100	09F38	natural	43
83	175	68	175	1.2	3.000	20.000	100	09L51	natural	43

6.2.1

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
83	175	72	175	1.2	2.100	20.000	100	09H41	natural	43
83	140	22	140	3.9	0.400	25.000	100	06F60	natural	43
83	140	28	140	2.9	0.500	25.000	100	06I60	natural	43
83	140	29	140	2.9	0.400	25.000	100	06F41	natural	43
83	140	36	140	2.3	0.500	25.000	100	06I41	natural	43
83	140	42	140	2.0	1.300	25.000	100	09D60	natural	43
83	140	56	140	1.5	1.300	25.000	100	09D41	natural	43
83	140	57	140	1.5	1.700	25.000	100	09F60	natural	43
83	140	72	140	1.2	2.100	25.000	100	09H60	natural	43
83	140	73	140	1.1	1.700	25.000	100	09F38	natural	43
83	125	24	125	3.4	0.400	28.000	100	06F60	natural	43
83	125	32	125	2.6	0.500	28.000	100	06I60	natural	43
83	125	32	125	2.6	0.400	28.000	100	06F41	natural	43
83	125	40	125	2.1	0.500	28.000	100	06I41	natural	43
83	125	47	125	1.8	1.300	28.000	100	09D60	natural	43
83	125	63	125	1.3	1.300	28.000	100	09D41	natural	43
83	125	64	125	1.3	1.700	28.000	100	09F60	natural	43
83	125	80	125	1.0	2.100	28.000	100	09H60	natural	43
83	125	81	125	1.0	1.700	28.000	100	09F38	natural	43
83	100	30	100	2.8	0.400	35.000	100	06F60	natural	43
83	100	40	100	2.1	0.500	35.000	100	06I60	natural	43
83	100	40	100	2.1	0.400	35.000	100	06F41	natural	43
83	100	50	100	1.6	0.500	35.000	100	06I41	natural	43
83	100	58	100	1.4	1.300	35.000	100	09D60	natural	43
83	100	78	100	1.1	1.300	35.000	100	09D41	natural	43
83	100	79	100	1.1	1.700	35.000	100	09F60	natural	43
83	76	23	76	3.5	0.300	50.000	100	06C60	natural	43
83	76	28	76	3.0	0.300	50.000	100	06C41	natural	43
83	76	43	76	1.9	0.400	50.000	100	06F60	natural	43
83	76	57	76	1.5	0.500	50.000	100	06I60	natural	43
83	76	57	76	1.4	0.400	50.000	100	06F41	natural	43
83	76	72	76	1.2	0.500	50.000	100	06I41	natural	43
83	64	33	64	2.5	0.300	70.000	100	06C60	natural	43
83	64	60	64	1.4	0.400	70.000	100	06F60	natural	43
83	64	79	64	1.1	0.500	70.000	100	06I60	natural	43
83	58	39	58	2.1	0.300	70.000	100	06C41	natural	43
83	58	80	58	1.0	0.400	70.000	100	06F41	natural	43
108	233	27	233	5.0	1.900	12.000	200	09D41	natural	47
135	233	27	233	5.0	2.300	12.000	200	09F60	natural	47
135	233	34	233	3.9	2.700	12.000	200	09H60	natural	47

6.2.1

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		MPR	MCS		
135	233	35	233	3.9	2.300	12.000	200	09F38	natural	47
135	233	41	233	3.3	3.600	12.000	200	09L51	natural	47
135	233	43	233	3.1	2.700	12.000	200	09H41	natural	47
135	233	48	233	2.8	5.000	12.000	200	12D41	natural	47
135	233	51	233	2.6	3.600	12.000	200	09L41	natural	47
135	233	68	233	2.0	5.000	12.000	200	12D35	forced	57
135	233	86	233	1.6	8.300	12.000	200	12H35	natural	47
135	233	91	233	1.5	8.300	12.000	200	12H30	natural	47
135	233	119	233	1.1	8.300	12.000	200	12H34	forced	57
135	233	126	233	1.1	12.000	12.000	200	12L41	natural	47
135	163	61	163	2.2	5.000	12.000	200	12D20	natural	47
135	138	79	138	1.7	5.000	12.000	200	12D17	forced	57
135	125	116	125	1.2	8.300	12.000	200	12H15	natural	47
144	194	36	194	5.6	1.900	16.000	200	09D41	natural	47
181	155	33	155	5.9	1.700	20.000	200	09D60	natural	47
181	155	45	155	4.3	1.700	20.000	200	09D41	natural	47
190	60	116	60	1.6	1.600	70.000	200	09D60	natural	47
190	60	159	60	1.2	2.000	70.000	200	09F60	natural	47
190	58	157	58	1.2	1.600	70.000	200	09D41	natural	47
195	155	45	155	4.3	2.100	20.000	200	09F60	natural	47
195	155	57	155	3.4	2.500	20.000	200	09H60	natural	47
195	155	58	155	3.4	2.100	20.000	200	09F38	natural	47
195	155	68	155	2.9	3.400	20.000	200	09L51	natural	47
195	155	72	155	2.7	2.500	20.000	200	09H41	natural	47
195	155	81	155	2.4	4.800	20.000	200	12D41	natural	47
195	155	85	155	2.3	3.400	20.000	200	09L41	natural	47
195	155	113	155	1.7	4.800	20.000	200	12D35	forced	57
195	155	144	155	1.4	8.100	20.000	200	12H35	natural	47
195	150	151	150	1.3	8.100	20.000	200	12H30	natural	47
195	124	42	124	4.7	1.700	25.000	200	09D60	natural	47
195	124	56	124	3.5	1.700	25.000	200	09D41	natural	47
195	124	57	124	3.4	2.100	25.000	200	09F60	natural	47
195	124	72	124	2.7	2.500	25.000	200	09H60	natural	47
195	124	73	124	2.7	2.100	25.000	200	09F38	natural	47
195	124	84	124	2.3	3.400	25.000	200	09L51	natural	47
195	124	90	124	2.2	2.500	25.000	200	09H41	natural	47
195	124	101	124	1.9	4.700	25.000	200	12D41	natural	47
195	124	106	124	1.8	3.400	25.000	200	09L41	natural	47
195	124	142	124	1.4	4.700	25.000	200	12D35	forced	57
195	124	180	124	1.1	8.000	25.000	200	12H35	natural	47

6.2.1

MPR planetary geared motors



Technical data

Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
195	120	189	120	1.0	8.000	25.000	200	12H30	natural	47
195	98	102	98	1.9	4.800	20.000	200	12D20	natural	47
195	89	58	89	3.4	1.600	35.000	200	09D60	natural	47
195	89	78	89	2.5	1.600	35.000	200	09D41	natural	47
195	89	79	89	2.5	2.000	35.000	200	09F60	natural	47
195	89	101	89	1.9	2.400	35.000	200	09H60	natural	47
195	89	102	89	1.9	2.000	35.000	200	09F38	natural	47
195	89	118	89	1.6	3.300	35.000	200	09L51	natural	47
195	89	125	89	1.6	2.400	35.000	200	09H41	natural	47
195	89	141	89	1.4	4.700	35.000	200	12D41	natural	47
195	89	149	89	1.3	3.300	35.000	200	09L41	natural	47
195	83	132	83	1.5	4.800	20.000	200	12D17	forced	57
195	78	128	78	1.5	4.700	25.000	200	12D20	natural	47
195	75	194	75	1.0	8.100	20.000	200	12H15	natural	47
195	70	83	70	2.3	1.600	50.000	200	09D60	natural	47
195	70	112	70	1.7	1.600	50.000	200	09D41	natural	47
195	70	113	70	1.7	2.000	50.000	200	09F60	natural	47
195	70	144	70	1.4	2.400	50.000	200	09H60	natural	47
195	70	145	70	1.3	2.000	50.000	200	09F38	natural	47
195	70	169	70	1.1	3.300	50.000	200	09L51	natural	47
195	70	179	70	1.1	2.400	50.000	200	09H41	natural	47
195	66	165	66	1.2	4.700	25.000	200	12D17	forced	57
195	56	179	56	1.1	4.700	35.000	200	12D20	natural	47
200	194	36	194	5.5	2.300	16.000	200	09F60	natural	47
200	194	46	194	4.3	2.300	16.000	200	09F38	natural	47
200	194	46	194	4.3	2.700	16.000	200	09H60	natural	47
200	194	54	194	3.7	3.600	16.000	200	09L51	natural	47
200	194	57	194	3.5	2.700	16.000	200	09H41	natural	47
200	194	65	194	3.1	4.900	16.000	200	12D41	natural	47
200	194	68	194	2.9	3.600	16.000	200	09L41	natural	47
200	194	91	194	2.2	4.900	16.000	200	12D35	forced	57
200	194	115	194	1.7	8.200	16.000	200	12H35	natural	47
200	194	159	194	1.3	8.200	16.000	200	12H34	forced	57
200	194	168	194	1.2	12.000	16.000	200	12L41	natural	47
200	188	121	188	1.6	8.200	16.000	200	12H30	natural	47
200	122	82	122	2.4	4.900	16.000	200	12D20	natural	47
200	111	47	111	4.3	1.600	28.000	200	09D60	natural	47
200	111	63	111	3.2	1.600	28.000	200	09D41	natural	47
200	111	64	111	3.1	2.000	28.000	200	09F60	natural	47
200	111	80	111	2.5	2.400	28.000	200	09H60	natural	47

6.2.1

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
200	111	81	111	2.5	2.000	28.000	200	09F38	natural	47
200	111	95	111	2.1	3.300	28.000	200	09L51	natural	47
200	111	100	111	2.0	2.400	28.000	200	09H41	natural	47
200	111	113	111	1.8	4.700	28.000	200	12D41	natural	47
200	111	119	111	1.7	3.300	28.000	200	09L41	natural	47
200	111	159	111	1.3	4.700	28.000	200	12D35	forced	57
200	103	106	103	1.9	4.900	16.000	200	12D17	forced	57
200	94	155	94	1.3	8.200	16.000	200	12H15	natural	47
200	84	183	84	1.1	8.200	16.000	200	12H14	forced	57
200	78	67	78	3.0	1.600	40.000	200	09D60	natural	47
200	78	90	78	2.2	1.600	40.000	200	09D41	natural	47
200	78	91	78	2.2	2.000	40.000	200	09F60	natural	47
200	78	115	78	1.7	2.400	40.000	200	09H60	natural	47
200	78	116	78	1.7	2.000	40.000	200	09F38	natural	47
200	78	135	78	1.5	3.300	40.000	200	09L51	natural	47
200	78	143	78	1.4	2.400	40.000	200	09H41	natural	47
200	78	161	78	1.2	4.600	40.000	200	12D41	natural	47
200	78	170	78	1.2	3.300	40.000	200	09L41	natural	47
200	70	143	70	1.4	4.700	28.000	200	12D20	natural	47
200	59	185	59	1.1	4.700	28.000	200	12D17	forced	57
202	217	68	217	4.3	6.700	12.000	300	12D35	forced	60
202	138	79	138	3.7	6.700	12.000	300	12D17	forced	60
205	217	48	217	6.0	6.700	12.000	300	12D41	natural	51
205	163	61	163	4.7	6.700	12.000	300	12D20	natural	51
269	181	91	181	4.3	6.500	16.000	300	12D35	forced	60
269	103	106	103	3.7	6.500	16.000	300	12D17	forced	60
274	122	82	122	4.8	6.500	16.000	300	12D20	natural	51
290	217	85	217	3.4	11.000	12.000	300	14D36	natural	51
290	217	86	217	3.4	10.000	12.000	300	12H35	natural	51
290	217	91	217	3.2	10.000	12.000	300	12H30	natural	51
290	217	119	217	2.4	10.000	12.000	300	12H34	forced	60
290	217	120	217	2.4	11.000	12.000	300	14D30	forced	60
290	217	126	217	2.3	13.000	12.000	300	12L41	natural	51
290	217	159	217	1.8	13.000	12.000	300	12L39	forced	60
290	217	159	217	1.8	17.000	12.000	300	14H32	natural	51
290	217	196	217	1.5	27.000	12.000	300	14L32	natural	51
290	217	235	217	1.2	17.000	12.000	300	14H28	forced	60
290	217	239	217	1.2	70.000	12.000	300	19F30	natural	51
290	217	240	217	1.2	38.000	12.000	300	14P32	natural	51
290	163	156	163	1.9	13.000	12.000	300	12L20	natural	51

6.2.1

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
290	138	191	138	1.5	13.000	12.000	300	12L17	forced	60
290	125	105	125	2.8	11.000	12.000	300	14D15	natural	51
290	125	116	125	2.5	10.000	12.000	300	12H15	natural	51
290	125	181	125	1.6	17.000	12.000	300	14H15	natural	51
290	125	261	125	1.1	27.000	12.000	300	14L15	natural	51
290	113	137	113	2.1	11.000	12.000	300	14D14	forced	60
290	113	137	113	2.1	10.000	12.000	300	12H14	forced	60
290	100	272	100	1.1	17.000	12.000	300	14H12	forced	60
336	145	113	145	3.4	6.300	20.000	300	12D35	forced	60
336	83	132	83	3.0	6.300	20.000	300	12D17	forced	60
342	145	81	145	4.8	6.300	20.000	300	12D41	natural	51
342	98	102	98	3.8	6.300	20.000	300	12D20	natural	51
380	46	282	46	1.4	6.100	70.000	300	12D41	natural	51
380	28	358	28	1.1	6.100	70.000	300	12D20	natural	51
390	181	113	181	3.5	11.000	16.000	300	14D36	natural	51
390	181	115	181	3.4	9.800	16.000	300	12H35	natural	51
390	181	121	181	3.2	9.800	16.000	300	12H30	natural	51
390	181	159	181	2.5	9.800	16.000	300	12H34	forced	60
390	181	160	181	2.4	11.000	16.000	300	14D30	forced	60
390	181	168	181	2.3	13.000	16.000	300	12L41	natural	51
390	181	212	181	1.8	13.000	16.000	300	12L39	forced	60
390	181	212	181	1.8	17.000	16.000	300	14H32	natural	51
390	181	261	181	1.5	26.000	16.000	300	14L32	natural	51
390	181	319	181	1.2	70.000	16.000	300	19F30	natural	51
390	181	320	181	1.2	38.000	16.000	300	14P32	natural	51
390	181	387	181	1.0	26.000	16.000	300	14L30	forced	60
390	173	314	173	1.2	17.000	16.000	300	14H28	forced	60
390	145	141	145	2.8	11.000	20.000	300	14D36	natural	51
390	145	144	145	2.7	9.600	20.000	300	12H35	natural	51
390	145	151	145	2.6	9.600	20.000	300	12H30	natural	51
390	145	199	145	2.0	9.600	20.000	300	12H34	forced	60
390	145	200	145	1.9	11.000	20.000	300	14D30	forced	60
390	145	211	145	1.9	13.000	20.000	300	12L41	natural	51
390	145	264	145	1.5	17.000	20.000	300	14H32	natural	51
390	145	265	145	1.5	13.000	20.000	300	12L39	forced	60
390	145	326	145	1.2	26.000	20.000	300	14L32	natural	51
390	122	208	122	1.9	13.000	16.000	300	12L20	natural	51
390	116	101	116	3.9	6.200	25.000	300	12D41	natural	51
390	116	142	116	2.8	6.200	25.000	300	12D35	forced	60
390	116	176	116	2.2	11.000	25.000	300	14D36	natural	51

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
390	116	180	116	2.2	9.500	25.000	300	12H35	natural	51
390	116	189	116	2.1	9.500	25.000	300	12H30	natural	51
390	116	249	116	1.6	11.000	25.000	300	14D30	forced	60
390	116	249	116	1.6	9.500	25.000	300	12H34	forced	60
390	116	263	116	1.5	13.000	25.000	300	12L41	natural	51
390	116	331	116	1.2	13.000	25.000	300	12L39	forced	60
390	116	331	116	1.2	17.000	25.000	300	14H32	natural	51
390	104	113	104	3.5	6.100	28.000	300	12D41	natural	51
390	104	159	104	2.5	6.100	28.000	300	12D35	forced	60
390	104	198	104	2.0	11.000	28.000	300	14D36	natural	51
390	104	202	104	1.9	9.400	28.000	300	12H35	natural	51
390	104	212	104	1.8	9.400	28.000	300	12H30	natural	51
390	104	278	104	1.4	9.400	28.000	300	12H34	forced	60
390	104	279	104	1.4	11.000	28.000	300	14D30	forced	60
390	104	295	104	1.3	13.000	28.000	300	12L41	natural	51
390	104	370	104	1.1	17.000	28.000	300	14H32	natural	51
390	104	371	104	1.1	13.000	28.000	300	12L39	forced	60
390	103	255	103	1.5	13.000	16.000	300	12L17	forced	60
390	98	261	98	1.5	13.000	20.000	300	12L20	natural	51
390	94	140	94	2.8	11.000	16.000	300	14D15	natural	51
390	94	155	94	2.5	9.800	16.000	300	12H15	natural	51
390	94	242	94	1.6	17.000	16.000	300	14H15	natural	51
390	94	348	94	1.1	26.000	16.000	300	14L15	natural	51
390	84	183	84	2.1	11.000	16.000	300	14D14	forced	60
390	84	183	84	2.1	9.800	16.000	300	12H14	forced	60
390	83	141	83	2.8	6.100	35.000	300	12D41	natural	51
390	83	198	83	2.0	6.100	35.000	300	12D35	forced	60
390	83	247	83	1.6	11.000	35.000	300	14D36	natural	51
390	83	252	83	1.6	9.400	35.000	300	12H35	natural	51
390	83	265	83	1.5	9.400	35.000	300	12H30	natural	51
390	83	319	83	1.2	13.000	20.000	300	12L17	forced	60
390	83	348	83	1.1	9.400	35.000	300	12H34	forced	60
390	83	349	83	1.1	11.000	35.000	300	14D30	forced	60
390	83	368	83	1.1	13.000	35.000	300	12L41	natural	51
390	78	128	78	3.0	6.200	25.000	300	12D20	natural	51
390	78	326	78	1.2	13.000	25.000	300	12L20	natural	51
390	75	175	75	2.2	11.000	20.000	300	14D15	natural	51
390	75	194	75	2.0	9.600	20.000	300	12H15	natural	51
390	75	302	75	1.3	17.000	20.000	300	14H15	natural	51
390	75	363	75	1.1	17.000	16.000	300	14H12	forced	60

6.2.1

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCS		
390	73	161	73	2.4	6.100	40.000	300	12D41	natural	51
390	73	226	73	1.7	6.100	40.000	300	12D35	forced	60
390	73	282	73	1.4	11.000	40.000	300	14D36	natural	51
390	73	288	73	1.4	9.400	40.000	300	12H35	natural	51
390	73	302	73	1.3	9.400	40.000	300	12H30	natural	51
390	70	143	70	2.7	6.100	28.000	300	12D20	natural	51
390	70	365	70	1.1	13.000	28.000	300	12L20	natural	51
390	68	228	68	1.7	11.000	20.000	300	14D14	forced	60
390	68	228	68	1.7	9.600	20.000	300	12H14	forced	60
390	66	165	66	2.4	6.200	25.000	300	12D17	forced	60
390	64	202	64	1.9	6.100	50.000	300	12D41	natural	51
390	64	283	64	1.4	6.100	50.000	300	12D35	forced	60
390	64	360	64	1.1	9.400	50.000	300	12H35	natural	51
390	60	219	60	1.8	11.000	25.000	300	14D15	natural	51
390	60	242	60	1.6	9.500	25.000	300	12H15	natural	51
390	60	378	60	1.0	17.000	25.000	300	14H15	natural	51
390	60	378	60	1.0	9.400	50.000	300	12H30	natural	51
390	59	185	59	2.1	6.100	28.000	300	12D17	forced	60
390	58	353	58	1.1	11.000	50.000	300	14D36	natural	51
390	56	179	56	2.2	6.100	35.000	300	12D20	natural	51
390	54	246	54	1.6	11.000	28.000	300	14D15	natural	51
390	54	271	54	1.4	9.400	28.000	300	12H15	natural	51
390	54	286	54	1.4	11.000	25.000	300	14D14	forced	60
390	54	286	54	1.4	9.500	25.000	300	12H14	forced	60
390	49	205	49	1.9	6.100	40.000	300	12D20	natural	51
390	48	320	48	1.2	11.000	28.000	300	14D14	forced	60
390	48	320	48	1.2	9.400	28.000	300	12H14	forced	60
390	47	231	47	1.7	6.100	35.000	300	12D17	forced	60
390	43	307	43	1.3	11.000	35.000	300	14D15	natural	51
390	43	339	43	1.1	9.400	35.000	300	12H15	natural	51
390	41	264	41	1.5	6.100	40.000	300	12D17	forced	60
390	39	256	39	1.5	6.100	50.000	300	12D20	natural	51
390	38	351	38	1.1	11.000	40.000	300	14D15	natural	51
390	38	387	38	1.0	9.400	40.000	300	12H15	natural	51
390	33	330	33	1.2	6.100	50.000	300	12D17	forced	60

6.2.1

MPR planetary geared motors




Technical data

Dimensions, notes

Notes on the dimensions

The following legend shows the layout of the dimension sheets.

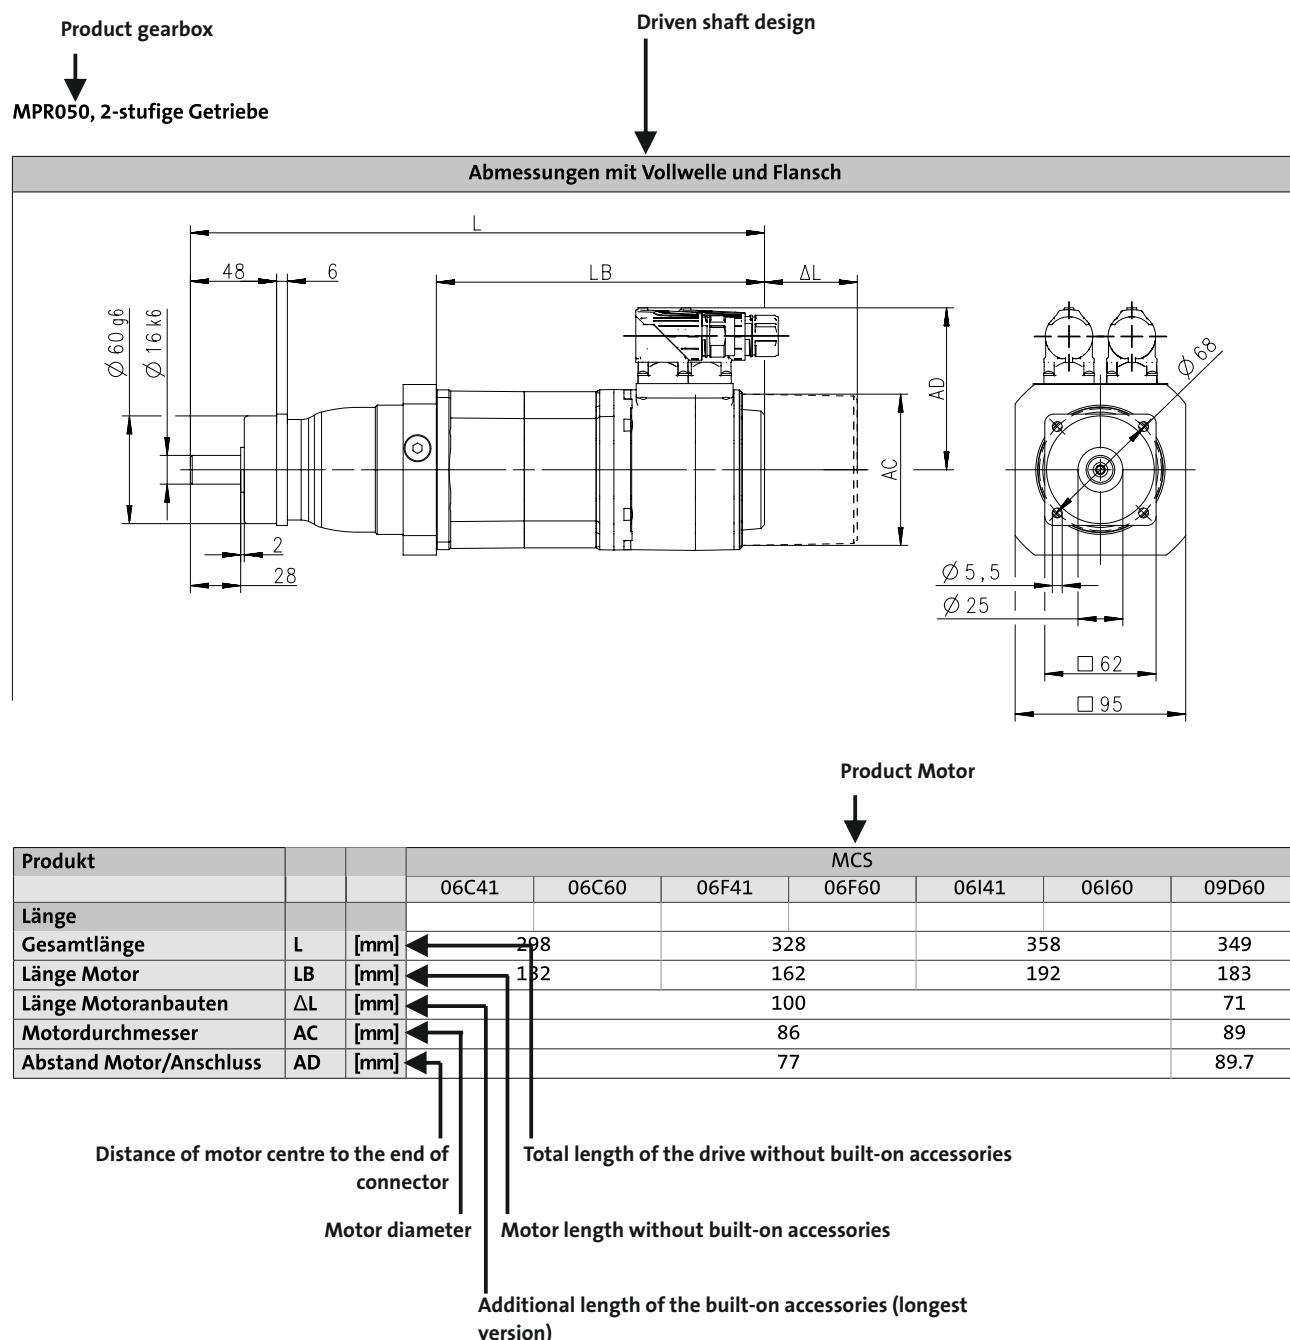

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR0501-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			
6.2.1			8800233-00

Product			MCS							
Length			06C41	06C60	06F41	06F60	06I41	06I60	09D41	09D60
Total length	L	[mm]	269		299		329		320	
Motor length	LB	[mm]	132		162		192		183	
Length of motor options	Δ L	[mm]			100				71	
Motor diameter	AC	[mm]			86				89	
Distance motor/connection	AD	[mm]			77				89.7	

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		
Datum/date						
Benennung						

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR0501-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

Front View Dimensions:

- Shaft diameter: $\varnothing 60 \text{ g}6$
- Housing height: 6
- Bearing width: LB
- Axial clearance: ΔL
- Housing shoulder height: AD
- Bearing shoulder height: AC
- Side view dimension: L
- Front view dimension: 48
- Front view dimension: 28
- Front view dimension: 2

Top View Detail Dimensions:

- Outer diameter: $\varnothing 68$
- Bore diameter: $\varnothing 5,5$
- Bore diameter: $\varnothing 25$
- Housing width: 62
- Housing width: 95

8800233-00

6.2.1

8800233-00

Product			MCS							
			09F38	09F60	09H41	09H60	09L41	09L51	12D20	12D41
Length										
Total length	L	[mm]	340		360		400		334	
Motor length	LB	[mm]	203		223		263		188	
Length of motor options	Δ L	[mm]			71				69	
Motor diameter	AC	[mm]			89				116	
Distance motor/connection	AD	[mm]			89.7				105	

				Allgemeintoleranzen general tolerance nach: 6.2.1 - 39	Oberflächen/ surface	
						Werkst. Rohteil

MPR planetary geared motors




Technical data

Dimensions, self-ventilated motors

MPR050: 2-stage gearboxes

Product			MCS						
			06C41	06C60	06F41	06F60	06I41	06I60	09D60
Length									
Total length	L	[mm]	298		328		358		349
Motor length	LB	[mm]	132		162		192		183
Length of motor options	Δ L	[mm]			100				71
Motor diameter	AC	[mm]			86				89
Distance motor/connection	AD	[mm]			77				89.7

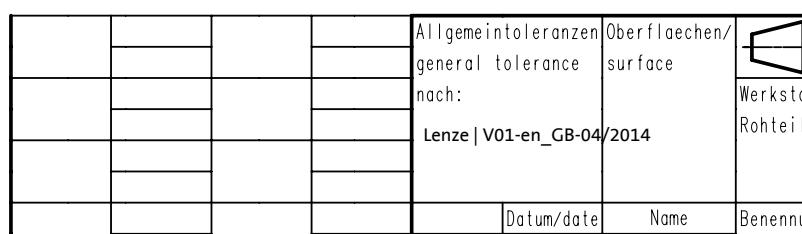


MPR planetary geared motors

Technical data



Dimensions, self-ventilated motors

MPR100, 1-stage gearboxes

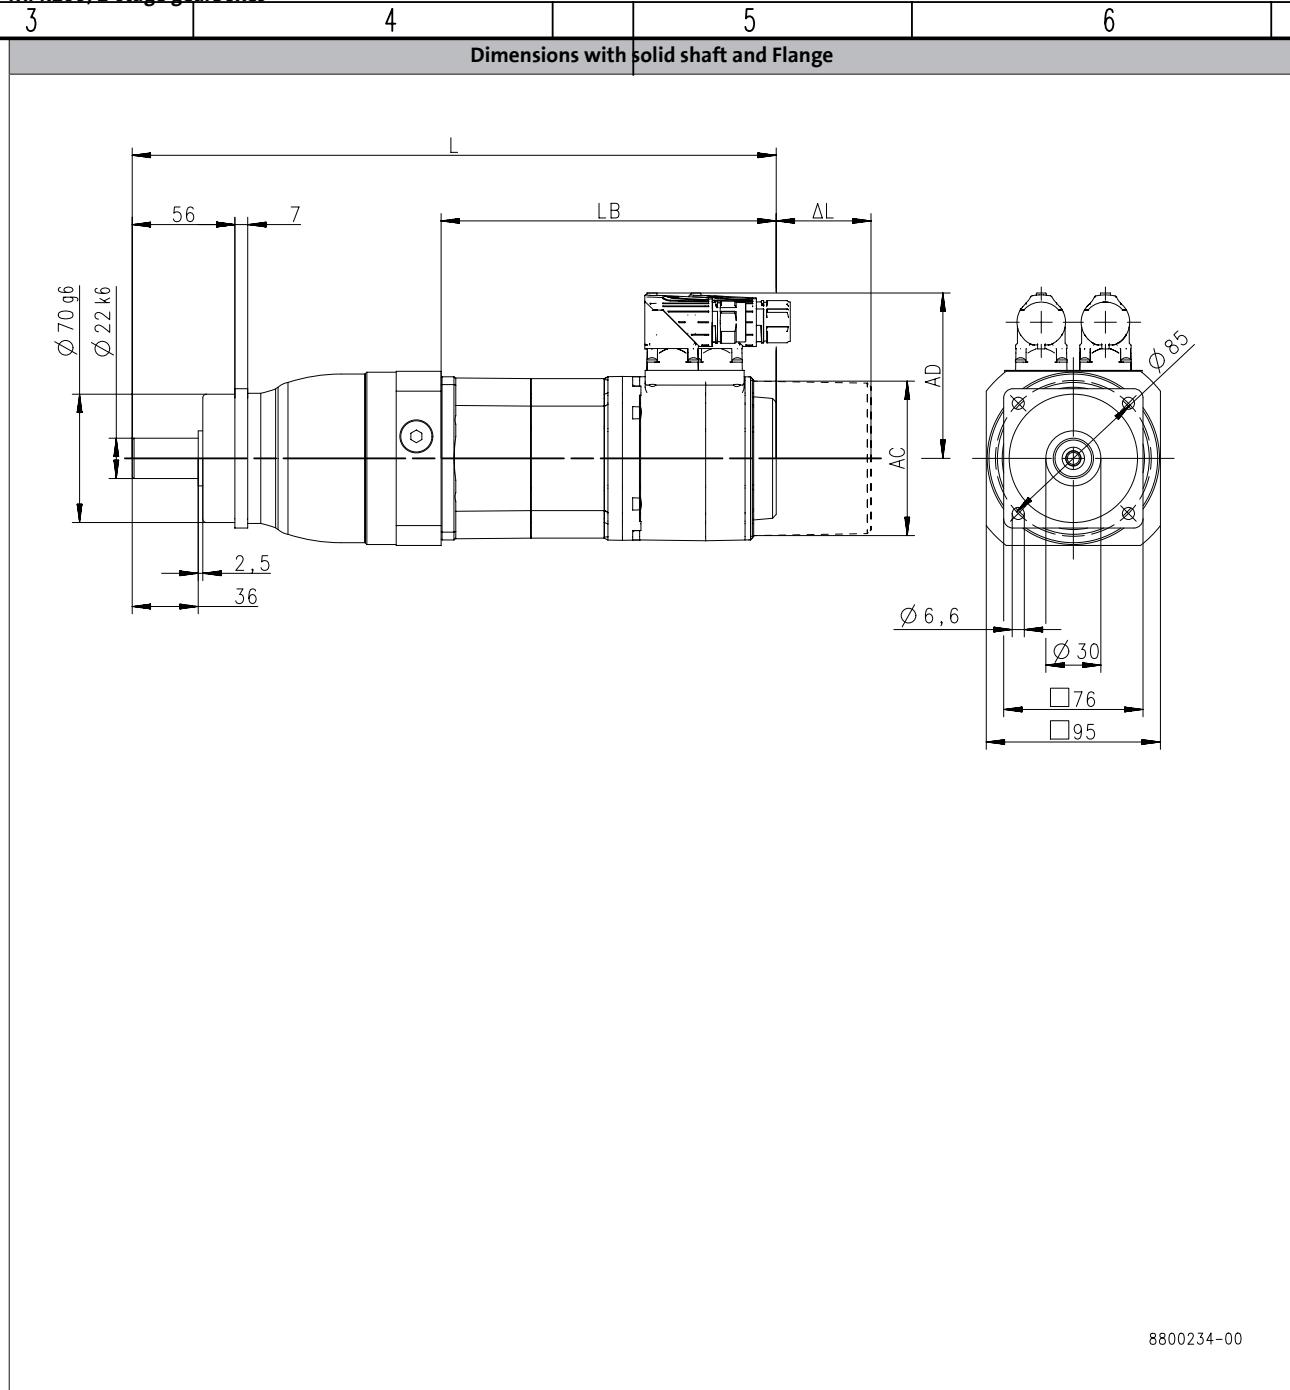

Product			MCS							
Length										
Total length	L	[mm]	09D41	09D60	09F38	09F60	09H41	09H60	09L41	09L51
Motor length	LB	[mm]		352		372		392		432
Length of motor options	Δ L	[mm]					71			
Motor diameter	AC	[mm]					89			
Distance motor/connection	AD	[mm]					89.7			


MPR planetary geared motors

Technical data



Dimensions, self-ventilated motors

MPR100, 1-stage gearboxes

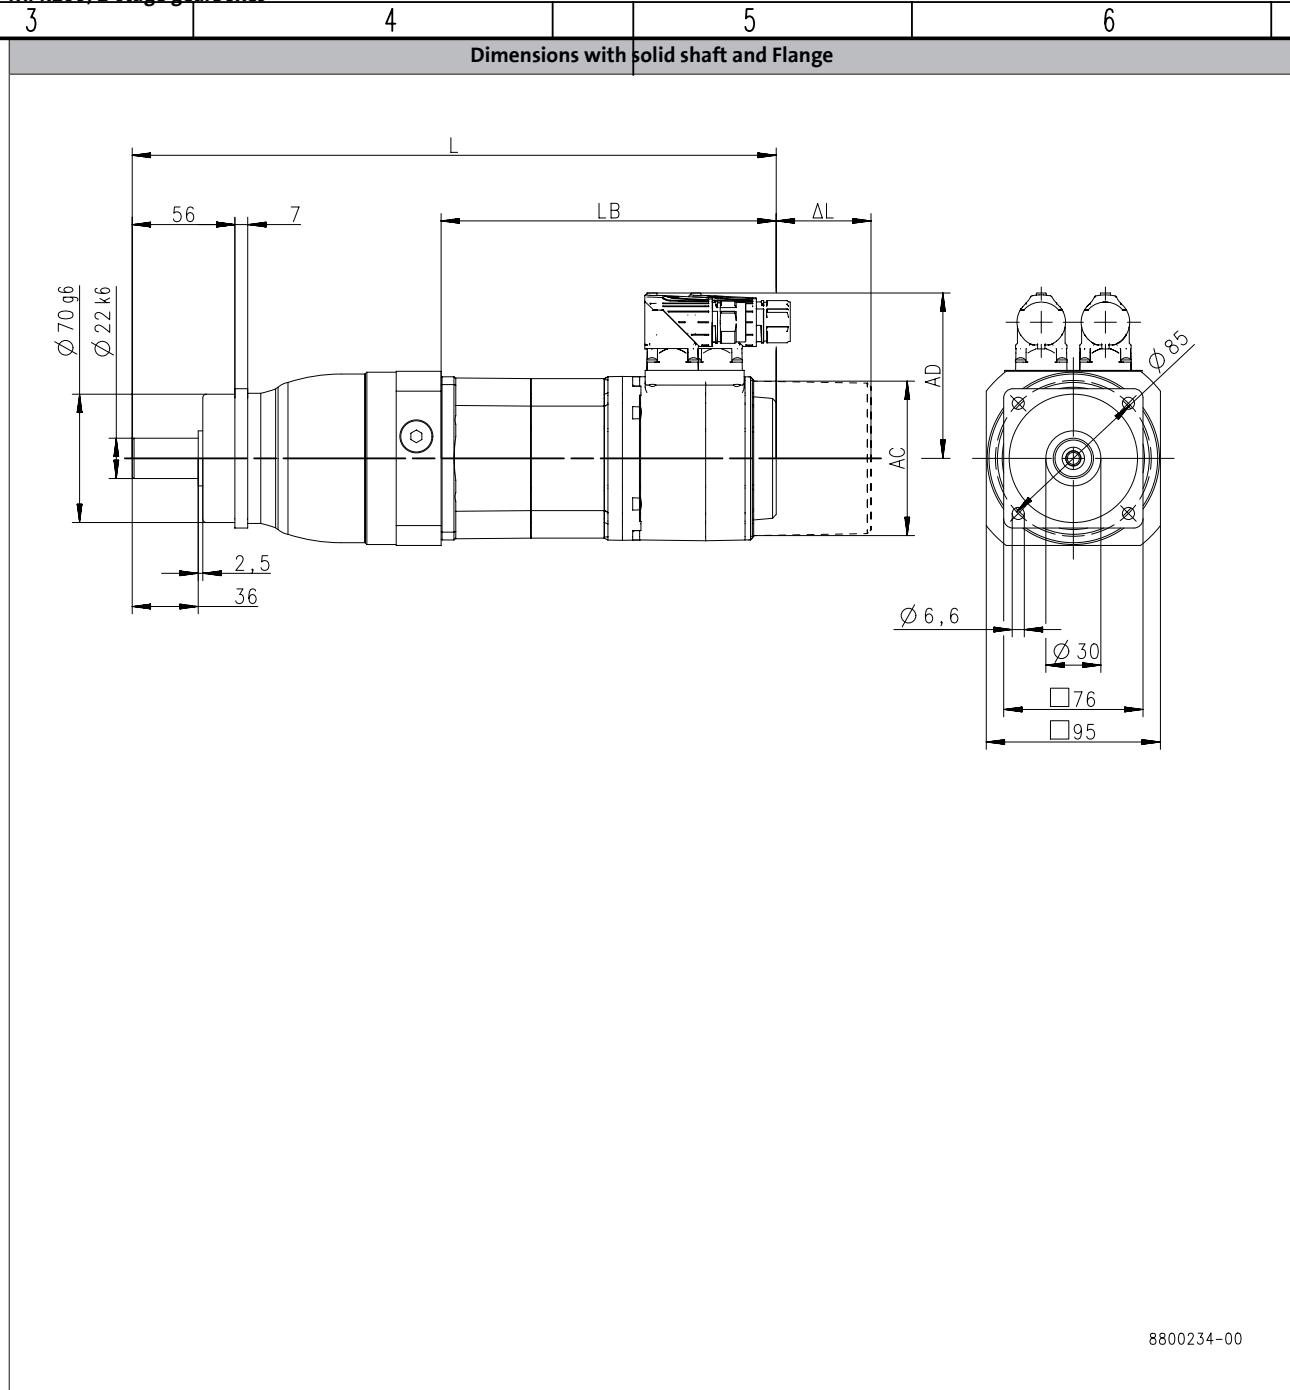

Product			MCS									
			12D20	12D41	12H15	12H30	12H35	12L20	12L41	14D15	14D36	
Length												
Total length	L	[mm]	357		397		437		380		380	
Motor length	LB	[mm]	188		228		268		201			
Length of motor options	ΔL	[mm]			69				78			
Motor diameter	AC	[mm]			116				143			
Distance motor/connection	AD	[mm]			105				116.5			

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		
				Datum/date	Name	Benennung

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR100: 2-stage gearboxes

Dimensions with solid shaft and Flange

Front View Dimensions:

- Shaft diameter: $\varnothing 70\text{ g}6$
- Shaft shoulder: $\varnothing 22\text{ k}6$
- Bore diameter: $\varnothing 56$
- Shaft shoulder height: 7
- Shaft shoulder width: 2.5
- Shaft shoulder distance from base: 36
- Shaft length: L
- Shaft shoulder distance from bearing: LB
- Shaft shoulder distance from bearing: ΔL
- Shaft shoulder distance from bearing: AD
- Shaft shoulder distance from bearing: AC
- Shaft shoulder width: $\varnothing 6.6$
- Shaft shoulder diameter: $\varnothing 30$
- Shaft shoulder width: □76
- Shaft shoulder width: □95

Side View Dimensions:


- Shaft shoulder diameter: $\varnothing 85$

Part Number: 8800234-00

6.2.1

8800234-00

Product			MCS						
			06C41	06C60	06F41	06F60	06I41	06I60	09D41
Length									
Total length	L	[mm]	321		351		381		372
Motor length	LB	[mm]	132		162		192		183
Length of motor options	Δ L	[mm]			100				71
Motor diameter	AC	[mm]			86				89
Distance motor/connection	AD	[mm]			77				89.7

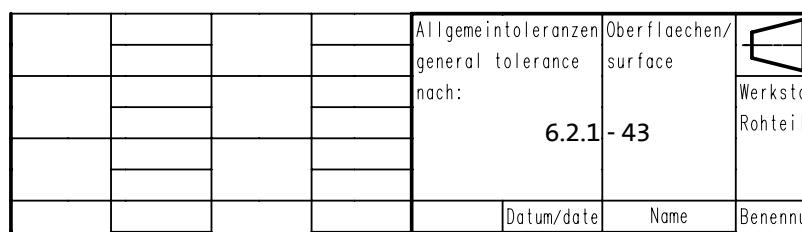


MPR planetary geared motors

Technical data



Dimensions, self-ventilated motors

MPR100: 2-stage gearboxes

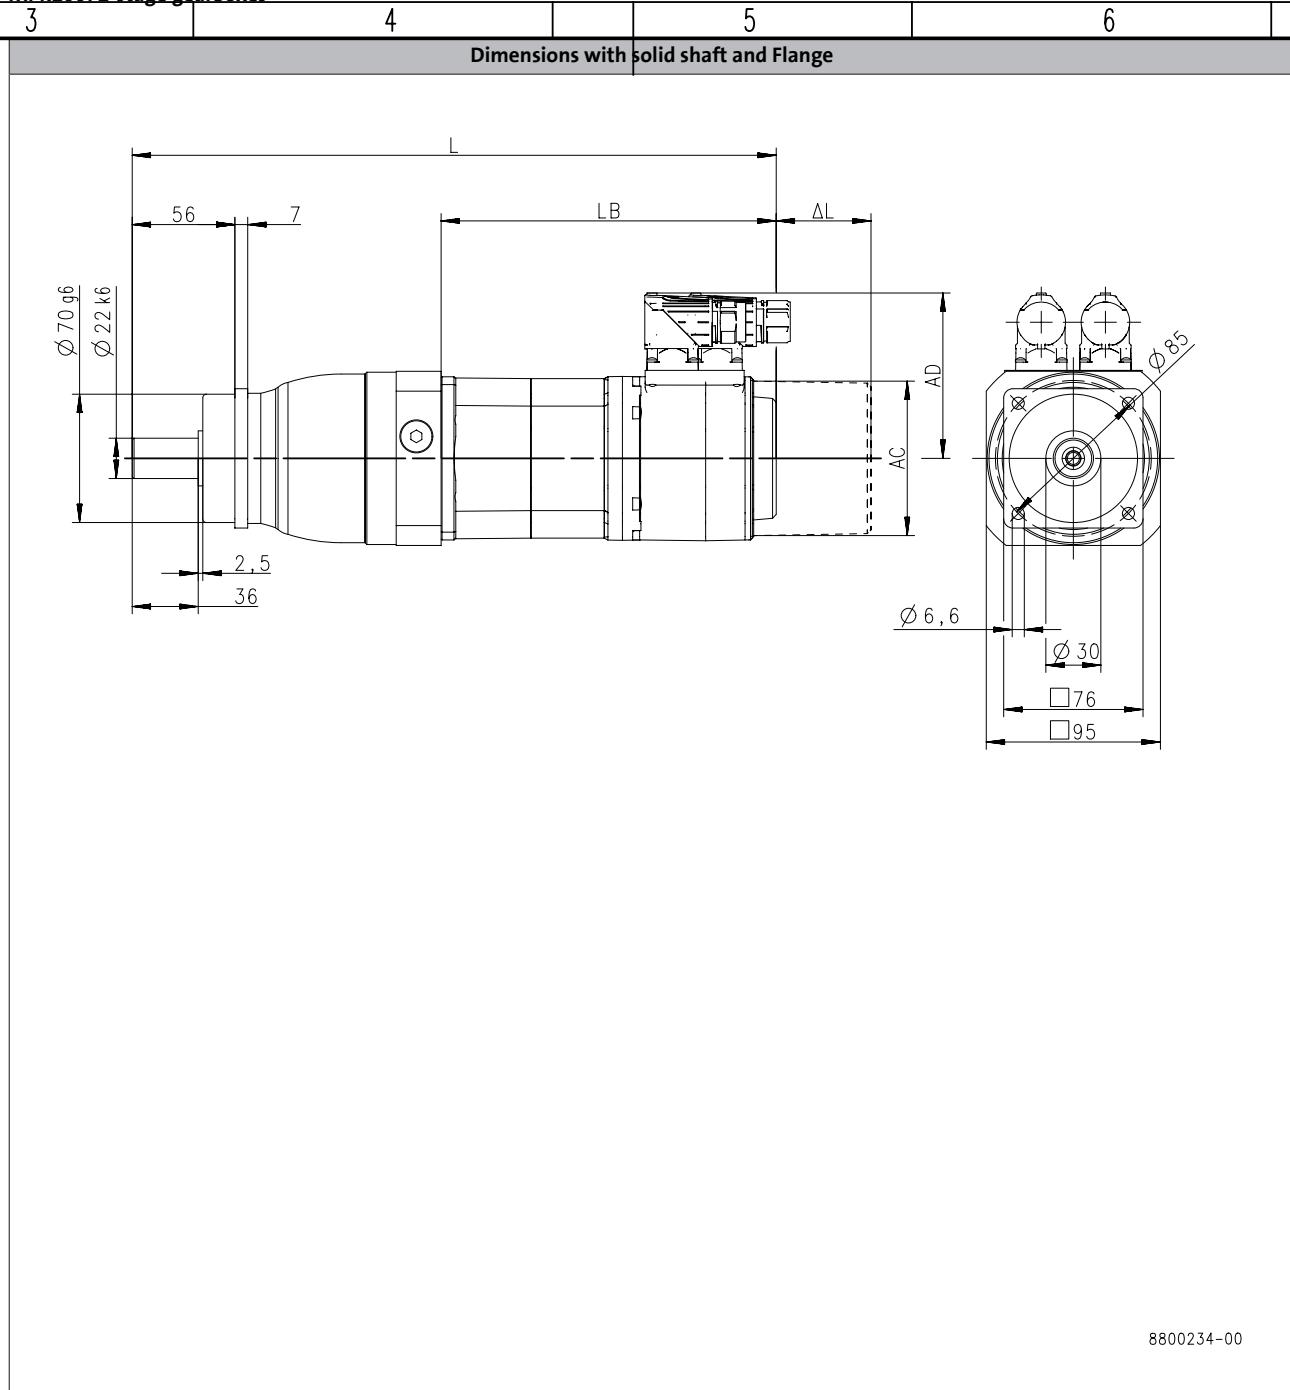

Product			MCS						
			09D60	09F38	09F60	09H41	09H60	09L41	09L51
Length									
Total length	L	[mm]	372	392		412		452	
Motor length	LB	[mm]	183	203		223		263	
Length of motor options	Δ L	[mm]			71				
Motor diameter	AC	[mm]			89				
Distance motor/connection	AD	[mm]			89.7				

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	 nach: Lenze V01-en_GB-04/2014

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR200, 1-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

The technical drawing consists of two views: a front view on the left and a top view on the right. The front view shows a solid shaft with a diameter of $\phi 32k6$, a shoulder of $\phi 90g6$, a keyway of 58 , and a hub with a bore of $\phi 45$. The total length is L , and the distance from the shoulder to the hub is LB . The top view shows a flange with a diameter of $\phi 120$, a central hole of $\phi 9$, and mounting holes. The distance between the center of the central hole and the outer edge is AC , and the distance from the bottom of the central hole to the bottom of the flange is AD . The distance from the center of the central hole to the center of the mounting holes is 101 , and the distance from the center of the central hole to the outer edge is 130 .

Front View Dimensions:

- Shaft diameter: $\phi 32k6$
- Shoulder diameter: $\phi 90g6$
- Keyway width: 58
- Total length: L
- Distance from shoulder to hub: LB
- Hub bore diameter: $\phi 45$
- Shaft shoulder to hub: 10
- Shaft shoulder to hub center: 3

Top View Dimensions:

- Flange outer diameter: $\phi 120$
- Central hole diameter: $\phi 9$
- Mounting hole diameter: $\phi 45$
- Center-to-center of mounting holes: 101
- Center-to-outer edge of mounting holes: 130
- Hub height: AC
- Flange thickness: AD

8800235-00

6.2.1

8800235-00

Product			MCS								
			12D20	12D41	12H15	12H30	12H35	12L20	12L41	14D15	14D36
Length											
Total length	L	[mm]	414			454			494		427
Motor length	LB	[mm]		188		228		268			201
Length of motor options	Δ L	[mm]				69					78
Motor diameter	AC	[mm]				116					143
Distance motor/connection	AD	[mm]				105					116.5

				Allgemeintoleranzen general tolerance nach: 6.2.1	Oberflächen/ surface	
						Werkst...
						Rohte...
					Datum/date	Name
						Benenn...

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR200, 1-stage gearboxes

Dimensions with solid shaft and Flange


Front View Dimensions:

- Shaft diameter: $\varnothing 90\text{g}6$
- Bearing housing diameter: $\varnothing 32\text{k}6$
- Hub width: 88
- Hub shoulder height: 10
- Bearing bore diameter: $\varnothing 45$
- Bearing outer diameter: $\square 101$
- Bearing outer diameter: $\square 130$
- Flange outer diameter: $\varnothing 120$
- Hub shoulder height: 3
- Total length: L
- Shaft shoulder distance: LB
- Shaft shoulder distance: ΔL
- Shaft shoulder height: AC
- Shaft shoulder height: AD

Top View Dimensions:

- Shaft diameter: $\varnothing 9$
- Shaft shoulder diameter: $\varnothing 45$
- Shaft shoulder diameter: $\square 101$
- Shaft shoulder diameter: $\square 130$
- Shaft shoulder diameter: $\varnothing 120$

Product			MCS								
			14H15	14H32	14L15	14L32	14P14	14P32	19F14	19F30	19J14
Length											
Total length	L	[mm]	467		507		547		446		486
Motor length	LB	[mm]	241		281		321		220		260
Length of motor options	Δ L	[mm]			78				83		93
Motor diameter	AC	[mm]			143					192	
Distance motor/connection	AD	[mm]	116.5		146	116.5	146	141.5	171	141.5	171

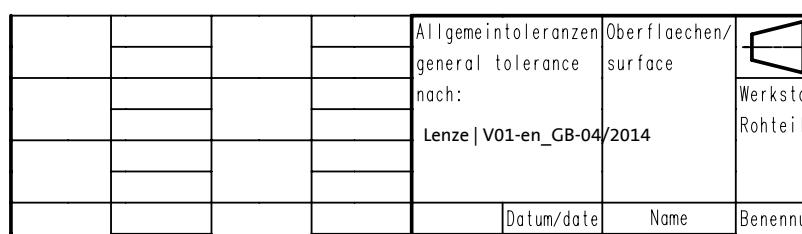

MPR planetary geared motors

Technical data



Dimensions, self-ventilated motors

MPR200, 2-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.2.1

8800235-00

Product			MCS						
			09D41	09D60	09F38	09F60	09H41	09H60	09L41
Length									
Total length	L	[mm]		423		443		463	503
Motor length	LB	[mm]		183		203		223	263
Length of motor options	Δ L	[mm]				71			
Motor diameter	AC	[mm]				89			
Distance motor/connection	AD	[mm]				89.7			

				Allgemeintoleranzen general tolerance nach: 6.2.1 - 47	Oberflaechen/ surface	

MPR planetary geared motors

Technical data



Dimensions, self-ventilated motors

MPR200, 2-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			
6.2.1			
8800235-00			

Product			MCS						
Length			09L51	12D20	12D41	12H15	12H30	12H35	12L41
Total length	L	[mm]	503	428		468			508
Motor length	LB	[mm]	263	188		228			268
Length of motor options	Δ L	[mm]	71		69				
Motor diameter	AC	[mm]	89		116				
Distance motor/connection	AD	[mm]	89.7		105				

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	 Lenze V01-en_GB-04/2014
				nach:		
				Datum/date		

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR300, 1-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

The drawing consists of two parts: a front view on the left and a top view on the right.

Front View Dimensions:

- Total length: L
- Shaft diameter: $\varnothing 40\text{h}6$
- Shaft shoulder width: 112
- Shaft shoulder thickness: 12
- Shaft shoulder height: 82
- Shaft shoulder thickness at bottom: 3
- Shaft shoulder height from base: AD
- Shaft shoulder thickness from base: AC
- Shaft shoulder width from base: LB
- Shaft shoulder thickness from base: AL

Top View Dimensions:

- Shaft diameter: $\varnothing 11$
- Shaft shoulder diameter: $\varnothing 65$
- Shaft shoulder width: 141
- Shaft shoulder thickness: 150
- Shaft shoulder diameter: $\varnothing 165$

8800236-00

6.2.1

8800236-00

Product			MCS						
			14D15	14D36	14H15	14H32	14L15	14L32	14P14
Length									
Total length	L	[mm]	497		537		577		617
Motor length	LB	[mm]	201		241		281		321
Length of motor options	Δ L	[mm]			78				
Motor diameter	AC	[mm]			143				
Distance motor/connection	AD	[mm]		116.5			146		116.5

				Allgemeintoleranzen general tolerance nach: 6.2.1	Oberflächen/ surface	
						Werkst...
						Rohte...
					Datum/date	Name
						Benenn...

MPR planetary geared motors

Technical data



Dimensions, self-ventilated motors

MPR300, 1-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

8800236-00

Product	14P32	19F14	19F30	19J14	19J30	19P14	19P30
Length							
Total length	L [mm]	617	516	556		616	
Motor length	LB [mm]	321	220	260		320	
Length of motor options	Δ L [mm]	78	83		93		
Motor diameter	AC [mm]	143		192			
Distance motor/connection	AD [mm]	146	141.5	171	141.5	171	141.5

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface
				nach: Lenze V01-en_GB-04/2014	
				Datum/date	Name
					Benennung

MPR planetary geared motors

Technical data



Dimensions, self-ventilated motors

MPR300, 2-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.2.1

8800236-00

Product			MCS						
			12D20	12D41	12H15	12H30	12H35	12L20	12L41
Length									
Total length	L	[mm]		502		542		582	
Motor length	LB	[mm]		188		228		268	
Length of motor options	Δ L	[mm]				69			
Motor diameter	AC	[mm]				116			
Distance motor/connection	AD	[mm]				105			

				Allgemeintoleranzen general tolerance nach: 6.2.1 - 51	Oberflaechen/ surface	

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR300, 2-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange


Front View Dimensions:

- Shaft diameter: $\varnothing 130\text{g}6$
- Shoulder length: 112
- Keyway width: 12
- Hub length: LB
- Shoulder height: AC
- Total length: L
- Shoulder distance: AD
- Shaft shoulder distance: 82
- Shaft shoulder thickness: 3

Inset View Dimensions:

- Flange outer diameter: $\varnothing 165$
- Keyway diameter: $\varnothing 11$
- Hub diameter: $\varnothing 65$
- Mounting hole distance: □141, □150

Product			MCS						
			14D15	14D36	14H15	14H32	14L15	14L32	14P32
Length									
Total length	L	[mm]	515		555		595	635	534
Motor length	LB	[mm]	201		241		281	321	220
Length of motor options	Δ L	[mm]			78				83
Motor diameter	AC	[mm]			143				192
Distance motor/connection	AD	[mm]		116.5			146		171

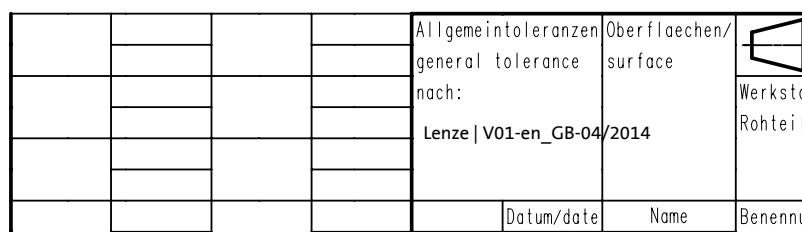

MPR planetary geared motors

Technical data



Dimensions, forced ventilated motors

MPR0501-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.2.1

8800233-00

Product	MCS		
Length			
Total length	L [mm]	407	
Motor length	LB [mm]	261	
Length of motor options	Δ L [mm]	63	
Motor diameter	AC [mm]	140	
Distance motor/connection	AD [mm]	105	

				Allgemeintoleranzen general tolerance nach: 6.2.1 - 53	Oberflaechen/ surface	


MPR planetary geared motors

Technical data



Dimensions, forced ventilated motors

MPR100, 1-stage gearboxes

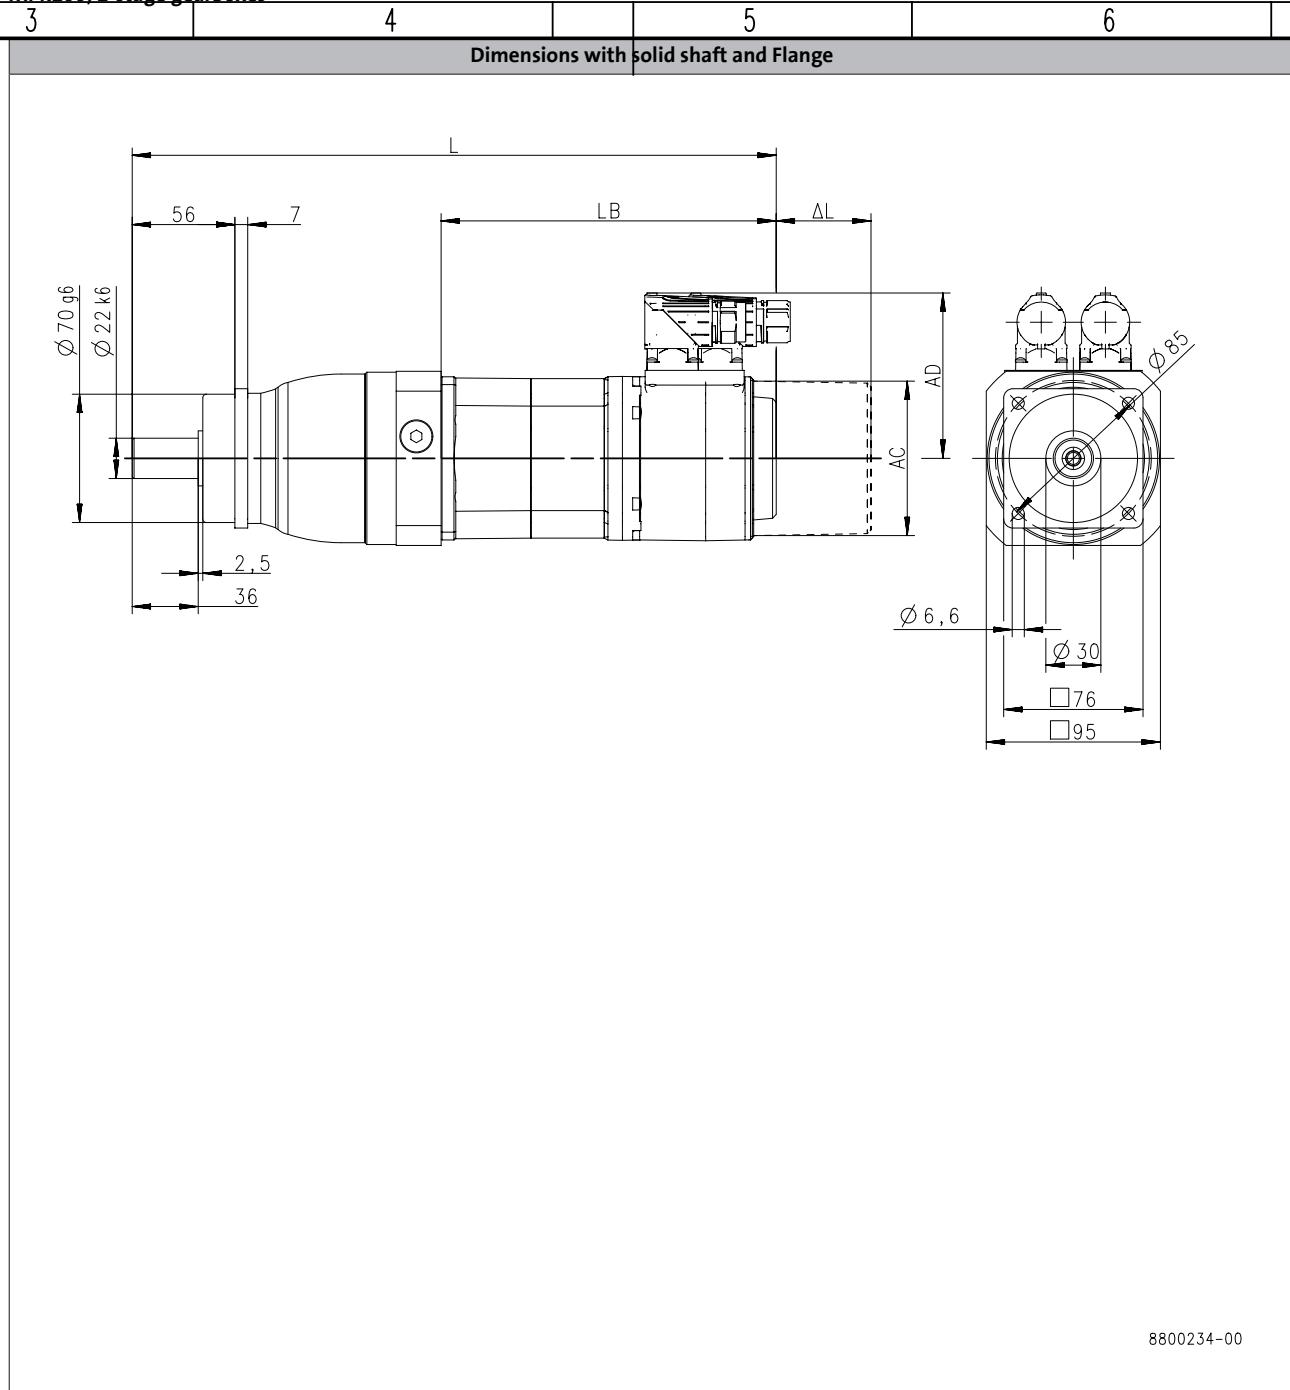

Product			MCS							
			12D17	12D35	12H14	12H34	12L17	12L39	14D14	14D30
Length										
Total length	L	[mm]	430		470		510		468	
Motor length	LB	[mm]	261		301		341		289	
Length of motor options	Δ L	[mm]			63				81.5	
Motor diameter	AC	[mm]			140				167	
Distance motor/connection	AD	[mm]			105				116.5	

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		
				Datum/date	Name	Benennung

MPR planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPR200, 1-stage gearboxes

Dimensions with solid shaft and Flange

Front View Dimensions:

- Shaft diameter: $\varnothing\ 90\text{g}6$
- Bearing width: LB
- Hub length: ΔL
- Shaft shoulder: 88
- Shaft shoulder: 10
- Shaft shoulder: 58
- Shaft shoulder: 3
- Shaft shoulder: AC
- Shaft shoulder: AD

Top View Dimensions:

- Outer diameter: $\varnothing\ 120$
- Bore diameter: $\varnothing\ 9$
- Mouting hole diameter: $\varnothing\ 45$
- Mouting hole diameter: 101
- Mouting hole diameter: 130

6.2.1

8800235-00

Product			MCS						
			12D17	12D35	12H14	12H34	12L17	12L39	14D14
Length									
Total length	L	[mm]	487		527		567		515
Motor length	LB	[mm]	261		301		341		289
Length of motor options	Δ L	[mm]			63				81.5
Motor diameter	AC	[mm]			140				167
Distance motor/connection	AD	[mm]			105				116.5

				Allgemeintoleranzen general tolerance nach: 6.2.1	Oberflächen/ surface	
						Werkst...
						Rohte...
					Datum/date	Name
						Benenn...

MPR planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPR200, 1-stage gearboxes

Dimensions with solid shaft and Flange


Front View Dimensions:

- Shaft diameter: $\phi 90\text{g}6$
- Shoulder diameter: $\phi 32\text{k}6$
- Shoulder height: 58
- Neck height: 3
- Total length: L
- Neck length: LB
- Neck shoulder height: ΔL
- Flange thickness: AD
- Neck shoulder height: AC
- Shaft shoulder height: ΔL
- Outer diameter: $\phi 120$

Top View Dimensions:

- Central hole diameter: $\phi 45$
- Square hole width: □101
- Rectangular hole width: □130
- Bore diameter: $\phi 9$

Product			MCS							
			14H12	14H28	14L14	14L30	14P11	14P26	19F12	19F29
Length										
Total length	L	[mm]	555		595		635		553	
Motor length	LB	[mm]	329		369		409		327	
Length of motor options	Δ L	[mm]			81.5				72	
Motor diameter	AC	[mm]			167				212	
Distance motor/connection	AD	[mm]	116.5	146	116.5	146	116.5	146	141.5	171

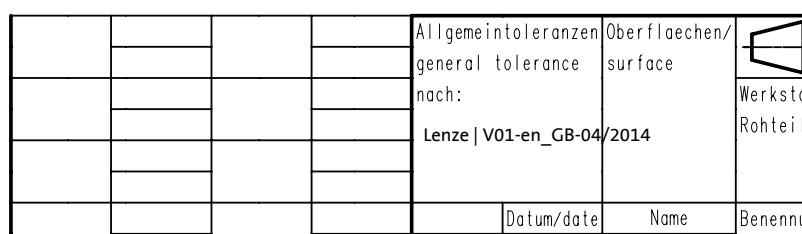

MPR planetary geared motors

Technical data



Dimensions, forced ventilated motors

MPR200, 2-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.2.1

8800235-00

Product			MCS		
			12D17	12D35	12H14
Length					
Total length	L	[mm]		501	541
Motor length	LB	[mm]		261	301
Length of motor options	Δ L	[mm]		63	
Motor diameter	AC	[mm]		140	
Distance motor/connection	AD	[mm]		105	

				Allgemeintoleranzen general tolerance nach: 6.2.1 - 57	Oberflaechen/ surface	

MPR planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPR300, 1-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

Front View Dimensions:

- Shaft diameter: $\varnothing 130\text{g}6$
- Shoulder length: 112
- Keyway width: 12
- Hub length: LB
- Shoulder height: AC
- Total length: L
- Shoulder distance: AD
- Shaft shoulder distance: 82
- Shaft shoulder thickness: 3

Inset View Dimensions:

- Flange outer diameter: $\varnothing 165$
- Keyway diameter: $\varnothing 11$
- Hub diameter: $\varnothing 65$
- Mounting hole distance: □141, □150

Product			MCS					
			14D14	14D30	14H12	14H28	14L14	14L30
Length								
Total length	L	[mm]	585		625		665	705
Motor length	LB	[mm]	289		329		369	409
Length of motor options	Δ L	[mm]			81.5			
Motor diameter	AC	[mm]			167			
Distance motor/connection	AD	[mm]	116.5		146	116.5	146	116.5

MPR planetary geared motors

Technical data



Dimensions, forced ventilated motors

MPR300, 1-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.2.1

8800236-00

Product			MCS						
			14P26	19F12	19F29	19J12	19J29	19P12	19P29
Length									
Total length	L	[mm]	705	623		663		723	
Motor length	LB	[mm]	409	327		367		427	
Length of motor options	Δ L	[mm]	81.5	72		82			
Motor diameter	AC	[mm]	167		212				
Distance motor/connection	AD	[mm]	146	141.5		171			

				Allgemeintoleranzen general tolerance nach: 6.2.1 - 59	Oberflaechen/ surface	

MPR planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPR300, 2-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange


Front View Dimensions:

- Shaft diameter: $\varnothing 130\text{g}6$
- Shoulder length: 112
- Keyway width: 12
- Hub length: LB
- Shoulder height: AC
- Total length: L
- Shoulder distance: AD
- Shaft shoulder distance: 82
- Shaft shoulder thickness: 3

Inset View Dimensions:

- Flange outer diameter: $\varnothing 165$
- Keyway diameter: $\varnothing 11$
- Hub diameter: $\varnothing 65$
- Mounting hole distance: □141, □150

Product			MCS										
			12D17	12D35	12H14	12H34	12L17	12L39	14D14	14D30	14H12	14H28	14L30
Length													
Total length	L	[mm]	575		615		655		603		643		683
Motor length	LB	[mm]	261		301		341		289		329		369
Length of motor options	Δ L	[mm]			63						81.5		
Motor diameter	AC	[mm]			140						167		
Distance motor/connection	AD	[mm]			105					116.5		146	

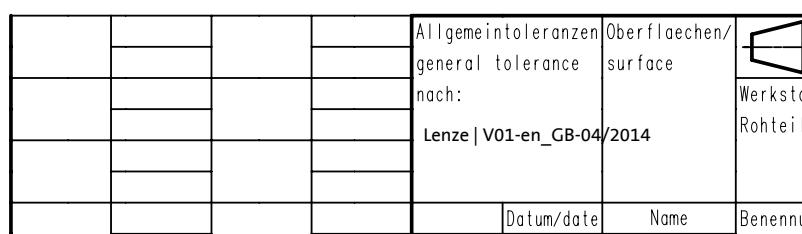

MPR planetary geared motors



Technical data

Weights, self-ventilated motors

1-stage gearboxes

		MCS									
		06C41 06C60	06F41 06F60	06I41 06I60	09D41 09D60	09F38 09F60	09H41 09H60	09L41 09L51	12D20 12D41	12H15 12H30 12H35	
MPR	050	m [kg]	3.9	4.3	5.0	6.4	7.3	8.2	10	8.5	
	100	m [kg]				7.4	8.3	9.2	11	9.5	
	200	m [kg]							14	17	

		MCS									
		12L20 12L41	14D15 14D36	14H15 14H32	14L15 14L32	14P14 14P32	19F14 19F30	19J14 19J30	19P14 19P30		
MPR	100	m [kg]	16	14							
	200	m [kg]	20	18	23	27	32	30	37		
	300	m [kg]		28	33	37	42	40	47	57	

2-stage gearboxes

		MCS									
		06C41 06C60	06F41 06F60	06I41 06I60	09D41	09D60	09F38 09F60	09H41 09H60	09L41 09L51	12D20 12D41	
MPR	050	m [kg]	4.5	4.9	5.6		7.0				
	100	m [kg]	6.2	6.6	7.3	8.7	9.6	10	12		
	200	m [kg]				13		14	16	15	
	300	m [kg]								25	

		MCS									
		12H15 12H30 12H35	12L20	12L41	14D15 14D36	14H15 14H32	14L15 14L32	14P32	19F30		
MPR	200	m [kg]	18		21						
	300	m [kg]	28	32		30	34	39	44	42	

Weights, forced ventilated motors

1-stage gearboxes

		MCS									
		12D17 12D35	12H14 12H34	12L17 12L39	14D14 14D30	14H12 14H28	14L14 14L30	14P11 14P26	19F12 19F29	19J12 19J29	19P12 19P29
MPR	050	m [kg]	11								
	100	m [kg]	12	15	18						
	200	m [kg]	16	19	22	27	31	36			
	300	m [kg]			32	37	41	46	53	63	

2-stage gearboxes

		MCS									
		12D17 12D35	12H14 12H34	12L17 12L39	14D14 14D30	14H12 14H28	14L14 14L30	14P11 14P26	19F12 19F29	19J12 19J29	19P12 19P29
MPR	200	m [kg]	17		20						
	300	m [kg]	28	31		34		38		43	

MPR planetary geared motors



Technical data

Surface and corrosion protection

For optimum protection of geared motors against ambient conditions, the surface and corrosion protection system (OKS) offers tailor-made solutions.

Various surface coatings combined with other protective measures ensure that the geared motors operate reliably even at high air humidity, in outdoor installations or in the presence of atmospheric impurities. Any colour from the RAL Classic collection can be chosen for the top coat. The geared motors are also available unpainted (no surface and corrosion protection).

Surface and corrosion protection	Applications	Measures
OKS-G (primed)	• Dependent on subsequent top coat applied	<ul style="list-style-type: none">• 2K PUR priming coat (grey)• Zinc-coated screws• Rust-free breather elementsOptional measures• Stainless steel nameplate

Structure of surface coating

Surface and corrosion protection	Surface coating
	Structure
Without OKS(uncoated)	Dipping primed gearbox
OKS-G (primed)	Dipping primed gearbox 2K PUR priming coat

MPR planetary geared motors

Technical data



6.2.1

MPR planetary geared motors

Technical data




6.2.1

Gearboxes

MPR planetary-geared motors

6 ... 359 Nm (asynchronous servo motors)

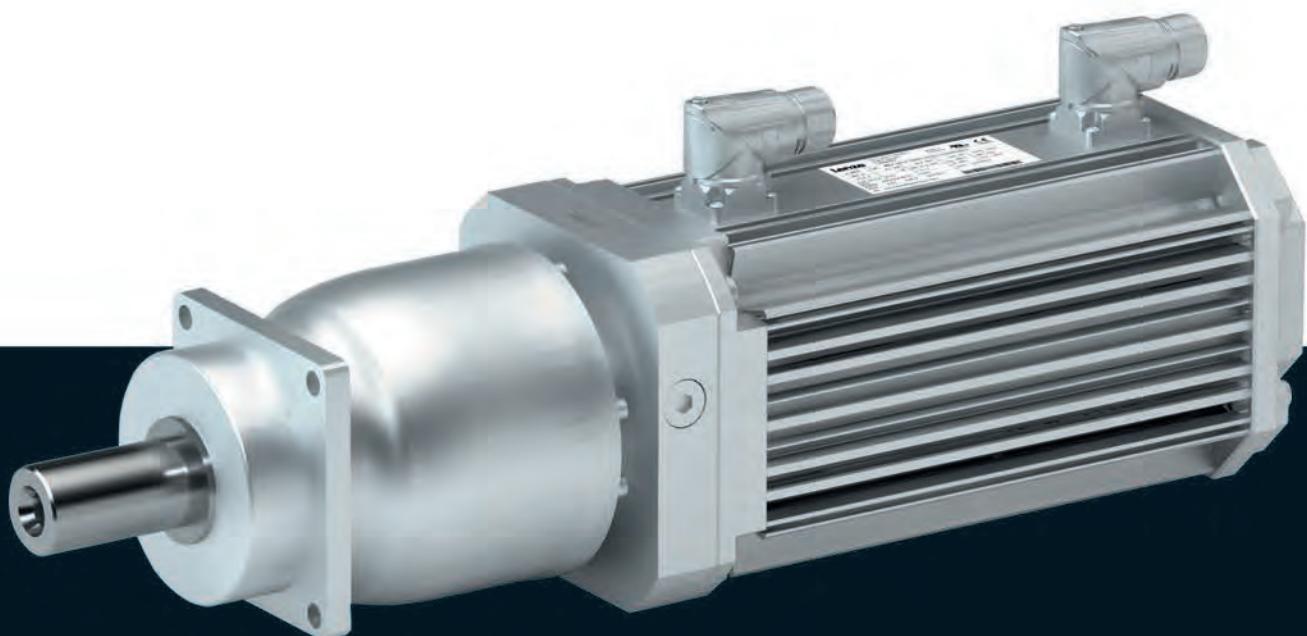

MPR planetary geared motors



Contents

General information	List of abbreviations	6.2.2 - 5
	Product information	6.2.2 - 6
	Equipment	6.2.2 - 7
	The gearbox kit	6.2.2 - 9
	Dimensioning	6.2.2 - 14
Technical data	Selection tables, notes	6.2.2 - 17
	Selection tables	6.2.2 - 18
	Dimensions, notes	6.2.2 - 24
	Dimensions, self-ventilated motors	6.2.2 - 25
	Dimensions, forced ventilated motors	6.2.2 - 32
	Weights, self-ventilated motors	6.2.2 - 37
	Weights, forced ventilated motors	6.2.2 - 38
	Surface and corrosion protection	6.2.2 - 39

MPR planetary geared motors



Contents

6.2.2

MPR planetary geared motors



General information

List of abbreviations

c		Load capacity
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass
M ₂	[Nm]	Output torque
M _{2, max}	[Nm]	Max. output torque
n _{2, eto}	[r/min]	Transition speed
n _{2, th}	[r/min]	Thermal limit speed

CCC	China Compulsory Certificate
CE	Communauté Européenne
CSA	Canadian Standards Association
cURus	Combined certification marks of UL for the USA and Canada
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

6.2.2

MPR planetary geared motors



General information

Product information

The combination of Vogel MPR/MPG planetary gearboxes and Lenze servo motors is the optimum solution for dynamic or highly dynamic applications requiring the highest precision. These solutions cater to the requirements such as those encountered on a daily basis in the printing and packaging industry, as well as in the fields of handling and robot technology, filling and materials handling technology and, in many cases, also general engineering.

The MPR/MPG planetary gearboxes feature a higher-than-average torsional stiffness combined with a backlash down to one angular minute. Their combination with MCS synchronous servo motors and MCA asynchronous servo motors creates flexible and particularly energy-efficient solutions which cover virtually every application.

Version

- Robust planetary gearbox with solid shaft (MPR) or flanged shaft (MPG)
- High precision for the application thanks to low backlash (min. <=1 angular minutes)
- Efficient drive solutions with high efficiency (95 ... 97 %)
- Any mounting position which can be changed subsequently as well
- Enclosure IP65 (dust-tight, protection against water jets under any angle)

The product name

Gearbox type	Product range	Rated torque [Nm]	Product
Planetary gearbox	MPR	29	MPR050
		83	MPR100
		200	MPR200
		390	MPR300

MPR planetary geared motors




General information

Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

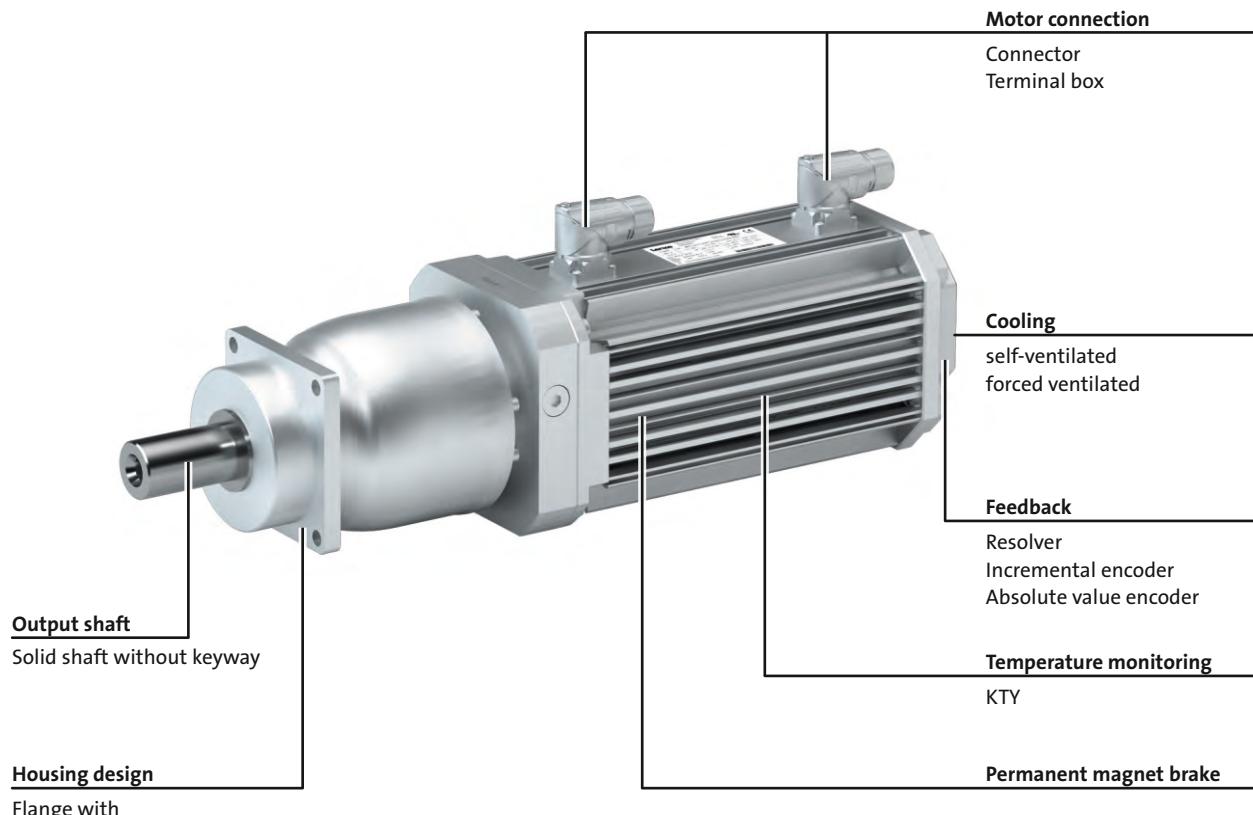

MPR planetary geared motors

General information



6.2.2

MPR planetary geared motors



General information

The gearbox kit

Geared motor

Product	MPR050	MPR100	MPR200	MPR300
Motor type				
		Asynchronous servo motor		
Servo motor				
2.0 Nm	MCA10			
4.0 - 6.3 Nm		MCA13		
5.4 - 12 Nm			MCA14	
9.5 - 21 Nm			MCA17	
12 - 36 Nm				MCA19
17 - 61 Nm				
Technical data				
Output torque		See selection table		
Output speed		See selection table		
Ratio		See selection table		
Load capacity		See selection table		
Moment of inertia		See selection table		
Mounting position				
Standard		Any		
Colour		primed (RAL 9005M, matt jet black)		
Surface and corrosion protection		Without OKS(uncoated) OKS-G (primed)		

6.2.2

MPR planetary geared motors



General information

The gearbox kit

Motor details

Product	MCA										
	10I40	13I34 13I41	14L16 14L20 14L35 14L41	17N17 17N23 17N35 17N41	19S17 19S23 19S35 19S42	21X17 21X25 21X35 21X42					
Connection type	Plug connectors Terminal box										
Permanent magnet holding brake											
Rated torque [Nm]	3.3	12	15	24	46	88					
Brake voltage [V]	DC 24 AC 230										
Feedback	With absolute value encoder With incremental encoder With resolver										
Cooling	Self-ventilated	Self-ventilated Forced-ventilated									
Temperature monitoring	KTY83-110 thermal detector										
Approval	cURus GOST_R UkrSepro										
Degree of protection	IP54 IP65										

- ▶ Further information and installation feasibilities can be found in the Motors chapter.

MPR planetary geared motors



General information

The gearbox kit

Motor details

Connection type


Plug connectors
Terminal box
Cooling: self-ventilated



With resolver
With permanent magnet brake
With feedback With feedback and permanent magnet brake
Cooling: forced ventilated



With resolver
With permanent magnet brake
With feedback With feedback and permanent magnet brake

6.2.2

MPR planetary geared motors



General information

The gearbox kit

Gearbox details

Product	MPR050	MPR100	MPR200	MPR300
Driven shaft				
Solid shaft without keyway [mm]	16x28	22x36	32x58	40x82
Design		Standard		
Gasket		NBR		
Bearing		Standard		
Housing				
Housing version		Without foot with centering		
Output flange				
Flange square [mm]	62	76	101	141
Lubricant				
Type		Mobil SHC 629		
Breather element		Without		
Backlash				
Backlash		Standard Reduced		

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.


MPR planetary geared motors



General information

The gearbox kit

Gearbox details

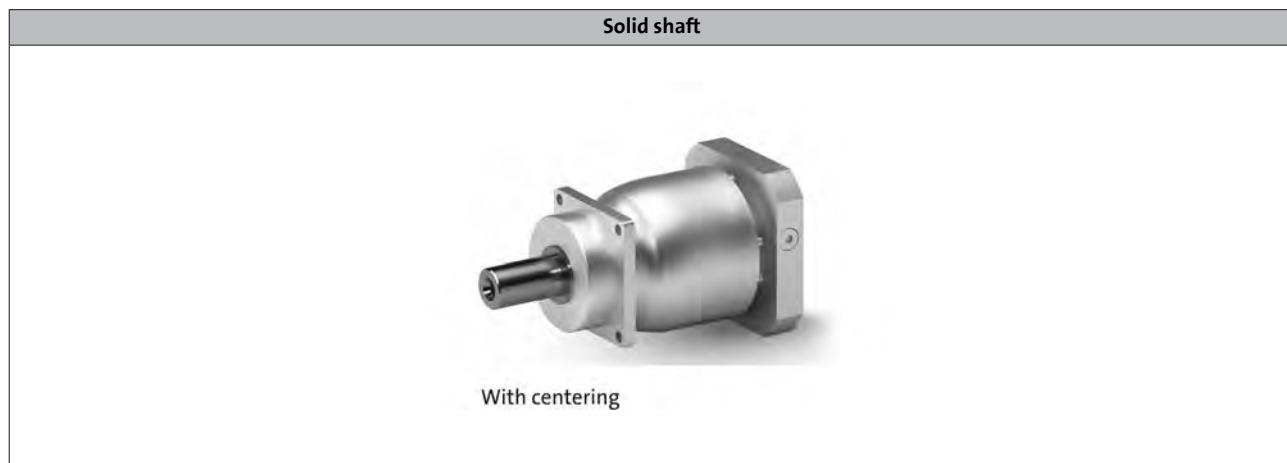

6.2.2

MPR planetary geared motors



General information

Dimensioning

General information about the data provided in this catalogue

The powers, torques and speeds specified in this catalogue are rounded values and are valid under the following conditions:

- Operating time/day = 8 h (100% OT)
- Duty class I for up to 10 switching operations/h
- Mounting positions and designs in this catalogue
- Standard lubricant
- $T_{amb} = 30 \text{ }^{\circ}\text{C}$ for gearboxes,
 $T_{amb} = 40 \text{ }^{\circ}\text{C}$ for motors (in accordance with EN 60034)
- Site altitude $< = 1000 \text{ m amsl}$
- The selection tables provide the permissible mechanical powers and torques. For notes on the thermal power limit, see chapter drive dimensioning.
- The rated power specified for motors and geared motors applies to operating mode S1 (in accordance with EN 60034).

Under different operating conditions, the values obtained may vary from those listed here.

In the case of extreme operating conditions, please consult your Lenze sales office.

MPR planetary geared motors



General information

Dimensioning

Load capacity and application factor

Load capacity c of gearbox

Rated value for the load capacity of Lenze geared motors.

- c is the ratio of the permissible rated torque of the gearbox to the rated torque supplied by the drive component (e.g. the built-in Lenze motor).
- The value of c must always be greater than the value of the application factor k calculated for the application.


Application factor k (according to DIN 3990)

Takes into account the influence of temporally variable loads which are actually present during the anticipated operating time of gearboxes and geared motors.

k is determined by:

- the type of load
- the load intensity
- temporal influences

Duty class	Load type
I	Smooth operation, small or light jolts
II	Uneven operation, average jolts
III	Uneven operation, severe jolts and/or alternating load

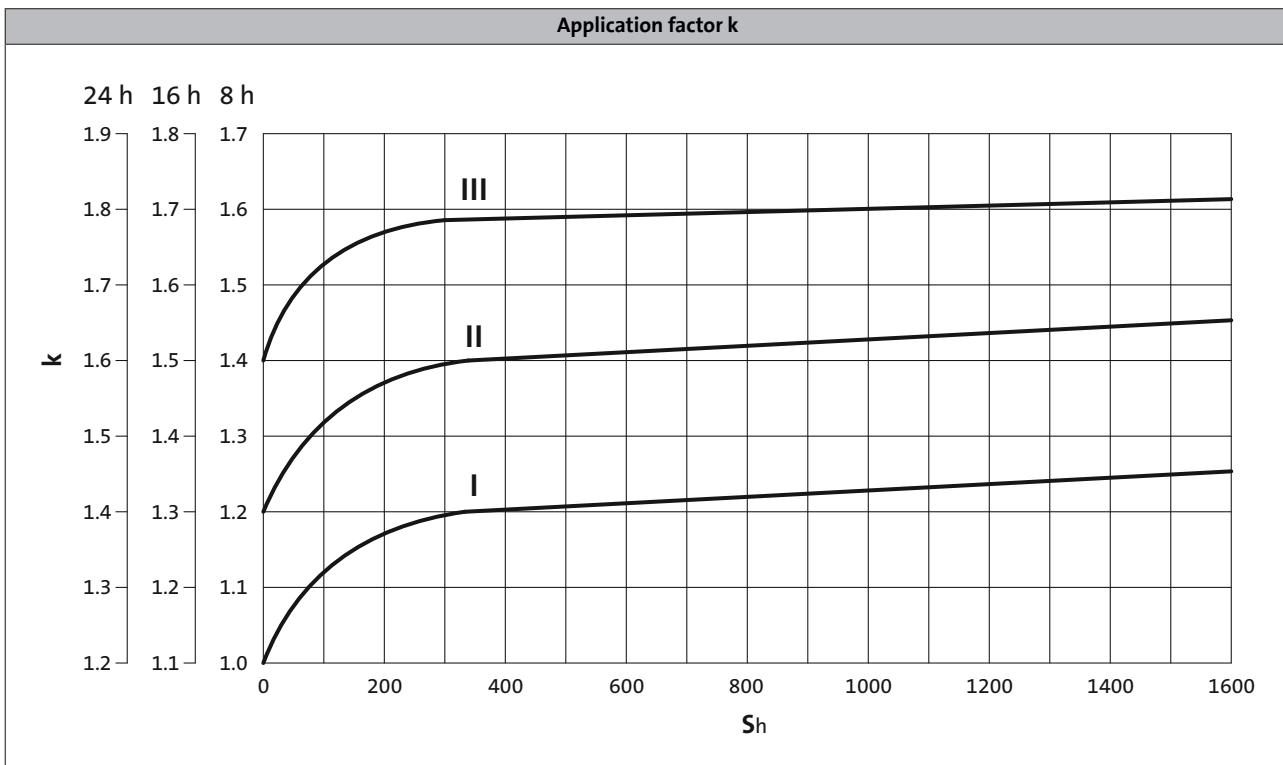

► S_h = switchings/h

MPR planetary geared motors



General information

Dimensioning

Weights

The values given in the tables consider the following gearbox/motor combination:

- Gearbox with solid shaft including lubricant amount
- Motor with feedback

For versions deviating from this, additional weights have to be considered.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data
- Motor options: Brake
 - > Chapter: Motors/Accessories

Moments of inertia

The given moments of inertia of the gearbox refer to the drive shaft. The influence of the ratio (i^2) has been considered in the data.

When the total moment of inertia of the geared motor is calculated, the values of the geared motors and the brake have to be added.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data/Selection tables
- Motor options: Brake
 - > Chapter: Motors/Accessories

MPR planetary geared motors



Technical data

Selection tables, notes

Notes on the selection tables

The selection tables show the available combinations of gearbox type, number of stages, ratio and motor. They are used only to provide basic orientation.

The following legend indicates the structure of the selection tables.

Number of the gear stage of the gearbox



2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		MPR	MCS		
20	333	6	333	3.6	0.300	12.000	050	06C60	Selbst	40
20	333	7	333	3.0	0.300	12.000	050	06C41	Selbst	40
20	333	10	333	1.9	0.400	12.000	050	06F60	Selbst	40
20	333	14	333	1.5	0.400	12.000	050	06F41	Selbst	40

For operating mode S1
Torque M₂ and
thermal output speed n_{2, th}

For operating mode S2, S3 und S6
Max. permissible acceleration torque of geared
motor M_{2, max} and
output speed n_{2, eto}

Moment of inertia of
geared motor

Product
Gearbox

Product
Motor

Type of
motor cooling

Page number
for dimensions

Load capacity of the gearbox

c is the ratio between the permissible rated torque of the gearbox and the rated torque of the three-phase AC motor (converted to the driven shaft).

c must be always higher than the service factor k determined for the application k.

$$c = \frac{M_{2, zul}}{M_{1,N} \cdot i \cdot \eta_{Getr}} > k$$

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCA		
19	395	19	395	1.0	2.600	10.000	050	10I40	natural	25
20	1100	6	1100	3.5	2.800	3.000	050	10I40	natural	25
29	825	8	825	3.9	2.700	4.000	050	10I40	natural	25
29	660	9	660	3.1	2.600	5.000	050	10I40	natural	25
29	529	13	529	2.2	2.600	7.000	050	10I40	natural	25
56	933	12	933	4.8	9.500	3.000	100	13I41	natural	26
56	933	18	933	3.1	9.500	3.000	100	13I34	forced	32
58	310	19	310	3.1	2.900	10.000	100	10I40	natural	26
58	310	39	310	1.5	8.900	10.000	100	13I41	natural	26
83	700	16	700	5.3	9.200	4.000	100	13I41	natural	26
83	700	24	700	3.5	9.200	4.000	100	13I34	forced	32
83	560	19	560	4.3	9.100	5.000	100	13I41	natural	26
83	560	30	560	2.8	9.100	5.000	100	13I34	forced	32
83	400	27	400	3.0	9.000	7.000	100	13I41	natural	26
83	400	42	400	2.0	9.000	7.000	100	13I34	forced	32
135	833	28	833	4.9	41.000	3.000	200	17N41	natural	28
135	833	31	833	4.3	24.000	3.000	200	14L35	forced	33
135	833	55	833	2.5	41.000	3.000	200	17N35	forced	33
135	767	31	767	4.3	41.000	3.000	200	17N23	natural	28
135	560	63	560	2.1	41.000	3.000	200	17N17	forced	33
135	545	36	545	3.8	24.000	3.000	200	14L16	forced	33
135	280	39	280	3.5	11.000	10.000	200	13I41	natural	28
135	280	52	280	2.6	22.000	10.000	200	14L41	natural	28
135	280	60	280	2.3	11.000	10.000	200	13I34	forced	33
135	280	92	280	1.5	39.000	10.000	200	17N41	natural	28
135	280	105	280	1.3	22.000	10.000	200	14L35	forced	33
135	230	105	230	1.3	39.000	10.000	200	17N23	natural	28
135	200	65	200	2.1	22.000	10.000	200	14L20	natural	28
135	164	119	164	1.1	22.000	10.000	200	14L16	forced	33
190	400	36	400	5.2	22.000	7.000	200	14L41	natural	28
190	400	42	400	4.5	11.000	7.000	200	13I34	forced	33
190	400	65	400	2.9	39.000	7.000	200	17N41	natural	28
190	400	73	400	2.6	22.000	7.000	200	14L35	forced	33
190	400	129	400	1.5	39.000	7.000	200	17N35	forced	33
190	329	73	329	2.6	39.000	7.000	200	17N23	natural	28
190	286	45	286	4.2	22.000	7.000	200	14L20	natural	28
190	240	147	240	1.3	39.000	7.000	200	17N17	forced	33
190	234	83	234	2.3	22.000	7.000	200	14L16	forced	33
195	500	46	500	4.2	39.000	5.000	200	17N41	natural	28
195	500	52	500	3.7	23.000	5.000	200	14L35	forced	33

MPR planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCA		
195	500	92	500	2.1	39.000	5.000	200	17N35	forced	33
195	460	52	460	3.7	39.000	5.000	200	17N23	natural	28
195	336	105	336	1.9	39.000	5.000	200	17N17	forced	33
195	327	59	327	3.3	23.000	5.000	200	14L16	forced	33
200	625	37	625	5.4	40.000	4.000	200	17N41	natural	28
200	625	42	625	4.8	23.000	4.000	200	14L35	forced	33
200	625	73	625	2.7	40.000	4.000	200	17N35	forced	33
200	575	42	575	4.8	40.000	4.000	200	17N23	natural	28
200	420	84	420	2.4	40.000	4.000	200	17N17	forced	33
200	409	48	409	4.2	23.000	4.000	200	14L16	forced	33
245	260	52	260	4.7	26.000	10.000	300	14L41	natural	30
245	260	92	260	2.6	42.000	10.000	300	17N41	natural	30
245	260	105	260	2.3	26.000	10.000	300	14L35	forced	35
245	260	116	260	2.1	80.000	10.000	300	19S42	natural	30
245	260	184	260	1.3	42.000	10.000	300	17N35	forced	35
245	234	158	234	1.6	80.000	10.000	300	19S23	natural	30
245	230	105	230	2.3	42.000	10.000	300	17N23	natural	30
245	200	65	200	3.8	26.000	10.000	300	14L20	natural	30
245	168	210	168	1.2	42.000	10.000	300	17N17	forced	35
245	164	119	164	2.1	26.000	10.000	300	14L16	forced	35
290	700	55	700	5.3	50.000	3.000	300	17N35	forced	35
290	700	105	700	2.8	87.000	3.000	300	19S35	forced	35
290	567	105	567	2.8	87.000	3.000	300	19S17	forced	35
290	560	63	560	4.6	50.000	3.000	300	17N17	forced	35
380	329	65	329	5.9	43.000	7.000	300	17N41	natural	30
380	329	73	329	5.2	43.000	7.000	300	17N23	natural	30
380	329	73	329	5.2	26.000	7.000	300	14L35	forced	35
380	329	81	329	4.7	81.000	7.000	300	19S42	natural	30
380	329	111	329	3.4	81.000	7.000	300	19S23	natural	30
380	329	129	329	3.0	43.000	7.000	300	17N35	forced	35
380	329	244	329	1.6	81.000	7.000	300	19S35	forced	35
380	243	244	243	1.6	81.000	7.000	300	19S17	forced	35
380	240	147	240	2.6	43.000	7.000	300	17N17	forced	35
380	234	83	234	4.6	26.000	7.000	300	14L16	forced	35
388	525	73	525	5.3	46.000	4.000	300	17N35	forced	35
388	420	84	420	4.7	46.000	4.000	300	17N17	forced	35
390	525	139	525	2.8	83.000	4.000	300	19S35	forced	35
390	425	139	425	2.8	83.000	4.000	300	19S17	forced	35
390	420	79	420	4.9	82.000	5.000	300	19S23	natural	30
390	420	92	420	4.3	44.000	5.000	300	17N35	forced	35

6.2.2

MPR planetary geared motors



Technical data

Selection tables

1-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		MPR	MCA		
390	420	174	420	2.2	82.000	5.000	300	19S35	forced	35
390	340	174	340	2.2	82.000	5.000	300	19S17	forced	35
390	336	105	336	3.7	44.000	5.000	300	17N17	forced	35

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCA		
56	258	22	258	2.5	2.700	12.000	100	10I40	natural	27
76	88	73	88	1.0	2.600	40.000	100	10I40	natural	27
83	219	29	219	2.8	2.700	16.000	100	10I40	natural	27
83	175	37	175	2.3	2.600	20.000	100	10I40	natural	27
83	140	46	140	1.8	2.600	25.000	100	10I40	natural	27
83	125	51	125	1.6	2.600	28.000	100	10I40	natural	27
83	100	64	100	1.3	2.600	35.000	100	10I40	natural	27
135	233	46	233	3.0	9.300	12.000	200	13I41	natural	29
135	233	70	233	1.9	9.300	12.000	200	13I34	forced	34
190	155	37	155	5.3	3.000	20.000	200	10I40	natural	29
190	56	129	56	1.5	2.900	70.000	200	10I40	natural	29
195	155	76	155	2.6	9.100	20.000	200	13I41	natural	29
195	155	117	155	1.7	9.100	20.000	200	13I34	forced	34
195	124	46	124	4.3	3.000	25.000	200	10I40	natural	29
195	124	95	124	2.0	9.000	25.000	200	13I41	natural	29
195	124	146	124	1.3	9.000	25.000	200	13I34	forced	34
195	89	64	89	3.0	2.900	35.000	200	10I40	natural	29
195	89	133	89	1.5	8.900	35.000	200	13I41	natural	29
195	70	92	70	2.1	2.900	50.000	200	10I40	natural	29
195	70	190	70	1.0	8.900	50.000	200	13I41	natural	29
200	194	61	194	3.3	9.200	16.000	200	13I41	natural	29
200	194	94	194	2.1	9.200	16.000	200	13I34	forced	34
200	111	51	111	3.9	2.900	28.000	200	10I40	natural	29
200	111	107	111	1.9	9.000	28.000	200	13I41	natural	29
200	111	164	111	1.2	9.000	28.000	200	13I34	forced	34
200	78	73	78	2.7	2.900	40.000	200	10I40	natural	29
200	78	152	78	1.3	8.900	40.000	200	13I41	natural	29
290	217	61	217	4.8	22.000	12.000	300	14L41	natural	31
290	217	70	217	4.1	11.000	12.000	300	13I34	forced	36
290	217	109	217	2.7	39.000	12.000	300	17N41	natural	31
290	217	123	217	2.4	22.000	12.000	300	14L35	forced	36
290	217	216	217	1.3	39.000	12.000	300	17N35	forced	36
290	192	123	192	2.4	39.000	12.000	300	17N23	natural	31
290	167	76	167	3.8	22.000	12.000	300	14L20	natural	31
290	140	246	140	1.2	39.000	12.000	300	17N17	forced	36
290	136	140	136	2.1	22.000	12.000	300	14L16	forced	36
380	46	267	46	1.4	10.000	70.000	300	13I41	natural	31
380	46	356	46	1.1	22.000	70.000	300	14L41	natural	31
390	181	81	181	4.8	22.000	16.000	300	14L41	natural	31
390	181	94	181	4.2	11.000	16.000	300	13I34	forced	36

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M_{2, max} [Nm]	n_{2, th} [r/min]	M₂ [Nm]	n_{2, eto} [r/min]	c	J [kgcm²]	i	Product		Cooling	
							MPR	MCA		
390	181	145	181	2.7	39.000	16.000	300	17N41	natural	31
390	181	164	181	2.4	22.000	16.000	300	14L35	forced	36
390	181	288	181	1.4	39.000	16.000	300	17N35	forced	36
390	145	76	145	5.1	11.000	20.000	300	13I41	natural	31
390	145	102	145	3.8	22.000	20.000	300	14L41	natural	31
390	145	117	145	3.3	11.000	20.000	300	13I34	forced	36
390	145	181	145	2.1	39.000	20.000	300	17N41	natural	31
390	145	205	145	1.9	22.000	20.000	300	14L35	forced	36
390	145	360	145	1.1	39.000	20.000	300	17N35	forced	36
390	144	164	144	2.4	39.000	16.000	300	17N23	natural	31
390	125	102	125	3.8	22.000	16.000	300	14L20	natural	31
390	116	95	116	4.1	11.000	25.000	300	13I41	natural	31
390	116	127	116	3.1	22.000	25.000	300	14L41	natural	31
390	116	146	116	2.7	11.000	25.000	300	13I34	forced	36
390	116	226	116	1.7	39.000	25.000	300	17N41	natural	31
390	116	256	116	1.5	22.000	25.000	300	14L35	forced	36
390	115	205	115	1.9	39.000	20.000	300	17N23	natural	31
390	105	328	105	1.2	39.000	16.000	300	17N17	forced	36
390	104	107	104	3.7	10.000	28.000	300	13I41	natural	31
390	104	142	104	2.7	22.000	28.000	300	14L41	natural	31
390	104	164	104	2.4	10.000	28.000	300	13I34	forced	36
390	104	253	104	1.5	39.000	28.000	300	17N41	natural	31
390	104	287	104	1.4	22.000	28.000	300	14L35	forced	36
390	102	186	102	2.1	22.000	16.000	300	14L16	forced	36
390	100	127	100	3.1	22.000	20.000	300	14L20	natural	31
390	92	256	92	1.5	39.000	25.000	300	17N23	natural	31
390	83	133	83	2.9	10.000	35.000	300	13I41	natural	31
390	83	178	83	2.2	22.000	35.000	300	14L41	natural	31
390	83	205	83	1.9	10.000	35.000	300	13I34	forced	36
390	83	317	83	1.2	39.000	35.000	300	17N41	natural	31
390	83	358	83	1.1	22.000	35.000	300	14L35	forced	36
390	82	233	82	1.7	22.000	20.000	300	14L16	forced	36
390	82	287	82	1.4	39.000	28.000	300	17N23	natural	31
390	80	159	80	2.5	22.000	25.000	300	14L20	natural	31
390	73	152	73	2.6	10.000	40.000	300	13I41	natural	31
390	73	204	73	1.9	22.000	40.000	300	14L41	natural	31
390	73	234	73	1.7	10.000	40.000	300	13I34	forced	36
390	73	362	73	1.1	39.000	40.000	300	17N41	natural	31
390	71	178	71	2.2	22.000	28.000	300	14L20	natural	31
390	66	359	66	1.1	39.000	35.000	300	17N23	natural	31

MPR planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPR	MCA		
390	65	291	65	1.3	22.000	25.000	300	14L16	forced	36
390	64	190	64	2.0	10.000	50.000	300	13I41	natural	31
390	64	293	64	1.3	10.000	50.000	300	13I34	forced	36
390	58	254	58	1.5	22.000	50.000	300	14L41	natural	31
390	58	326	58	1.2	22.000	28.000	300	14L16	forced	36
390	57	222	57	1.8	22.000	35.000	300	14L20	natural	31
390	50	254	50	1.5	22.000	40.000	300	14L20	natural	31
390	40	318	40	1.2	22.000	50.000	300	14L20	natural	31

MPR planetary geared motors




Technical data

Dimensions, notes

Notes on the dimensions

The following legend shows the layout of the dimension sheets.

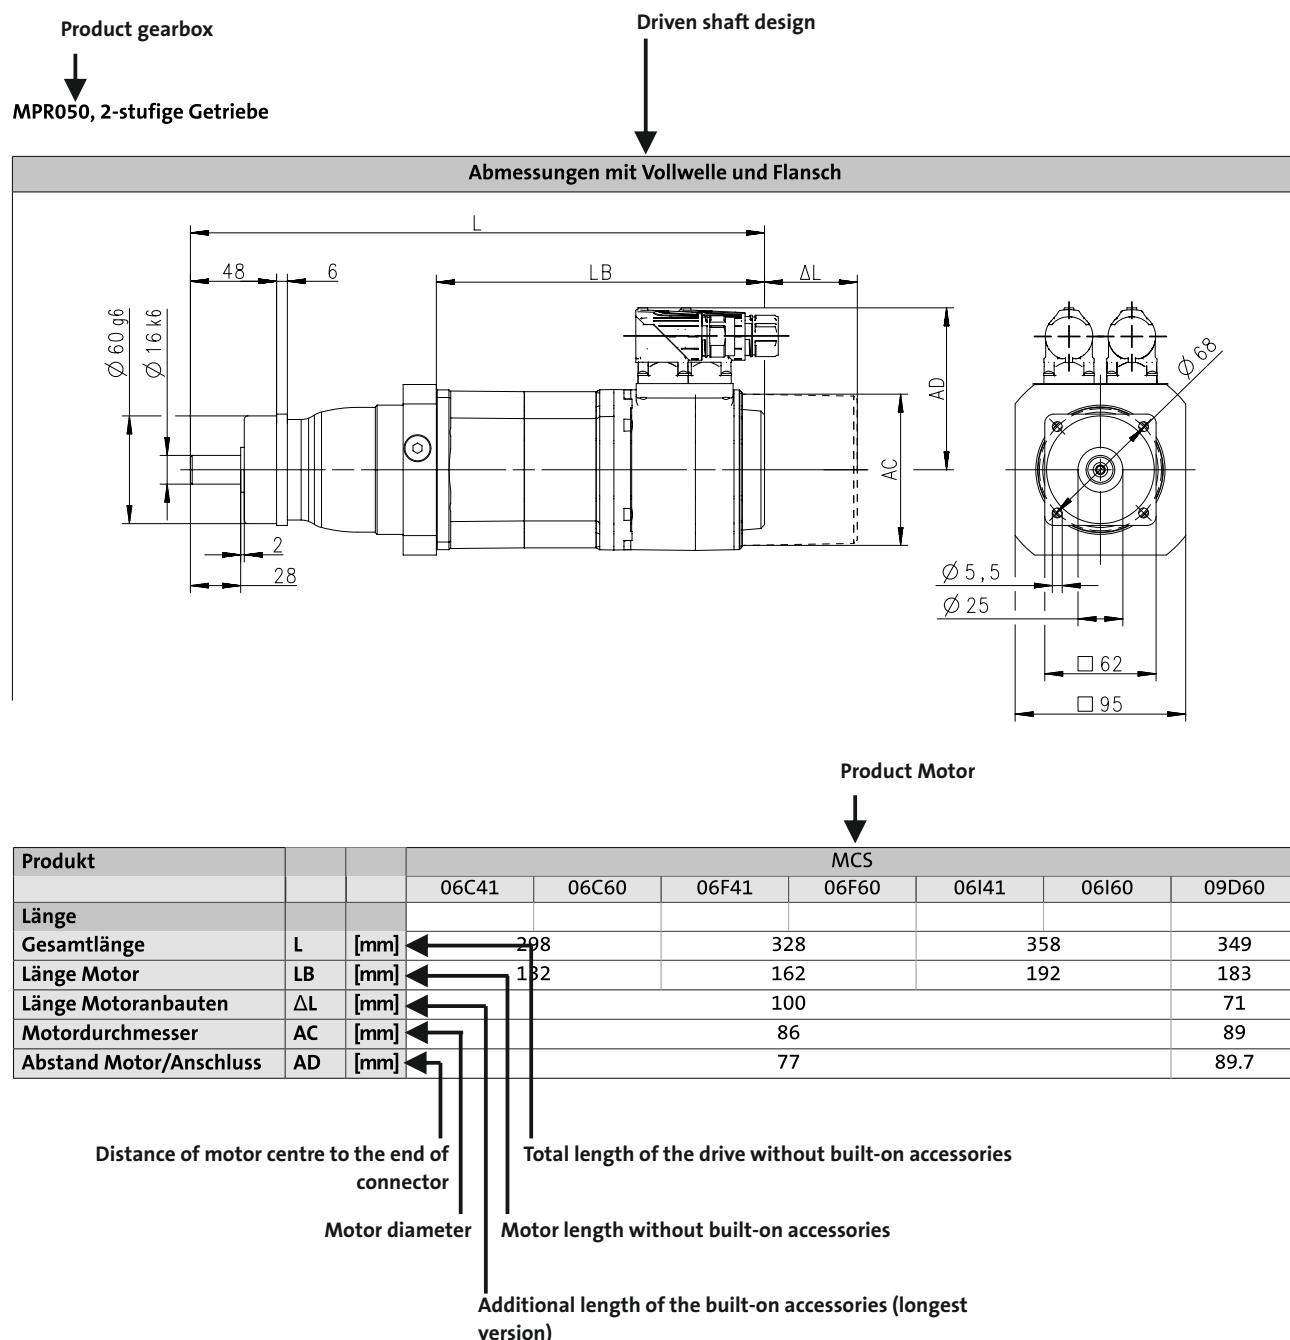

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR0501-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			
6.2.2			
8800255-00			

Product			MCA
			10140
Length			
Total length	L	[mm]	399
Motor length	LB	[mm]	262
Length of motor options	Δ L	[mm]	78.5
Motor diameter	AC	[mm]	102
Distance motor/connection	AD	[mm]	90

				Allgemeintoleranzen general tolerance nach: 6.2.2 - 25	Oberflaechen/ surface	


MPR planetary geared motors

Technical data



Dimensions, self-ventilated motors

MPR100, 1-stage gearboxes

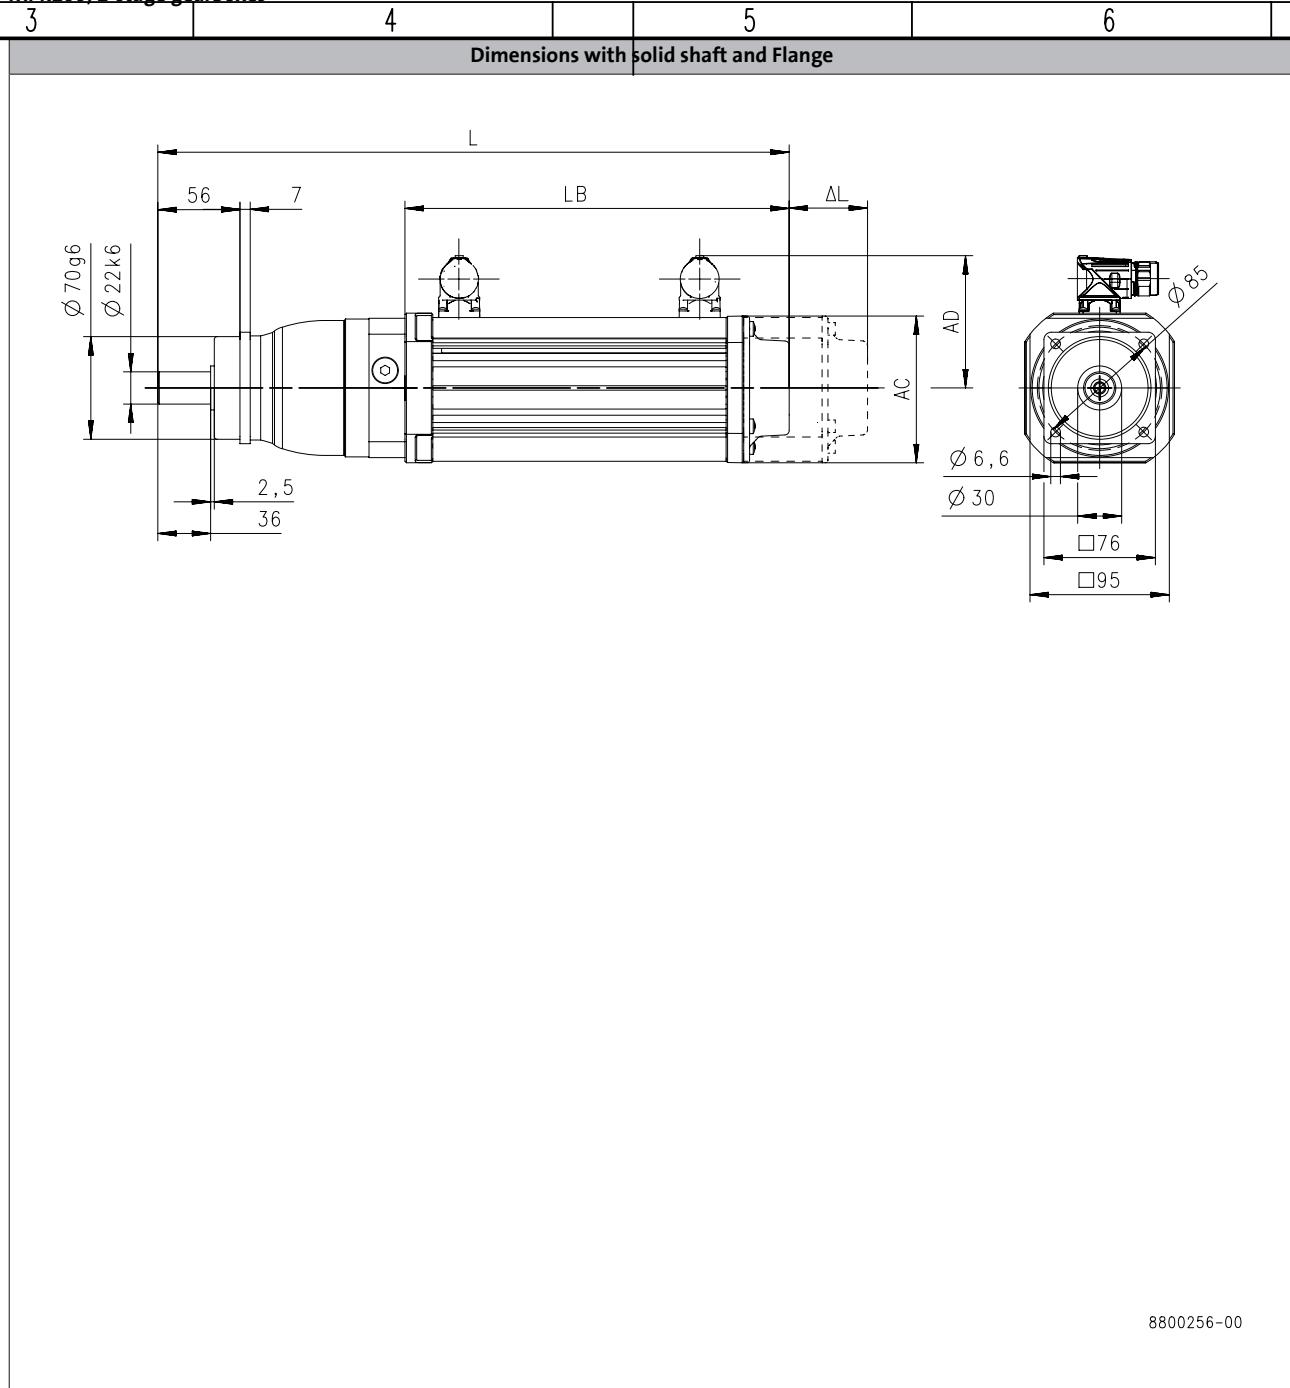

Product			MCA	
			10I40	13I41
Length				
Total length	L [mm]		431	439
Motor length	LB [mm]		262	270.5
Length of motor options	Δ L [mm]		78.5	89
Motor diameter	AC [mm]		102	130
Distance motor/connection	AD [mm]		90	102

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	 Lenze V01-en_GB-04/2014
				nach:		
				Datum/date		

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR100: 2-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			
6.2.2			
8800256-00			

Product			MCA
			10140
Length			
Total length	L	[mm]	451
Motor length	LB	[mm]	262
Length of motor options	Δ L	[mm]	78.5
Motor diameter	AC	[mm]	102
Distance motor/connection	AD	[mm]	90

				Allgemeintoleranzen general tolerance nach: 6.2.2	Oberflaechen/ surface	
				- 27		


MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR200, 1-stage gearboxes

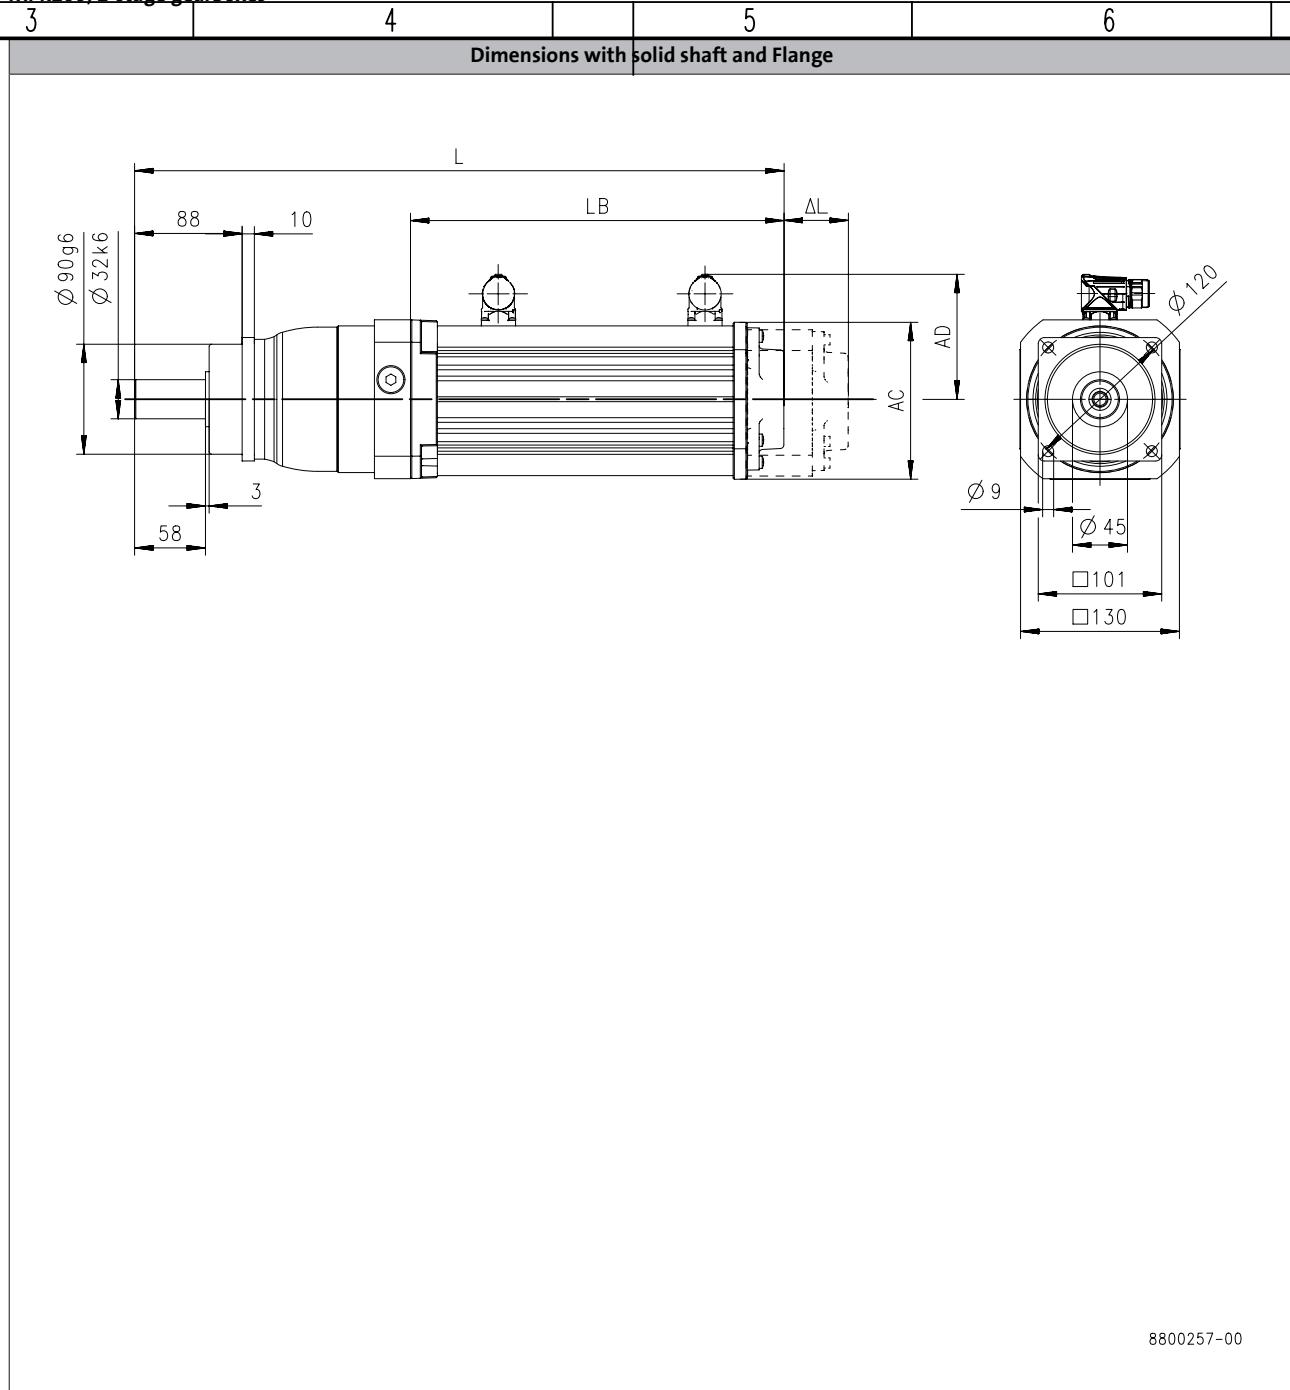

Product			MCA				
			13I41	14L20	14L41	17N23	17N41
Length							
Total length	L	[mm]	496	527		565	
Motor length	LB	[mm]	270.5	301.5		339.5	
Length of motor options	Δ L	[mm]	89	88.5		89.2	
Motor diameter	AC	[mm]	130	142		165	
Distance motor/connection	AD	[mm]	102	109		117.5	

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		
				Datum/date	Name	

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR200, 2-stage gearboxes


3

4

5

6

Dimensions with solid shaft and Flange

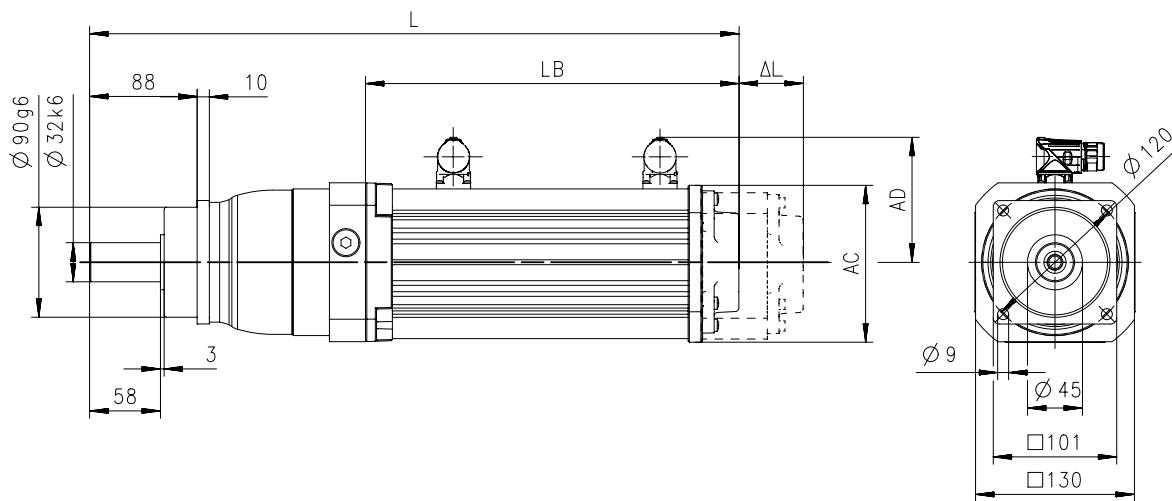

6.2.2

8800257-00

Product	MCA	
	10I40	13I41
Length		
Total length	L [mm]	502
Motor length	LB [mm]	262
Length of motor options	Δ L [mm]	78.5
Motor diameter	AC [mm]	102
Distance motor/connection	AD [mm]	90

				Allgemeintoleranzen general tolerance nach: 6.2.2	Oberflaechen/ surface	
				- 29		

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR300, 1-stage gearboxes

Dimensions with solid shaft and Flange

Front View Dimensions:

- Total width: 112
- Bearing width: LB
- Distance from bearing center to flange edge: ΔL
- Height: AD
- Distance from bottom of bearing to center of flange: AC
- Shaft diameter: $\varnothing 40\text{h}6$
- Shaft shoulder height: 3
- Shaft shoulder width: 82


Side View Dimensions:

- Outer diameter: $\varnothing 165$
- Inner hole diameter: $\varnothing 11$
- Mounting hole diameter: $\varnothing 65$
- Mounting hole distance: $\square 141$
- Mounting hole distance: $\square 150$

Top View Dimensions:

- Outer diameter: $\varnothing 165$
- Mounting hole diameter: $\varnothing 141$
- Mounting hole diameter: $\varnothing 150$

Product			MCA					
			14L20	14L41	17N23	17N41	19S23	19S42
Length								
Total length	L	[mm]	597		635		697	
Motor length	LB	[mm]	301.5		339.5		401	
Length of motor options	Δ L	[mm]	88.5		89.2		88.2	
Motor diameter	AC	[mm]	142		165		192	
Distance motor/connection	AD	[mm]	109		117.5		151	

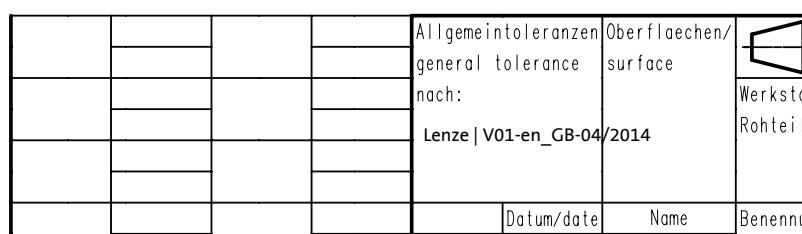

MPR planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPR300, 2-stage gearboxes


3

4

5

6

Dimensions with solid shaft and Flange

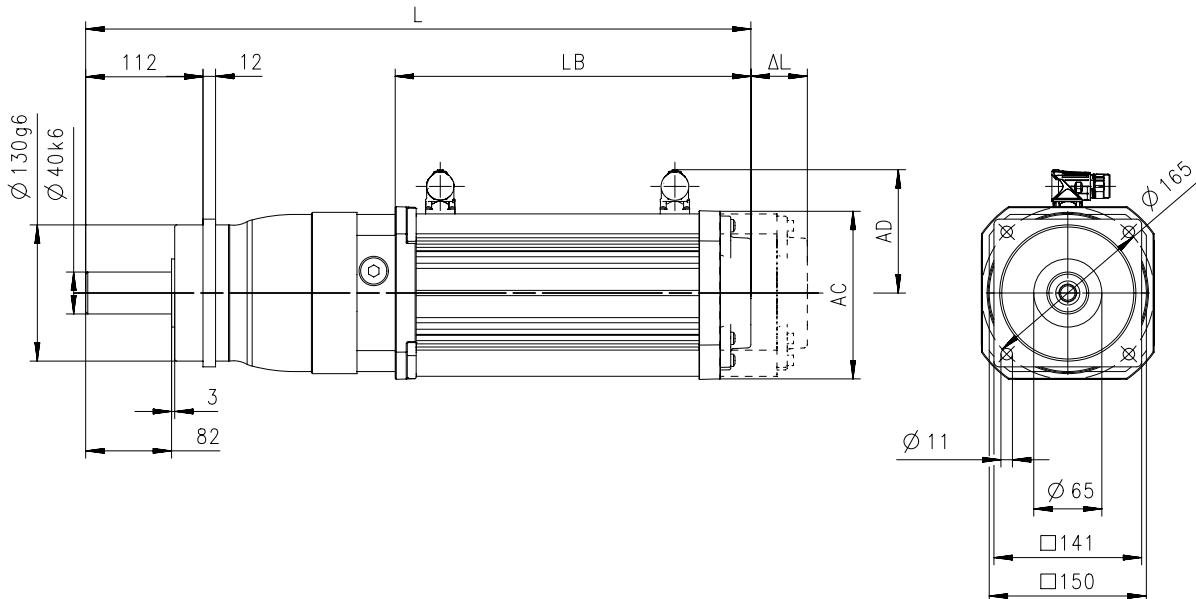

6.2.2

8800258-00

Product			MCA				
			13I41	14L20	14L41	17N23	17N41
Length							
Total length	L	[mm]	585	616		654	
Motor length	LB	[mm]	270.5	301.5		339.5	
Length of motor options	Δ L	[mm]	89	88.5		89.2	
Motor diameter	AC	[mm]	130	142		165	
Distance motor/connection	AD	[mm]	102	109		117.5	

				Allgemeintoleranzen general tolerance nach: 6.2.2 - 31	Oberflaechen/ surface	


MPR planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPR100, 1-stage gearboxes

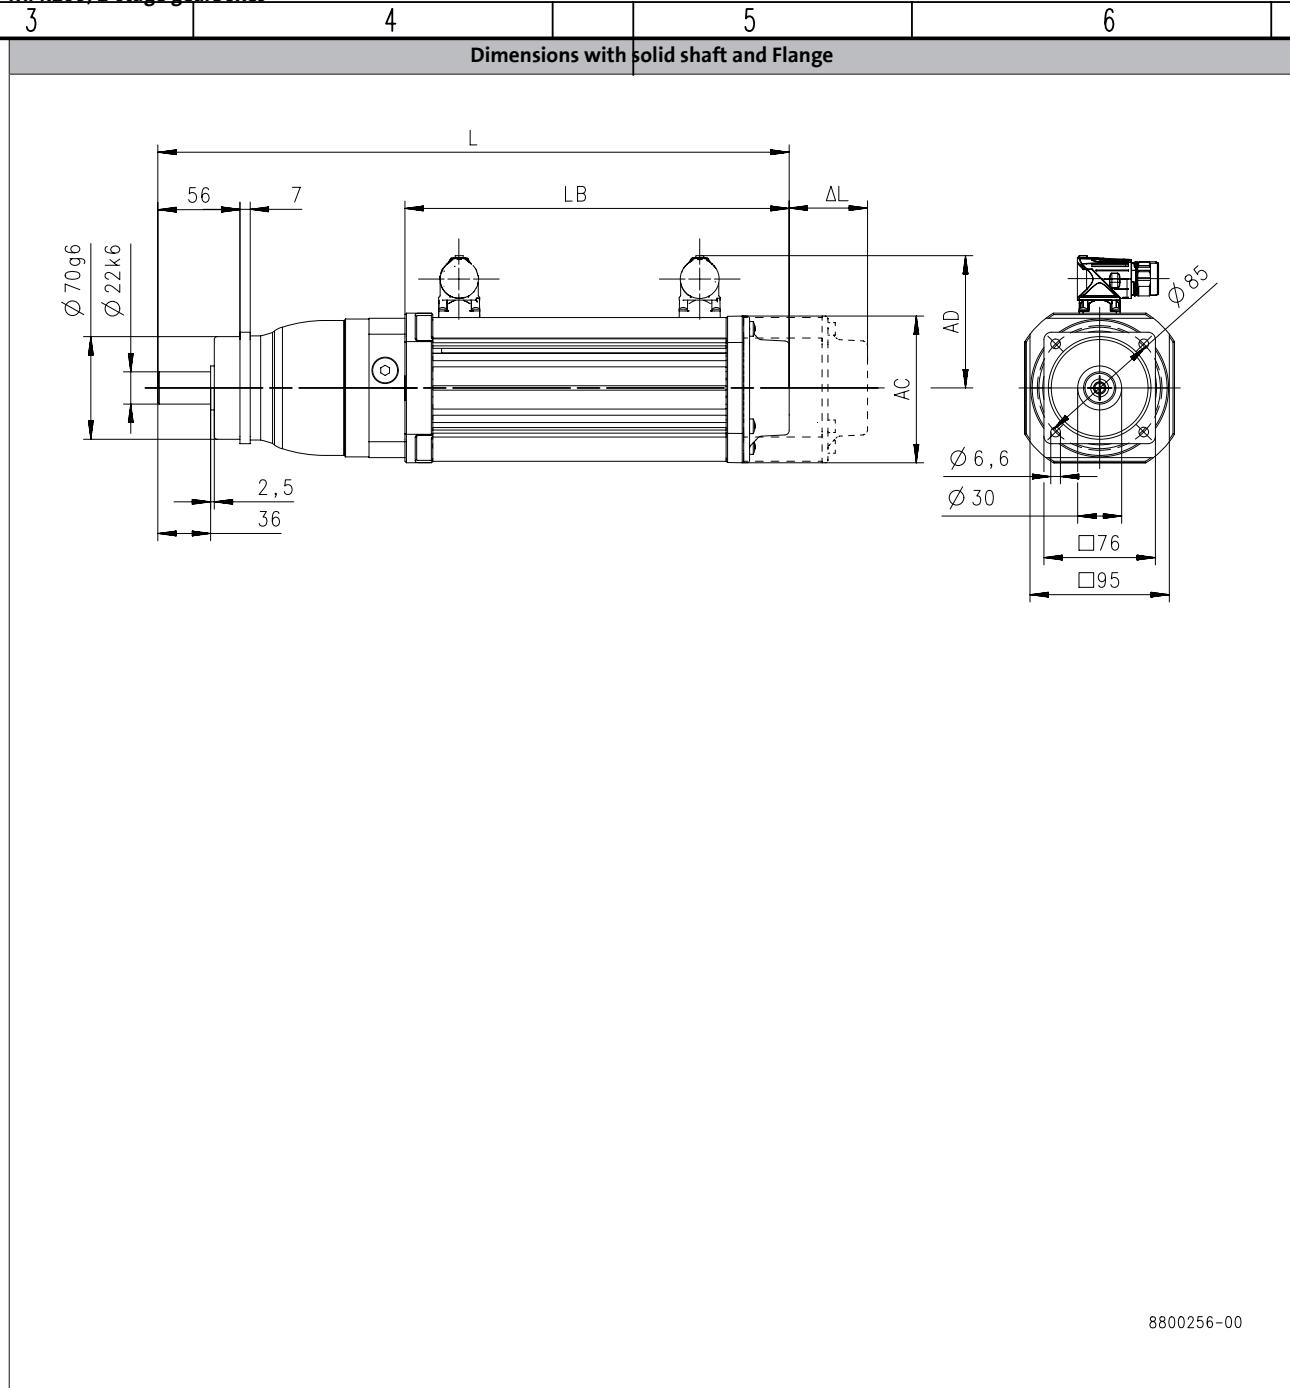

Product			MCA
			13134
Length			
Total length	L	[mm]	507
Motor length	LB	[mm]	338.5
Length of motor options	Δ L	[mm]	89.5
Motor diameter	AC	[mm]	130
Distance motor/connection	AD	[mm]	102

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach:		
				Lenze V01-en_GB-04/2014		
				Datum/date	Name	Benennung

MPR planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPR200, 1-stage gearboxes

Dimensions with solid shaft and Flange

The drawing shows a motor assembly with a solid shaft and a flange. The front view dimensions include:

- Shaft diameter: $\varnothing 32k6$
- Shaft length from bearing to flange: 88
- Shaft shoulder height: 10
- Shaft shoulder width: 3
- Shaft shoulder height from base: 58
- Bearing housing width: LB
- Shaft extension beyond bearing housing: ΔL
- Shaft shoulder height from top of bearing housing: AC
- Shaft shoulder width from top of bearing housing: AD

A detailed view of the flange shows the following dimensions:

- Flange outer diameter: $\varnothing 120$
- Flange thickness: 9
- Hole diameter: 45
- Distance between hole centers: 101
- Distance between hole centers: 130

6.2.2

8800257-00

Product			MCA				
			13I34	14L16	14L35	17N17	17N35
Length							
Total length	L	[mm]	564	589		651	
Motor length	LB	[mm]	338.5	363.5		425.5	
Length of motor options	Δ L	[mm]	89.5	88.5		89	
Motor diameter	AC	[mm]	130	142		165	
Distance motor/connection	AD	[mm]	102	109		117.5	

				Allgemeintoleranzen general tolerance nach: 6.2.2 - 33	Oberflaechen/ surface	
						Werkst...
						Rohte...
					Datum/date	Name
						Benenn...

MPR planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPR200, 2-stage gearboxes


3

4

5

6

Dimensions with solid shaft and Flange

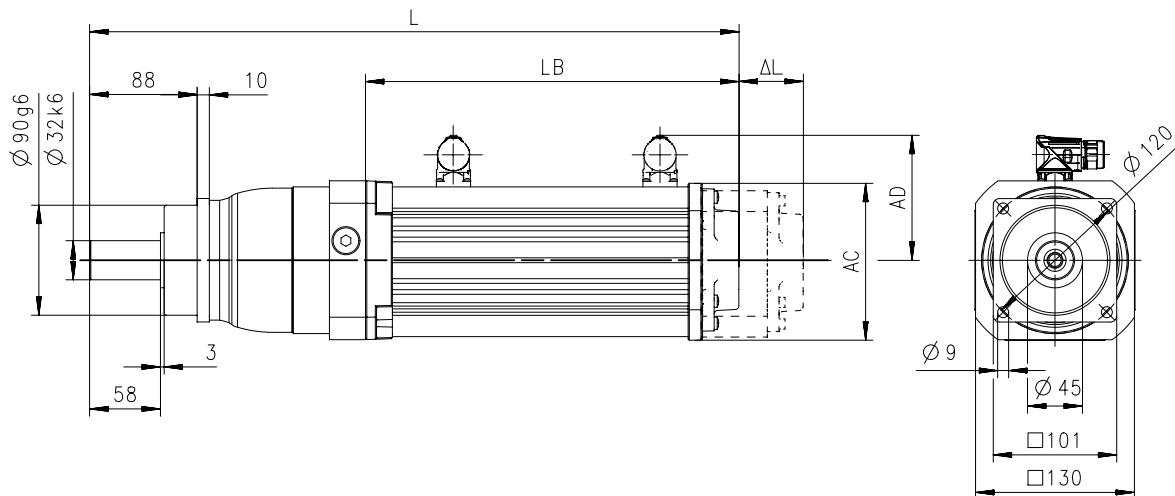

6.2.2

8800257-00

Product			MCA
			13I34
Length			
Total length	L [mm]		578
Motor length	LB [mm]		338.5
Length of motor options	Δ L [mm]		89.5
Motor diameter	AC [mm]		130
Distance motor/connection	AD [mm]		102

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		
					Datum/date	Benennung/ Name

MPR planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPR300, 1-stage gearboxes

Dimensions with solid shaft and Flange

Front View Dimensions:

- Total width: 112
- Bearing width: LB
- Distance from bearing center to flange edge: ΔL
- Height: AD
- Distance from bottom of bearing to center of flange: AC
- Shaft diameter: $\varnothing 40\text{h}6$
- Shaft shoulder height: 3
- Shaft shoulder width: 82

Side View Dimensions:

- Outer diameter: $\varnothing 165$
- Inner hole diameter: $\varnothing 11$
- Mounting hole diameter: $\varnothing 65$
- Mounting hole distance: $\square 141$
- Mounting hole distance: $\square 150$

Top View Dimensions:

- Outer diameter: $\varnothing 165$
- Mounting hole diameter: $\varnothing 141$
- Mounting hole diameter: $\varnothing 150$

6.2.2

8800258-00

Product			MCA					
			14L16	14L35	17N17	17N35	19S17	19S35
Length								
Total length	L	[mm]	659		721		794	
Motor length	LB	[mm]	363.5		425.5		498	
Length of motor options	Δ L	[mm]	88.5		89		88.2	
Motor diameter	AC	[mm]	142		165		192	
Distance motor/connection	AD	[mm]	109		117.5		151	

				Allgemeintoleranzen general tolerance nach: 6.2.2 - 35	Oberflächen/ surface	
						Werksto Rohtei
					Datum/date	Name
						Benennung

MPR planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPR300, 2-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

Front View Dimensions:


- Outer diameter: $\varnothing 130\text{g}6$
- Shaft diameter: $\varnothing 40\text{k}6$
- Width at base: 82
- Width at top: 3
- Total length: L
- Length of bearing housing: LB
- Shaft extension: ΔL
- Shaft shoulder height: AD
- Shaft shoulder width: AC

Inset View Dimensions:

- Outer diameter: $\varnothing 165$
- Inner hole diameter: $\varnothing 11$
- Side hole diameter: $\varnothing 65$
- Total width: 150
- Side width: 141

8800258-00

Product			MCA				
			13I34	14L16	14L35	17N17	17N35
Length							
Total length	L	[mm]	653	678		740	
Motor length	LB	[mm]	338.5	363.5		425.5	
Length of motor options	Δ L	[mm]	89.5	88.5		89	
Motor diameter	AC	[mm]	130	142		165	
Distance motor/connection	AD	[mm]	102	109		117.5	

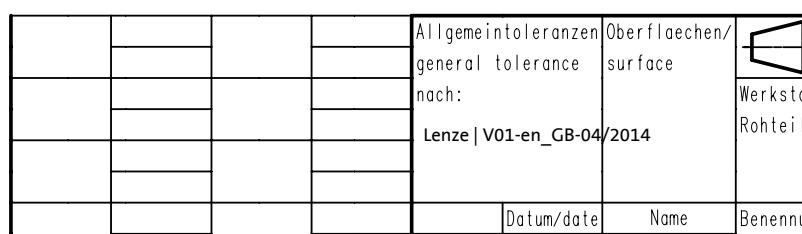

MPR planetary geared motors



Technical data

Weights, self-ventilated motors

1-stage gearboxes

				MCA				
				10I40	13I41	14L20 14L41	17N23 17N41	19S23 19S42
MPR	050	m	[kg]	8.5				
	100	m	[kg]	9.5	14			
	200	m	[kg]		18	22	30	
	300	m	[kg]			32	40	62

2-stage gearboxes

				MCA			
				10I40	13I41	14L20 14L41	17N23 17N41
MPR	100	m	[kg]	11			
	200	m	[kg]	15	19		
	300	m	[kg]		29	34	42

MPR planetary geared motors



Technical data

Weights, forced ventilated motors

1-stage gearboxes

		MCA			
		13I34	14L16 14L35	17N17 17N35	19S17 19S35
MPR	100	m [kg]	15		
	200	m [kg]	19	24	33
	300	m [kg]		34	43
					66

2-stage gearboxes

		MCA		
		13I34	14L16 14L35	17N17 17N35
MPR	200	m [kg]	20	
	300	m [kg]	31	36
				44

MPR planetary geared motors



Technical data

Surface and corrosion protection

For optimum protection of geared motors against ambient conditions, the surface and corrosion protection system (OKS) offers tailor-made solutions.

Various surface coatings combined with other protective measures ensure that the geared motors operate reliably even at high air humidity, in outdoor installations or in the presence of atmospheric impurities. Any colour from the RAL Classic collection can be chosen for the top coat. The geared motors are also available unpainted (no surface and corrosion protection).

Surface and corrosion protection	Applications	Measures
OKS-G (primed)	• Dependent on subsequent top coat applied	<ul style="list-style-type: none">• 2K PUR priming coat (grey)• Zinc-coated screws• Rust-free breather elementsOptional measures• Stainless steel nameplate

Structure of surface coating

Surface and corrosion protection	Surface coating
	Structure
Without OKS(uncoated)	Dipping primed gearbox
OKS-G (primed)	Dipping primed gearbox 2K PUR priming coat

6.2.2

MPR planetary geared motors

Technical data



6.2.2

Gearboxes

MPR planetary gearbox

29 to 390 Nm



MPR planetary gearboxes



Contents

General information	List of abbreviations	6.2.3 - 5
	Product information	6.2.3 - 6
	Equipment	6.2.3 - 7
	The gearbox kit	6.2.3 - 8
	Functions and features	6.2.3 - 10
Technical data	Permissible radial and axial forces at output	6.2.3 - 11
	Backlash and torsional rigidity	6.2.3 - 12
	Speeds and torques	6.2.3 - 13
	Moments of inertia	6.2.3 - 15

MPR planetary gearboxes

Contents



6.2.3

MPR planetary gearboxes

General information



List of abbreviations

$F_{ax,max}$	[N]	Max. axial force
$F_{rad,max}$	[N]	Max. radial force
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass

6.2.3

MPR planetary gearboxes



General information

Product information

The MPR/MPG planetary gearboxes feature a higher-than-average torsional stiffness combined with a backlash down to one angular minute. Their combination with MCS synchronous servo motors and MCA asynchronous servo motors creates flexible and particularly energy-efficient solutions which cover virtually every application.

Version

- Robust planetary gearbox with solid shaft (MPR) or flanged shaft (MPG)
- High precision for the application thanks to low backlash (min. <=1 angular minutes)
- Efficient drive solutions with high efficiency (95 ... 97 %)
- Any mounting position which can be changed subsequently as well
- Enclosure IP65 (dust-tight, protection against water jets under any angle)

The product name

Gearbox type	Product range	Rated torque [Nm]	Product
Planetary gearbox	MPR	29	MPR050
		83	MPR100
		200	MPR200
		390	MPR300

MPR planetary gearboxes


General information



Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

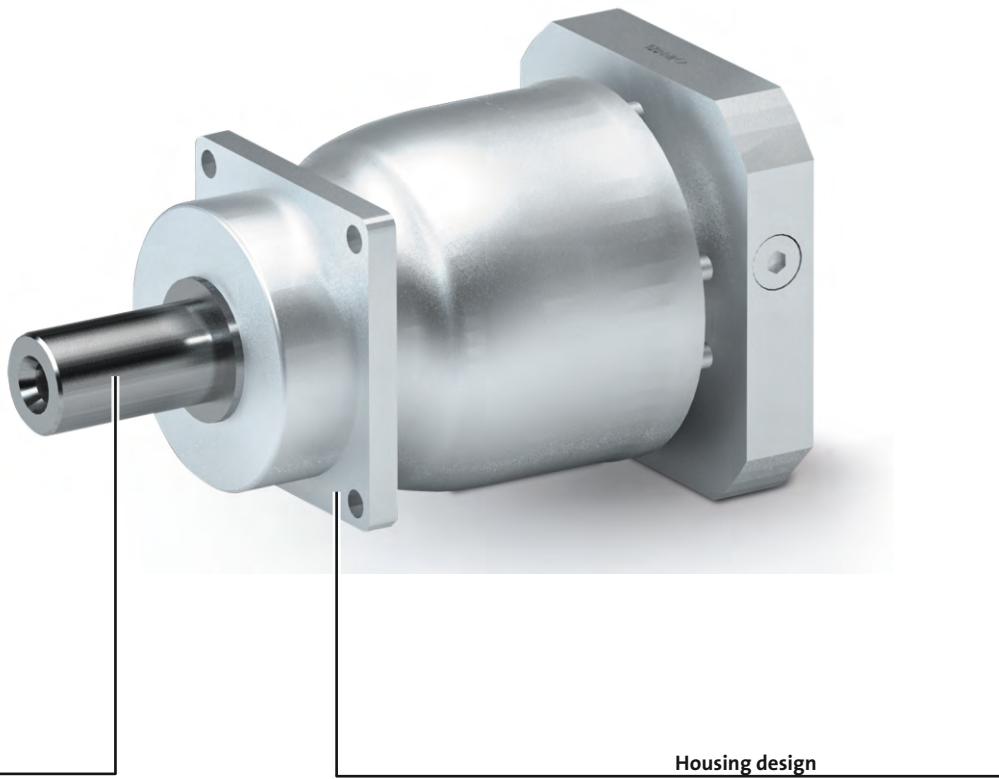

6.2.3

MPR planetary gearboxes



General information

The gearbox kit

Gearbox details

Product	MPR050	MPR100	MPR200	MPR300
Driven shaft				
Solid shaft without keyway [mm]	16x28	22x36	32x58	40x82
Design		Standard		
Gasket		NBR		
Bearing		Standard		
Housing				
Housing version		Without foot with centering		
Output flange				
Flange square [mm]	62	76	101	141
Lubricant				
Type		Mobil SHC 629		
Breather element		Without		
Backlash				
Backlash		Standard Reduced		

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.


MPR planetary gearboxes

General information



The gearbox kit

Gearbox details

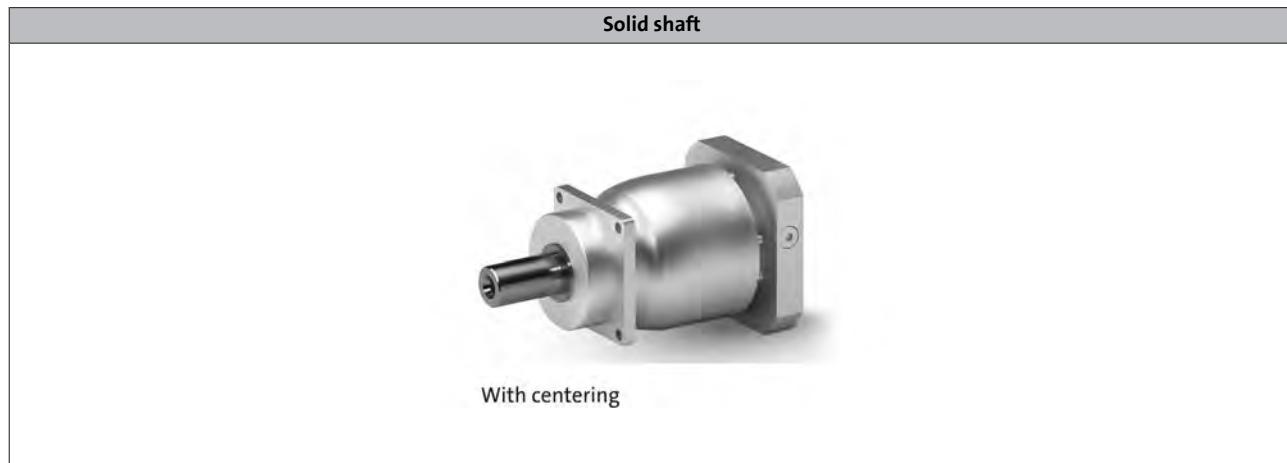

6.2.3

MPR planetary gearboxes




General information

Functions and features

Product	MPR050	MPR100	MPR200	MPR300
Housing				
Design		Cylindrical shape		
Solid shaft				
Design		Without keyway		
Tolerance			k6	
Toothed parts				
Design		Helical cut teeth		
Ratios		Mathematically precise		
Shaft-hub joint		Force-fit, motor gearbox connected via clamping hub		
Lubricants				
Changing interval		Lubricated for life		
Quantities		Can be installed in any orientation		
Mechanical efficiency				
1-stage gearboxes [$\eta_c=1$]		0.97		
2-stage gearboxes [$\eta_c=1$]		0.95		
3-stage gearboxes [$\eta_c=1$]				

Direction of rotation

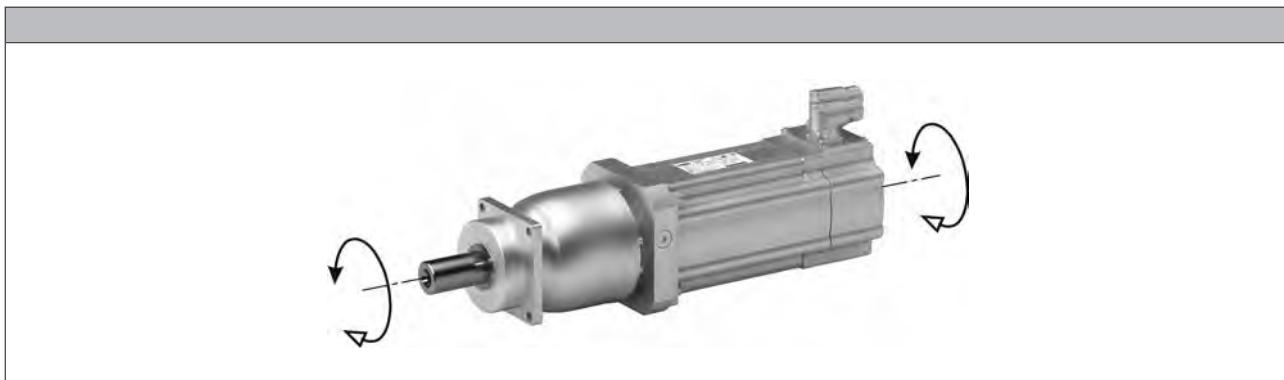

6.2.3

MPR planetary gearboxes



Technical data

Permissible radial and axial forces at output


Permissible radial force

$F_{rad,per} = F_{rad,max}$ if $F_{ax} = 0$

Permissible axial force

$F_{ax,per} = F_{ax,max}$ if $F_{rad} = 0$

- If F_{rad} and $F_{ax} \neq 0$, please contact Lenze.

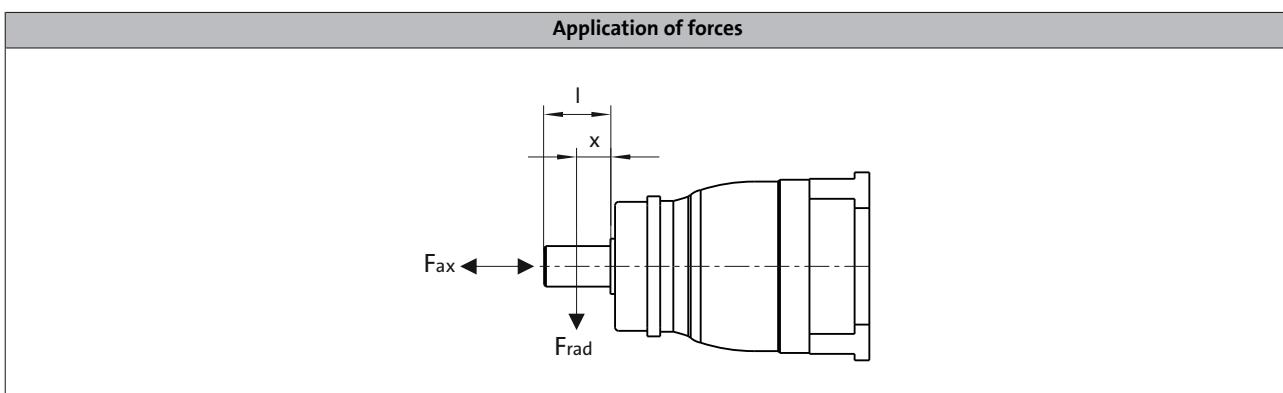

Product	n_2 [r/min]	
	Max. radial force, Solid shaft with flange	Max. axial force, Solid shaft with flange
	$F_{rad,max}$	$F_{ax,max}$
	[N]	[N]
MPR050	2700	2400
MPR100	4000	3350
MPR200	6300	5650
MPR300	9450	9870

- Application of force F_{rad} : centre of shaft journal ($x = l/2$)
- $F_{ax,max}$ only valid with $F_{rad} = 0$

MPR planetary gearboxes



Technical data

Backlash and torsional rigidity

1-stage gearboxes

Product	Backlash	
	Standard [arcmin]	Reduced [arcmin]
MPR050	4.00	2.00
MPR100		
MPR200	3.00	1.00
MPR300		

2-stage gearboxes

Product	Backlash	
	Standard [arcmin]	Reduced [arcmin]
MPR050	6.00	4.00
MPR100		
MPR200	5.00	3.00
MPR300		

► Measured at output. Load 2 % of the rated torque value.

MPR planetary gearboxes



Technical data

Speeds and torques

► Rated torque $M_{2, GN}$

At rated speed, ambient temperature 20 °C and duty type S1.

► Max. output torque $M_{2, max}$

Max. 1000 cycles per hour permissible.

► Emergency off torque $M_{2, not}$

Max. 1000 emergency switching off actions during gearbox service life

► Max. gearbox input speed

$n_{1, max\ 50\%}$

Max. medium speed at 50 % rated torque

$n_{1, max\ 100\%}$

Max. medium speed at 100 % rated torque

$n_{1, max}$

Max. permissible speed

1-stage gearboxes

Product	Ratio	Rated torque $M_{2, GN}$	Max. output torque $M_{2, max}$	Max. gearbox input speed			Emergency off-torque $M_{2, not}$
				$n_{1, max\ 50\%}$	$n_{1, max\ 100\%}$	$n_{1, max}$	
	i	[Nm]	[Nm]	[r/min]	[r/min]	[r/min]	[Nm]
MPR050	3.000	20	32	3300	3300	6000	80
	4.000	29	44	3300	3300		110
	5.000	29	44	3300	3300		110
	7.000	29	44	3700	3700		107
	10.000	19	35	4000	4000		88
MPR100	3.000	56	90	2800	2800	6000	200
	4.000	83	120	2800	2800		275
	5.000	83	120	2800	2800		275
	7.000	83	120	2800	2800		275
	10.000	58	90	3100	3100		220
MPR200	3.000	135	230	2500	2500	4500	500
	4.000	200	330	2500	2500		690
	5.000	195	330	2500	2500		675
	7.000	190	300	2800	2800		640
	10.000	135	235	2800	2800		550
MPR300	3.000	290	400	2100	2100	4000	1000
	4.000	390	660	2100	2100		1400
	5.000	390	660	2100	2100		1400
	7.000	380	600	2300	2300		1400
	10.000	245	480	2600	2600		1100

MPR planetary gearboxes



Technical data

Speeds and torques

2-stage gearboxes

Product	Ratio	Rated torque	Max. output torque	Max. gearbox input speed			Emergency off-torque
				$M_{2, GN}$	$M_{2, max}$	$n_{1, max\ 50\%}$	
				[Nm]	[Nm]	[r/min]	
MPR050	12.000	20	32	4000	4000	4000	80
	16.000	29	44	4400	4400	4400	110
	20.000	29	44	4400	4400	4400	110
	25.000	29	44	4400	4400	4400	110
	28.000	29	44	4400	4400	4400	110
	35.000	29	44	4400	4400	4400	110
	40.000	29	44	4400	4400	4400	110
	50.000	29	44	4800	4800	4800	110
	70.000	29	44	5500	5500	5500	107
	100.000	19	35	5500	5500	5500	88
MPR100	12.000	56	90	3100	3100	3100	200
	16.000	83	120	3500	3500	3500	275
	20.000	83	120	3500	3500	3500	275
	25.000	83	120	3500	3500	3500	275
	28.000	83	120	3500	3500	3500	275
	35.000	83	120	3500	3500	3500	275
	40.000	76	120	3500	3500	3500	275
	50.000	83	120	3800	3800	3800	275
	70.000	83	120	4500	4500	4500	275
	100.000	58	90	4500	4500	4500	220
MPR200	12.000	135	230	2800	2800	2800	500
	16.000	200	330	3100	3100	3100	690
	20.000	195	330	3100	3100	3100	675
	25.000	195	330	3100	3100	3100	675
	28.000	200	330	3100	3100	3100	690
	35.000	195	330	3100	3100	3100	675
	40.000	200	330	3100	3100	3100	690
	50.000	195	330	3500	3500	3500	675
	70.000	190	330	4200	4200	4200	640
	100.000	135	235	4200	4200	4200	550
MPR300	12.000	290	400	2600	2600	2600	1000
	16.000	390	660	2900	2900	2900	1400
	20.000	390	660	2900	2900	2900	1400
	25.000	390	660	2900	2900	2900	1400
	28.000	390	660	2900	2900	2900	1400
	35.000	390	660	2900	2900	2900	1400
	40.000	390	660	2900	2900	2900	1400
	50.000	390	660	3200	3200	3200	1400

MPR planetary gearboxes



Technical data

Moments of inertia

- The moments of inertia relate to the drive shaft of the gearbox.
- The total moment of inertia is calculated by adding the values of the gearbox, motor and accessories.

1-stage gearboxes

Product	Dimensions	Ratio	Moment of inertia		
			Motor shaft diameter		
			d	i	J
MPR050			[mm]	[kgcm ²]	
			11	3.000	0.330
			11	4.000	0.240
			11	5.000	0.200
			11	7.000	0.180
			11	10.000	0.160
			14	3.000	0.360
			14	4.000	0.270
			14	5.000	0.230
			14	7.000	0.210
			14	10.000	0.190
			19	3.000	0.530
			19	4.000	0.440
			19	5.000	0.400
			19	7.000	0.340
			19	10.000	0.330
MPR100			14	3.000	1.070
			14	4.000	0.740
			14	5.000	0.620
			14	7.000	0.520
			14	10.000	0.470
			19	3.000	1.210
			19	4.000	0.880
			19	5.000	0.760
			19	7.000	0.670
			19	10.000	0.620
			24	3.000	1.920
			24	4.000	1.590
			24	5.000	1.470
			24	7.000	1.370
			24	10.000	1.320
MPR200			19	3.000	4.480
			19	4.000	3.230
			19	5.000	2.780
			19	7.000	2.420
			19	10.000	2.230

Product	Dimensions	Ratio	Moment of inertia		
			Motor shaft diameter		
			d	i	J
MPR200			[mm]	[mm]	[kgcm ²]
			24	3.000	5.000
			24	4.000	3.750
			24	5.000	3.300
			24	7.000	2.940
			24	10.000	2.750
			28	3.000	6.800
			28	4.000	5.560
			28	5.000	5.100
			28	7.000	4.740
			28	10.000	4.550
			38	3.000	8.940
			38	4.000	7.690
			38	5.000	7.240
			38	7.000	6.850
			38	10.000	6.670
MPR300			24	3.000	13.540
			24	4.000	9.720
			24	5.000	8.270
			24	7.000	7.140
			24	10.000	6.460
			28	3.000	15.300
			28	4.000	11.490
			28	5.000	10.040
			28	7.000	8.890
			28	10.000	8.220
			38	3.000	16.590
			38	4.000	12.780
			38	5.000	11.330
			38	7.000	10.160
			38	10.000	9.480

6.2.3

MPR planetary gearboxes



Technical data

Moments of inertia

2-stage gearboxes


Product	Dimensions	Ratio	Moment of inertia
	Motor shaft diameter		
	d	i	J
	[mm]		[kgcm ²]
MPR050	11	12.000	0.210
	11	16.000	0.210
	11	20.000	0.180
	11	25.000	0.180
	11	28.000	0.170
	11	35.000	0.170
	11	40.000	0.160
	11	50.000	0.160
	11	70.000	0.160
	11	100.000	0.160
	14	12.000	0.250
	14	16.000	0.240
	14	20.000	0.210
	14	25.000	0.210
	14	28.000	0.200
	14	35.000	0.200
	14	40.000	0.190
	14	50.000	0.190
	14	70.000	0.190
	14	100.000	0.190
MPR100	11	12.000	0.250
	11	16.000	0.230
	11	20.000	0.190
	11	25.000	0.190
	11	28.000	0.170
	11	35.000	0.170
	11	40.000	0.160
	11	50.000	0.160
	11	70.000	0.160
	11	100.000	0.160
	14	12.000	0.290
	14	16.000	0.260
	14	20.000	0.220
	14	25.000	0.220
	14	28.000	0.200
	14	35.000	0.200
	14	40.000	0.190
	14	50.000	0.190
	14	70.000	0.190
	14	100.000	0.190
MPR200	14	12.000	0.840
	14	16.000	0.760
	14	20.000	0.610
	14	25.000	0.600
	14	28.000	0.520
	14	35.000	0.510
	14	40.000	0.470
	14	50.000	0.460
	14	70.000	0.460

6.2.3

Product	Dimensions	Ratio	Moment of inertia
	Motor shaft diameter		
	d	i	J
	[mm]		[kgcm ²]
MPR200	14	100.000	0.460
	19	12.000	0.980
	19	16.000	0.900
	19	20.000	0.760
	19	25.000	0.740
	19	28.000	0.660
	19	35.000	0.650
	19	40.000	0.620
	19	50.000	0.610
	19	70.000	0.610
	19	100.000	0.600
	19	12.000	2.700
	19	16.000	2.460
	19	20.000	2.260
	19	25.000	2.200
MPR300	19	28.000	2.140
	19	35.000	2.120
	19	40.000	2.110
	19	50.000	2.080
	19	70.000	2.070
	19	100.000	2.060
	24	12.000	3.220
	24	16.000	2.980
	24	20.000	2.780
	24	25.000	2.720
	24	28.000	2.660
	24	35.000	2.630
	24	40.000	2.620
	24	50.000	2.590
	24	70.000	2.580
MPR400	24	100.000	2.580
	28	12.000	5.020
	28	16.000	4.780
	28	20.000	4.580
	28	25.000	4.530
	28	28.000	4.460
	28	35.000	4.430
	28	40.000	4.420
	28	50.000	4.390
	28	70.000	4.380
	28	100.000	438.000

MPG planetary-geared motors

6 ... 387 Nm (synchronous servo motors)

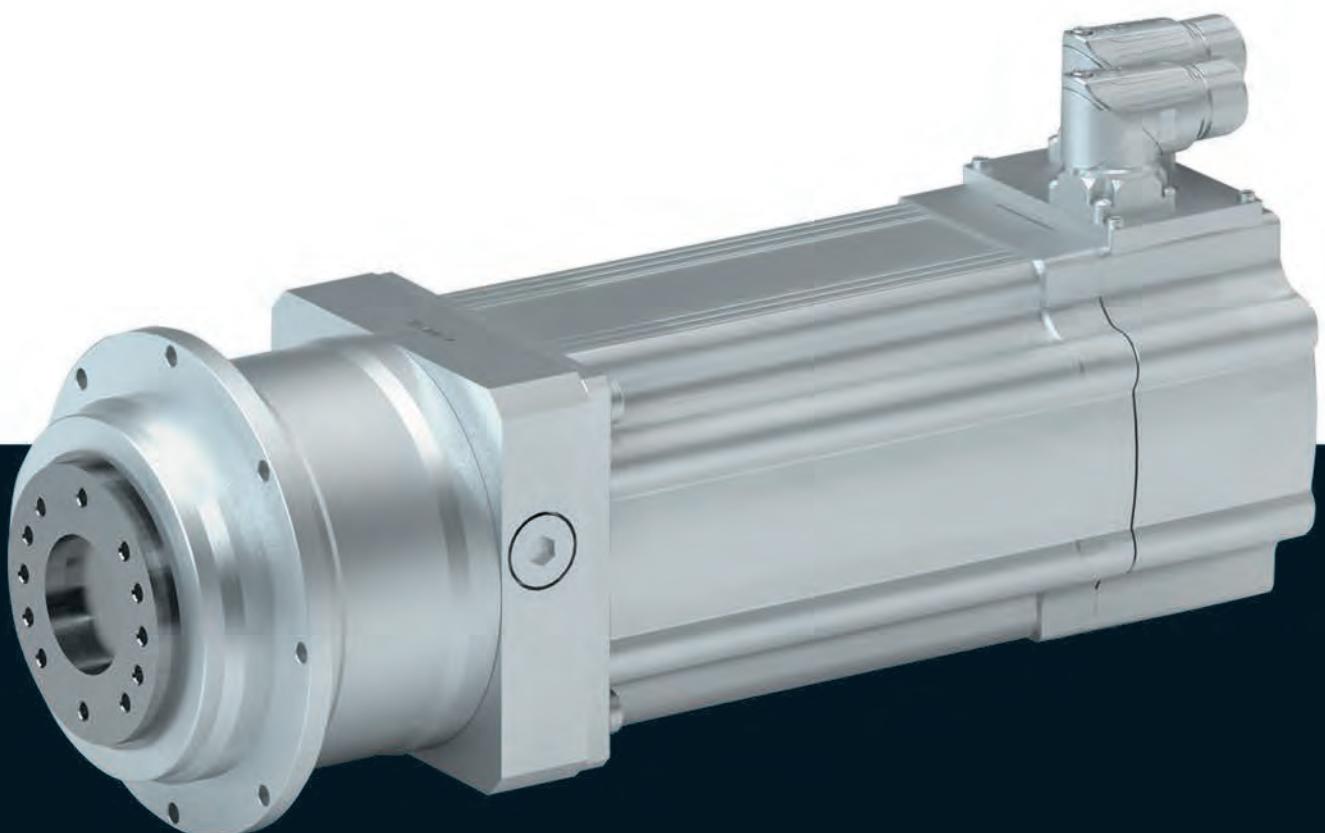

MPG planetary geared motors

Contents



General information	List of abbreviations	6.2.4 - 5
	Product information	6.2.4 - 6
	Equipment	6.2.4 - 7
	The gearbox kit	6.2.4 - 9
	Dimensioning	6.2.4 - 14
Technical data	Selection tables, notes	6.2.4 - 17
	Selection tables	6.2.4 - 18
	Dimensions, notes	6.2.4 - 36
	Dimensions, self-ventilated motors	6.2.4 - 37
	Dimensions, forced ventilated motors	6.2.4 - 52
	Weights, self-ventilated motors	6.2.4 - 60
	Weights, forced ventilated motors	6.2.4 - 61
	Surface and corrosion protection	6.2.4 - 62

MPG planetary geared motors

Contents



MPG planetary geared motors



General information

List of abbreviations

c		Load capacity
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass
M ₂	[Nm]	Output torque
M _{2, max}	[Nm]	Max. output torque
n _{2, eto}	[r/min]	Transition speed
n _{2, th}	[r/min]	Thermal limit speed

CCC	China Compulsory Certificate
CE	Communauté Européenne
CSA	Canadian Standards Association
cURus	Combined certification marks of UL for the USA and Canada
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

6.2.4

MPG planetary geared motors



General information

Product information

The combination of Vogel MPR/MPG planetary gearboxes and Lenze servo motors is the optimum solution for dynamic or highly dynamic applications requiring the highest precision. These solutions cater to the requirements such as those encountered on a daily basis in the printing and packaging industry, as well as in the fields of handling and robot technology, filling and materials handling technology and, in many cases, also general engineering.

The MPR/MPG planetary gearboxes feature a higher-than-average torsional stiffness combined with a backlash down to one angular minute. Their combination with MCS synchronous servo motors and MCA asynchronous servo motors creates flexible and particularly energy-efficient solutions which cover virtually every application.

Version

- Robust planetary gearbox with solid shaft (MPR) or flanged shaft (MPG)
- High precision for the application thanks to low backlash (min. <=1 angular minutes)
- Efficient drive solutions with high efficiency (95 ... 97 %)
- Any mounting position which can be changed subsequently as well
- Enclosure IP65 (dust-tight, protection against water jets under any angle)

The product name

Gearbox type	Product range	Rated torque [Nm]	Product
Planetary gearbox	MPG	29	MPG050
		83	MPG100
		200	MPG200
		390	MPG300

MPG planetary geared motors


General information



Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

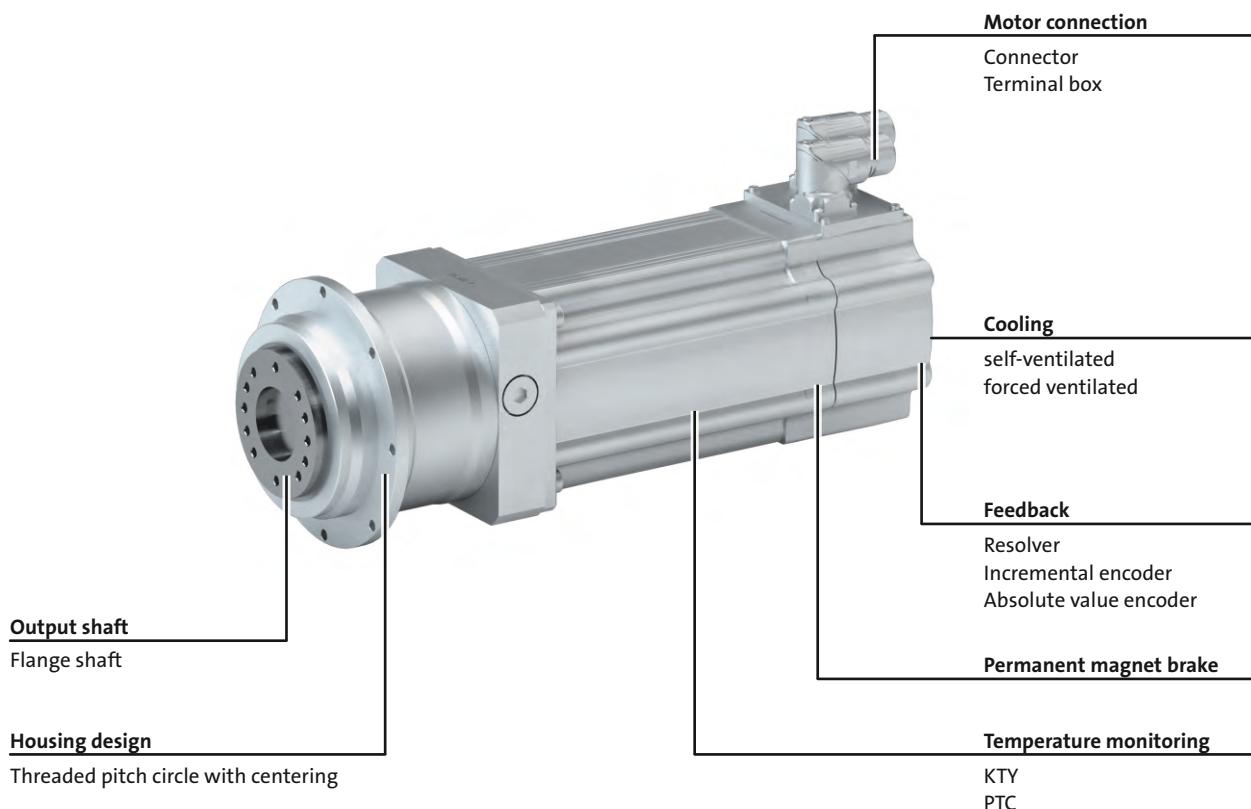

MPG planetary geared motors

General information



6.2.4

MPG planetary geared motors



General information

The gearbox kit

Geared motor

Product	MPG050	MPG100	MPG200	MPG300
Motor type				Synchronous servo motor
Servo motor				
0.6 - 1.5 Nm	MCS06			
2.3 - 4.5 Nm		MCS09		
5.5 - 17 Nm			MCS12	
9.2 - 42 Nm				MCS14
27 - 72 Nm				MCS19
Technical data				
Output torque		See selection table		
Output speed		See selection table		
Ratio		See selection table		
Load capacity		See selection table		
Moment of inertia		See selection table		
Mounting position				
Standard		Any		
Colour		primed (RAL 9005M, matt jet black)		
Surface and corrosion protection		Without OKS(uncoated) OKS-G (primed)		

6.2.4

MPG planetary geared motors



General information

The gearbox kit

Motor details

Product	MCS				
	06C41	09L41	12H14	14D14	19F12
	06C60	09D41	12L17	14L14	19P12
	06F41	09L51	12D17	14H12	19J12
	06F60	09D60	12L20	14P11	19P14
	06I41	09F38	12H15	14P14	19J14
	06I60	09F60	12D20	14D15	19F14
		09H41	12D35	14H15	19J29
		09H60	12H34	14L15	19P29
			12L39	14H28	19F29
			12D41	14P26	19J30
			12H35	14L30	19F30
			12L41	14D30	19P30
				14H32	
				14P32	
				14D36	
				14L32	
Connection type	Plug connectors		Plug connectors Terminal box		
Permanent magnet holding brake					
Rated torque [Nm]	2.2	8.0	12	22	37
Brake voltage [V]			DC 24		
Feedback			With absolute value encoder With incremental encoder With resolver		
Cooling	Self-ventilated		Self-ventilated Forced-ventilated		
Temperature monitoring	KTY83-110 thermal detector		KTY83-110 thermal detector PTC thermistor		
Approval			cURus GOST_R UkrSepro		
Degree of protection			IP54 IP65		

- Further information and installation feasibilities can be found in the Motors chapter.

MPG planetary geared motors

General information



The gearbox kit

Motor details

Connection type
 Plug connectors
 Terminal box
Cooling: self-ventilated
 With resolver
 With permanent magnet brake
 With feedback With feedback and permanent magnet brake
Cooling: forced ventilated
 With resolver
 With permanent magnet brake
 With feedback With feedback and permanent magnet brake

6.2.4

MPG planetary geared motors

General information



The gearbox kit

Gearbox details

Product	MPG050	MPG100	MPG200	MPG300
Driven shaft				
Flange shaft with threaded holes	40	63	80	100
Design		Standard		
Gasket		NBR		
Bearing		Standard		
Housing				
Housing version		Without foot with centering		
Output flange				
flange diameter [mm]	86	118	145	179
Lubricant				
Type		Mobil SHC 629		
Breather element		Without		
Backlash				
Backlash		Standard Reduced		

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.


MPG planetary geared motors

General information



The gearbox kit

Gearbox details

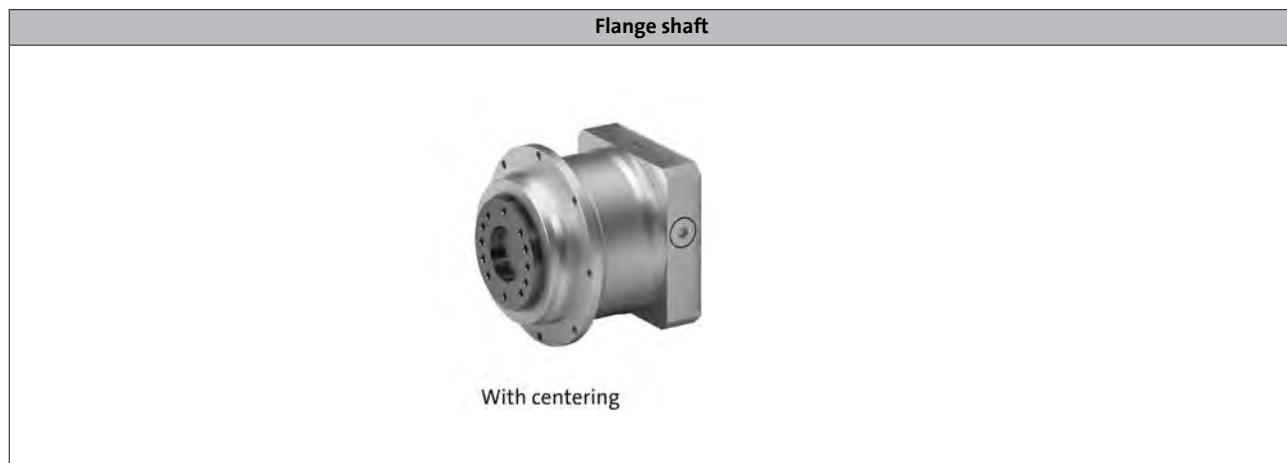

6.2.4

MPG planetary geared motors

General information



Dimensioning

General information about the data provided in this catalogue

The powers, torques and speeds specified in this catalogue are rounded values and are valid under the following conditions:

- Operating time/day = 8 h (100% OT)
- Duty class I for up to 10 switching operations/h
- Mounting positions and designs in this catalogue
- Standard lubricant
- $T_{amb} = 30 \text{ }^{\circ}\text{C}$ for gearboxes,
 $T_{amb} = 40 \text{ }^{\circ}\text{C}$ for motors (in accordance with EN 60034)
- Site altitude $< = 1000 \text{ m amsl}$
- The selection tables provide the permissible mechanical powers and torques. For notes on the thermal power limit, see chapter drive dimensioning.
- The rated power specified for motors and geared motors applies to operating mode S1 (in accordance with EN 60034).

Under different operating conditions, the values obtained may vary from those listed here.

In the case of extreme operating conditions, please consult your Lenze sales office.

MPG planetary geared motors



General information

Dimensioning

Load capacity and application factor

Load capacity c of gearbox

Rated value for the load capacity of Lenze geared motors.

- c is the ratio of the permissible rated torque of the gearbox to the rated torque supplied by the drive component (e.g. the built-in Lenze motor).
- The value of c must always be greater than the value of the application factor k calculated for the application.


Application factor k (according to DIN 3990)

Takes into account the influence of temporally variable loads which are actually present during the anticipated operating time of gearboxes and geared motors.

k is determined by:

- the type of load
- the load intensity
- temporal influences

Duty class	Load type
I	Smooth operation, small or light jolts
II	Uneven operation, average jolts
III	Uneven operation, severe jolts and/or alternating load

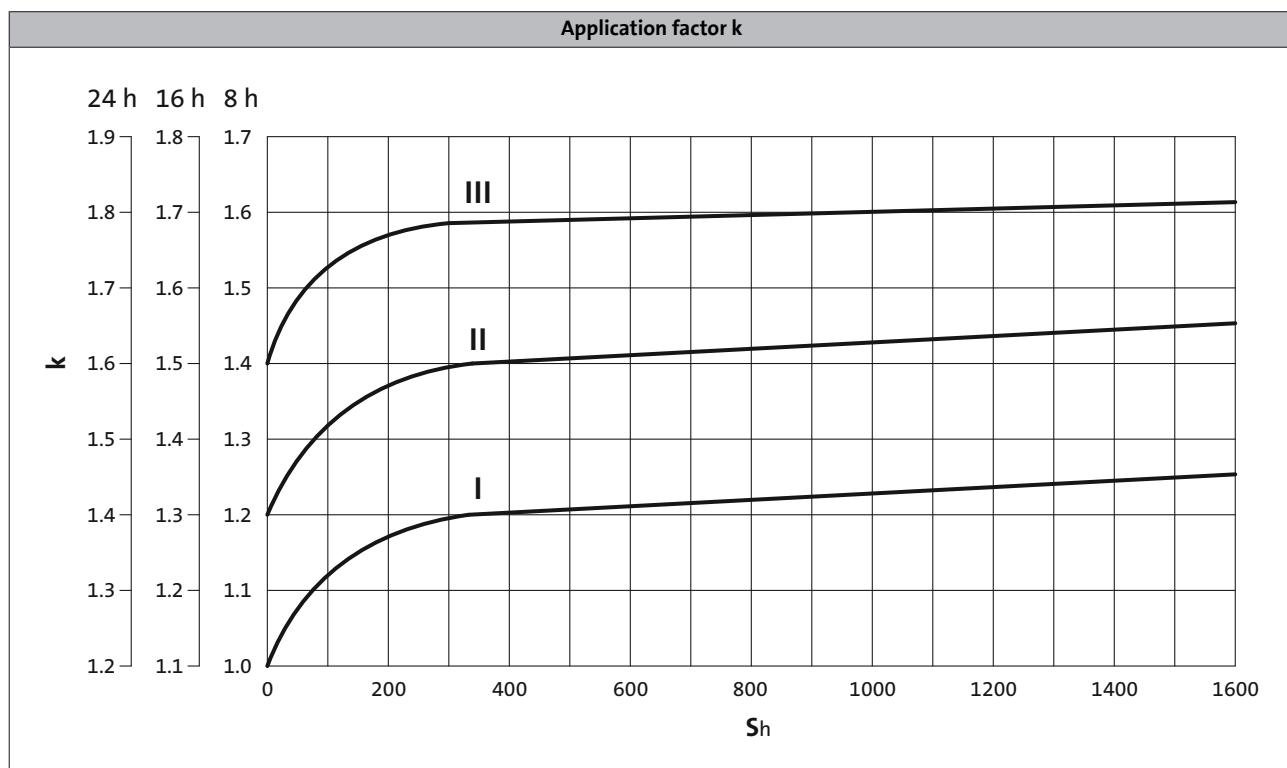

► S_h = switchings/h

MPG planetary geared motors



General information

Dimensioning

Weights

The values given in the tables consider the following gearbox/motor combination:

- Gearbox with solid shaft including lubricant amount
- Motor with feedback

For versions deviating from this, additional weights have to be considered.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data
- Motor options: Brake
 - > Chapter: Motors/Accessories

Moments of inertia

The given moments of inertia of the gearbox refer to the drive shaft. The influence of the ratio (i^2) has been considered in the data.

When the total moment of inertia of the geared motor is calculated, the values of the geared motors and the brake have to be added.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data/Selection tables
- Motor options: Brake
 - > Chapter: Motors/Accessories

MPG planetary geared motors



Technical data

Selection tables, notes

Notes on the selection tables

The selection tables show the available combinations of gearbox type, number of stages, ratio and motor. They are used only to provide basic orientation.

The following legend indicates the structure of the selection tables.

Number of the gear stage of the gearbox



2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		MPG	MCS		
29	275	7	275	3.9	0.300	16.000	050	06C60	Selbst	39
29	275	14	275	2.1	0.400	16.000	050	06F60	Selbst	39
29	275	18	275	1.6	0.500	16.000	050	06I60	Selbst	39
29	275	27	275	1.1	1.300	16.000	050	09D60	Selbst	39

For operating mode S1
Torque M₂ and
thermal output speed n_{2, th}

For operating mode S2, S3 und S6
Max. permissible acceleration torque of geared
motor M_{2, max} and
output speed n_{2, eto}

Load capacity of the gearbox

c is the ratio between the permissible rated torque of the gearbox and the rated torque of the three-phase AC motor (converted to the driven shaft).

c must be always higher than the service factor k determined for the application k.

$$c = \frac{M_{2, zul}}{M_{1,N} \cdot i \cdot \eta_{Getr}} > k$$

Product Gearbox

Product Motor

Type of
motor cooling

Page number
for dimensions

MPG planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
19	400	5	400	4.0	0.300	10.000	050	06C60	natural	37
19	400	6	400	3.3	0.300	10.000	050	06C41	natural	37
19	400	9	400	2.2	0.400	10.000	050	06F60	natural	37
19	400	12	400	1.6	0.400	10.000	050	06F41	natural	37
19	400	12	400	1.6	0.500	10.000	050	06I60	natural	37
19	400	15	400	1.3	0.500	10.000	050	06I41	natural	37
19	400	17	400	1.1	1.300	10.000	050	09D60	natural	37
21	660	6	660	5.0	0.400	5.000	050	06F41	natural	37
24	825	6	825	5.0	0.500	4.000	050	06I41	natural	37
29	825	7	825	4.3	1.400	4.000	050	09D60	natural	37
29	825	9	825	3.2	1.400	4.000	050	09D41	natural	37
29	825	9	825	3.1	1.800	4.000	050	09F60	natural	37
29	825	12	825	2.5	2.200	4.000	050	09H60	natural	37
29	825	12	825	2.5	1.800	4.000	050	09F38	natural	37
29	825	14	825	2.1	3.100	4.000	050	09L51	natural	37
29	825	15	825	2.0	2.200	4.000	050	09H41	natural	37
29	825	16	825	1.8	4.400	4.000	050	12D41	natural	37
29	825	17	825	1.7	3.100	4.000	050	09L41	natural	37
29	825	23	825	1.3	4.400	4.000	050	12D35	forced	52
29	660	6	660	5.0	0.500	5.000	050	06I60	natural	37
29	660	7	660	4.0	0.500	5.000	050	06I41	natural	37
29	660	8	660	3.4	1.300	5.000	050	09D60	natural	37
29	660	11	660	2.5	1.300	5.000	050	09D41	natural	37
29	660	12	660	2.5	1.700	5.000	050	09F60	natural	37
29	660	15	660	2.0	2.100	5.000	050	09H60	natural	37
29	660	15	660	2.0	1.700	5.000	050	09F38	natural	37
29	660	17	660	1.7	3.000	5.000	050	09L51	natural	37
29	660	18	660	1.6	2.100	5.000	050	09H41	natural	37
29	660	21	660	1.4	4.400	5.000	050	12D41	natural	37
29	660	22	660	1.3	3.000	5.000	050	09L41	natural	37
29	660	29	660	1.0	4.400	5.000	050	12D35	forced	52
29	529	6	529	4.7	0.400	7.000	050	06F60	natural	37
29	529	8	529	3.5	0.400	7.000	050	06F41	natural	37
29	529	8	529	3.6	0.500	7.000	050	06I60	natural	37
29	529	10	529	2.8	0.500	7.000	050	06I41	natural	37
29	529	12	529	2.4	1.300	7.000	050	09D60	natural	37
29	529	16	529	1.8	1.300	7.000	050	09D41	natural	37
29	529	16	529	1.8	1.700	7.000	050	09F60	natural	37
29	529	21	529	1.4	2.100	7.000	050	09H60	natural	37
29	529	21	529	1.4	1.700	7.000	050	09F38	natural	37

MPG planetary geared motors



Technical data

Selection tables

1-stage gearbox

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		MPG	MCS		
29	529	24	529	1.2	3.000	7.000	050	09L51	natural	37
29	529	26	529	1.1	2.100	7.000	050	09H41	natural	37
29	529	29	529	1.0	4.300	7.000	050	12D41	natural	37
29	488	21	488	1.4	4.400	4.000	050	12D20	natural	37
29	488	21	488	1.4	4.400	4.000	050	12D20	natural	37
29	413	27	413	1.1	4.400	4.000	050	12D17	forced	52
29	390	26	390	1.1	4.400	5.000	050	12D20	natural	37
29	390	26	390	1.1	4.400	5.000	050	12D20	natural	37
58	310	17	310	3.4	1.600	10.000	100	09D60	natural	40
58	310	23	310	2.5	1.600	10.000	100	09D41	natural	40
58	310	23	310	2.5	2.000	10.000	100	09F60	natural	40
58	310	29	310	2.0	2.400	10.000	100	09H60	natural	40
58	310	30	310	2.0	2.000	10.000	100	09F38	natural	40
58	310	35	310	1.7	3.300	10.000	100	09L51	natural	40
58	310	37	310	1.6	2.400	10.000	100	09H41	natural	40
58	310	41	310	1.4	4.600	10.000	100	12D41	natural	40
58	310	43	310	1.3	3.300	10.000	100	09L41	natural	40
58	310	58	310	1.0	4.600	10.000	100	12D35	forced	53
58	195	52	195	1.1	4.600	10.000	100	12D20	natural	40
58	195	52	195	1.1	4.600	10.000	100	12D20	natural	40
65	400	16	400	5.2	1.700	7.000	100	09D41	natural	40
69	700	23	700	3.6	5.000	4.000	100	12D35	forced	53
69	413	27	413	3.1	5.000	4.000	100	12D17	forced	53
70	700	16	700	5.0	5.000	4.000	100	12D41	natural	40
70	488	21	488	4.0	5.000	4.000	100	12D20	natural	40
70	488	21	488	4.0	5.000	4.000	100	12D20	natural	40
73	560	15	560	5.6	2.200	5.000	100	09F38	natural	40
78	700	15	700	5.7	2.800	4.000	100	09H41	natural	40
83	700	17	700	4.8	3.700	4.000	100	09L41	natural	40
83	700	29	700	2.9	9.800	4.000	100	14D36	natural	40
83	700	29	700	2.8	8.300	4.000	100	12H35	natural	40
83	700	31	700	2.7	8.300	4.000	100	12H30	natural	40
83	700	41	700	2.0	9.800	4.000	100	14D30	forced	53
83	700	41	700	2.0	8.300	4.000	100	12H34	forced	53
83	700	43	700	1.9	12.000	4.000	100	12L41	natural	40
83	700	54	700	1.5	12.000	4.000	100	12L39	forced	53
83	560	15	560	5.7	2.600	5.000	100	09H60	natural	40
83	560	17	560	4.8	3.500	5.000	100	09L51	natural	40
83	560	18	560	4.5	2.600	5.000	100	09H41	natural	40
83	560	21	560	4.0	4.900	5.000	100	12D41	natural	40

6.2.4

MPG planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
83	560	22	560	3.8	3.500	5.000	100	09L41	natural	40
83	560	29	560	2.9	4.900	5.000	100	12D35	forced	53
83	560	36	560	2.3	9.700	5.000	100	14D36	natural	40
83	560	37	560	2.3	8.200	5.000	100	12H35	natural	40
83	560	39	560	2.1	8.200	5.000	100	12H30	natural	40
83	560	51	560	1.6	9.700	5.000	100	14D30	forced	53
83	560	51	560	1.6	8.200	5.000	100	12H34	forced	53
83	560	54	560	1.5	11.000	5.000	100	12L41	natural	40
83	560	68	560	1.2	11.000	5.000	100	12L39	forced	53
83	488	53	488	1.6	12.000	4.000	100	12L20	natural	40
83	488	53	488	1.6	12.000	4.000	100	12L20	natural	40
83	413	65	413	1.3	12.000	4.000	100	12L17	forced	53
83	400	16	400	5.1	2.100	7.000	100	09F60	natural	40
83	400	21	400	4.0	2.500	7.000	100	09H60	natural	40
83	400	21	400	4.0	2.100	7.000	100	09F38	natural	40
83	400	24	400	3.4	3.400	7.000	100	09L51	natural	40
83	400	26	400	3.2	2.500	7.000	100	09H41	natural	40
83	400	29	400	2.9	4.700	7.000	100	12D41	natural	40
83	400	30	400	2.7	3.400	7.000	100	09L41	natural	40
83	400	40	400	2.0	4.700	7.000	100	12D35	forced	53
83	400	50	400	1.6	9.500	7.000	100	14D36	natural	40
83	400	52	400	1.6	8.000	7.000	100	12H35	natural	40
83	400	54	400	1.5	8.000	7.000	100	12H30	natural	40
83	400	71	400	1.2	9.500	7.000	100	14D30	forced	53
83	400	71	400	1.2	8.000	7.000	100	12H34	forced	53
83	400	75	400	1.1	11.000	7.000	100	12L41	natural	40
83	390	26	390	3.2	4.900	5.000	100	12D20	natural	40
83	390	26	390	3.2	4.900	5.000	100	12D20	natural	40
83	390	67	390	1.3	11.000	5.000	100	12L20	natural	40
83	390	67	390	1.3	11.000	5.000	100	12L20	natural	40
83	375	36	375	2.3	9.800	4.000	100	14D15	natural	40
83	375	40	375	2.1	8.300	4.000	100	12H15	natural	40
83	375	40	375	2.1	8.300	4.000	100	12H15	natural	40
83	338	47	338	1.8	9.800	4.000	100	14D14	forced	53
83	338	47	338	1.8	8.300	4.000	100	12H14	forced	53
83	330	34	330	2.5	4.900	5.000	100	12D17	forced	53
83	330	81	330	1.0	11.000	5.000	100	12L17	forced	53
83	300	45	300	1.9	9.700	5.000	100	14D15	natural	40
83	300	49	300	1.7	8.200	5.000	100	12H15	natural	40
83	300	49	300	1.7	8.200	5.000	100	12H15	natural	40

MPG planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
83	279	37	279	2.3	4.700	7.000	100	12D20	natural	40
83	279	37	279	2.3	4.700	7.000	100	12D20	natural	40
83	270	58	270	1.4	9.700	5.000	100	14D14	forced	53
83	270	58	270	1.4	8.200	5.000	100	12H14	forced	53
83	236	47	236	1.8	4.700	7.000	100	12D17	forced	53
83	214	63	214	1.3	9.500	7.000	100	14D15	natural	40
83	214	69	214	1.2	8.000	7.000	100	12H15	natural	40
83	214	69	214	1.2	8.000	7.000	100	12H15	natural	40
83	193	82	193	1.0	9.500	7.000	100	14D14	forced	53
83	193	82	193	1.0	8.000	7.000	100	12H14	forced	53
86	330	34	330	5.8	6.900	5.000	200	12D17	forced	54
113	625	41	625	4.9	11.000	4.000	200	12H34	forced	54
113	625	41	625	4.9	12.000	4.000	200	14D30	forced	54
113	375	36	375	5.6	12.000	4.000	200	14D15	natural	44
113	375	40	375	5.1	11.000	4.000	200	12H15	natural	44
113	375	40	375	5.1	11.000	4.000	200	12H15	natural	44
113	338	47	338	4.3	12.000	4.000	200	14D14	forced	54
113	338	47	338	4.3	11.000	4.000	200	12H14	forced	54
120	400	40	400	4.7	6.500	7.000	200	12D35	forced	54
120	236	47	236	4.0	6.500	7.000	200	12D17	forced	54
122	279	37	279	5.2	6.500	7.000	200	12D20	natural	44
122	279	37	279	5.2	6.500	7.000	200	12D20	natural	44
135	280	41	280	3.3	6.300	10.000	200	12D41	natural	44
135	280	58	280	2.3	6.300	10.000	200	12D35	forced	54
135	280	72	280	1.9	11.000	10.000	200	14D36	natural	44
135	280	74	280	1.8	9.600	10.000	200	12H35	natural	44
135	280	77	280	1.8	9.600	10.000	200	12H30	natural	44
135	280	102	280	1.3	9.600	10.000	200	12H34	forced	54
135	280	102	280	1.3	11.000	10.000	200	14D30	forced	54
135	280	107	280	1.3	13.000	10.000	200	12L41	natural	44
135	280	135	280	1.0	17.000	10.000	200	14H32	natural	44
135	195	52	195	2.6	6.300	10.000	200	12D20	natural	44
135	195	52	195	2.6	6.300	10.000	200	12D20	natural	44
135	195	133	195	1.0	13.000	10.000	200	12L20	natural	44
135	195	133	195	1.0	13.000	10.000	200	12L20	natural	44
135	165	67	165	2.0	6.300	10.000	200	12D17	forced	54
135	150	90	150	1.5	11.000	10.000	200	14D15	natural	44
135	150	99	150	1.4	9.600	10.000	200	12H15	natural	44
135	150	99	150	1.4	9.600	10.000	200	12H15	natural	44
135	135	117	135	1.2	11.000	10.000	200	14D14	forced	54

6.2.4

MPG planetary geared motors



Technical data

Selection tables

1-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
135	135	117	135	1.2	9.600	10.000	200	12H14	forced	54
141	500	36	500	5.4	12.000	5.000	200	14D36	natural	44
141	500	37	500	5.3	10.000	5.000	200	12H35	natural	44
141	500	39	500	5.0	10.000	5.000	200	12H30	natural	44
141	500	51	500	3.8	10.000	5.000	200	12H34	forced	54
141	500	51	500	3.8	12.000	5.000	200	14D30	forced	54
141	300	45	300	4.4	12.000	5.000	200	14D15	natural	44
141	300	49	300	4.0	10.000	5.000	200	12H15	natural	44
141	300	49	300	4.0	10.000	5.000	200	12H15	natural	44
141	270	58	270	3.3	12.000	5.000	200	14D14	forced	54
141	270	58	270	3.3	10.000	5.000	200	12H14	forced	54
190	400	50	400	3.8	11.000	7.000	200	14D36	natural	44
190	400	52	400	3.7	9.800	7.000	200	12H35	natural	44
190	400	54	400	3.5	9.800	7.000	200	12H30	natural	44
190	400	71	400	2.7	9.800	7.000	200	12H34	forced	54
190	400	71	400	2.7	11.000	7.000	200	14D30	forced	54
190	400	75	400	2.5	13.000	7.000	200	12L41	natural	44
190	400	94	400	2.0	17.000	7.000	200	14H32	natural	44
190	400	95	400	2.0	13.000	7.000	200	12L39	forced	54
190	400	117	400	1.6	26.000	7.000	200	14L32	natural	44
190	400	143	400	1.3	38.000	7.000	200	14P32	natural	44
190	400	143	400	1.3	70.000	7.000	200	19F30	natural	44
190	400	173	400	1.1	26.000	7.000	200	14L30	forced	54
190	396	140	396	1.4	17.000	7.000	200	14H28	forced	54
190	279	93	279	2.0	13.000	7.000	200	12L20	natural	44
190	279	93	279	2.0	13.000	7.000	200	12L20	natural	44
190	236	114	236	1.7	13.000	7.000	200	12L17	forced	54
190	214	63	214	3.0	11.000	7.000	200	14D15	natural	44
190	214	69	214	2.8	9.800	7.000	200	12H15	natural	44
190	214	69	214	2.8	9.800	7.000	200	12H15	natural	44
190	214	108	214	1.8	17.000	7.000	200	14H15	natural	44
190	214	156	214	1.2	26.000	7.000	200	14L15	natural	44
190	204	182	204	1.0	70.000	7.000	200	19F14	natural	44
190	193	82	193	2.3	11.000	7.000	200	14D14	forced	54
190	193	82	193	2.3	9.800	7.000	200	12H14	forced	54
190	171	162	171	1.2	17.000	7.000	200	14H12	forced	54
195	500	54	500	3.6	14.000	5.000	200	12L41	natural	44
195	500	67	500	2.9	18.000	5.000	200	14H32	natural	44
195	500	68	500	2.9	14.000	5.000	200	12L39	forced	54
195	500	83	500	2.3	27.000	5.000	200	14L32	natural	44

MPG planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
195	500	100	500	1.9	18.000	5.000	200	14H28	forced	54
195	500	102	500	1.9	38.000	5.000	200	14P32	natural	44
195	500	102	500	1.9	70.000	5.000	200	19F30	natural	44
195	500	124	500	1.6	27.000	5.000	200	14L30	forced	54
195	500	140	500	1.4	110.000	5.000	200	19J30	natural	44
195	500	158	500	1.2	70.000	5.000	200	19F29	forced	54
195	500	161	500	1.2	38.000	5.000	200	14P26	forced	54
195	390	67	390	2.9	14.000	5.000	200	12L20	natural	44
195	390	67	390	2.9	14.000	5.000	200	12L20	natural	44
195	330	81	330	2.4	14.000	5.000	200	12L17	forced	54
195	300	77	300	2.5	18.000	5.000	200	14H15	natural	44
195	300	111	300	1.8	27.000	5.000	200	14L15	natural	44
195	285	130	285	1.5	70.000	5.000	200	19F14	natural	44
195	270	144	270	1.4	38.000	5.000	200	14P14	natural	44
195	270	148	270	1.3	27.000	5.000	200	14L14	forced	54
195	240	116	240	1.7	18.000	5.000	200	14H12	forced	54
195	240	185	240	1.1	70.000	5.000	200	19F12	forced	54
197	329	71	329	5.3	16.000	7.000	300	14D30	forced	57
197	193	82	193	4.7	16.000	7.000	300	14D14	forced	57
200	625	43	625	4.7	14.000	4.000	200	12L41	natural	44
200	625	54	625	3.7	14.000	4.000	200	12L39	forced	54
200	625	54	625	3.7	18.000	4.000	200	14H32	natural	44
200	625	67	625	3.0	27.000	4.000	200	14L32	natural	44
200	625	80	625	2.5	18.000	4.000	200	14H28	forced	54
200	625	82	625	2.5	39.000	4.000	200	14P32	natural	44
200	625	82	625	2.5	71.000	4.000	200	19F30	natural	44
200	625	99	625	2.0	27.000	4.000	200	14L30	forced	54
200	625	112	625	1.8	111.000	4.000	200	19J30	natural	44
200	625	126	625	1.6	71.000	4.000	200	19F29	forced	54
200	625	128	625	1.6	39.000	4.000	200	14P26	forced	54
200	488	53	488	3.8	14.000	4.000	200	12L20	natural	44
200	488	53	488	3.8	14.000	4.000	200	12L20	natural	44
200	413	65	413	3.1	14.000	4.000	200	12L17	forced	54
200	375	62	375	3.2	18.000	4.000	200	14H15	natural	44
200	375	89	375	2.3	27.000	4.000	200	14L15	natural	44
200	356	104	356	1.9	71.000	4.000	200	19F14	natural	44
200	356	156	356	1.3	111.000	4.000	200	19J14	natural	44
200	338	115	338	1.7	39.000	4.000	200	14P14	natural	44
200	338	118	338	1.7	27.000	4.000	200	14L14	forced	54
200	300	93	300	2.2	18.000	4.000	200	14H12	forced	54

6.2.4

MPG planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
200	300	148	300	1.4	71.000	4.000	200	19F12	forced	54
200	263	162	263	1.2	39.000	4.000	200	14P11	forced	54
213	525	80	525	4.9	25.000	4.000	300	14H28	forced	57
213	300	93	300	4.2	25.000	4.000	300	14H12	forced	57
245	260	72	260	3.4	15.000	10.000	300	14D36	natural	48
245	260	102	260	2.4	15.000	10.000	300	14D30	forced	57
245	260	135	260	1.8	21.000	10.000	300	14H32	natural	48
245	260	167	260	1.5	30.000	10.000	300	14L32	natural	48
245	260	200	260	1.2	21.000	10.000	300	14H28	forced	57
245	260	204	260	1.2	41.000	10.000	300	14P32	natural	48
245	260	204	260	1.2	73.000	10.000	300	19F30	natural	48
245	150	90	150	2.7	15.000	10.000	300	14D15	natural	48
245	150	154	150	1.6	21.000	10.000	300	14H15	natural	48
245	150	222	150	1.1	30.000	10.000	300	14L15	natural	48
245	135	117	135	2.1	15.000	10.000	300	14D14	forced	57
245	120	232	120	1.1	21.000	10.000	300	14H12	forced	57
266	420	100	420	3.9	23.000	5.000	300	14H28	forced	57
266	240	116	240	3.4	23.000	5.000	300	14H12	forced	57
267	420	67	420	5.8	23.000	5.000	300	14H32	natural	48
267	300	77	300	5.0	23.000	5.000	300	14H15	natural	48
299	525	67	525	5.8	34.000	4.000	300	14L32	natural	48
299	525	99	525	4.0	34.000	4.000	300	14L30	forced	57
299	375	89	375	4.4	34.000	4.000	300	14L15	natural	48
299	338	118	338	3.3	34.000	4.000	300	14L14	forced	57
334	525	82	525	4.8	76.000	4.000	300	19F30	natural	48
334	525	126	525	3.1	76.000	4.000	300	19F29	forced	57
334	356	104	356	3.8	76.000	4.000	300	19F14	natural	48
334	300	148	300	2.6	76.000	4.000	300	19F12	forced	57
372	329	140	329	2.7	22.000	7.000	300	14H28	forced	57
372	171	162	171	2.3	22.000	7.000	300	14H12	forced	57
373	420	83	420	4.7	32.000	5.000	300	14L32	natural	48
373	329	94	329	4.0	22.000	7.000	300	14H32	natural	48
373	300	111	300	3.5	32.000	5.000	300	14L15	natural	48
373	214	108	214	3.5	22.000	7.000	300	14H15	natural	48
374	420	124	420	3.2	32.000	5.000	300	14L30	forced	57
374	270	148	270	2.6	32.000	5.000	300	14L14	forced	57
380	329	117	329	3.3	31.000	7.000	300	14L32	natural	48
380	329	143	329	2.7	42.000	7.000	300	14P32	natural	48
380	329	143	329	2.7	74.000	7.000	300	19F30	natural	48
380	329	173	329	2.2	31.000	7.000	300	14L30	forced	57

MPG planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
380	329	197	329	1.9	114.000	7.000	300	19J30	natural	48
380	329	216	329	1.8	169.000	7.000	300	19P30	natural	48
380	329	221	329	1.7	74.000	7.000	300	19F29	forced	57
380	329	225	329	1.7	42.000	7.000	300	14P26	forced	57
380	329	344	329	1.1	114.000	7.000	300	19J29	forced	57
380	329	359	329	1.1	169.000	7.000	300	19P29	forced	57
380	214	156	214	2.4	31.000	7.000	300	14L15	natural	48
380	204	182	204	2.1	74.000	7.000	300	19F14	natural	48
380	204	273	204	1.4	114.000	7.000	300	19J14	natural	48
380	193	202	193	1.9	42.000	7.000	300	14P14	natural	48
380	193	207	193	1.8	31.000	7.000	300	14L14	forced	57
380	193	346	193	1.1	169.000	7.000	300	19P14	natural	48
380	171	259	171	1.5	74.000	7.000	300	19F12	forced	57
380	150	284	150	1.3	42.000	7.000	300	14P11	forced	57
390	525	82	525	4.8	46.000	4.000	300	14P32	natural	48
390	525	112	525	3.5	116.000	4.000	300	19J30	natural	48
390	525	124	525	3.2	171.000	4.000	300	19P30	natural	48
390	525	128	525	3.0	46.000	4.000	300	14P26	forced	57
390	525	196	525	2.0	116.000	4.000	300	19J29	forced	57
390	525	205	525	1.9	171.000	4.000	300	19P29	forced	57
390	420	102	420	3.8	44.000	5.000	300	14P32	natural	48
390	420	102	420	3.8	76.000	5.000	300	19F30	natural	48
390	420	140	420	2.8	116.000	5.000	300	19J30	natural	48
390	420	154	420	2.5	171.000	5.000	300	19P30	natural	48
390	420	158	420	2.5	76.000	5.000	300	19F29	forced	57
390	420	161	420	2.4	44.000	5.000	300	14P26	forced	57
390	420	245	420	1.6	116.000	5.000	300	19J29	forced	57
390	420	257	420	1.5	171.000	5.000	300	19P29	forced	57
390	356	156	356	2.5	116.000	4.000	300	19J14	natural	48
390	338	115	338	3.4	46.000	4.000	300	14P14	natural	48
390	338	198	338	2.0	171.000	4.000	300	19P14	natural	48
390	300	244	300	1.6	116.000	4.000	300	19J12	forced	57
390	300	278	300	1.4	171.000	4.000	300	19P12	forced	57
390	285	130	285	3.0	76.000	5.000	300	19F14	natural	48
390	285	195	285	2.0	116.000	5.000	300	19J14	natural	48
390	270	144	270	2.7	44.000	5.000	300	14P14	natural	48
390	270	247	270	1.6	171.000	5.000	300	19P14	natural	48
390	263	162	263	2.4	46.000	4.000	300	14P11	forced	57
390	240	185	240	2.1	76.000	5.000	300	19F12	forced	57
390	240	305	240	1.3	116.000	5.000	300	19J12	forced	57

6.2.4

MPG planetary geared motors



Technical data

Selection tables

1-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		MPG	MCS		
390	240	347	240	1.1	171.000	5.000	300	19P12	forced	57
390	210	203	210	1.9	44.000	5.000	300	14P11	forced	57

MPG planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
29	275	7	275	3.9	0.300	16.000	050	06C60	natural	39
29	275	14	275	2.1	0.400	16.000	050	06F60	natural	39
29	275	18	275	1.6	0.500	16.000	050	06I60	natural	39
29	275	27	275	1.1	1.300	16.000	050	09D60	natural	39
29	253	9	253	3.2	0.300	16.000	050	06C41	natural	39
29	253	9	253	3.2	0.300	16.000	050	06C41	natural	39
29	253	18	253	1.6	0.400	16.000	050	06F41	natural	39
29	253	18	253	1.6	0.400	16.000	050	06F41	natural	39
29	253	23	253	1.3	0.500	16.000	050	06I41	natural	39
29	253	23	253	1.3	0.500	16.000	050	06I41	natural	39
29	220	9	220	3.1	0.300	20.000	050	06C60	natural	39
29	220	17	220	1.7	0.400	20.000	050	06F60	natural	39
29	220	23	220	1.3	0.500	20.000	050	06I60	natural	39
29	203	11	203	2.6	0.300	20.000	050	06C41	natural	39
29	203	11	203	2.6	0.300	20.000	050	06C41	natural	39
29	203	23	203	1.3	0.400	20.000	050	06F41	natural	39
29	203	23	203	1.3	0.400	20.000	050	06F41	natural	39
29	203	29	203	1.0	0.500	20.000	050	06I41	natural	39
29	203	29	203	1.0	0.500	20.000	050	06I41	natural	39
29	176	12	176	2.5	0.300	25.000	050	06C60	natural	39
29	176	22	176	1.4	0.400	25.000	050	06F60	natural	39
29	176	28	176	1.0	0.500	25.000	050	06I60	natural	39
29	162	14	162	2.1	0.300	25.000	050	06C41	natural	39
29	162	14	162	2.1	0.300	25.000	050	06C41	natural	39
29	162	29	162	1.0	0.400	25.000	050	06F41	natural	39
29	162	29	162	1.0	0.400	25.000	050	06F41	natural	39
29	157	13	157	2.2	0.300	28.000	050	06C60	natural	39
29	157	24	157	1.2	0.400	28.000	050	06F60	natural	39
29	145	16	145	1.9	0.300	28.000	050	06C41	natural	39
29	145	16	145	1.9	0.300	28.000	050	06C41	natural	39
29	126	16	126	1.8	0.300	35.000	050	06C60	natural	39
29	116	20	116	1.5	0.300	35.000	050	06C41	natural	39
29	116	20	116	1.5	0.300	35.000	050	06C41	natural	39
29	110	19	110	1.6	0.300	40.000	050	06C60	natural	39
29	101	22	101	1.3	0.300	40.000	050	06C41	natural	39
29	101	22	101	1.3	0.300	40.000	050	06C41	natural	39
29	96	23	96	1.2	0.300	50.000	050	06C60	natural	39
29	81	28	81	1.0	0.300	50.000	050	06C41	natural	39
29	81	28	81	1.0	0.300	50.000	050	06C41	natural	39
57	140	14	140	5.9	0.300	25.000	100	06C41	natural	42

6.2.4

MPG planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
57	140	14	140	5.9	0.300	25.000	100	06C41	natural	42
58	45	47	45	1.2	0.300	100.000	100	06C60	natural	42
58	41	56	41	1.0	0.300	100.000	100	06C41	natural	42
58	41	56	41	1.0	0.300	100.000	100	06C41	natural	42
64	125	16	125	5.3	0.300	28.000	100	06C41	natural	42
64	125	16	125	5.3	0.300	28.000	100	06C41	natural	42
67	219	18	219	4.5	0.500	16.000	100	06F41	natural	42
67	219	18	219	4.5	0.500	16.000	100	06F41	natural	42
76	88	19	88	4.0	0.300	40.000	100	06C60	natural	42
76	88	22	88	3.4	0.300	40.000	100	06C41	natural	42
76	88	22	88	3.4	0.300	40.000	100	06C41	natural	42
76	88	34	88	2.2	0.400	40.000	100	06F60	natural	42
76	88	45	88	1.7	0.500	40.000	100	06I60	natural	42
76	88	46	88	1.7	0.400	40.000	100	06F41	natural	42
76	88	46	88	1.7	0.400	40.000	100	06F41	natural	42
76	88	57	88	1.3	0.500	40.000	100	06I41	natural	42
76	88	67	88	1.1	1.300	40.000	100	09D60	natural	42
80	100	16	100	5.1	0.300	35.000	100	06C60	natural	42
80	100	20	100	4.2	0.300	35.000	100	06C41	natural	42
80	100	20	100	4.2	0.300	35.000	100	06C41	natural	42
83	219	18	219	4.6	0.500	16.000	100	06I60	natural	42
83	219	23	219	3.6	0.500	16.000	100	06I41	natural	42
83	219	27	219	3.1	1.400	16.000	100	09D60	natural	42
83	219	36	219	2.3	1.800	16.000	100	09F60	natural	42
83	219	36	219	2.3	1.400	16.000	100	09D41	natural	42
83	219	46	219	1.8	2.200	16.000	100	09H60	natural	42
83	219	46	219	1.8	1.800	16.000	100	09F38	natural	42
83	219	54	219	1.5	3.100	16.000	100	09L51	natural	42
83	219	57	219	1.4	2.200	16.000	100	09H41	natural	42
83	219	68	219	1.2	3.100	16.000	100	09L41	natural	42
83	175	17	175	4.8	0.400	20.000	100	06F60	natural	42
83	175	23	175	3.6	0.400	20.000	100	06F41	natural	42
83	175	23	175	3.6	0.400	20.000	100	06F41	natural	42
83	175	23	175	3.7	0.500	20.000	100	06I60	natural	42
83	175	29	175	2.9	0.500	20.000	100	06I41	natural	42
83	175	33	175	2.5	1.300	20.000	100	09D60	natural	42
83	175	45	175	1.8	1.700	20.000	100	09F60	natural	42
83	175	45	175	1.9	1.300	20.000	100	09D41	natural	42
83	175	57	175	1.4	2.100	20.000	100	09H60	natural	42
83	175	58	175	1.4	1.700	20.000	100	09F38	natural	42

MPG planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
83	175	68	175	1.2	3.000	20.000	100	09L51	natural	42
83	175	72	175	1.2	2.100	20.000	100	09H41	natural	42
83	140	22	140	3.9	0.400	25.000	100	06F60	natural	42
83	140	28	140	2.9	0.500	25.000	100	06I60	natural	42
83	140	29	140	2.9	0.400	25.000	100	06F41	natural	42
83	140	29	140	2.9	0.400	25.000	100	06F41	natural	42
83	140	36	140	2.3	0.500	25.000	100	06I41	natural	42
83	140	42	140	2.0	1.300	25.000	100	09D60	natural	42
83	140	56	140	1.5	1.300	25.000	100	09D41	natural	42
83	140	57	140	1.5	1.700	25.000	100	09F60	natural	42
83	140	72	140	1.2	2.100	25.000	100	09H60	natural	42
83	140	73	140	1.1	1.700	25.000	100	09F38	natural	42
83	125	24	125	3.4	0.400	28.000	100	06F60	natural	42
83	125	32	125	2.6	0.400	28.000	100	06F41	natural	42
83	125	32	125	2.6	0.400	28.000	100	06F41	natural	42
83	125	32	125	2.6	0.500	28.000	100	06I60	natural	42
83	125	40	125	2.1	0.500	28.000	100	06I41	natural	42
83	125	47	125	1.8	1.300	28.000	100	09D60	natural	42
83	125	63	125	1.3	1.300	28.000	100	09D41	natural	42
83	125	64	125	1.3	1.700	28.000	100	09F60	natural	42
83	125	80	125	1.0	2.100	28.000	100	09H60	natural	42
83	125	81	125	1.0	1.700	28.000	100	09F38	natural	42
83	100	30	100	2.8	0.400	35.000	100	06F60	natural	42
83	100	40	100	2.1	0.400	35.000	100	06F41	natural	42
83	100	40	100	2.1	0.400	35.000	100	06F41	natural	42
83	100	40	100	2.1	0.500	35.000	100	06I60	natural	42
83	100	50	100	1.6	0.500	35.000	100	06I41	natural	42
83	100	58	100	1.4	1.300	35.000	100	09D60	natural	42
83	100	78	100	1.1	1.300	35.000	100	09D41	natural	42
83	100	79	100	1.1	1.700	35.000	100	09F60	natural	42
83	76	23	76	3.5	0.300	50.000	100	06C60	natural	42
83	76	28	76	3.0	0.300	50.000	100	06C41	natural	42
83	76	28	76	3.0	0.300	50.000	100	06C41	natural	42
83	76	43	76	1.9	0.400	50.000	100	06F60	natural	42
83	76	57	76	1.4	0.400	50.000	100	06F41	natural	42
83	76	57	76	1.4	0.400	50.000	100	06F41	natural	42
83	76	57	76	1.5	0.500	50.000	100	06I60	natural	42
83	76	72	76	1.2	0.500	50.000	100	06I41	natural	42
83	64	33	64	2.5	0.300	70.000	100	06C60	natural	42
83	64	60	64	1.4	0.400	70.000	100	06F60	natural	42

6.2.4

MPG planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
83	64	79	64	1.1	0.500	70.000	100	06I60	natural	42
83	58	39	58	2.1	0.300	70.000	100	06C41	natural	42
83	58	39	58	2.1	0.300	70.000	100	06C41	natural	42
83	58	80	58	1.0	0.400	70.000	100	06F41	natural	42
83	58	80	58	1.0	0.400	70.000	100	06F41	natural	42
144	194	36	194	5.6	1.900	16.000	200	09D41	natural	46
144	194	36	194	5.6	1.900	16.000	200	09D41	natural	46
181	155	33	155	5.9	1.700	20.000	200	09D60	natural	46
181	155	45	155	4.3	1.700	20.000	200	09D41	natural	46
181	155	45	155	4.3	1.700	20.000	200	09D41	natural	46
190	60	116	60	1.6	1.600	70.000	200	09D60	natural	46
190	60	159	60	1.2	2.000	70.000	200	09F60	natural	46
190	58	157	58	1.2	1.600	70.000	200	09D41	natural	46
190	58	157	58	1.2	1.600	70.000	200	09D41	natural	46
195	155	45	155	4.3	2.100	20.000	200	09F60	natural	46
195	155	57	155	3.4	2.500	20.000	200	09H60	natural	46
195	155	58	155	3.4	2.100	20.000	200	09F38	natural	46
195	155	68	155	2.9	3.400	20.000	200	09L51	natural	46
195	155	72	155	2.7	2.500	20.000	200	09H41	natural	46
195	155	81	155	2.4	4.800	20.000	200	12D41	natural	46
195	155	85	155	2.3	3.400	20.000	200	09L41	natural	46
195	155	113	155	1.7	4.800	20.000	200	12D35	forced	56
195	155	144	155	1.4	8.100	20.000	200	12H35	natural	46
195	150	151	150	1.3	8.100	20.000	200	12H30	natural	46
195	124	42	124	4.7	1.700	25.000	200	09D60	natural	46
195	124	56	124	3.5	1.700	25.000	200	09D41	natural	46
195	124	56	124	3.5	1.700	25.000	200	09D41	natural	46
195	124	57	124	3.4	2.100	25.000	200	09F60	natural	46
195	124	72	124	2.7	2.500	25.000	200	09H60	natural	46
195	124	73	124	2.7	2.100	25.000	200	09F38	natural	46
195	124	84	124	2.3	3.400	25.000	200	09L51	natural	46
195	124	90	124	2.2	2.500	25.000	200	09H41	natural	46
195	124	101	124	1.9	4.800	25.000	200	12D41	natural	46
195	124	106	124	1.8	3.400	25.000	200	09L41	natural	46
195	124	142	124	1.4	4.800	25.000	200	12D35	forced	56
195	124	180	124	1.1	8.100	25.000	200	12H35	natural	46
195	120	189	120	1.0	8.100	25.000	200	12H30	natural	46
195	98	102	98	1.9	4.800	20.000	200	12D20	natural	46
195	98	102	98	1.9	4.800	20.000	200	12D20	natural	46
195	89	58	89	3.4	1.600	35.000	200	09D60	natural	46

MPG planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
195	89	78	89	2.5	1.600	35.000	200	09D41	natural	46
195	89	78	89	2.5	1.600	35.000	200	09D41	natural	46
195	89	79	89	2.5	2.000	35.000	200	09F60	natural	46
195	89	101	89	1.9	2.400	35.000	200	09H60	natural	46
195	89	102	89	1.9	2.000	35.000	200	09F38	natural	46
195	89	118	89	1.6	3.300	35.000	200	09L51	natural	46
195	89	125	89	1.6	2.400	35.000	200	09H41	natural	46
195	89	141	89	1.4	4.700	35.000	200	12D41	natural	46
195	89	149	89	1.3	3.300	35.000	200	09L41	natural	46
195	83	132	83	1.5	4.800	20.000	200	12D17	forced	56
195	78	128	78	1.5	4.800	25.000	200	12D20	natural	46
195	78	128	78	1.5	4.800	25.000	200	12D20	natural	46
195	75	194	75	1.0	8.100	20.000	200	12H15	natural	46
195	75	194	75	1.0	8.100	20.000	200	12H15	natural	46
195	70	83	70	2.3	1.600	50.000	200	09D60	natural	46
195	70	112	70	1.7	1.600	50.000	200	09D41	natural	46
195	70	112	70	1.7	1.600	50.000	200	09D41	natural	46
195	70	113	70	1.7	2.000	50.000	200	09F60	natural	46
195	70	144	70	1.4	2.400	50.000	200	09H60	natural	46
195	70	145	70	1.3	2.000	50.000	200	09F38	natural	46
195	70	169	70	1.1	3.300	50.000	200	09L51	natural	46
195	70	179	70	1.1	2.400	50.000	200	09H41	natural	46
195	66	165	66	1.2	4.800	25.000	200	12D17	forced	56
195	56	179	56	1.1	4.700	35.000	200	12D20	natural	46
195	56	179	56	1.1	4.700	35.000	200	12D20	natural	46
200	194	36	194	5.5	2.300	16.000	200	09F60	natural	46
200	194	46	194	4.3	2.700	16.000	200	09H60	natural	46
200	194	46	194	4.3	2.300	16.000	200	09F38	natural	46
200	194	54	194	3.7	3.600	16.000	200	09L51	natural	46
200	194	57	194	3.5	2.700	16.000	200	09H41	natural	46
200	194	65	194	3.1	4.900	16.000	200	12D41	natural	46
200	194	68	194	2.9	3.600	16.000	200	09L41	natural	46
200	194	91	194	2.2	4.900	16.000	200	12D35	forced	56
200	194	115	194	1.7	8.200	16.000	200	12H35	natural	46
200	194	159	194	1.3	8.200	16.000	200	12H34	forced	56
200	194	168	194	1.2	12.000	16.000	200	12L41	natural	46
200	188	121	188	1.6	8.200	16.000	200	12H30	natural	46
200	122	82	122	2.4	4.900	16.000	200	12D20	natural	46
200	122	82	122	2.4	4.900	16.000	200	12D20	natural	46
200	111	47	111	4.3	1.600	28.000	200	09D60	natural	46

6.2.4

MPG planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
200	111	63	111	3.2	1.600	28.000	200	09D41	natural	46
200	111	63	111	3.2	1.600	28.000	200	09D41	natural	46
200	111	64	111	3.1	2.000	28.000	200	09F60	natural	46
200	111	80	111	2.5	2.400	28.000	200	09H60	natural	46
200	111	81	111	2.5	2.000	28.000	200	09F38	natural	46
200	111	95	111	2.1	3.300	28.000	200	09L51	natural	46
200	111	100	111	2.0	2.400	28.000	200	09H41	natural	46
200	111	113	111	1.8	4.700	28.000	200	12D41	natural	46
200	111	119	111	1.7	3.300	28.000	200	09L41	natural	46
200	111	159	111	1.3	4.700	28.000	200	12D35	forced	56
200	103	106	103	1.9	4.900	16.000	200	12D17	forced	56
200	94	155	94	1.3	8.200	16.000	200	12H15	natural	46
200	94	155	94	1.3	8.200	16.000	200	12H15	natural	46
200	84	183	84	1.1	8.200	16.000	200	12H14	forced	56
200	78	67	78	3.0	1.600	40.000	200	09D60	natural	46
200	78	90	78	2.2	1.600	40.000	200	09D41	natural	46
200	78	90	78	2.2	1.600	40.000	200	09D41	natural	46
200	78	91	78	2.2	2.000	40.000	200	09F60	natural	46
200	78	115	78	1.7	2.400	40.000	200	09H60	natural	46
200	78	116	78	1.7	2.000	40.000	200	09F38	natural	46
200	78	135	78	1.5	3.300	40.000	200	09L51	natural	46
200	78	143	78	1.4	2.400	40.000	200	09H41	natural	46
200	78	161	78	1.2	4.600	40.000	200	12D41	natural	46
200	78	170	78	1.2	3.300	40.000	200	09L41	natural	46
200	70	143	70	1.4	4.700	28.000	200	12D20	natural	46
200	70	143	70	1.4	4.700	28.000	200	12D20	natural	46
200	59	185	59	1.1	4.700	28.000	200	12D17	forced	56
269	181	91	181	4.3	7.200	16.000	300	12D35	forced	59
269	103	106	103	3.7	7.200	16.000	300	12D17	forced	59
274	122	82	122	4.8	7.200	16.000	300	12D20	natural	50
274	122	82	122	4.8	7.200	16.000	300	12D20	natural	50
336	145	113	145	3.4	6.800	20.000	300	12D35	forced	59
336	83	132	83	3.0	6.800	20.000	300	12D17	forced	59
342	145	81	145	4.8	6.800	20.000	300	12D41	natural	50
342	98	102	98	3.8	6.800	20.000	300	12D20	natural	50
342	98	102	98	3.8	6.800	20.000	300	12D20	natural	50
380	46	282	46	1.4	6.200	70.000	300	12D41	natural	50
380	28	358	28	1.1	6.200	70.000	300	12D20	natural	50
380	28	358	28	1.1	6.200	70.000	300	12D20	natural	50
390	181	113	181	3.5	12.000	16.000	300	14D36	natural	50

MPG planetary geared motors

Technical data



Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
390	181	115	181	3.4	10.000	16.000	300	12H35	natural	50
390	181	121	181	3.2	10.000	16.000	300	12H30	natural	50
390	181	159	181	2.5	10.000	16.000	300	12H34	forced	59
390	181	160	181	2.4	12.000	16.000	300	14D30	forced	59
390	181	168	181	2.3	14.000	16.000	300	12L41	natural	50
390	181	212	181	1.8	18.000	16.000	300	14H32	natural	50
390	181	212	181	1.8	14.000	16.000	300	12L39	forced	59
390	181	261	181	1.5	27.000	16.000	300	14L32	natural	50
390	181	319	181	1.2	71.000	16.000	300	19F30	natural	50
390	181	320	181	1.2	38.000	16.000	300	14P32	natural	50
390	181	387	181	1.0	27.000	16.000	300	14L30	forced	59
390	173	314	173	1.2	18.000	16.000	300	14H28	forced	59
390	145	141	145	2.8	11.000	20.000	300	14D36	natural	50
390	145	144	145	2.7	10.000	20.000	300	12H35	natural	50
390	145	151	145	2.6	10.000	20.000	300	12H30	natural	50
390	145	199	145	2.0	10.000	20.000	300	12H34	forced	59
390	145	200	145	1.9	11.000	20.000	300	14D30	forced	59
390	145	211	145	1.9	13.000	20.000	300	12L41	natural	50
390	145	264	145	1.5	17.000	20.000	300	14H32	natural	50
390	145	265	145	1.5	13.000	20.000	300	12L39	forced	59
390	145	326	145	1.2	27.000	20.000	300	14L32	natural	50
390	122	208	122	1.9	14.000	16.000	300	12L20	natural	50
390	122	208	122	1.9	14.000	16.000	300	12L20	natural	50
390	116	101	116	3.9	6.700	25.000	300	12D41	natural	50
390	116	142	116	2.8	6.700	25.000	300	12D35	forced	59
390	116	176	116	2.2	11.000	25.000	300	14D36	natural	50
390	116	180	116	2.2	10.000	25.000	300	12H35	natural	50
390	116	189	116	2.1	10.000	25.000	300	12H30	natural	50
390	116	249	116	1.6	11.000	25.000	300	14D30	forced	59
390	116	249	116	1.6	10.000	25.000	300	12H34	forced	59
390	116	263	116	1.5	13.000	25.000	300	12L41	natural	50
390	116	331	116	1.2	17.000	25.000	300	14H32	natural	50
390	116	331	116	1.2	13.000	25.000	300	12L39	forced	59
390	104	113	104	3.5	6.400	28.000	300	12D41	natural	50
390	104	159	104	2.5	6.400	28.000	300	12D35	forced	59
390	104	198	104	2.0	11.000	28.000	300	14D36	natural	50
390	104	202	104	1.9	9.700	28.000	300	12H35	natural	50
390	104	212	104	1.8	9.700	28.000	300	12H30	natural	50
390	104	278	104	1.4	9.700	28.000	300	12H34	forced	59
390	104	279	104	1.4	11.000	28.000	300	14D30	forced	59

6.2.4

MPG planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCS		
390	104	295	104	1.3	13.000	28.000	300	12L41	natural	50
390	104	370	104	1.1	17.000	28.000	300	14H32	natural	50
390	104	371	104	1.1	13.000	28.000	300	12L39	forced	59
390	103	255	103	1.5	14.000	16.000	300	12L17	forced	59
390	98	261	98	1.5	13.000	20.000	300	12L20	natural	50
390	98	261	98	1.5	13.000	20.000	300	12L20	natural	50
390	94	140	94	2.8	12.000	16.000	300	14D15	natural	50
390	94	155	94	2.5	10.000	16.000	300	12H15	natural	50
390	94	155	94	2.5	10.000	16.000	300	12H15	natural	50
390	94	242	94	1.6	18.000	16.000	300	14H15	natural	50
390	94	348	94	1.1	27.000	16.000	300	14L15	natural	50
390	84	183	84	2.1	10.000	16.000	300	12H14	forced	59
390	84	183	84	2.1	12.000	16.000	300	14D14	forced	59
390	83	141	83	2.8	6.400	35.000	300	12D41	natural	50
390	83	198	83	2.0	6.400	35.000	300	12D35	forced	59
390	83	247	83	1.6	11.000	35.000	300	14D36	natural	50
390	83	252	83	1.6	9.700	35.000	300	12H35	natural	50
390	83	265	83	1.5	9.700	35.000	300	12H30	natural	50
390	83	319	83	1.2	13.000	20.000	300	12L17	forced	59
390	83	348	83	1.1	9.700	35.000	300	12H34	forced	59
390	83	349	83	1.1	11.000	35.000	300	14D30	forced	59
390	83	368	83	1.1	13.000	35.000	300	12L41	natural	50
390	78	128	78	3.0	6.700	25.000	300	12D20	natural	50
390	78	128	78	3.0	6.700	25.000	300	12D20	natural	50
390	78	326	78	1.2	13.000	25.000	300	12L20	natural	50
390	78	326	78	1.2	13.000	25.000	300	12L20	natural	50
390	75	175	75	2.2	11.000	20.000	300	14D15	natural	50
390	75	194	75	2.0	10.000	20.000	300	12H15	natural	50
390	75	194	75	2.0	10.000	20.000	300	12H15	natural	50
390	75	302	75	1.3	17.000	20.000	300	14H15	natural	50
390	75	363	75	1.1	18.000	16.000	300	14H12	forced	59
390	73	161	73	2.4	6.200	40.000	300	12D41	natural	50
390	73	226	73	1.7	6.200	40.000	300	12D35	forced	59
390	73	282	73	1.4	11.000	40.000	300	14D36	natural	50
390	73	288	73	1.4	9.500	40.000	300	12H35	natural	50
390	73	302	73	1.3	9.500	40.000	300	12H30	natural	50
390	70	143	70	2.7	6.400	28.000	300	12D20	natural	50
390	70	143	70	2.7	6.400	28.000	300	12D20	natural	50
390	70	365	70	1.1	13.000	28.000	300	12L20	natural	50
390	70	365	70	1.1	13.000	28.000	300	12L20	natural	50

MPG planetary geared motors

Technical data



Selection tables

2-stage gearboxes

M_{2, max} [Nm]	n_{2, th} [r/min]	Inverter operation				i	MPG	Product MCS	Cooling	
		M₂ [Nm]	n_{2, eto} [r/min]	c	J [kgcm²]					
390	68	228	68	1.7	10.000	20.000	300	12H14	forced	59
390	68	228	68	1.7	11.000	20.000	300	14D14	forced	59
390	66	165	66	2.4	6.700	25.000	300	12D17	forced	59
390	64	202	64	1.9	6.200	50.000	300	12D41	natural	50
390	64	283	64	1.4	6.200	50.000	300	12D35	forced	59
390	64	360	64	1.1	9.500	50.000	300	12H35	natural	50
390	60	219	60	1.8	11.000	25.000	300	14D15	natural	50
390	60	242	60	1.6	10.000	25.000	300	12H15	natural	50
390	60	242	60	1.6	10.000	25.000	300	12H15	natural	50
390	60	378	60	1.0	9.500	50.000	300	12H30	natural	50
390	60	378	60	1.0	17.000	25.000	300	14H15	natural	50
390	59	185	59	2.1	6.400	28.000	300	12D17	forced	59
390	58	353	58	1.1	11.000	50.000	300	14D36	natural	50
390	56	179	56	2.2	6.400	35.000	300	12D20	natural	50
390	56	179	56	2.2	6.400	35.000	300	12D20	natural	50
390	54	246	54	1.6	11.000	28.000	300	14D15	natural	50
390	54	271	54	1.4	9.700	28.000	300	12H15	natural	50
390	54	271	54	1.4	9.700	28.000	300	12H15	natural	50
390	54	286	54	1.4	10.000	25.000	300	12H14	forced	59
390	54	286	54	1.4	11.000	25.000	300	14D14	forced	59
390	49	205	49	1.9	6.200	40.000	300	12D20	natural	50
390	49	205	49	1.9	6.200	40.000	300	12D20	natural	50
390	48	320	48	1.2	9.700	28.000	300	12H14	forced	59
390	48	320	48	1.2	11.000	28.000	300	14D14	forced	59
390	47	231	47	1.7	6.400	35.000	300	12D17	forced	59
390	43	307	43	1.3	11.000	35.000	300	14D15	natural	50
390	43	339	43	1.1	9.700	35.000	300	12H15	natural	50
390	43	339	43	1.1	9.700	35.000	300	12H15	natural	50
390	41	264	41	1.5	6.200	40.000	300	12D17	forced	59
390	39	256	39	1.5	6.200	50.000	300	12D20	natural	50
390	39	256	39	1.5	6.200	50.000	300	12D20	natural	50
390	38	351	38	1.1	11.000	40.000	300	14D15	natural	50
390	38	387	38	1.0	9.500	40.000	300	12H15	natural	50
390	38	387	38	1.0	9.500	40.000	300	12H15	natural	50
390	33	330	33	1.2	6.200	50.000	300	12D17	forced	59

6.2.4

MPG planetary geared motors




Technical data

Dimensions, notes

Notes on the dimensions

The following legend shows the layout of the dimension sheets.

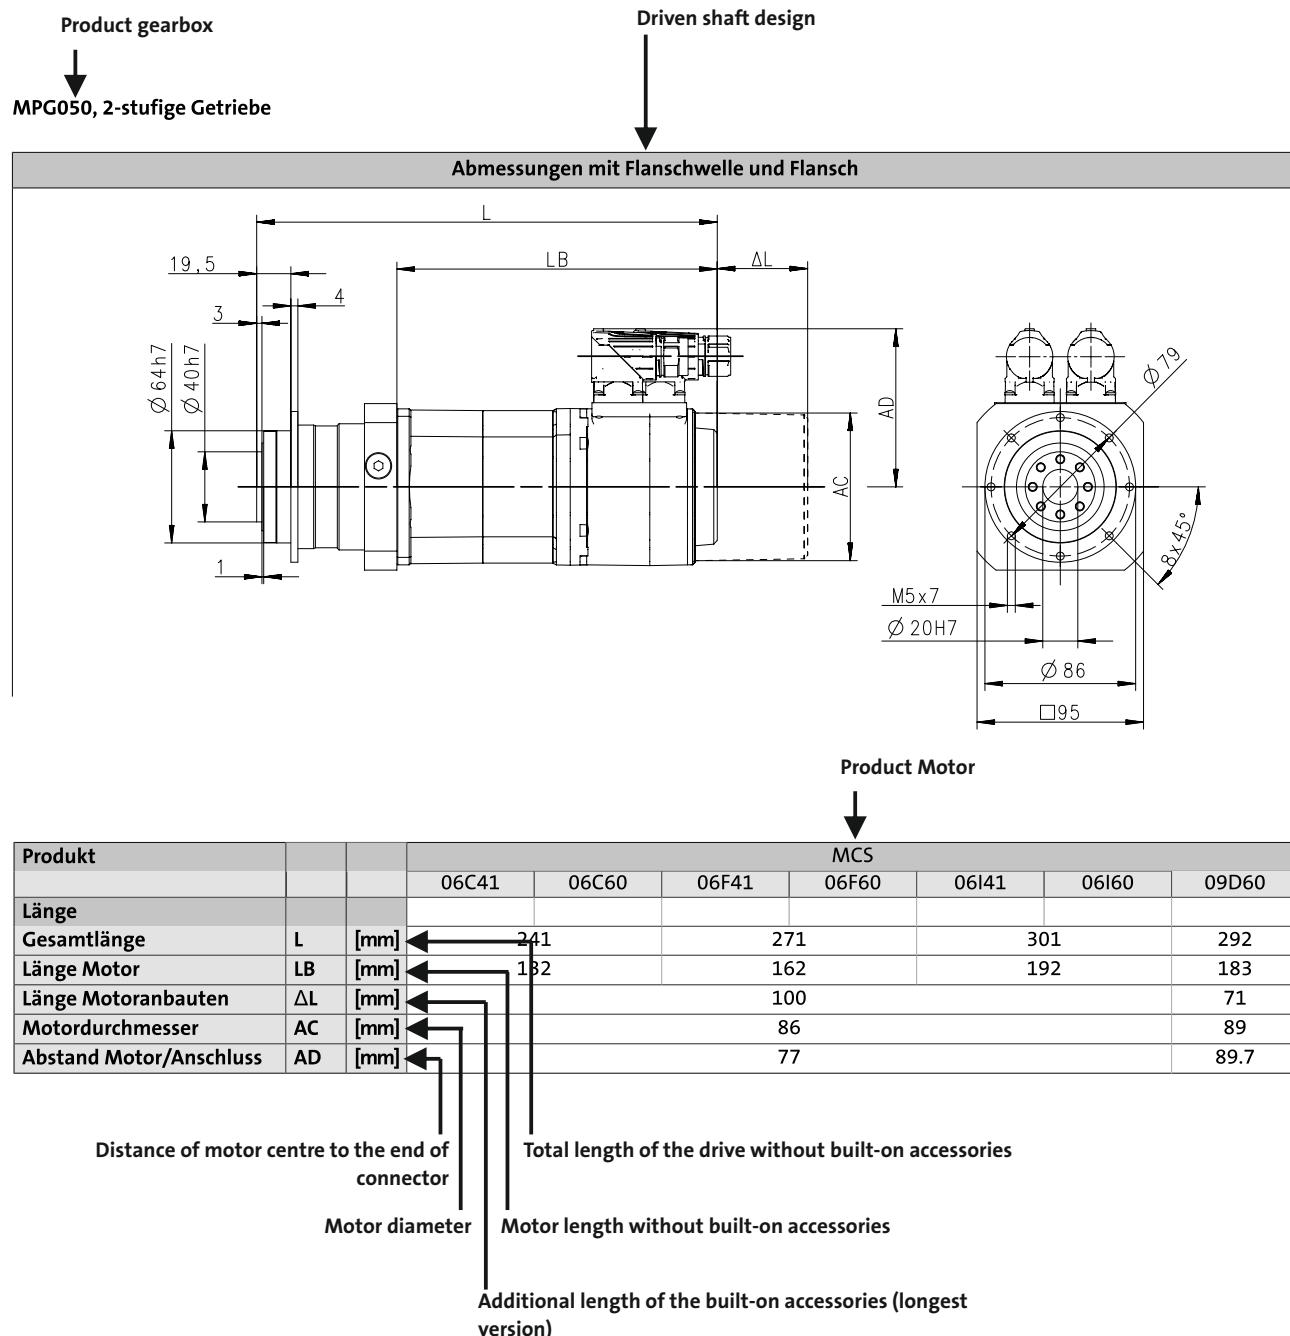

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG050, 1-stage gearboxes

3	4	5	6
Dimensions with flange shaft and Flange			

6.2.4

8800237-00

Product			MCS							
Length			06C41	06C60	06F41	06F60	06I41	06I60	09D41	09D60
Total length	L	[mm]		212		242		272		263
Motor length	LB	[mm]		132		162		192		183
Length of motor options	Δ L	[mm]			100				71	
Motor diameter	AC	[mm]			86				89	
Distance motor/connection	AD	[mm]			77				89.7	

				Allgemeintoleranzen general tolerance nach: 6.2.4 - 37	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG050, 1-stage gearboxes

3	4	5	6
Dimensions with flange shaft and Flange			
6.2.4			8800237-00

Product			MCS							
Length			09F38	09F60	09H41	09H60	09L41	09L51	12D20	12D41
Total length	L	[mm]	283		303		343		277	
Motor length	LB	[mm]	203		223		263		188	
Length of motor options	Δ L	[mm]			71				69	
Motor diameter	AC	[mm]			89				116	
Distance motor/connection	AD	[mm]			89.7				105	

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V00-en_GB-04/2014		
				Datum/date	Name	Benennung

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG050, 2-stage gearboxes

3 4 5 6

Dimensions with flange shaft and Flange

19,5

3

4

$\varnothing\ 64\ h7$

$\varnothing\ 40\ h7$

1

L

LB

ΔL

AD

AC

M5 x 7

$\varnothing\ 20H7$

$\varnothing\ 86$

□ 95

$\varnothing\ 19$

$8 \times 45^\circ$

6.2.4

8800237-00

Product			MCS					
			06C41	06C60	06F41	06F60	06I41	06I60
Length								
Total length	L	[mm]	241		271		301	292
Motor length	LB	[mm]	132		162		192	183
Length of motor options	Δ L	[mm]			100			71
Motor diameter	AC	[mm]			86			89
Distance motor/connection	AD	[mm]			77			89.7

				Allgemeintoleranzen general tolerance nach: 6.2.4 - 39	Oberflächen/ surface	
						Werkst...
						Rohte...
					Datum/date	Name
						Benenn...


MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG100, 1-stage gearboxes

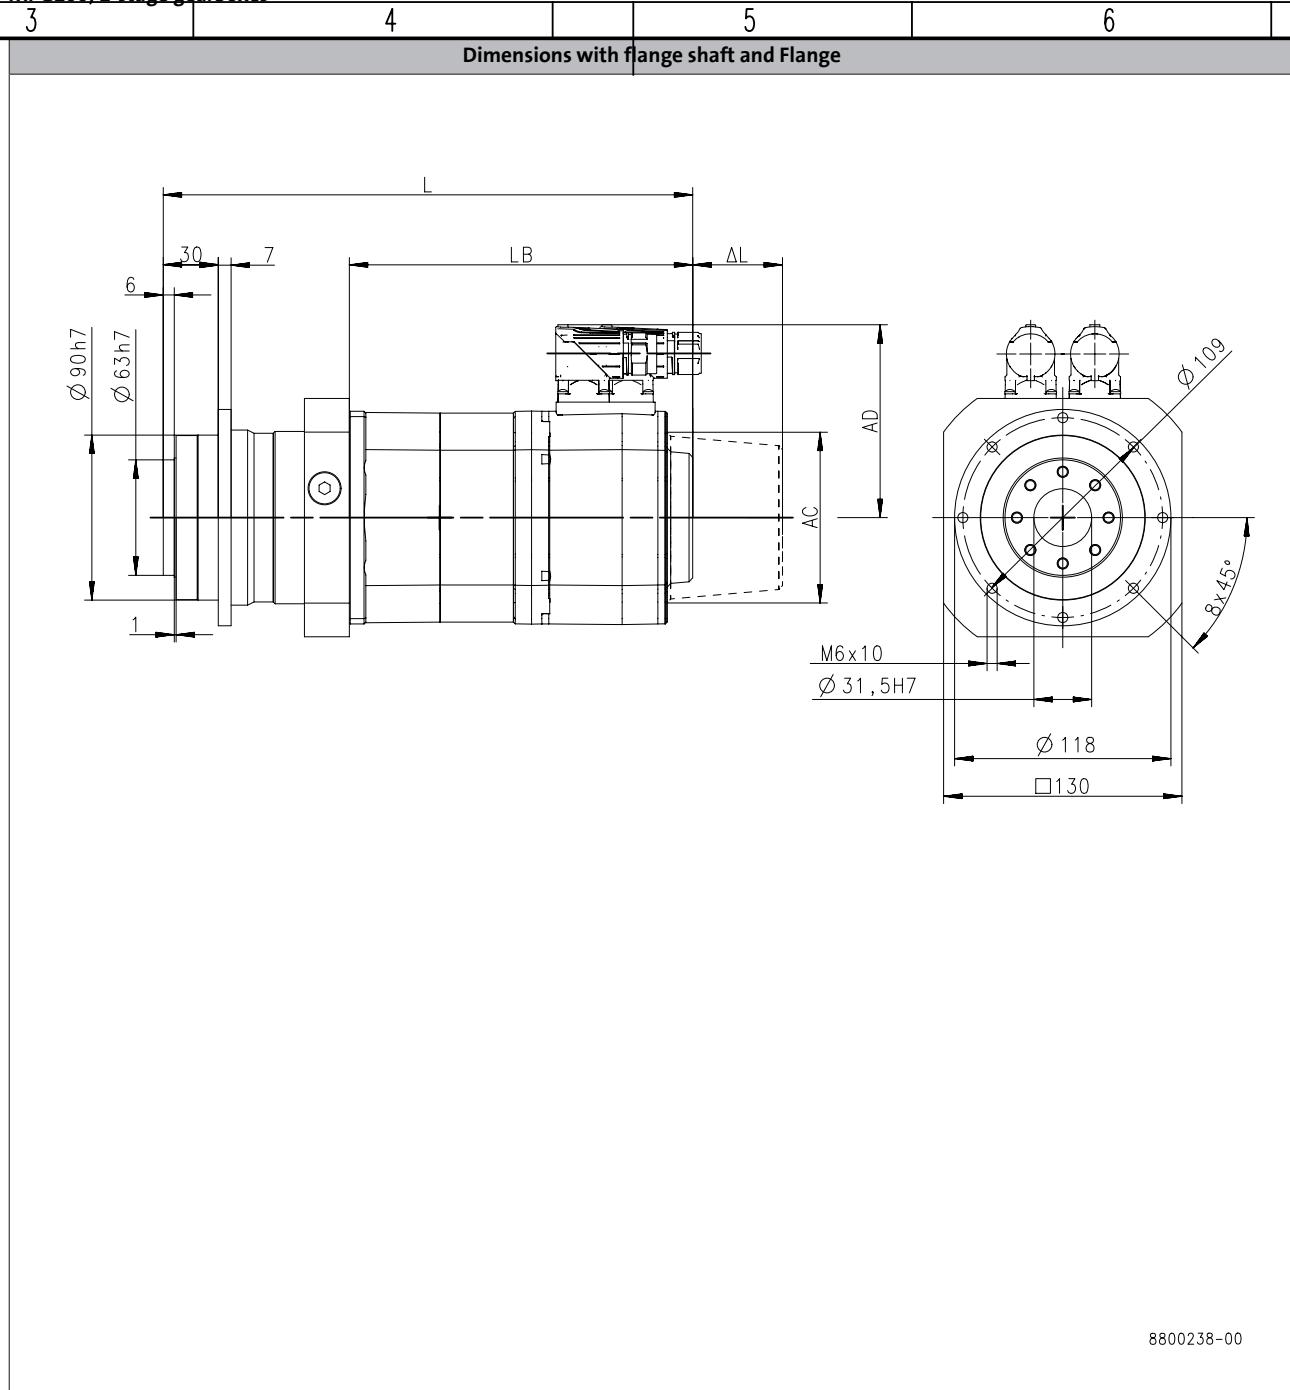

Product			MCS							
			09D41	09D60	09F38	09F60	09H41	09H60	09L41	09L51
Length										
Total length	L	[mm]		285		305		325		365
Motor length	LB	[mm]		183		203		223		263
Length of motor options	Δ L	[mm]				71				
Motor diameter	AC	[mm]				89				
Distance motor/connection	AD	[mm]				89.7				

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	Werksto Rohtei
				nach: Lenze V00-en_GB-04/2014		
				Datum/date	Name	

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG100, 1-stage gearboxes

Dimensions with flange shaft and Flange

Front View Dimensions:

- Total length: $L = 180$
- Front bearing width: $LB = 110$
- Rear bearing width: $\Delta L = 10$
- Shoulder height: $AC = 10$
- Shoulder height: $AD = 10$
- Shoulder width: $M6 \times 10$
- Shoulder diameter: $\varnothing 31,5H7$
- Shaft shoulder height: 1
- Shaft shoulder diameter: $\varnothing 63h7$
- Shaft shoulder height: 6
- Shaft shoulder height: 30
- Shaft shoulder height: 7
- Shaft shoulder height: 1

Flange Dimensions:

- Outer diameter: $\varnothing 118$
- Thickness: $\Delta D = 10$
- Width: $\Delta B = 130$
- Angle: $8 \times 45^\circ$

Product			MCS								
			12D20	12D41	12H15	12H30	12H35	12L20	12L41	14D15	14D36
Length											
Total length	L	[mm]	290			330			370		313
Motor length	LB	[mm]		188		228			268		201
Length of motor options	Δ L	[mm]				69					78
Motor diameter	AC	[mm]				116					143
Distance motor/connection	AD	[mm]				105					116.5

				Allgemeintoleranzen general tolerance nach: 6.2.4-41	Oberflächen/ surface	
						Werkst...
						Rohte...
					Datum/date	Name
						Benenn...


MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG100, 2-stage gearboxes

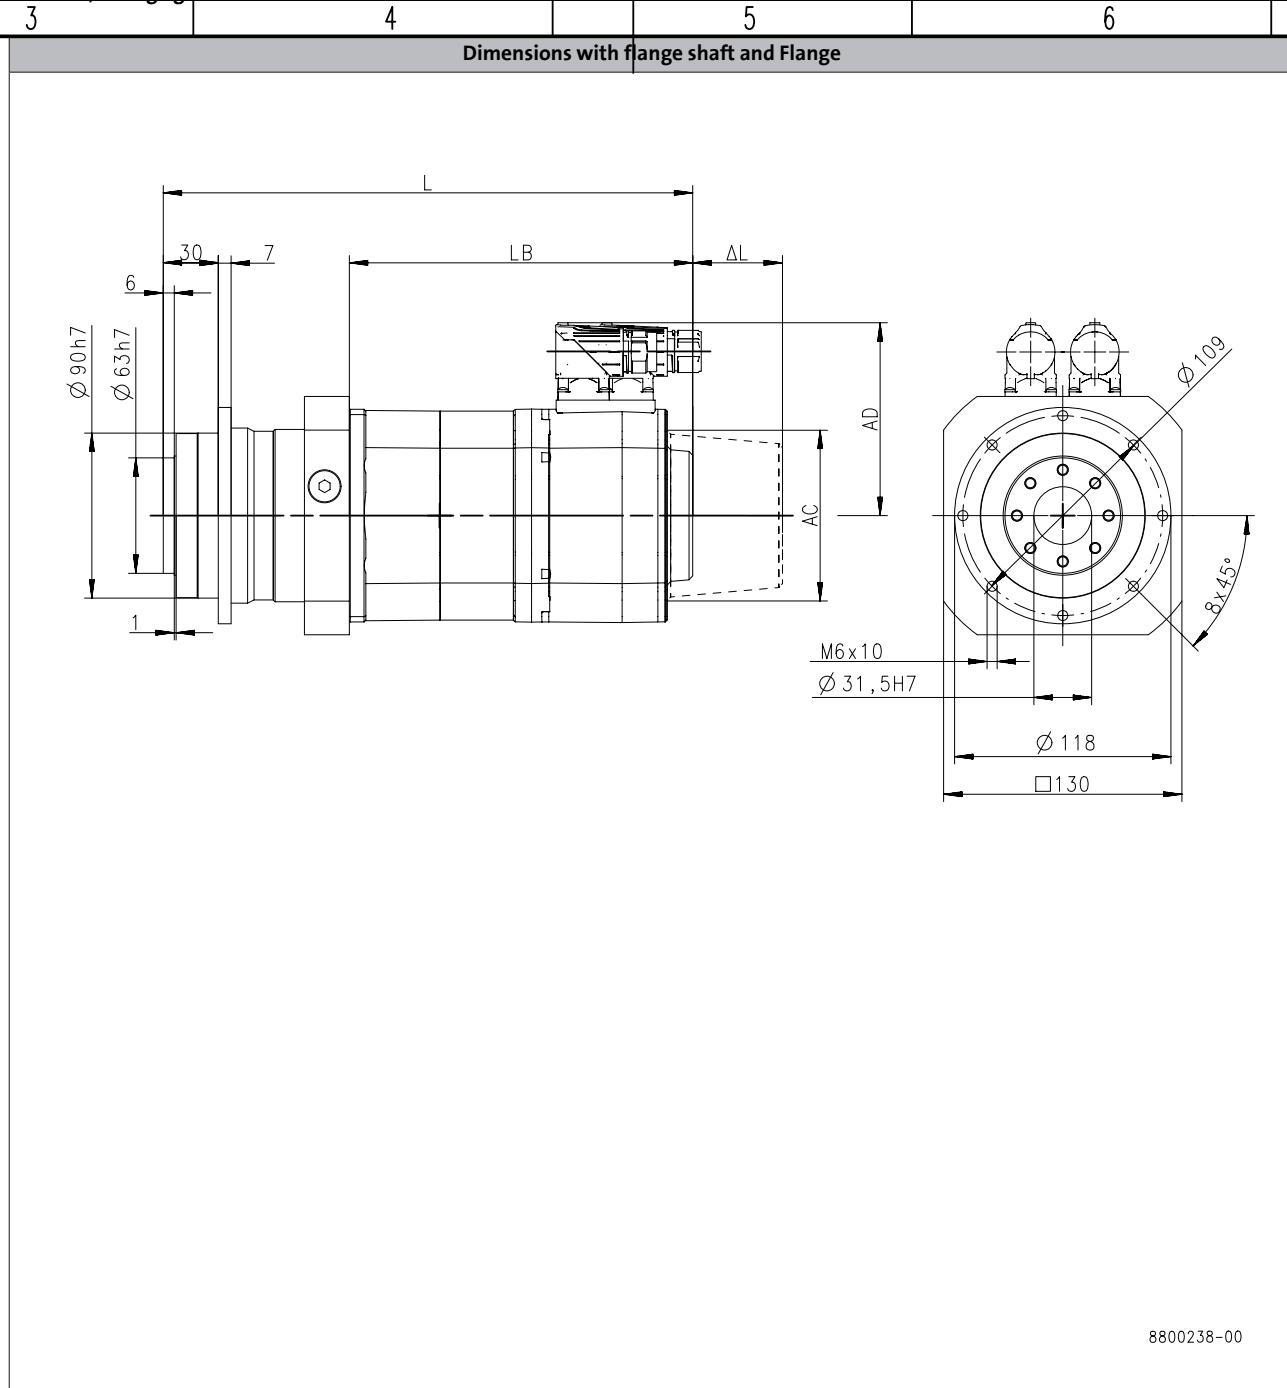

Product			MCS						
			06C41	06C60	06F41	06F60	06I41	06I60	09D41
Length									
Total length	L	[mm]	254		284		314		305
Motor length	LB	[mm]	132		162		192		183
Length of motor options	ΔL	[mm]			100			71	
Motor diameter	AC	[mm]			86			89	
Distance motor/connection	AD	[mm]			77			89.7	

				Allgemeintoleranzen general tolerance nach: Lenze V00-en_GB-04/2014	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG100, 2-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

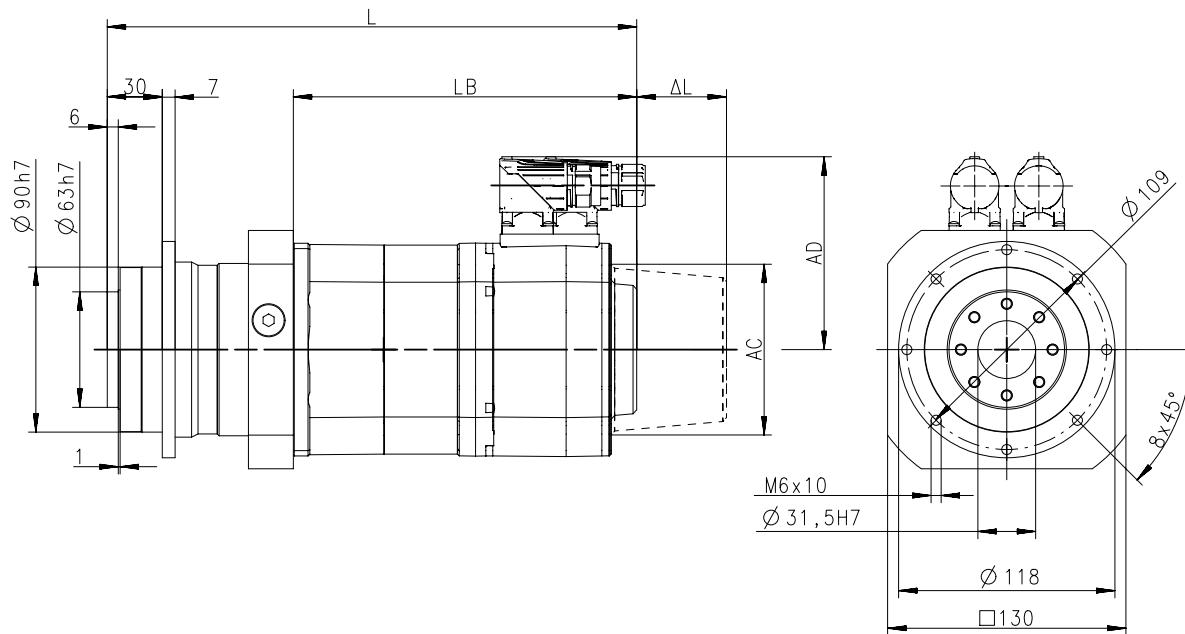

6.2.4

8800238-00

Product			MCS					
Length			09D60	09F38	09F60	09H41	09H60	09L41
Total length	L	[mm]	305	325		345		385
Motor length	LB	[mm]	183	203		223		263
Length of motor options	Δ L	[mm]			71			
Motor diameter	AC	[mm]			89			
Distance motor/connection	AD	[mm]			89.7			

				Allgemeintoleranzen general tolerance nach: 6.2.4 - 43	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG200, 1-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

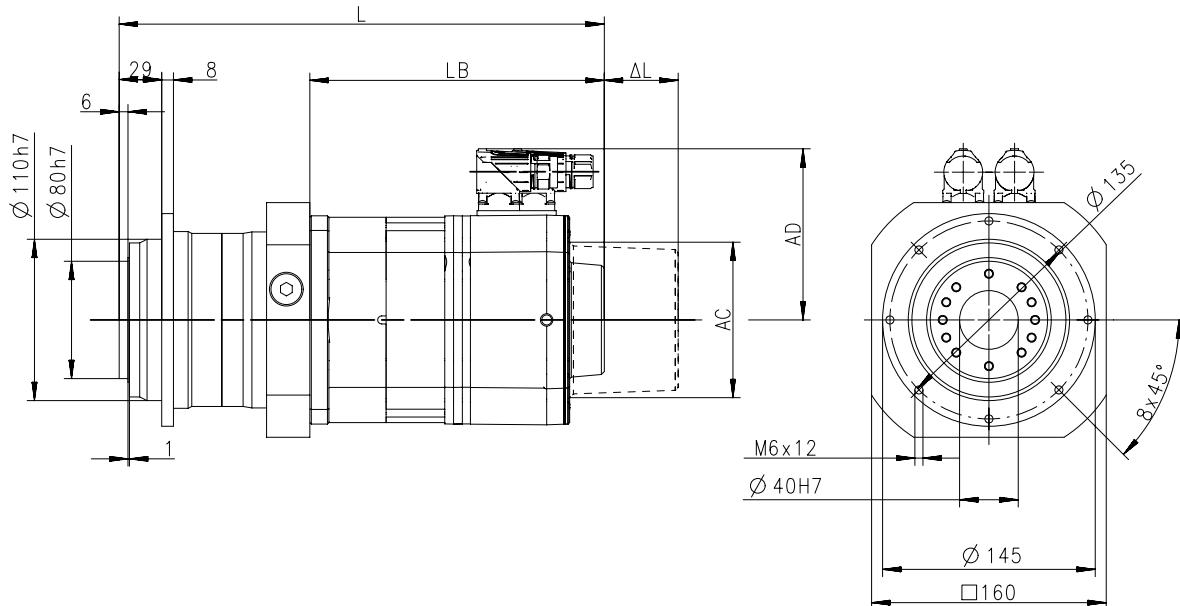

6.2.4

8800239-00

Product			MCS								
			12D20	12D41	12H15	12H30	12H35	12L20	12L41	14D15	14D36
Length											
Total length	L	[mm]	318		358		398		331		
Motor length	LB	[mm]	188		228		268		201		
Length of motor options	Δ L	[mm]			69				78		
Motor diameter	AC	[mm]			116				143		
Distance motor/connection	AD	[mm]			105				116.5		

				Allgemeintoleranzen general tolerance nach: Lenze V00-en_GB-04/2014	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG200, 1-stage gearboxes

Dimensions with flange shaft and Flange

3 4 5 6

$\varnothing 110\text{h}7$

$\varnothing 80\text{h}7$

6

29

8

L

LB

ΔL

1

AC

AD

M6x12

$\varnothing 40\text{H}7$

$\varnothing 135$

$8 \times 45^\circ$

$\varnothing 145$

□160

8800239-00

6.2.4

8800239-00

Product			MCS								
			14H15	14H32	14L15	14L32	14P14	14P32	19F14	19F30	19J14
Length											
Total length	L	[mm]	371		411		451		350		390
Motor length	LB	[mm]	241		281		321		220		260
Length of motor options	Δ L	[mm]			78				83		93
Motor diameter	AC	[mm]			143					192	
Distance motor/connection	AD	[mm]	116.5		146	116.5	146	141.5	171	141.5	171

				Allgemeintoleranzen general tolerance nach: 6.2.4 - 45	Oberflächen/ surface	 Werkst. Rohteil

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG200, 2-stage gearboxes

Dimensions with flange shaft and Flange

3 4 5 6

Dimensions:

- Shaft diameter: $\varnothing 110\text{h}7$
- Shaft shoulder height: 6
- Shaft shoulder width: 29
- Shaft shoulder distance from base: 8
- Shaft shoulder distance from top: 1
- Housing width: LB
- Flange width: ΔL
- Flange thickness: AC
- Flange outer diameter: $\varnothing 135$
- Flange inner hole diameter: $\varnothing 40\text{H}7$
- Flange mounting holes: M6x12
- Flange side width: 160

Notes:

- 8x45°

Product			MCS					
			09D41	09D60	09F38	09F60	09H41	09H60
Length								
Total length	L	[mm]	327		347		367	407
Motor length	LB	[mm]	183		203		223	263
Length of motor options	Δ L	[mm]			71			
Motor diameter	AC	[mm]			89			
Distance motor/connection	AD	[mm]			89.7			

				Allgemeintoleranzen general tolerance nach: Lenze V00-en_GB-04/2014	Oberflächen/ surface	Werkst. Rohhei

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG200, 2-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

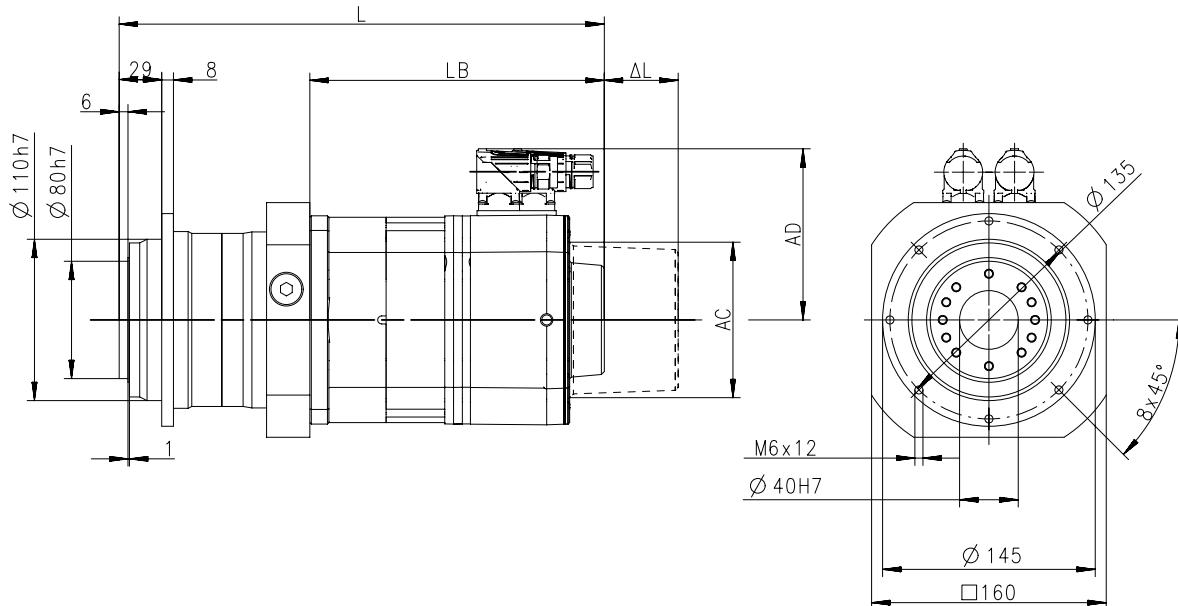

6.2.4

8800239-00

Product			MCS						
			09L51	12D20	12D41	12H15	12H30	12H35	12L41
Length									
Total length	L	[mm]	407	332		372			412
Motor length	LB	[mm]	263	188		228			268
Length of motor options	Δ L	[mm]	71		69				
Motor diameter	AC	[mm]	89		116				
Distance motor/connection	AD	[mm]	89.7		105				

				Allgemeintoleranzen general tolerance nach: 6.2.4 - 47	Oberflaechen/ surface	 Werkstoff Rohteil

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG300, 1-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

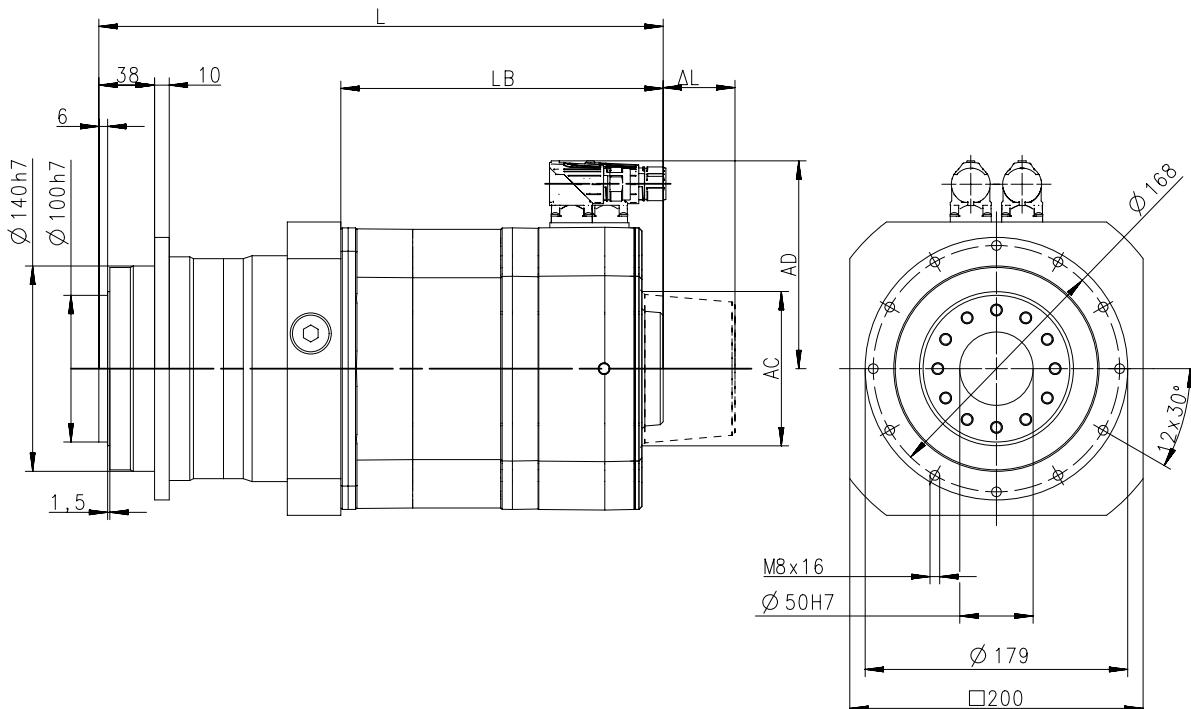

6.2.4

8800240-00

Product			MCS						
			14D15	14D36	14H15	14H32	14L15	14L32	14P14
Length									
Total length	L	[mm]		366		406		446	486
Motor length	LB	[mm]	201		241		281		321
Length of motor options	ΔL	[mm]				78			
Motor diameter	AC	[mm]				143			
Distance motor/connection	AD	[mm]			116.5		146	116.5	

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V00-en_GB-04/2014		

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG300, 1-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

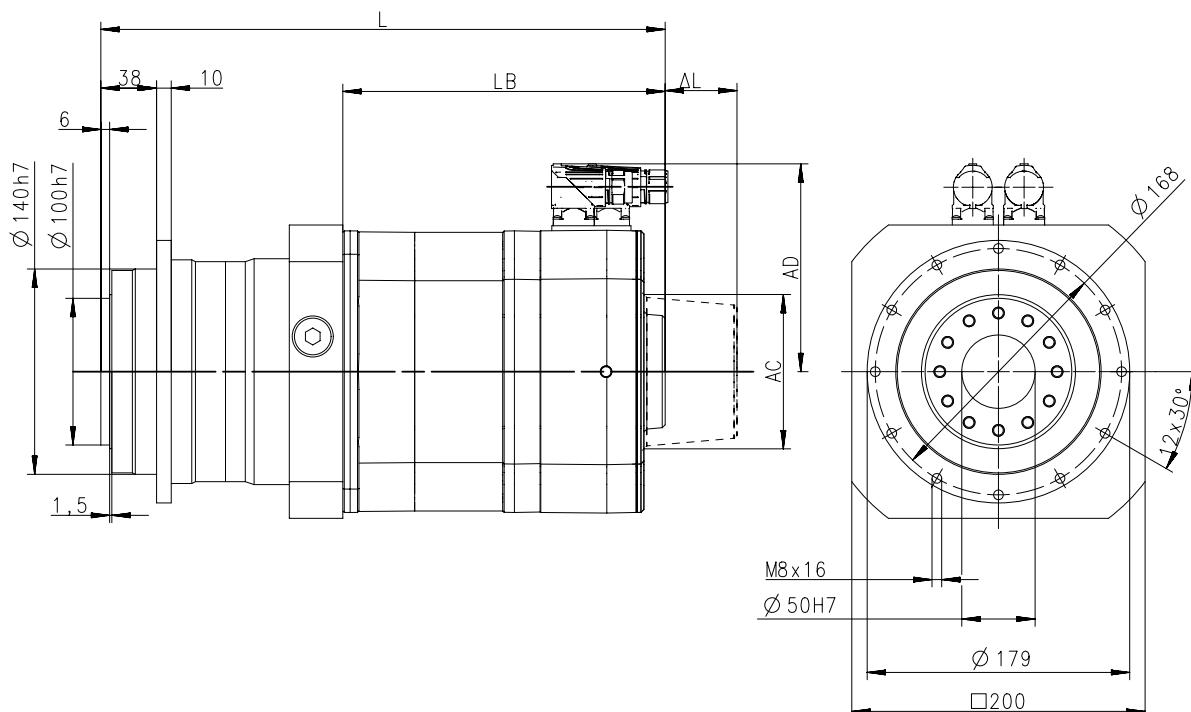

6.2.4

8800240-00

Product			MCS						
			14P32	19F14	19F30	19J14	19J30	19P14	19P30
Length									
Total length	L	[mm]	486	385		425		485	
Motor length	LB	[mm]	321	220		260		320	
Length of motor options	Δ L	[mm]	78	83		93			
Motor diameter	AC	[mm]	143		192				
Distance motor/connection	AD	[mm]	146	141.5	171	141.5	171	141.5	171

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG300, 2-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

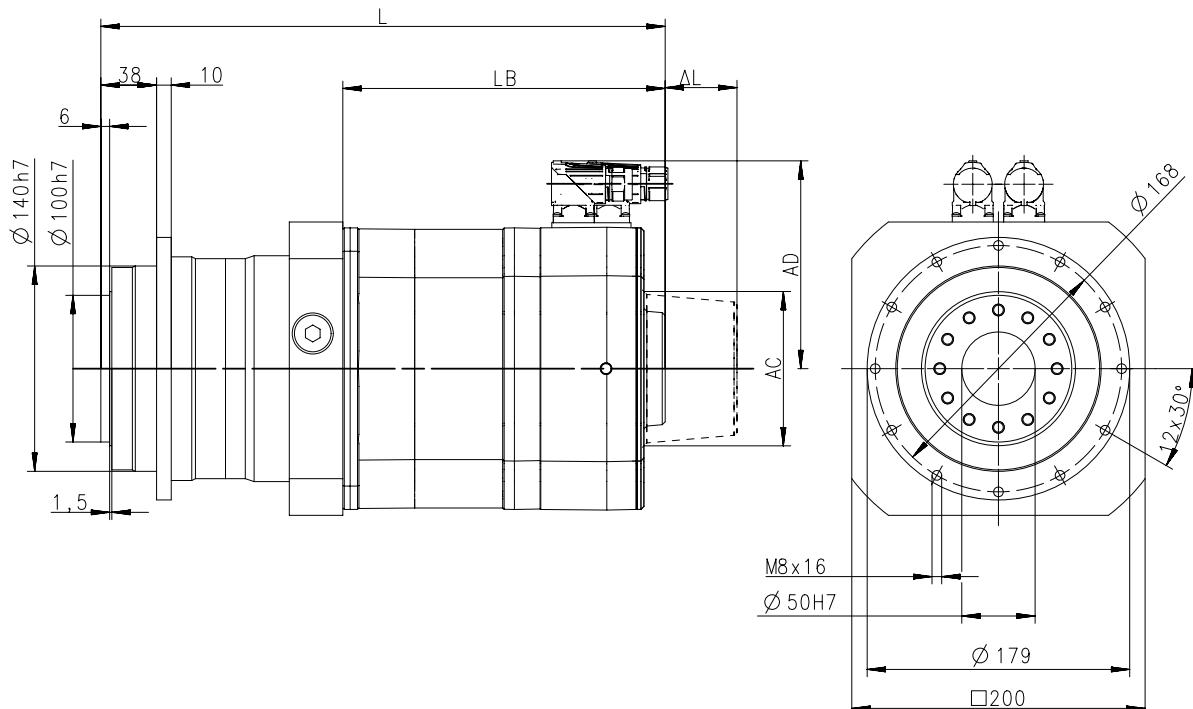

6.2.4

8800240-00

Product			MCS						
			12D20	12D41	12H15	12H30	12H35	12L20	12L41
Length									
Total length	L	[mm]	372			412		452	
Motor length	LB	[mm]	188			228		268	
Length of motor options	ΔL	[mm]			69				
Motor diameter	AC	[mm]			116				
Distance motor/connection	AD	[mm]			105				

6.2.4 - 50

				Allgemeintoleranzen general tolerance nach: Lenze V00-en_GB-04/2014	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG300, 2-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

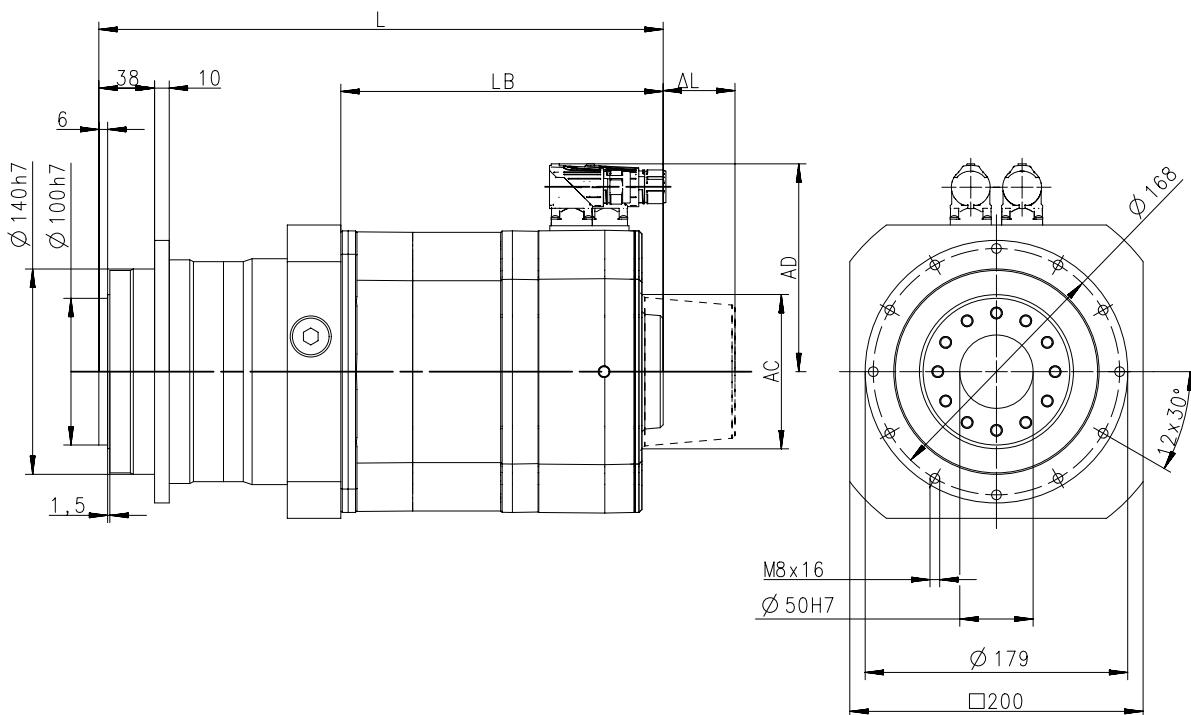

6.2.4

8800240-00

Product			MCS							
			14D15	14D36	14H15	14H32	14L15	14L32	14P32	19F30
Length										
Total length	L	[mm]	385		425		465		505	404
Motor length	LB	[mm]	201		241		281		321	220
Length of motor options	Δ L	[mm]			78				83	
Motor diameter	AC	[mm]			143				192	
Distance motor/connection	AD	[mm]			116.5			146		171

				Allgemeintoleranzen general tolerance nach: 6.2.4 - 51	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG050, 1-stage gearboxes

3 4 5 6

Dimensions with flange shaft and Flange

$\varnothing 64\text{ h}7$

$\varnothing 40\text{ h}7$

1

19,5

3

4

L

LB

ΔL

AD

AC

M5x7

$\varnothing 20\text{ H}7$

$\varnothing 19$


8 x 45°

$\varnothing 86$

□ 95

8800237-00

Product			MCS	
			12D17	12D35
Length				
Total length	L	[mm]	350	
Motor length	LB	[mm]	261	
Length of motor options	Δ L	[mm]	63	
Motor diameter	AC	[mm]	140	
Distance motor/connection	AD	[mm]	105	

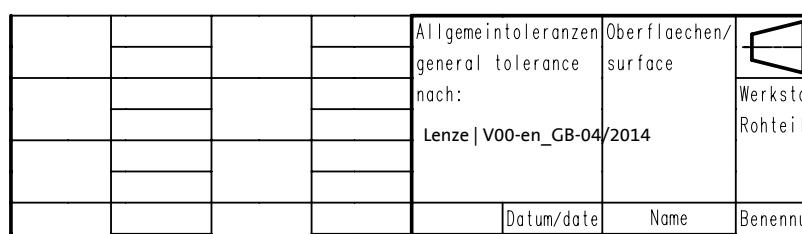

MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG100, 1-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

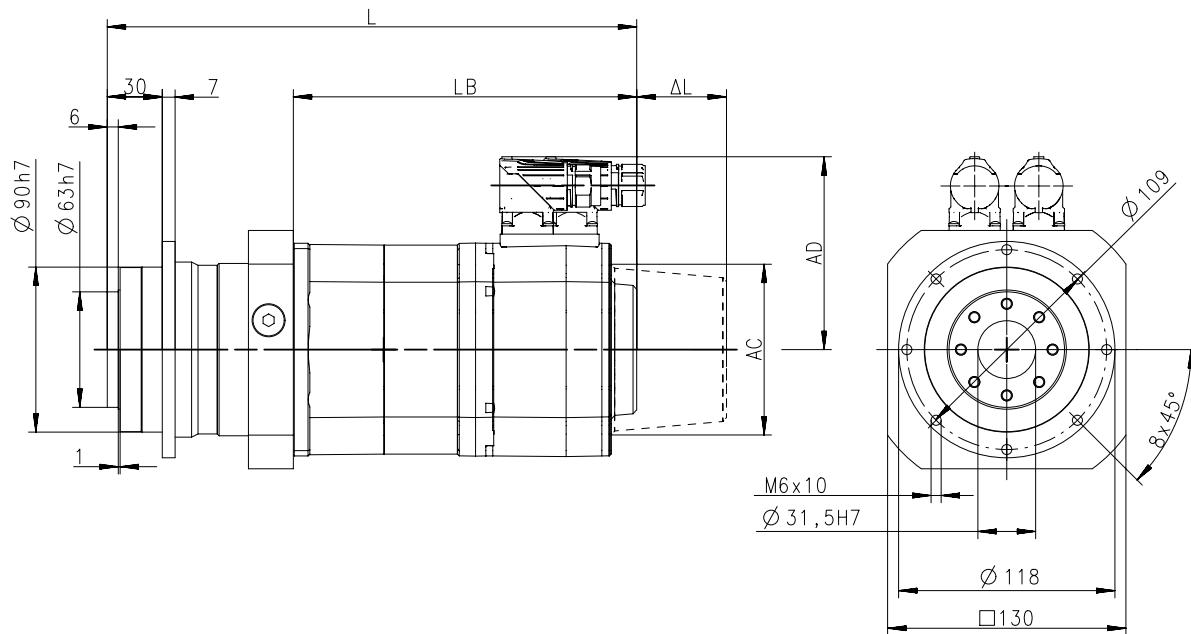

6.2.4

8800238-00

Product			MCS							
Length			12D17	12D35	12H14	12H34	12L17	12L39	14D14	14D30
Total length	L	[mm]		363		403		443		401
Motor length	LB	[mm]		261		301		341		289
Length of motor options	Δ L	[mm]			63				81.5	
Motor diameter	AC	[mm]				140			167	
Distance motor/connection	AD	[mm]					105			116.5

				Allgemeintoleranzen general tolerance nach: 6.2.4 - 53	Oberflaechen/ surface	


MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG200, 1-stage gearboxes

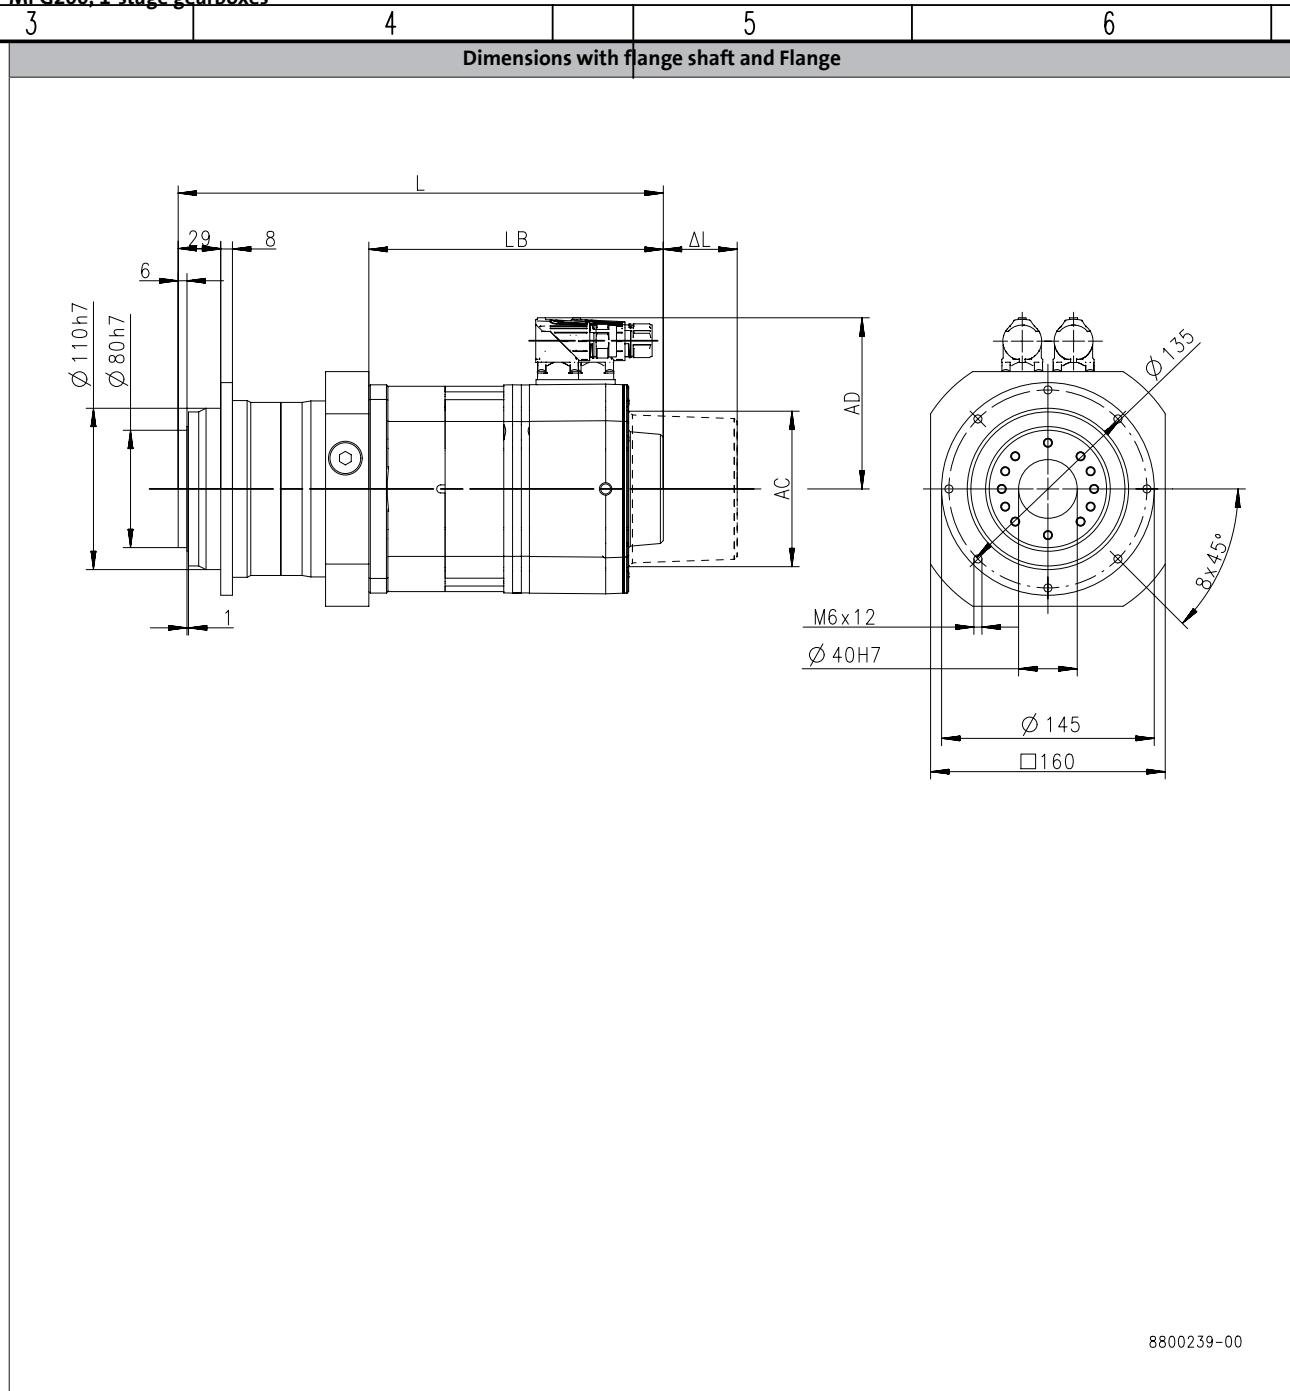

Product			MCS							
			12D17	12D35	12H14	12H34	12L17	12L39	14D14	14D30
Length										
Total length	L	[mm]		391		431		471		419
Motor length	LB	[mm]		261		301		341		289
Length of motor options	Δ L	[mm]			63				81.5	
Motor diameter	AC	[mm]			140				167	
Distance motor/connection	AD	[mm]			105				116.5	

				Allgemeintoleranzen general tolerance nach: Lenze V00-en_GB-04/2014	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG200, 1-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

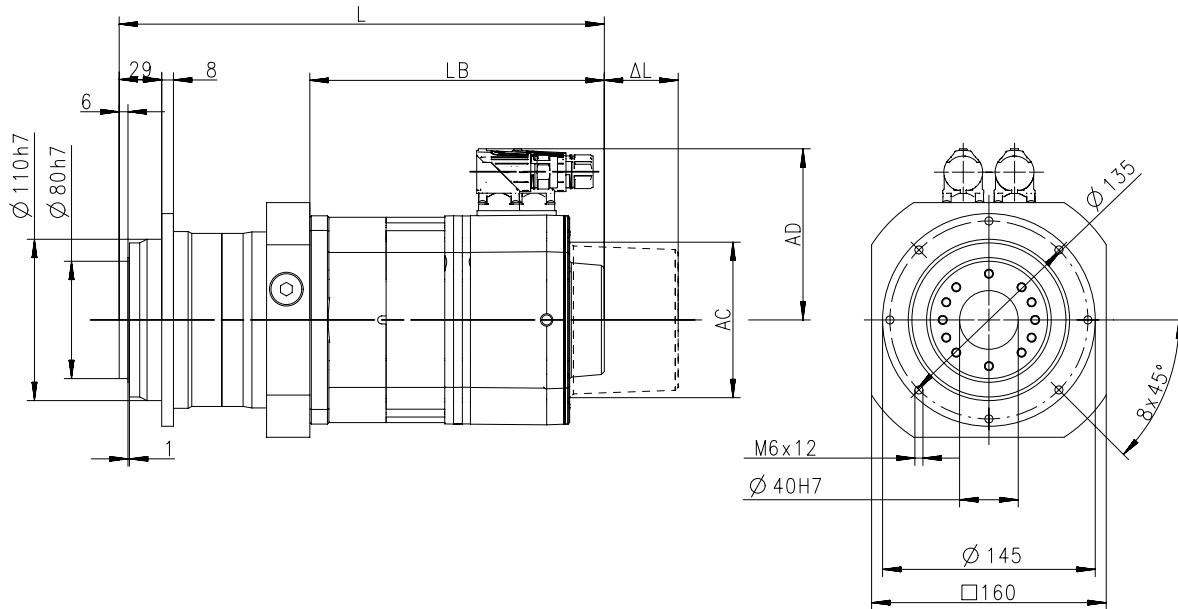

6.2.4

8800239-00

Product			MCS							
			14H12	14H28	14L14	14L30	14P11	14P26	19F12	19F29
Length										
Total length	L	[mm]	459		499		539		457	
Motor length	LB	[mm]	329		369		409		327	
Length of motor options	Δ L	[mm]			81.5				72	
Motor diameter	AC	[mm]			167				212	
Distance motor/connection	AD	[mm]	116.5	146	116.5	146	116.5	146	141.5	171


MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG200, 2-stage gearboxes

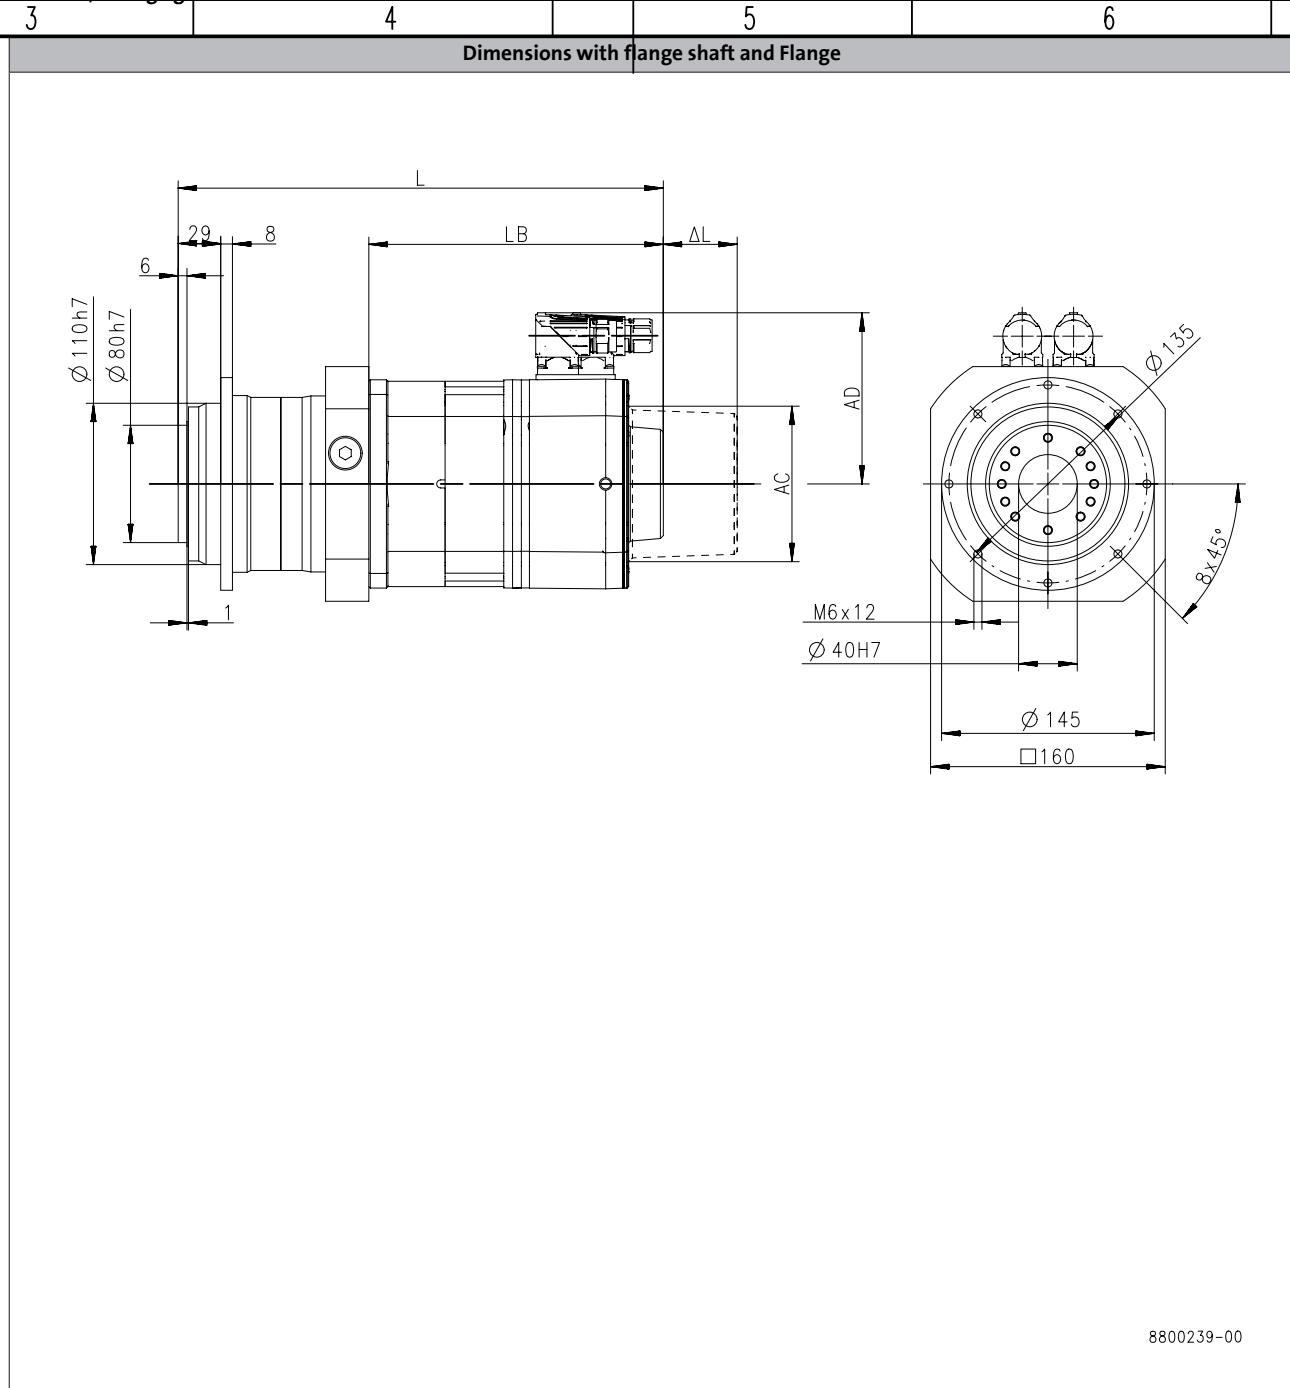

Product	MCS			
	12D17	12D35	12H14	12H34
Length				
Total length	L [mm]	405	445	
Motor length	LB [mm]	261	301	
Length of motor options	Δ L [mm]	63		
Motor diameter	AC [mm]	140		
Distance motor/connection	AD [mm]	105		

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	 Lenze V00-en_GB-04/2014
				nach:		
				Datum/date		

MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG300, 1-stage gearboxes

3	4	5	6
Dimensions with flange shaft and Flange			

6.2.4

8800240-00

Product			MCS						
			14D14	14D30	14H12	14H28	14L14	14L30	14P11
Length									
Total length	L	[mm]		454		494		534	574
Motor length	LB	[mm]		289		329		369	409
Length of motor options	Δ L	[mm]				81.5			
Motor diameter	AC	[mm]				167			
Distance motor/connection	AD	[mm]	116.5			146	116.5	146	116.5

				Allgemeintoleranzen general tolerance nach: 6.2.4 - 57	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG300, 1-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

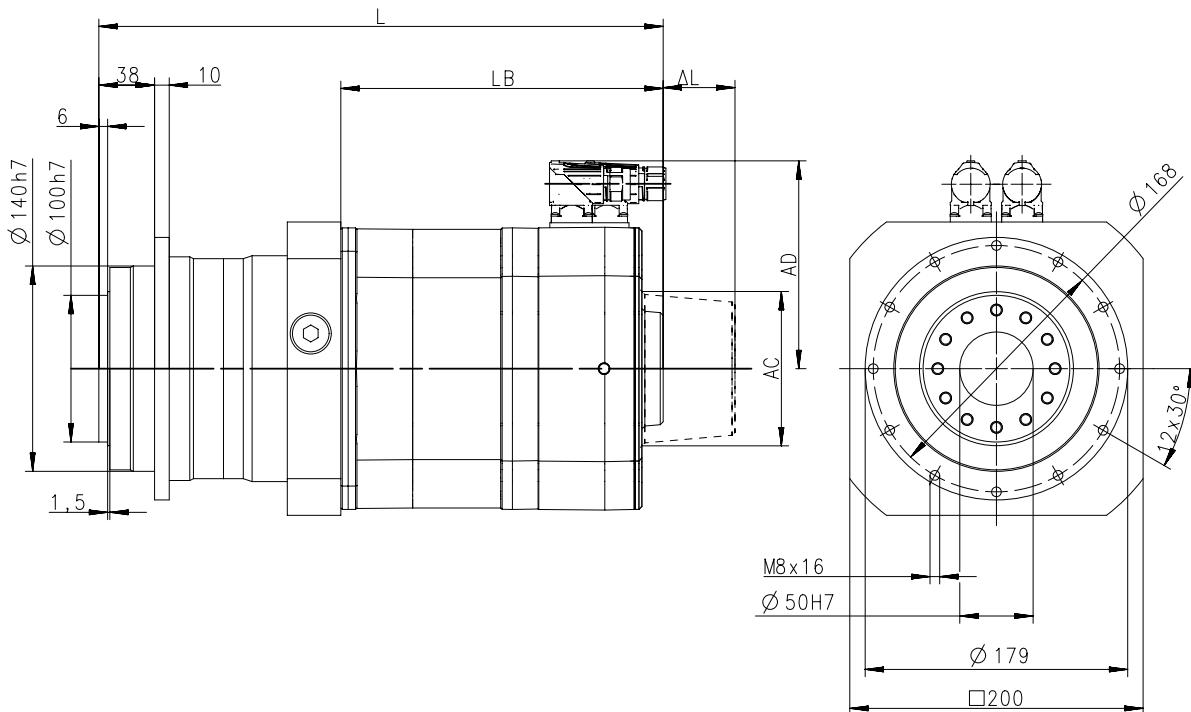

6.2.4

8800240-00

Product			MCS						
			14P26	19F12	19F29	19J12	19J29	19P12	19P29
Length									
Total length	L	[mm]	574	492		532		592	
Motor length	LB	[mm]	409	327		367		427	
Length of motor options	ΔL	[mm]	81.5	72		82			
Motor diameter	AC	[mm]	167			212			
Distance motor/connection	AD	[mm]	146	141.5			171		

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V00-en_GB-04/2014		

MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG300, 2-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

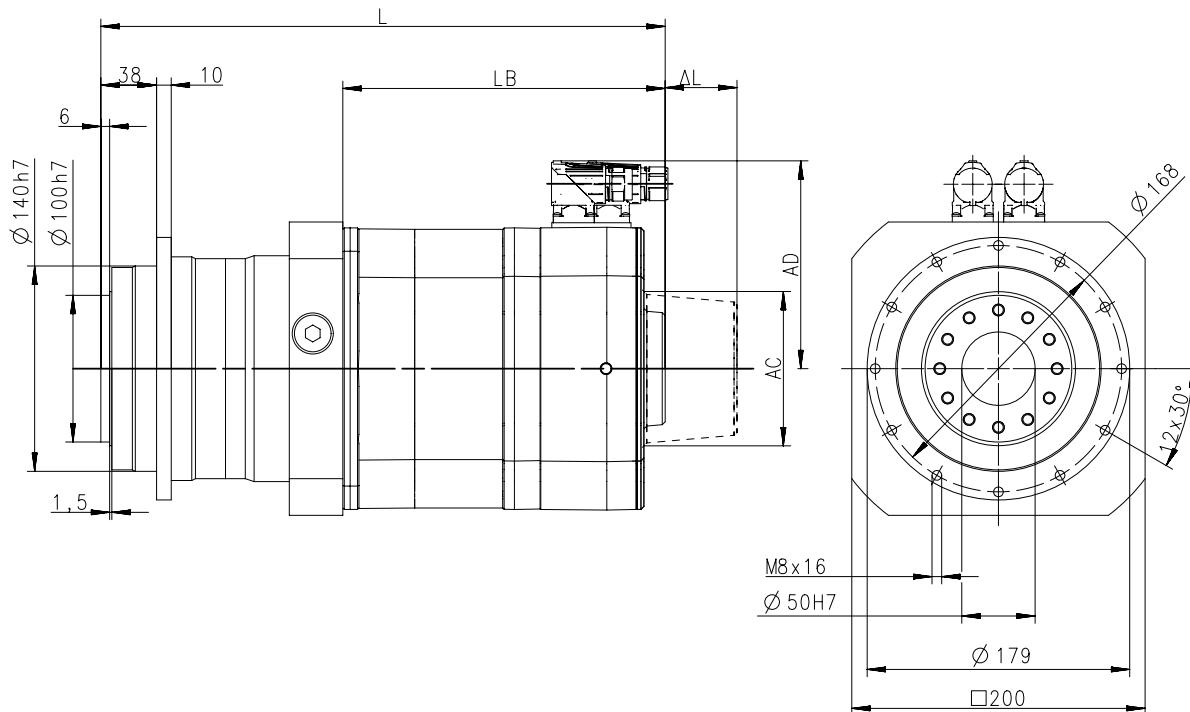

6.2.4

8800240-00

Product			MCS										
Length			12D17	12D35	12H14	12H34	12L17	12L39	14D14	14D30	14H12	14H28	14L30
Total length	L	[mm]	445	485	525				473	513	553		
Motor length	LB	[mm]	261	301	341				289	329	369		
Length of motor options	Δ L	[mm]			63					81.5			
Motor diameter	AC	[mm]			140					167			
Distance motor/connection	AD	[mm]			105				116.5		146		

				Allgemeintoleranzen general tolerance nach: 6.2.4 - 59	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Weights, self-ventilated motors

1-stage gearboxes

				MCS									
				06C41 06C60	06F41 06F60	06I41 06I60	09D41 09D60	09F38 09F60	09H41 09H60	09L41 09L51	12D20 12D41	12H15 12H30 12H35	
MPG	050	m	[kg]	3.3	3.7	4.4	5.8	6.7	7.6	9.4	7.9		
	100	m	[kg]				8.2	9.1	10	12	10	13	
	200	m	[kg]								13	16	

				MCS								
				12L20 12L41	14D15 14D36	14H15 14H32	14L15 14L32	14P14 14P32	19F14 19F30	19J14 19J30	19P14 19P30	
MPG	100	m	[kg]	16	15							
	200	m	[kg]	19	17	22	27	32	30	37		
	300	m	[kg]		24	29	34	38	36	44	54	

2-stage gearboxes

				MCS									
				06C41 06C60	06F41 06F60	06I41 06I60	09D41	09D60	09F38 09F60	09H41 09H60	09L41 09L51	12D20 12D41	
MPG	050	m	[kg]	23		24		25					
	100	m	[kg]	6.1	6.5	7.2		8.6		9.5	10	12	
	200	m	[kg]				11		12	13	15	13	
	300	m	[kg]									21	

				MCS								
				12H15 12H30 12H35	12L20	12L41	14D15 14D36	14H15 14H32	14L15 14L32	14P32	19F30	
MPG	200	m	[kg]	16		20						
	300	m	[kg]	24		27		25	30	34	39	37

MPG planetary geared motors



Technical data

Weights, forced ventilated motors

1-stage gearboxes

				MCS								
				12D17 12D35	12H14 12H34	12L17 12L39	14D14 14D30	14H12 14H28	14L14 14L30	14P11 14P26 19F12 19F29	19J12 19J29	19P12 19P29
MPG	050	m	[kg]	10								
	100	m	[kg]	12	16	19	18					
	200	m	[kg]	15	18		21	26	31	36		
	300	m	[kg]				28	33	38	42	50	60

2-stage gearboxes

				MCS					
				12D17 12D35	12H14 12H34	12L17 12L39	14D14 14D30	14H12 14H28	14L30
MPG	200	m	[kg]	16		19			
	300	m	[kg]	23		26		29	34

MPG planetary geared motors



Technical data

Surface and corrosion protection

For optimum protection of geared motors against ambient conditions, the surface and corrosion protection system (OKS) offers tailor-made solutions.

Various surface coatings combined with other protective measures ensure that the geared motors operate reliably even at high air humidity, in outdoor installations or in the presence of atmospheric impurities. Any colour from the RAL Classic collection can be chosen for the top coat. The geared motors are also available unpainted (no surface and corrosion protection).

Surface and corrosion protection	Applications	Measures
OKS-G (primed)	• Dependent on subsequent top coat applied	<ul style="list-style-type: none">• 2K PUR priming coat (grey)• Zinc-coated screws• Rust-free breather elementsOptional measures• Stainless steel nameplate

Structure of surface coating

Surface and corrosion protection	Surface coating
	Structure
Without OKS(uncoated)	Dipping primed gearbox
OKS-G (primed)	Dipping primed gearbox 2K PUR priming coat

MPG planetary geared motors

Technical data



6.2.4

MPG planetary geared motors

Technical data



6.2.4

MPG planetary-geared motors

19 ... 359 Nm (asynchronous servo motors)



MPG planetary geared motors



Contents

General information	List of abbreviations	6.2.5 - 5
	Product information	6.2.5 - 6
	Equipment	6.2.5 - 7
	The gearbox kit	6.2.5 - 9
	Dimensioning	6.2.5 - 14
Technical data	Selection tables, notes	6.2.5 - 17
	Selection tables	6.2.5 - 18
	Dimensions, notes	6.2.5 - 22
	Dimensions, self-ventilated motors	6.2.5 - 23
	Dimensions, forced ventilated motors	6.2.5 - 30
	Weights, self-ventilated motors	6.2.5 - 35
	Weights, forced ventilated motors	6.2.5 - 35
	Surface and corrosion protection	6.2.5 - 36

MPG planetary geared motors

Contents



MPG planetary geared motors



General information

List of abbreviations

c		Load capacity
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass
M ₂	[Nm]	Output torque
M _{2, max}	[Nm]	Max. output torque
n _{2, eto}	[r/min]	Transition speed
n _{2, th}	[r/min]	Thermal limit speed

CCC	China Compulsory Certificate
CE	Communauté Européenne
CSA	Canadian Standards Association
cURus	Combined certification marks of UL for the USA and Canada
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

MPG planetary geared motors



General information

Product information

The combination of Vogel MPR/MPG planetary gearboxes and Lenze servo motors is the optimum solution for dynamic or highly dynamic applications requiring the highest precision. These solutions cater to the requirements such as those encountered on a daily basis in the printing and packaging industry, as well as in the fields of handling and robot technology, filling and materials handling technology and, in many cases, also general engineering.

The MPR/MPG planetary gearboxes feature a higher-than-average torsional stiffness combined with a backlash down to one angular minute. Their combination with MCS synchronous servo motors and MCA asynchronous servo motors creates flexible and particularly energy-efficient solutions which cover virtually every application.

Version

- Robust planetary gearbox with solid shaft (MPR) or flanged shaft (MPG)
- High precision for the application thanks to low backlash (min. <=1 angular minutes)
- Efficient drive solutions with high efficiency (95 ... 97 %)
- Any mounting position which can be changed subsequently as well
- Enclosure IP65 (dust-tight, protection against water jets under any angle)

The product name

Gearbox type	Product range	Rated torque [Nm]	Product
Planetary gearbox	MPG	29	MPG050
		83	MPG100
		200	MPG200
		390	MPG300

MPG planetary geared motors




General information

Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

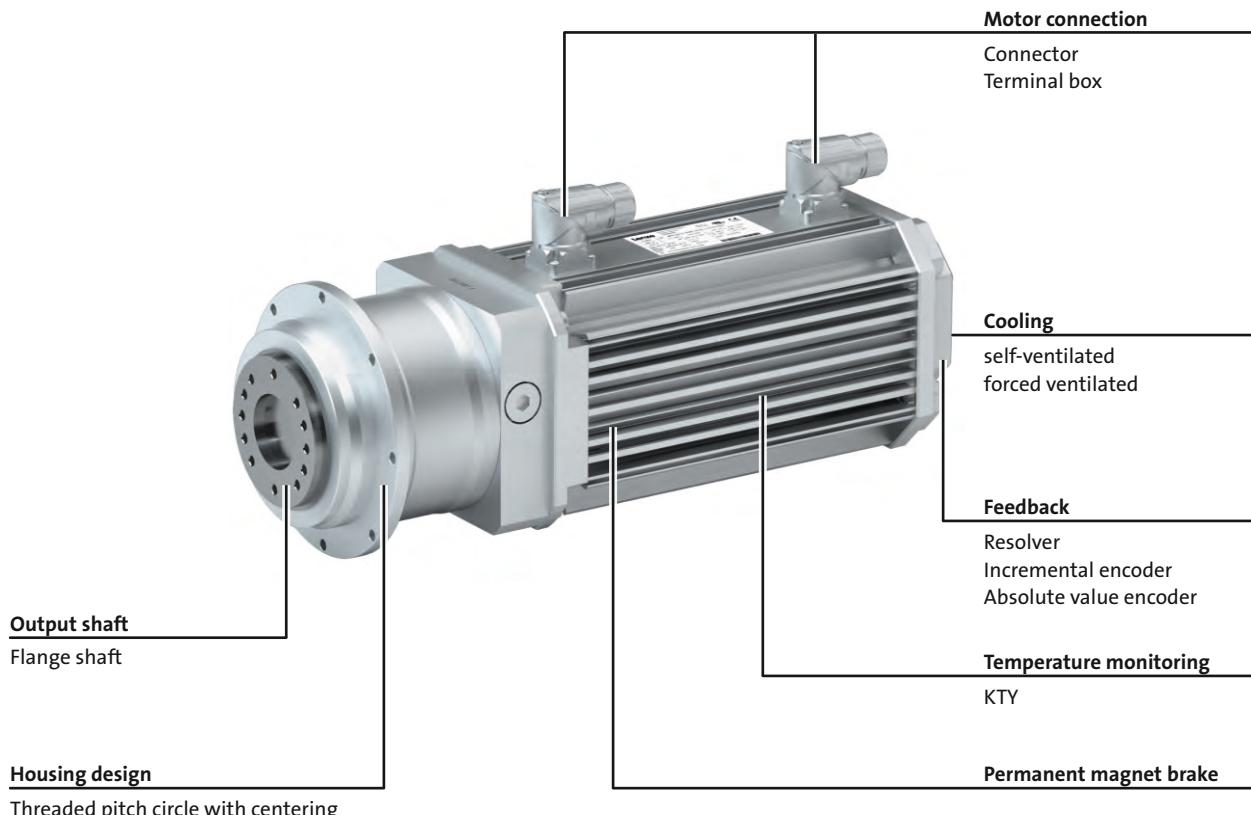

MPG planetary geared motors

General information



6.2.5

MPG planetary geared motors



General information

The gearbox kit

Geared motor

Product	MPG050	MPG100	MPG200	MPG300
Motor type				
		Asynchronous servo motor		
Servo motor				
2.0 Nm	MCA10			
4.0 - 6.3 Nm		MCA13		
5.4 - 12 Nm			MCA14	
9.5 - 21 Nm			MCA17	
12 - 36 Nm				MCA19
17 - 61 Nm				
Technical data				
Output torque		See selection table		
Output speed		See selection table		
Ratio		See selection table		
Load capacity		See selection table		
Moment of inertia		See selection table		
Mounting position				
Standard		Any		
Colour		primed (RAL 9005M, matt jet black)		
Surface and corrosion protection		Without OKS(uncoated) OKS-G (primed)		

6.2.5

MPG planetary geared motors



General information

The gearbox kit

Motor details

Product	MCA										
	10I40	13I34 13I41	14L16 14L20 14L35 14L41	17N17 17N23 17N35 17N41	19S17 19S23 19S35 19S42	21X17 21X25 21X35 21X42					
Connection type	Plug connectors Terminal box										
Permanent magnet holding brake											
Rated torque [Nm]	3.3	12	15	24	46	88					
Brake voltage [V]	DC 24 AC 230										
Feedback	With absolute value encoder With incremental encoder With resolver										
Cooling	Self-ventilated	Self-ventilated Forced-ventilated									
Temperature monitoring	KTY83-110 thermal detector										
Approval	cURus GOST_R UkrSepro										
Degree of protection	IP54 IP65										

- ▶ Further information and installation feasibilities can be found in the Motors chapter.

MPG planetary geared motors



General information

The gearbox kit

Motor details

Connection type


Plug connectors
Terminal box
Cooling: self-ventilated



With resolver
With permanent magnet brake
With feedback With feedback and permanent magnet brake
Cooling: forced ventilated



With resolver
With permanent magnet brake
With feedback With feedback and permanent magnet brake

6.2.5

MPG planetary geared motors



General information

The gearbox kit

Gearbox details

Product	MPG050	MPG100	MPG200	MPG300
Driven shaft				
Flange shaft with threaded holes	40	63	80	100
Design		Standard		
Gasket		NBR		
Bearing		Standard		
Housing				
Housing version		Without foot with centering		
Output flange				
flange diameter [mm]	86	118	145	179
Lubricant				
Type		Mobil SHC 629		
Breather element		Without		
Backlash				
Backlash		Standard Reduced		

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.


MPG planetary geared motors



General information

The gearbox kit

Gearbox details

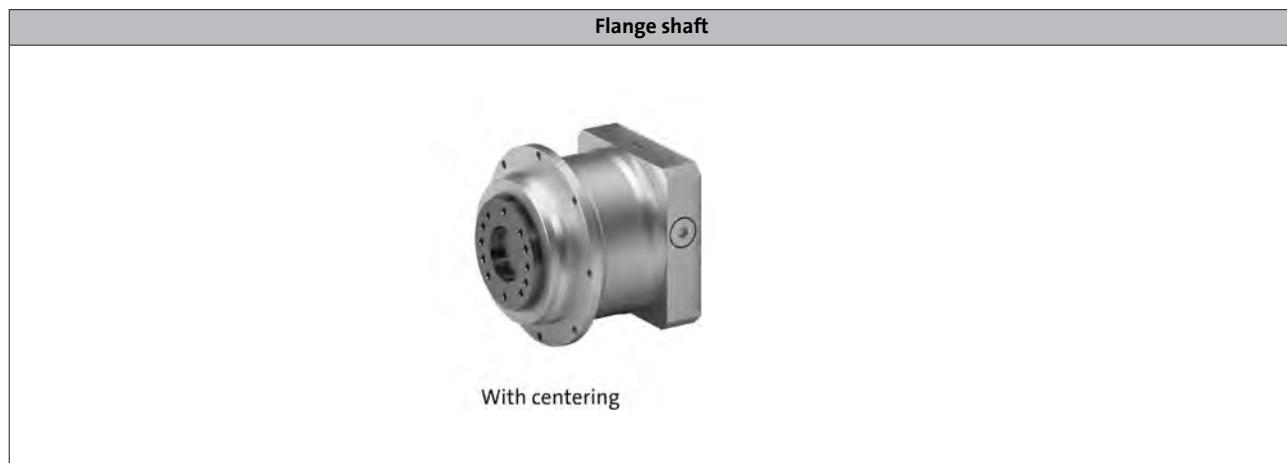

6.2.5

MPG planetary geared motors



General information

Dimensioning

General information about the data provided in this catalogue

The powers, torques and speeds specified in this catalogue are rounded values and are valid under the following conditions:

- Operating time/day = 8 h (100% OT)
- Duty class I for up to 10 switching operations/h
- Mounting positions and designs in this catalogue
- Standard lubricant
- $T_{amb} = 30 \text{ }^{\circ}\text{C}$ for gearboxes,
 $T_{amb} = 40 \text{ }^{\circ}\text{C}$ for motors (in accordance with EN 60034)
- Site altitude $< = 1000 \text{ m amsl}$
- The selection tables provide the permissible mechanical powers and torques. For notes on the thermal power limit, see chapter drive dimensioning.
- The rated power specified for motors and geared motors applies to operating mode S1 (in accordance with EN 60034).

Under different operating conditions, the values obtained may vary from those listed here.

In the case of extreme operating conditions, please consult your Lenze sales office.

MPG planetary geared motors



General information

Dimensioning

Load capacity and application factor

Load capacity c of gearbox

Rated value for the load capacity of Lenze geared motors.

- c is the ratio of the permissible rated torque of the gearbox to the rated torque supplied by the drive component (e.g. the built-in Lenze motor).
- The value of c must always be greater than the value of the application factor k calculated for the application.


Application factor k (according to DIN 3990)

Takes into account the influence of temporally variable loads which are actually present during the anticipated operating time of gearboxes and geared motors.

k is determined by:

- the type of load
- the load intensity
- temporal influences

Duty class	Load type
I	Smooth operation, small or light jolts
II	Uneven operation, average jolts
III	Uneven operation, severe jolts and/or alternating load

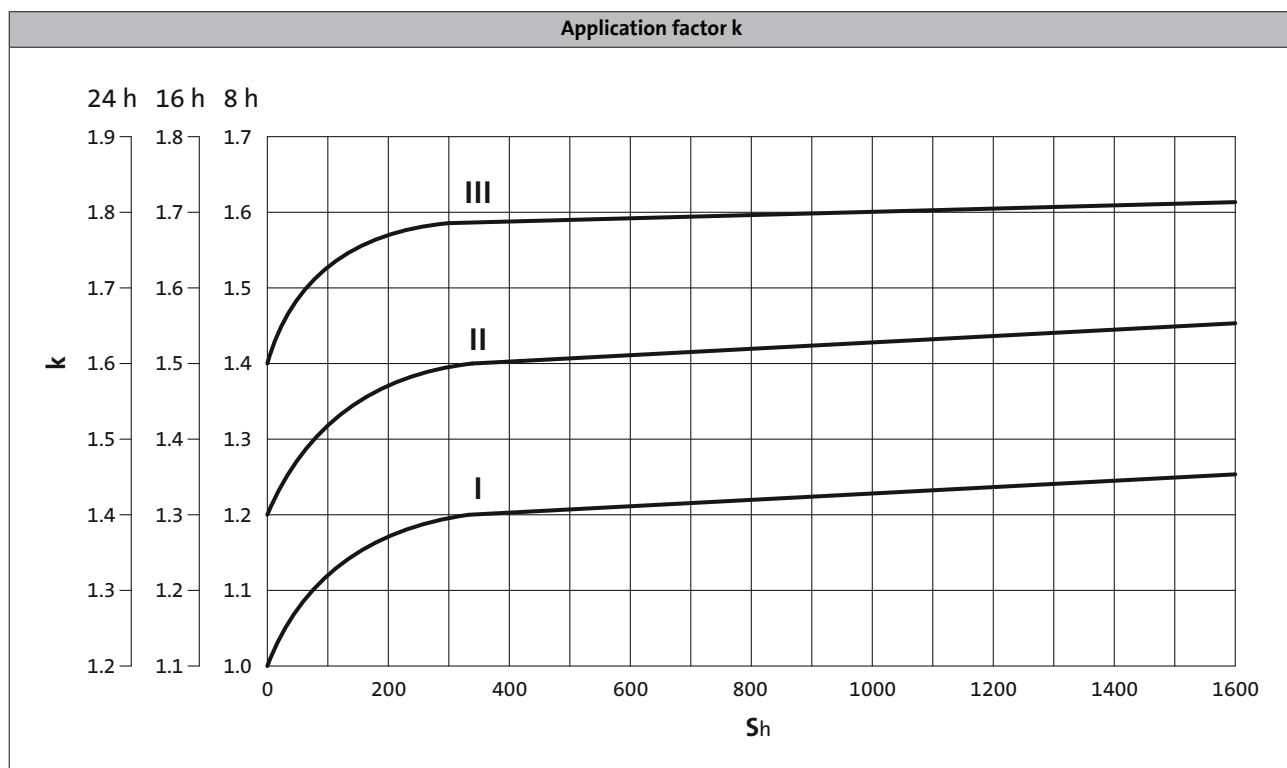

► S_h = switchings/h

MPG planetary geared motors



General information

Dimensioning

Weights

The values given in the tables consider the following gearbox/motor combination:

- Gearbox with solid shaft including lubricant amount
- Motor with feedback

For versions deviating from this, additional weights have to be considered.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data
- Motor options: Brake
 - > Chapter: Motors/Accessories

Moments of inertia

The given moments of inertia of the gearbox refer to the drive shaft. The influence of the ratio (i^2) has been considered in the data.

When the total moment of inertia of the geared motor is calculated, the values of the geared motors and the brake have to be added.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data/Selection tables
- Motor options: Brake
 - > Chapter: Motors/Accessories

MPG planetary geared motors



Technical data

Selection tables, notes

Notes on the selection tables

The selection tables show the available combinations of gearbox type, number of stages, ratio and motor. They are used only to provide basic orientation.

The following legend indicates the structure of the selection tables.

Number of the gear stage of the gearbox



2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		MPG	MCS		
29	275	7	275	3.9	0.300	16.000	050	06C60	Selbst	39
29	275	14	275	2.1	0.400	16.000	050	06F60	Selbst	39
29	275	18	275	1.6	0.500	16.000	050	06I60	Selbst	39
29	275	27	275	1.1	1.300	16.000	050	09D60	Selbst	39

For operating mode S1
Torque M₂ and
thermal output speed n_{2, th}

For operating mode S2, S3 und S6
Max. permissible acceleration torque of geared
motor M_{2, max} and
output speed n_{2, eto}

Load capacity of the gearbox

c is the ratio between the permissible rated torque of the gearbox and the rated torque of the three-phase AC motor (converted to the driven shaft).

c must be always higher than the service factor k determined for the application k.

$$c = \frac{M_{2, zul}}{M_{1,N} \cdot i \cdot \eta_{Getr}} > k$$

Product
Gearbox
Ratio i
Moment of inertia of
geared motor

Product
Motor

Type of
motor cooling

Page number
for dimensions

MPG planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCA		
19	395	19	395	1.0	2.600	10.000	050	10I40	natural	23
29	825	8	825	3.9	2.700	4.000	050	10I40	natural	23
29	660	9	660	3.1	2.600	5.000	050	10I40	natural	23
29	529	13	529	2.2	2.600	7.000	050	10I40	natural	23
58	310	19	310	3.1	2.900	10.000	100	10I40	natural	24
58	310	39	310	1.5	8.900	10.000	100	13I41	natural	24
83	700	16	700	5.3	9.300	4.000	100	13I41	natural	24
83	700	24	700	3.5	9.300	4.000	100	13I34	forced	30
83	560	19	560	4.3	9.200	5.000	100	13I41	natural	24
83	560	30	560	2.8	9.200	5.000	100	13I34	forced	30
83	400	27	400	3.0	9.000	7.000	100	13I41	natural	24
83	400	42	400	2.0	9.000	7.000	100	13I34	forced	30
135	280	39	280	3.5	11.000	10.000	200	13I41	natural	26
135	280	52	280	2.6	22.000	10.000	200	14L41	natural	26
135	280	60	280	2.3	11.000	10.000	200	13I34	forced	31
135	280	92	280	1.5	39.000	10.000	200	17N41	natural	26
135	280	105	280	1.3	22.000	10.000	200	14L35	forced	31
135	230	105	230	1.3	39.000	10.000	200	17N23	natural	26
135	200	65	200	2.1	22.000	10.000	200	14L20	natural	26
135	164	119	164	1.1	22.000	10.000	200	14L16	forced	31
190	400	36	400	5.2	22.000	7.000	200	14L41	natural	26
190	400	42	400	4.5	11.000	7.000	200	13I34	forced	31
190	400	65	400	2.9	39.000	7.000	200	17N41	natural	26
190	400	73	400	2.6	22.000	7.000	200	14L35	forced	31
190	400	129	400	1.5	39.000	7.000	200	17N35	forced	31
190	329	73	329	2.6	39.000	7.000	200	17N23	natural	26
190	286	45	286	4.2	22.000	7.000	200	14L20	natural	26
190	240	147	240	1.3	39.000	7.000	200	17N17	forced	31
190	234	83	234	2.3	22.000	7.000	200	14L16	forced	31
195	500	46	500	4.2	39.000	5.000	200	17N41	natural	26
195	500	52	500	3.7	23.000	5.000	200	14L35	forced	31
195	500	92	500	2.1	39.000	5.000	200	17N35	forced	31
195	460	52	460	3.7	39.000	5.000	200	17N23	natural	26
195	336	105	336	1.9	39.000	5.000	200	17N17	forced	31
195	327	59	327	3.3	23.000	5.000	200	14L16	forced	31
200	625	37	625	5.4	40.000	4.000	200	17N41	natural	26
200	625	42	625	4.8	23.000	4.000	200	14L35	forced	31
200	625	73	625	2.7	40.000	4.000	200	17N35	forced	31
200	575	42	575	4.8	40.000	4.000	200	17N23	natural	26
200	420	84	420	2.4	40.000	4.000	200	17N17	forced	31

MPG planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCA		
200	409	48	409	4.2	23.000	4.000	200	14L16	forced	31
245	260	52	260	4.7	26.000	10.000	300	14L41	natural	28
245	260	92	260	2.6	43.000	10.000	300	17N41	natural	28
245	260	105	260	2.3	26.000	10.000	300	14L35	forced	33
245	260	116	260	2.1	80.000	10.000	300	19S42	natural	28
245	260	184	260	1.3	43.000	10.000	300	17N35	forced	33
245	234	158	234	1.6	80.000	10.000	300	19S23	natural	28
245	230	105	230	2.3	43.000	10.000	300	17N23	natural	28
245	200	65	200	3.8	26.000	10.000	300	14L20	natural	28
245	168	210	168	1.2	43.000	10.000	300	17N17	forced	33
245	164	119	164	2.1	26.000	10.000	300	14L16	forced	33
380	329	65	329	5.9	44.000	7.000	300	17N41	natural	28
380	329	73	329	5.2	44.000	7.000	300	17N23	natural	28
380	329	73	329	5.2	27.000	7.000	300	14L35	forced	33
380	329	81	329	4.7	81.000	7.000	300	19S42	natural	28
380	329	111	329	3.4	81.000	7.000	300	19S23	natural	28
380	329	129	329	3.0	44.000	7.000	300	17N35	forced	33
380	329	244	329	1.6	81.000	7.000	300	19S35	forced	33
380	243	244	243	1.6	81.000	7.000	300	19S17	forced	33
380	240	147	240	2.6	44.000	7.000	300	17N17	forced	33
380	234	83	234	4.6	27.000	7.000	300	14L16	forced	33
388	525	73	525	5.3	47.000	4.000	300	17N35	forced	33
388	420	84	420	4.7	47.000	4.000	300	17N17	forced	33
390	525	139	525	2.8	83.000	4.000	300	19S35	forced	33
390	425	139	425	2.8	83.000	4.000	300	19S17	forced	33
390	420	79	420	4.9	83.000	5.000	300	19S23	natural	28
390	420	92	420	4.3	45.000	5.000	300	17N35	forced	33
390	420	174	420	2.2	83.000	5.000	300	19S35	forced	33
390	340	174	340	2.2	83.000	5.000	300	19S17	forced	33
390	336	105	336	3.7	45.000	5.000	300	17N17	forced	33

6.2.5

MPG planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCA		
76	88	73	88	1.0	2.600	40.000	100	10I40	natural	25
83	219	29	219	2.8	2.700	16.000	100	10I40	natural	25
83	175	37	175	2.3	2.600	20.000	100	10I40	natural	25
83	140	46	140	1.8	2.600	25.000	100	10I40	natural	25
83	125	51	125	1.6	2.600	28.000	100	10I40	natural	25
83	100	64	100	1.3	2.600	35.000	100	10I40	natural	25
190	155	37	155	5.3	3.000	20.000	200	10I40	natural	27
190	56	129	56	1.5	2.900	70.000	200	10I40	natural	27
195	155	76	155	2.6	9.100	20.000	200	13I41	natural	27
195	155	117	155	1.7	9.100	20.000	200	13I34	forced	32
195	124	46	124	4.3	3.000	25.000	200	10I40	natural	27
195	124	95	124	2.0	9.100	25.000	200	13I41	natural	27
195	124	146	124	1.3	9.100	25.000	200	13I34	forced	32
195	89	64	89	3.0	2.900	35.000	200	10I40	natural	27
195	89	133	89	1.5	9.000	35.000	200	13I41	natural	27
195	70	92	70	2.1	2.900	50.000	200	10I40	natural	27
195	70	190	70	1.0	8.900	50.000	200	13I41	natural	27
200	194	61	194	3.3	9.200	16.000	200	13I41	natural	27
200	194	94	194	2.1	9.200	16.000	200	13I34	forced	32
200	111	51	111	3.9	2.900	28.000	200	10I40	natural	27
200	111	107	111	1.9	9.000	28.000	200	13I41	natural	27
200	111	164	111	1.2	9.000	28.000	200	13I34	forced	32
200	78	73	78	2.7	2.900	40.000	200	10I40	natural	27
200	78	152	78	1.3	8.900	40.000	200	13I41	natural	27
380	46	267	46	1.4	10.000	70.000	300	13I41	natural	29
380	46	356	46	1.1	22.000	70.000	300	14L41	natural	29
390	181	81	181	4.8	23.000	16.000	300	14L41	natural	29
390	181	94	181	4.2	11.000	16.000	300	13I34	forced	34
390	181	145	181	2.7	40.000	16.000	300	17N41	natural	29
390	181	164	181	2.4	23.000	16.000	300	14L35	forced	34
390	181	288	181	1.4	40.000	16.000	300	17N35	forced	34
390	145	76	145	5.1	11.000	20.000	300	13I41	natural	29
390	145	102	145	3.8	22.000	20.000	300	14L41	natural	29
390	145	117	145	3.3	11.000	20.000	300	13I34	forced	34
390	145	181	145	2.1	39.000	20.000	300	17N41	natural	29
390	145	205	145	1.9	22.000	20.000	300	14L35	forced	34
390	145	360	145	1.1	39.000	20.000	300	17N35	forced	34
390	144	164	144	2.4	40.000	16.000	300	17N23	natural	29
390	125	102	125	3.8	23.000	16.000	300	14L20	natural	29
390	116	95	116	4.1	11.000	25.000	300	13I41	natural	29

MPG planetary geared motors



Technical data

Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							MPG	MCA		
390	116	127	116	3.1	22.000	25.000	300	14L41	natural	29
390	116	146	116	2.7	11.000	25.000	300	13I34	forced	34
390	116	226	116	1.7	39.000	25.000	300	17N41	natural	29
390	116	256	116	1.5	22.000	25.000	300	14L35	forced	34
390	115	205	115	1.9	39.000	20.000	300	17N23	natural	29
390	105	328	105	1.2	40.000	16.000	300	17N17	forced	34
390	104	107	104	3.7	11.000	28.000	300	13I41	natural	29
390	104	142	104	2.7	22.000	28.000	300	14L41	natural	29
390	104	164	104	2.4	11.000	28.000	300	13I34	forced	34
390	104	253	104	1.5	39.000	28.000	300	17N41	natural	29
390	104	287	104	1.4	22.000	28.000	300	14L35	forced	34
390	102	186	102	2.1	23.000	16.000	300	14L16	forced	34
390	100	127	100	3.1	22.000	20.000	300	14L20	natural	29
390	92	256	92	1.5	39.000	25.000	300	17N23	natural	29
390	83	133	83	2.9	11.000	35.000	300	13I41	natural	29
390	83	178	83	2.2	22.000	35.000	300	14L41	natural	29
390	83	205	83	1.9	11.000	35.000	300	13I34	forced	34
390	83	317	83	1.2	39.000	35.000	300	17N41	natural	29
390	83	358	83	1.1	22.000	35.000	300	14L35	forced	34
390	82	233	82	1.7	22.000	20.000	300	14L16	forced	34
390	82	287	82	1.4	39.000	28.000	300	17N23	natural	29
390	80	159	80	2.5	22.000	25.000	300	14L20	natural	29
390	73	152	73	2.6	11.000	40.000	300	13I41	natural	29
390	73	204	73	1.9	22.000	40.000	300	14L41	natural	29
390	73	234	73	1.7	11.000	40.000	300	13I34	forced	34
390	73	362	73	1.1	39.000	40.000	300	17N41	natural	29
390	71	178	71	2.2	22.000	28.000	300	14L20	natural	29
390	66	359	66	1.1	39.000	35.000	300	17N23	natural	29
390	65	291	65	1.3	22.000	25.000	300	14L16	forced	34
390	64	190	64	2.0	11.000	50.000	300	13I41	natural	29
390	64	293	64	1.3	11.000	50.000	300	13I34	forced	34
390	58	254	58	1.5	22.000	50.000	300	14L41	natural	29
390	58	326	58	1.2	22.000	28.000	300	14L16	forced	34
390	57	222	57	1.8	22.000	35.000	300	14L20	natural	29
390	50	254	50	1.5	22.000	40.000	300	14L20	natural	29
390	40	318	40	1.2	22.000	50.000	300	14L20	natural	29

6.2.5

MPG planetary geared motors




Technical data

Dimensions, notes

Notes on the dimensions

The following legend shows the layout of the dimension sheets.

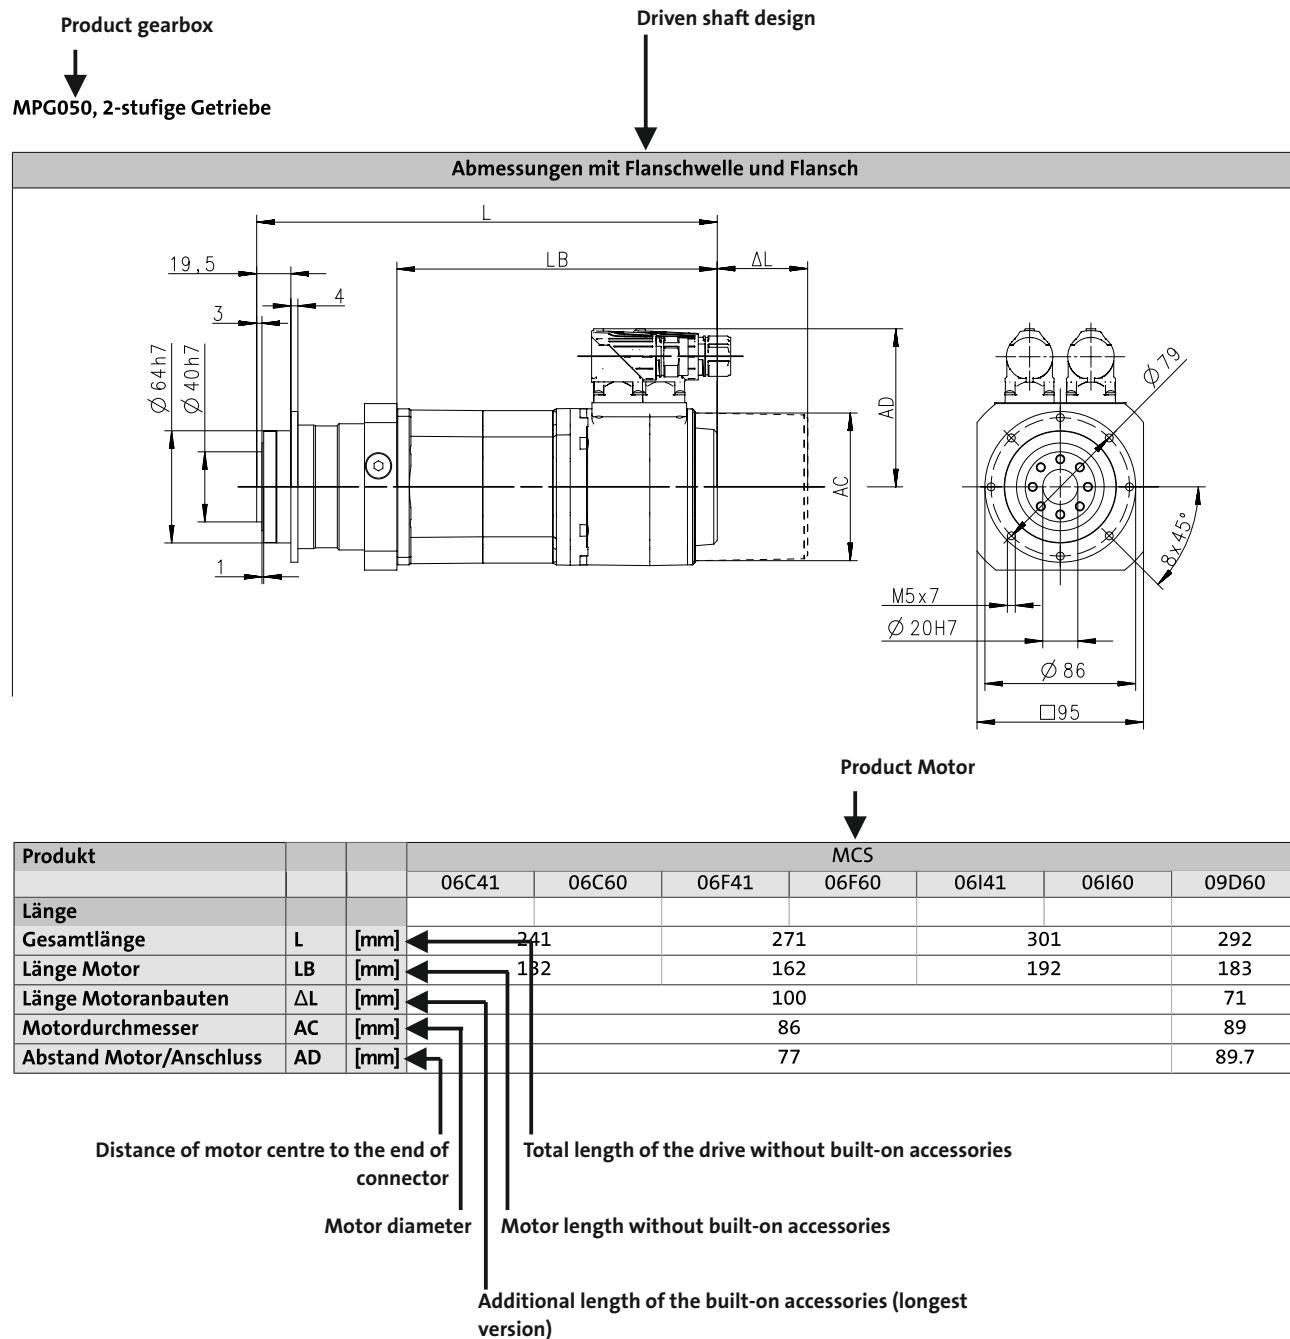

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG050, 1-stage gearboxes

Dimensions with flange shaft and Flange

Front View Dimensions:

- Vertical height: 19,5
- Horizontal length: L
- Horizontal offset from center: ΔL
- Vertical dimension on left: 64 h7
- Vertical dimension on left: Ø 40 h7
- Horizontal dimension LB
- Horizontal dimension ΔL
- Vertical dimension AC

Side View Dimension:

- Vertical height: 19,5
- Horizontal dimension LB
- Vertical dimension AC

Top View Dimensions:

- Diameter: Ø 19
- Thickness: 8x45°
- Central hole diameter: Ø 86
- Overall width: □ 95
- M5x7 Ø 20H7

Product			MCA
			10140
Length			
Total length	L	[mm]	342
Motor length	LB	[mm]	262
Length of motor options	Δ L	[mm]	78.5
Motor diameter	AC	[mm]	102
Distance motor/connection	AD	[mm]	90

				Allgemeintoleranzen general tolerance nach: 6.2.5	Oberflaechen/ surface	
						Werksto Rohtei
					Datum/date	Name


MPG planetary geared motors

Technical data



Dimensions, self-ventilated motors

MPG100, 1-stage gearboxes

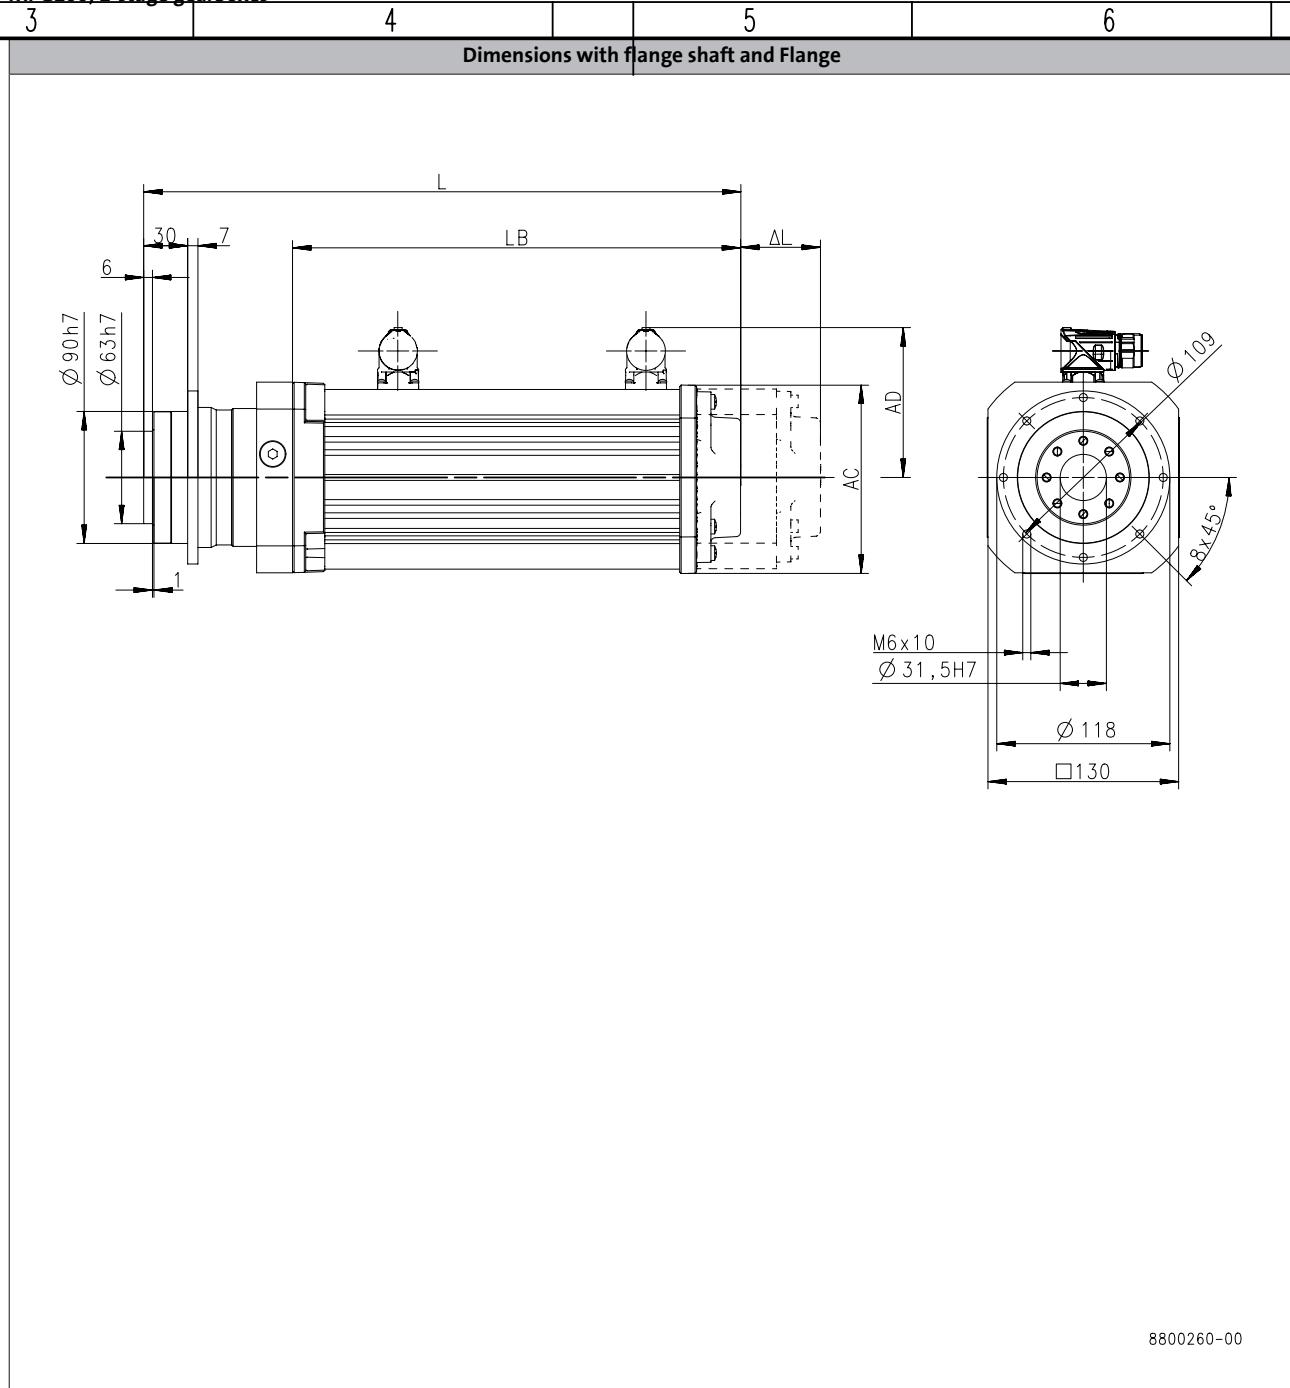

Product	MCA	
	10I40	13I41
Length		
Total length	L [mm]	364
Motor length	LB [mm]	262
Length of motor options	Δ L [mm]	78.5
Motor diameter	AC [mm]	102
Distance motor/connection	AD [mm]	90

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	 Lenze V00-en_GB-04/2014
				nach:		
				Datum/date		

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG100, 2-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

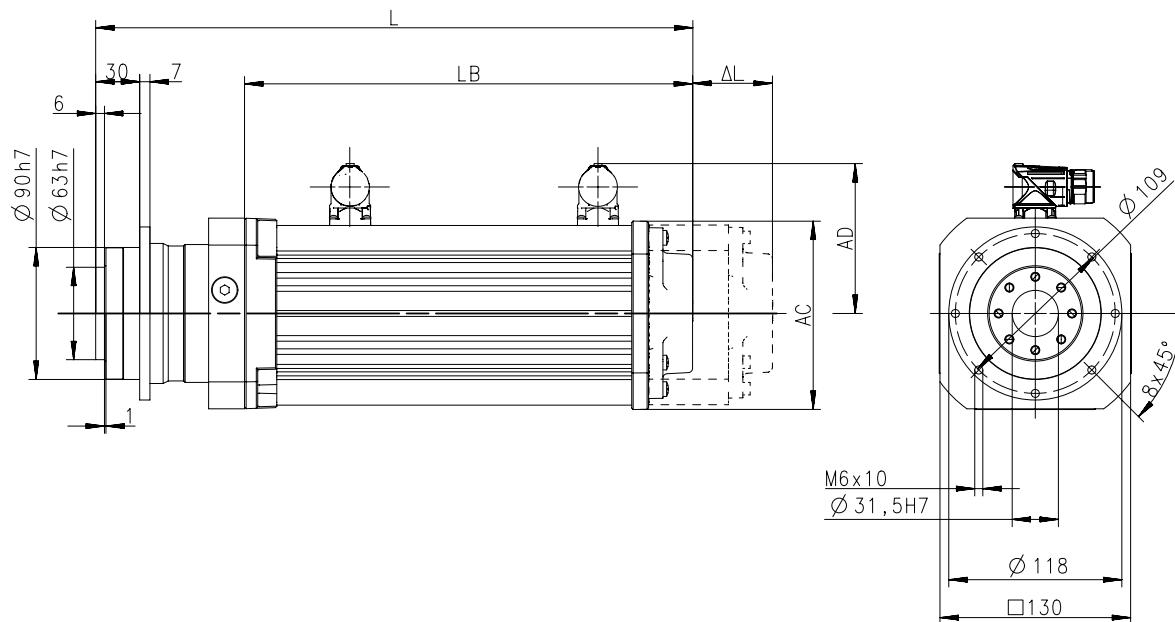

6.2.5

8800260-00

Product			MCA
			10140
Length			
Total length	L	[mm]	384
Motor length	LB	[mm]	262
Length of motor options	Δ L	[mm]	78.5
Motor diameter	AC	[mm]	102
Distance motor/connection	AD	[mm]	90

				Allgemeintoleranzen general tolerance nach:	Oberflaechen/ surface	
				6.2.5 - 25		

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors


MPG200, 1-stage gearboxes

3 4 5 6

Dimensions with flange shaft and Flange

The figure consists of two technical drawings of a mechanical component. The left drawing is a front view showing a vertical shaft with a diameter of $\varnothing 80\text{H}7$. Key dimensions include a total height of 29, a shoulder height of 6, a shoulder width of 8, a hub length of LB, a shoulder length of AL, a bore diameter of $\varnothing 110\text{h}7$, a shoulder thickness of 1, and a hub width of AC. The right drawing is a top view of a flange with a diameter of $\varnothing 145$. It features a central hole of $\varnothing 40\text{H}7$, a square mounting hole of $\square 160$, and a flange thickness of 160. A note indicates a $8 \times 45^\circ$ chamfer on the flange's outer edge.

Product			MCA				
			13I41	14L20	14L41	17N23	17N41
Length							
Total length	L	[mm]	401		432		470
Motor length	LB	[mm]	270.5		301.5		339.5
Length of motor options	Δ L	[mm]	89		88.5		89.2
Motor diameter	AC	[mm]	130		142		165
Distance motor/connection	AD	[mm]	102		109		117.5

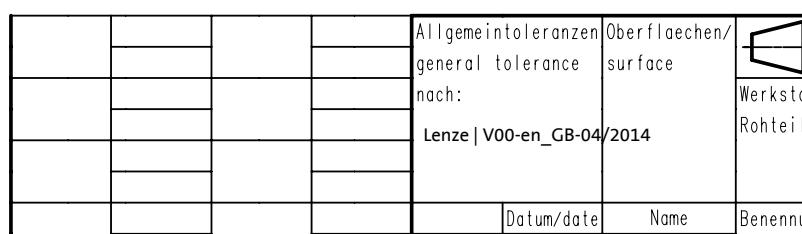

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG200, 2-stage gearboxes

3	4	5	6
Dimensions with flange shaft and Flange			

6.2.5

8800261-00

Product	MCA	
	10I40	13I41
Length		
Total length	L [mm]	406
Motor length	LB [mm]	262
Length of motor options	Δ L [mm]	78.5
Motor diameter	AC [mm]	102
Distance motor/connection	AD [mm]	90

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG300, 1-stage gearboxes

3 4 5 6

Dimensions with flange shaft and Flange

Φ 140h7

Φ 100h7

38

6

10

L

LB

ΔL

AC

AD

1,5

M8x16

Ø 50H7

Φ 179

□ 200

12x30°

Φ 168

8800262-00

Product			MCA					
			14L20	14L41	17N23	17N41	19S23	19S42
Length								
Total length	L	[mm]	467		505		566	
Motor length	LB	[mm]	301.5		339.5		401	
Length of motor options	Δ L	[mm]	88.5		89.2		88.2	
Motor diameter	AC	[mm]	142		165		192	
Distance motor/connection	AD	[mm]	109		117.5		151	

MPG planetary geared motors



Technical data

Dimensions, self-ventilated motors

MPG300, 2-stage gearboxes

Dimensions with flange shaft and Flange

Front View Dimensions:

- Vertical height: 19,5
- Horizontal length: L
- Horizontal offset from center: ΔL
- Vertical dimension on left: 64 h7
- Vertical dimension on left: Ø 40 h7
- Horizontal dimension LB
- Horizontal dimension ΔL
- Vertical dimension AC

Side View Dimension:

- Vertical height: 19,5
- Horizontal dimension LB
- Vertical dimension AC

Top View Dimensions:

- Diameter: Ø 19
- Thickness: 8x45°
- Central hole diameter: Ø 86
- Overall width: □ 95
- M5x7 Ø 20H7

6.2.5

8800259-00

Product			MCA				
			13I41	14L20	14L41	17N23	17N41
Length							
Total length	L	[mm]	454	485		523	
Motor length	LB	[mm]	270.5	301.5		339.5	
Length of motor options	Δ L	[mm]	89	88.5		89.2	
Motor diameter	AC	[mm]	130	142		165	
Distance motor/connection	AD	[mm]	102	109		117.5	

				Allgemeintoleranzen general tolerance nach: 6.2.5 - 29	Oberflächen/ surface	
						Werkst...
						Rohte...
					Datum/date	Name
						Benenn...


MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG100, 1-stage gearboxes

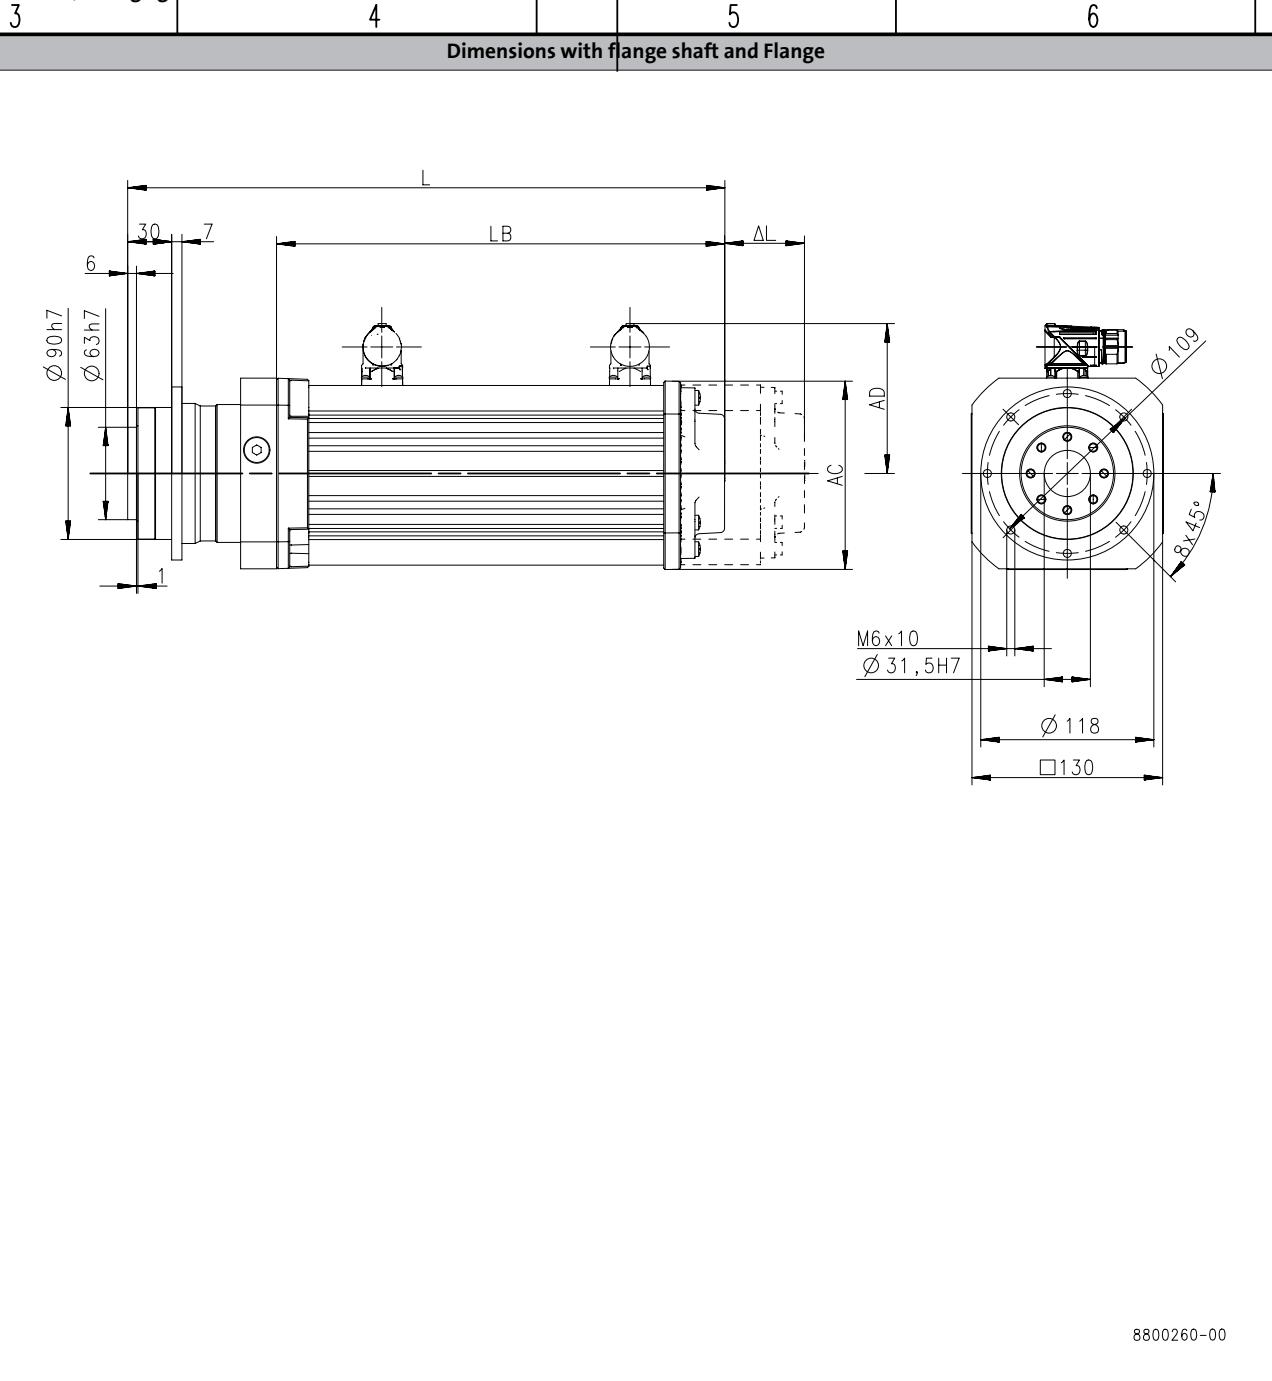

Product			MCA
			13134
Length			
Total length	L	[mm]	440
Motor length	LB	[mm]	338.5
Length of motor options	ΔL	[mm]	89.5
Motor diameter	AC	[mm]	130
Distance motor/connection	AD	[mm]	102

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V00-en_GB-04/2014		
Datum/date						
Name						

MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG200, 1-stage gearboxes

Dimensions with flange shaft and Flange

3 4 5 6

Main View Dimensions:

- Shaft diameter: $\varnothing 80\text{h}7$
- Shaft length: 29
- Shaft shoulder height: 6
- Shaft shoulder width: 8
- Total length: L
- Shaft bearing distance: LB
- Shaft end clearance: AL
- Shaft center height: AC
- Shaft center distance: AD

Inset View Dimensions:

- Flange bolt holes: M6x12
- Shaft diameter: $\varnothing 40\text{H}7$
- Shaft diameter: Ø145
- Shaft diameter: Ø160
- Angle: 8x45°

6.2.5

8800261-00

Product			MCA				
			13I34	14L16	14L35	17N17	17N35
Length							
Total length	L	[mm]	469	494		556	
Motor length	LB	[mm]	338.5	363.5		425.5	
Length of motor options	Δ L	[mm]	89.5	88.5		89	
Motor diameter	AC	[mm]	130	142		165	
Distance motor/connection	AD	[mm]	102	109		117.5	

				Allgemeintoleranzen general tolerance nach: 6.2.5	Oberflaechen/ surface	
						Werksto Rohtei
					Datum/date	Name


MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG200, 2-stage gearboxes

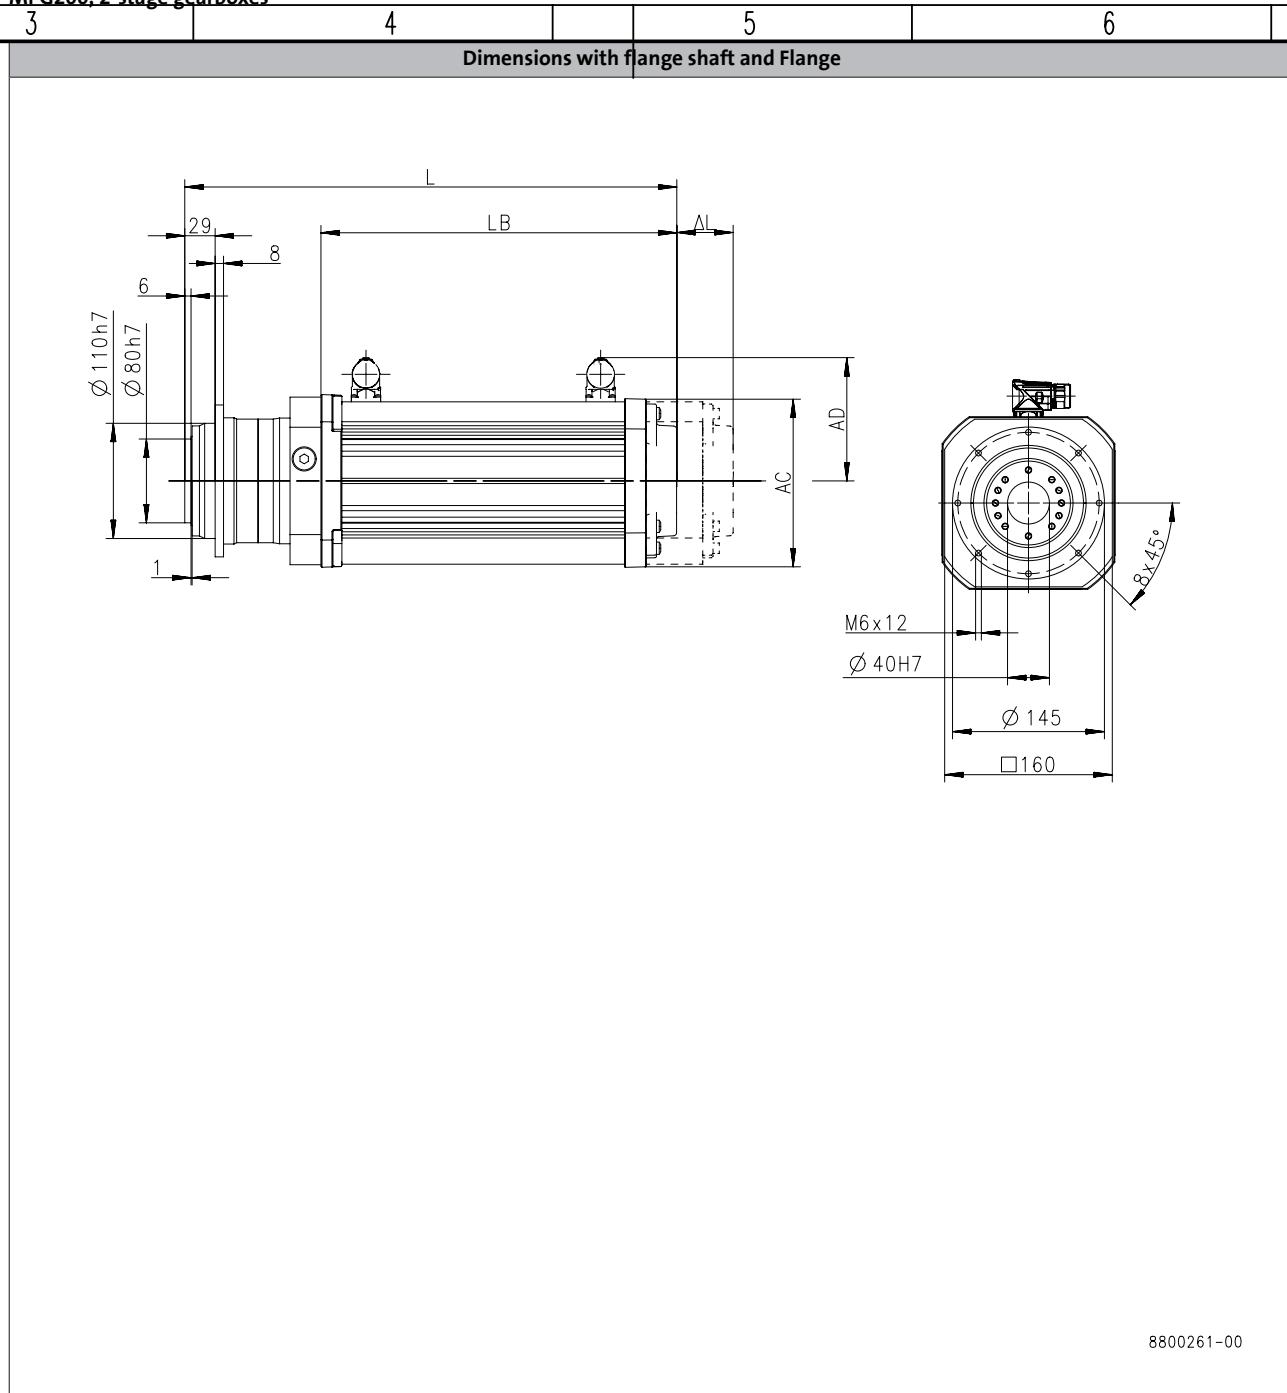

Product			MCA
			13134
Length			
Total length	L [mm]		483
Motor length	LB [mm]		338.5
Length of motor options	Δ L [mm]		89.5
Motor diameter	AC [mm]		130
Distance motor/connection	AD [mm]		102

			Allgemeintoleranzen general tolerance	Oberflaechen/ surface
			nach: Lenze V00-en_GB-04/2014	
			Datum/date	Name
				Benennung

MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG300, 1-stage gearboxes


3

4

5

6

Dimensions with flange shaft and Flange

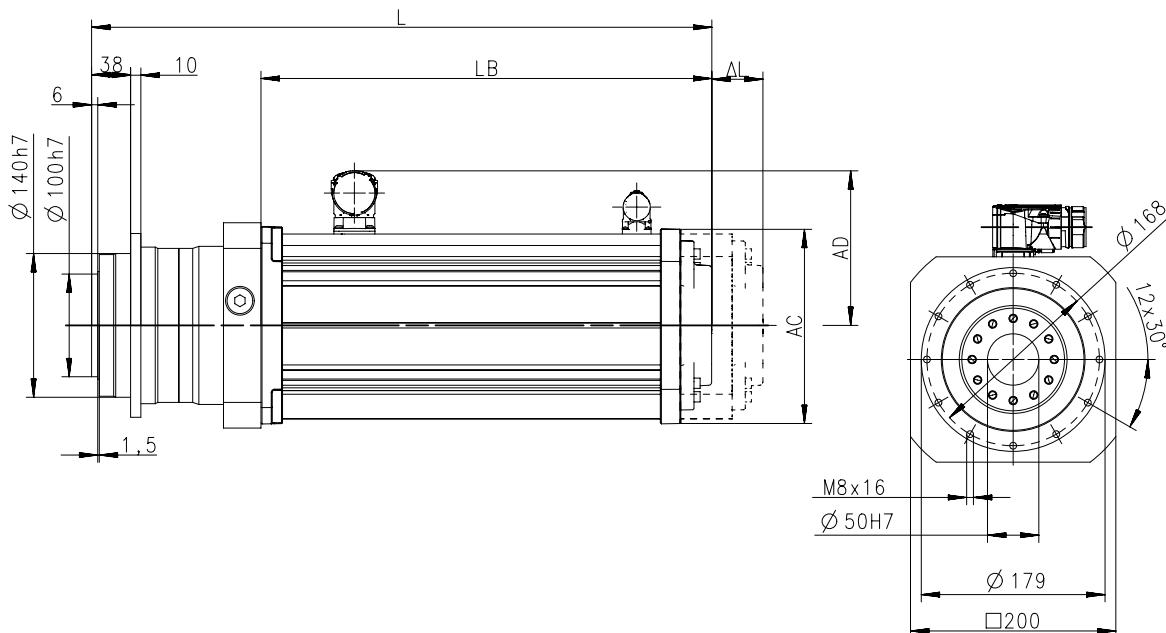

6.2.5

8800262-00

Product			MCA					
			14L16	14L35	17N17	17N35	19S17	19S35
Length								
Total length	L	[mm]		529		591		663
Motor length	LB	[mm]		363.5		425.5		498
Length of motor options	Δ L	[mm]		88.5		89		88.2
Motor diameter	AC	[mm]		142		165		192
Distance motor/connection	AD	[mm]		109		117.5		151

				Allgemeintoleranzen general tolerance nach: 6.2.5 - 33	Oberflaechen/ surface	

MPG planetary geared motors



Technical data

Dimensions, forced ventilated motors

MPG300, 2-stage gearboxes

Dimensions with flange shaft and Flange

3 4 5 6

Dimensions:

- Shaft diameter: $\Phi 140\text{h}7$
- Bearing housing diameter: $\Phi 100\text{h}7$
- Total height: 38
- Width: 6
- Shoulder height: 10
- Total length: L
- Bearing housing length: LB
- Axial clearance: ΔL
- Flange thickness: AD
- Hub height: AC
- Flange bore diameter: $\Phi 179$
- Flange base width: 200
- Flange mounting holes: M8x16, $\Phi 50\text{H}7$
- Flange angle: 12x30°

Product		MCA				
		13I34	14L16	14L35	17N17	17N35
Length						
Total length	L	[mm]	522	547		609
Motor length	LB	[mm]	338.5	363.5		425.5
Length of motor options	Δ L	[mm]	89.5	88.5		89
Motor diameter	AC	[mm]	130	142		165
Distance motor/connection	AD	[mm]	102	109		117.5

				Allgemeintoleranzen general tolerance nach: Lenze V00-en_GB-04/2014	Oberflächen/ surface	
						Werkst...
						Rohte...
					Datum/date	Name
						Benenn...

MPG planetary geared motors



Technical data

Weights, self-ventilated motors

1-stage gearboxes

				MCA				
				10I40	13I41	14L20 14L41	17N23 17N41	19S23 19S42
MPG	050	m	[kg]	7.9				
	100	m	[kg]	10	14			
	200	m	[kg]		17	22	30	
	300	m	[kg]			29	36	58

2-stage gearboxes

				MCA			
				10I40	13I41	14L20 14L41	17N23 17N41
MPG	100	m	[kg]	11			
	200	m	[kg]	13	17		
	300	m	[kg]		25	30	37

Weights, forced ventilated motors

1-stage gearboxes

				MCA			
				13I34	14L16 14L35	17N17 17N35	19S17 19S35
MPG	100	m	[kg]	16			
	200	m	[kg]	19	24	32	
	300	m	[kg]		30	39	62

2-stage gearboxes

				MCA		
				13I34	14L16 14L35	17N17 17N35
MPG	200	m	[kg]	19		
	300	m	[kg]	26	31	40

6.2.5

MPG planetary geared motors



Technical data

Surface and corrosion protection

For optimum protection of geared motors against ambient conditions, the surface and corrosion protection system (OKS) offers tailor-made solutions.

Various surface coatings combined with other protective measures ensure that the geared motors operate reliably even at high air humidity, in outdoor installations or in the presence of atmospheric impurities. Any colour from the RAL Classic collection can be chosen for the top coat. The geared motors are also available unpainted (no surface and corrosion protection).

Surface and corrosion protection	Applications	Measures
OKS-G (primed)	• Dependent on subsequent top coat applied	<ul style="list-style-type: none">• 2K PUR priming coat (grey)• Zinc-coated screws• Rust-free breather elementsOptional measures• Stainless steel nameplate

Structure of surface coating

Surface and corrosion protection	Surface coating
	Structure
Without OKS(uncoated)	Dipping primed gearbox
OKS-G (primed)	Dipping primed gearbox 2K PUR priming coat

Gearboxes

MPG planetary gearbox

29 to 390 Nm



MPG planetary gearboxes

Contents



General information	List of abbreviations	6.2.6 - 5
	Product information	6.2.6 - 6
	Equipment	6.2.6 - 7
	The gearbox kit	6.2.6 - 8
	Functions and features	6.2.6 - 10
Technical data	Permissible radial and axial forces at output	6.2.6 - 11
	Backlash and torsional rigidity	6.2.6 - 12
	Speeds and torques	6.2.6 - 13
	Moments of inertia	6.2.6 - 15

MPG planetary gearboxes

Contents



MPG planetary gearboxes

General information



List of abbreviations

$F_{ax,max}$	[N]	Max. axial force
$F_{rad,max}$	[N]	Max. radial force
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass

6.2.6

MPG planetary gearboxes

General information



Product information

The MPR/MPG planetary gearboxes feature a higher-than-average torsional stiffness combined with a backlash down to one angular minute. Their combination with MCS synchronous servo motors and MCA asynchronous servo motors creates flexible and particularly energy-efficient solutions which cover virtually every application.

Version

- Robust planetary gearbox with solid shaft (MPR) or flanged shaft (MPG)
- High precision for the application thanks to low backlash (min. <=1 angular minutes)
- Efficient drive solutions with high efficiency (95 ... 97 %)
- Any mounting position which can be changed subsequently as well
- Enclosure IP65 (dust-tight, protection against water jets under any angle)

The product name

Gearbox type	Product range	Rated torque [Nm]	Product
Planetary gearbox	MPG	29	MPG050
		83	MPG100
		200	MPG200
		390	MPG300

MPG planetary gearboxes

General information



Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.



Output shaft

Flange shaft

Housing design

Flange with through holes

MPG planetary gearboxes

General information



The gearbox kit

Gearbox details

Product	MPG050	MPG100	MPG200	MPG300
Driven shaft				
Flange shaft with threaded holes	40	63	80	100
Design		Standard		
Gasket		NBR		
Bearing		Standard		
Housing				
Housing version		Without foot with centering		
Output flange				
flange diameter [mm]	86	118	145	179
Lubricant				
Type		Mobil SHC 629		
Breather element		Without		
Backlash				
Backlash		Standard Reduced		

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.


MPG planetary gearboxes

General information



The gearbox kit

Gearbox details

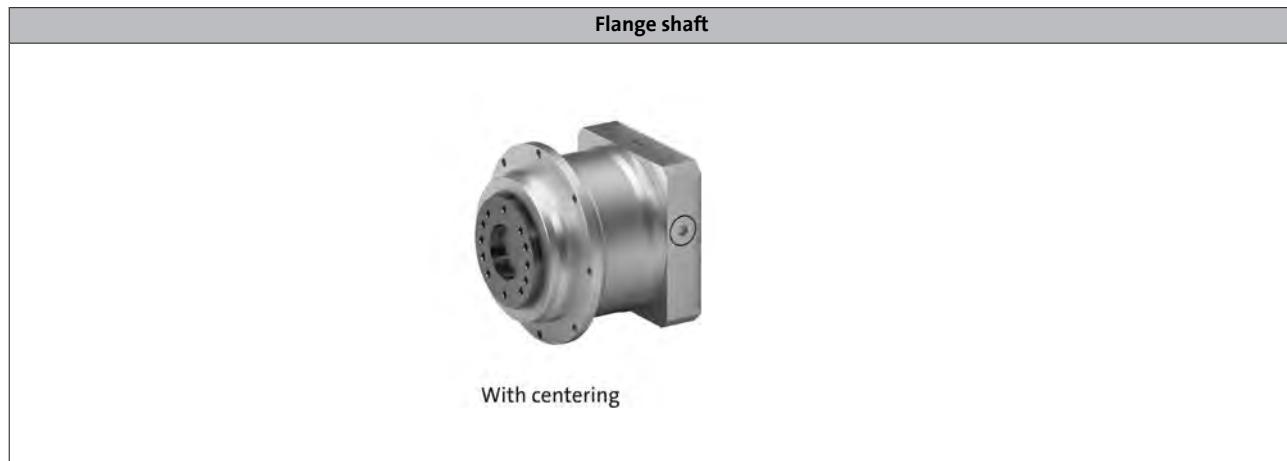

6.2.6

MPG planetary gearboxes

General information



Functions and features

Product	MPG050	MPG100	MPG200	MPG300
Housing				
Design		Cylindrical shape		
Flange shaft				
Version		With threaded holes		
Tolerance			h7	
Toothed parts				
Design		Helical cut teeth		
Ratios		Mathematically precise		
Shaft-hub joint		Force-fit, motor gearbox connected via clamping hub		
Lubricants				
Changing interval		Lubricated for life		
Quantities		Can be installed in any orientation		
Mechanical efficiency				
1-stage gearboxes [$\eta_c=1$]		0.97		
2-stage gearboxes [$\eta_c=1$]		0.95		
3-stage gearboxes [$\eta_c=1$]				

Direction of rotation



MPG planetary gearboxes


Technical data



Permissible radial and axial forces at output

Permissible axial force

$F_{ax,per} = F_{ax,max}$ if $F_{rad} = 0$

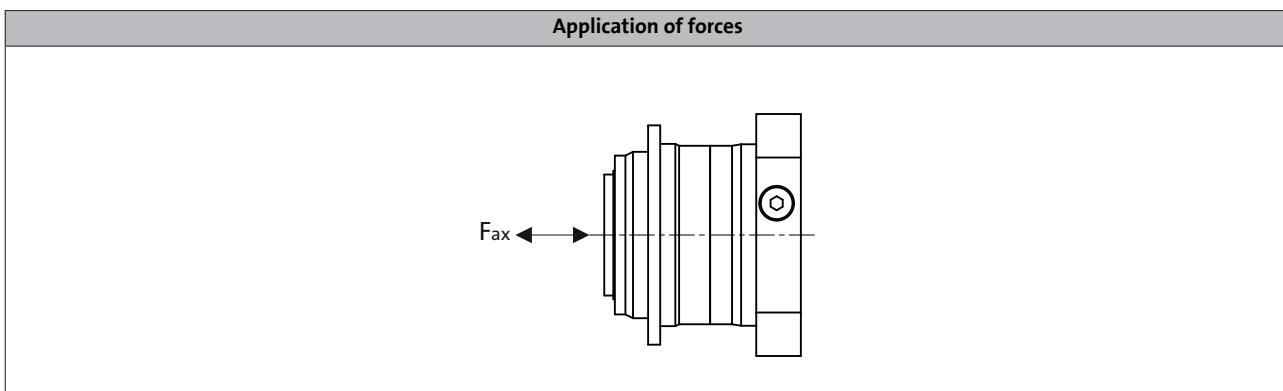

Product	n_2 [r/min]
	250
	$F_{ax,max}$ [N]
MPG050	2200
MPG100	3600
MPG200	4200
MPG300	8000

MPG planetary gearboxes

Technical data



Backlash and torsional rigidity

1-stage gearboxes

Product	Backlash	
	Standard [arcmin]	Reduced [arcmin]
MPG050	4.00	2.00
MPG100		
MPG200	3.00	1.00
MPG300		

2-stage gearboxes

Product	Backlash	
	Standard [arcmin]	Reduced [arcmin]
MPG050	4.00	2.00
MPG100		
MPG200	3.00	1.00
MPG300		

- Measured at output. Load 2 % of the rated torque value.

MPG planetary gearboxes

Technical data



Speeds and torques

► Rated torque $M_{2, GN}$

At rated speed, ambient temperature 20 °C and duty type S1.

► Max. output torque $M_{2, max}$

Max. 1000 cycles per hour permissible.

► Emergency off torque $M_{2, not}$

Max. 1000 emergency switching off actions during gearbox service life

► Max. gearbox input speed

$n_{1, max\ 50\%}$

Max. medium speed at 50 % rated torque

$n_{1, max\ 100\%}$

Max. medium speed at 100 % rated torque

$n_{1, max}$

Max. permissible speed

1-stage gearboxes

Product	Ratio	Rated torque $M_{2, GN}$	Max. output torque $M_{2, max}$	Max. gearbox input speed			Emergency off-torque $M_{2, not}$
				$n_{1, max\ 50\%}$	$n_{1, max\ 100\%}$	$n_{1, max}$	
	i	[Nm]	[Nm]	[r/min]	[r/min]	[r/min]	
MPG050	4.000	29	44	3300	3300	6000	110
	5.000	29	44	3300	3300		110
	7.000	29	44	3700	3700		107
	10.000	19	35	4000	4000		88
MPG100	4.000	83	120	2800	2800	6000	275
	5.000	83	120	2800	2800		275
	7.000	83	120	2800	2800		275
	10.000	58	90	3100	3100		220
MPG200	4.000	200	330	2500	2500	4500	690
	5.000	195	330	2500	2500		675
	7.000	190	300	2800	2800		640
	10.000	135	235	2800	2800		550
MPG300	4.000	390	660	2100	2100	4000	1400
	5.000	390	660	2100	2100		1400
	7.000	380	600	2300	2300		1400
	10.000	245	480	2600	2600		1100

MPG planetary gearboxes

Technical data



Speeds and torques

2-stage gearboxes

Product	Ratio	Rated torque	Max. output torque	Max. gearbox input speed			Emergency off-torque		
				M _{2, GN}	M _{2, max}	n _{1, max 50%}	n _{1, max 100%}	n _{1, max}	
	i	M _{2, GN}	M _{2, max}	[Nm]	[Nm]	[r/min]	[r/min]	[r/min]	[Nm]
MPG050	16.000	29	44	4400	4400	4400	6000	110	
	20.000	29	44	4400	4400	4400		110	
	25.000	29	44	4400	4400	4400		110	
	28.000	29	44	4400	4400	4400		110	
	35.000	29	44	4400	4400	4400		110	
	40.000	29	44	4400	4400	4400		110	
	50.000	29	44	4800	4800	4800		110	
	70.000	29	44	5500	5500	5500		107	
	100.000	19	35	5500	5500	5500		88	
MPG100	16.000	83	120	3500	3500	3500	6000	275	
	20.000	83	120	3500	3500	3500		275	
	25.000	83	120	3500	3500	3500		275	
	28.000	83	120	3500	3500	3500		275	
	35.000	83	120	3500	3500	3500		275	
	40.000	76	120	3500	3500	3500		275	
	50.000	83	120	3800	3800	3800		275	
	70.000	83	120	4500	4500	4500		275	
	100.000	58	90	4500	4500	4500		220	
MPG200	16.000	200	330	3100	3100	3100	4500	690	
	20.000	195	330	3100	3100	3100		675	
	25.000	195	330	3100	3100	3100		675	
	28.000	200	330	3100	3100	3100		690	
	35.000	195	330	3100	3100	3100		675	
	40.000	200	330	3100	3100	3100		690	
	50.000	195	330	3500	3500	3500		675	
	70.000	190	330	4200	4200	4200		640	
	100.000	135	235	4200	4200	4200		550	
MPG300	16.000	390	660	2900	2900	2900	4000	1400	
	20.000	390	660	2900	2900	2900		1400	
	25.000	390	660	2900	2900	2900		1400	
	28.000	390	660	2900	2900	2900		1400	
	35.000	390	660	2900	2900	2900		1400	
	40.000	390	660	2900	2900	2900		1400	
	50.000	390	660	3200	3200	3200		1400	
	70.000	380	600	3200	3200	3200		1400	
	100.000	245	480	3900	3900	3900		1100	

MPG planetary gearboxes

Technical data



Moments of inertia

- The moments of inertia relate to the drive shaft of the gearbox.
- The total moment of inertia is calculated by adding the values of the gearbox, motor and accessories.

1-stage gearboxes

Product	Dimensions	Ratio	Moment of inertia
	Motor shaft diameter		
	d	i	J
	[mm]		[kgcm ²]
MPG050	11	4.000	0.240
	11	5.000	0.200
	11	7.000	0.180
	11	10.000	0.160
	14	4.000	0.270
	14	5.000	0.230
	14	7.000	0.210
	14	10.000	0.190
	19	4.000	0.440
	19	5.000	0.400
	19	7.000	0.340
	19	10.000	0.330
MPG100	14	4.000	0.900
	14	5.000	0.720
	14	7.000	0.570
	14	10.000	0.500
	19	4.000	1.040
	19	5.000	0.870
	19	7.000	0.720
	19	10.000	0.640
	24	4.000	1.750
	24	5.000	1.570
	24	7.000	1.420
	24	10.000	1.350

Product	Dimensions	Ratio	Moment of inertia
	Motor shaft diameter		
	d	i	J
	[mm]		[kgcm ²]
MPG200	19	4.000	3.480
	19	5.000	2.940
	19	7.000	2.500
	19	10.000	2.270
	24	4.000	4.000
	24	5.000	3.460
	24	7.000	3.020
	24	10.000	2.790
	28	4.000	5.810
	28	5.000	5.270
	28	7.000	4.820
	28	10.000	4.590
MPG300	24	4.000	10.810
	24	5.000	8.980
	24	7.000	7.500
	24	10.000	6.700
	28	4.000	12.580
	28	5.000	10.750
	28	7.000	9.260
	28	10.000	8.460

MPG planetary gearboxes

Technical data



Moments of inertia

2-stage gearboxes

Product	Dimensions	Ratio	Moment of inertia	
			Motor shaft diameter	
			d	J
MPG050	[mm]		[kgcm ²]	
	11	16.000	0.210	
	11	20.000	0.180	
	11	25.000	0.180	
	11	28.000	0.170	
	11	35.000	0.170	
	11	40.000	0.160	
	11	50.000	0.160	
	11	70.000	0.160	
	11	100.000	0.160	
	14	16.000	0.240	
	14	20.000	0.210	
	14	25.000	0.210	
	14	28.000	0.200	
	14	35.000	0.200	
	14	40.000	0.190	
	14	50.000	0.190	
	14	70.000	0.190	
	14	100.000	0.190	
MPG100	[mm]		[kgcm ²]	
	11	16.000	0.240	
	11	20.000	0.200	
	11	25.000	0.190	
	11	28.000	0.170	
	11	35.000	0.170	
	11	40.000	0.160	
	11	50.000	0.160	
	11	70.000	0.160	
	11	100.000	0.160	
	14	16.000	0.270	
	14	20.000	0.230	
	14	25.000	0.220	
	14	28.000	0.210	
	14	35.000	0.200	
	14	40.000	0.190	
	14	50.000	0.190	
	14	70.000	0.190	
	14	100.000	0.190	
MPG200	[mm]		[kgcm ²]	
	14	16.000	0.780	
	14	20.000	0.620	
	14	25.000	0.600	
	14	28.000	0.520	
	14	35.000	0.510	
	14	40.000	0.470	
	14	50.000	0.470	
	14	70.000	0.460	
	14	100.000	0.460	
	19	16.000	0.920	
	19	20.000	0.770	
	19	25.000	0.750	
	19	28.000	0.670	
	19	35.000	0.660	
	19	40.000	0.620	
	19	50.000	0.610	
	19	70.000	0.610	
	19	100.000	0.600	

6.2.6

Motors

MCS synchronous servo motors

0.25 to 190 Nm



MCS synchronous servo motors



Contents

General information	List of abbreviations	6.11 - 4
	Product key	6.11 - 6
	Product information	6.11 - 8
	Functions and features	6.11 - 9
	Dimensioning	6.11 - 10
Technical data	Standards and operating conditions	6.11 - 17
	Permissible radial and axial forces	6.11 - 18
	Rated data, non-ventilated	6.11 - 19
	Rated data, forced ventilated	6.11 - 24
	Selection tables, Servo Drives 9400 HighLine	6.11 - 26
	Selection tables, Inverter Drives 8400 TopLine	6.11 - 36
	Selection tables, Servo Drives ECS	6.11 - 47
	Selection tables, Servo Inverter 9300	6.11 - 56
	Torque characteristics	6.11 - 63
	Dimensions, self-ventilated	6.11 - 100
	Dimensions, forced ventilated	6.11 - 104
Accessories	Permanent magnet holding brake	6.11 - 107
	Resolver	6.11 - 109
	Incremental encoder and SinCos absolute value encoder	6.11 - 110
	Blowers	6.11 - 112
	Temperature monitoring	6.11 - 113
	Terminal box	6.11 - 114
	ICN connector	6.11 - 116

MCS synchronous servo motors

General information



List of abbreviations

$\eta_{100\%}$	[%]	Efficiency
$\cos \phi$		Power factor
dU/dt	[kV/ μ s]	Insulation resistance
$F_{ax,-}$	[N]	Min. axial force
$F_{ax,+}$	[N]	Max. axial force
$f_{in,max}$	[Hz]	Max. input frequency
f_{max}	[kHz]	Limit frequency
f_{max}	[kHz]	Max. switching frequency
f_N	[Hz]	Rated frequency
F_{rad}	[N]	Max. radial force
H_{max}	[m]	Site altitude
I_0	[A]	Standstill current
I_{max}	[A]	Max. short-time DC-bus current
I_{max}	[A]	Max. current
I_{max}	[A]	Max. current consumption
I_{max}	[A]	Max. current
I_{max}	[A]	Max. DC-bus current
I_N	[A]	Rated current
J	[kgcm ²]	Moment of inertia
J_{MB}	[kgcm ²]	Moment of inertia
$KE_{LL\ 150\ ^\circ C}$	[V /1000 rp]	Voltage constant
$Kt_{0\ 150\ ^\circ C}$	[Nm/A]	Torque constant
L	[mH]	Mutual inductance
$L_{1\sigma}$	[mH]	Stator leakage inductance
$L_{2\sigma}$	[mH]	Rotor leakage inductance
L_N	[mH]	Rated inductance
m	[kg]	Mass
M_0	[Nm]	Stall torque
$M_{0,\ max}$	[Nm]	Max. standstill torque
M_{av}	[Nm]	Average dynamic torque
M_{max}	[Nm]	Max. torque
M_N	[Nm]	Rated torque
n_{eto}	[r/min]	Transition speed
n_k	[r/min]	Speed
n_{max}	[r/min]	Max. speed

n_N	[r/min]	Rated speed
P_N	[kW]	Rated power
Q_E	[J]	Maximum switching energy
R	[Ω]	Insulation resistance
R	[Ω]	Min. insulation resistance
R_1	[Ω]	Stator impedance
R_2	[Ω]	Charging resistor
R_2	[Ω]	Rotor impedance
$R_{UV\ 150\ ^\circ C}$	[Ω]	Stator impedance
$R_{UV\ 20\ ^\circ C}$	[Ω]	Stator impedance
$S_{hü}$	[1/h]	Transition operating frequency
T	[$^\circ$ C]	Operating temperature
T	[$^\circ$ C]	Rated temperature
T	[$^\circ$ C]	Max. ambient temperature of bearing
T	[$^\circ$ C]	Max. surface temperature
T	[$^\circ$ C]	Max. ambient temperature for transport
T	[$^\circ$ C]	Min. ambient storage temperature
T	[$^\circ$ C]	Min. ambient temperature for transport
T	[$^\circ$ C]	Ambient temperature
t_1	[ms]	Engagement time
t_2	[ms]	Disengagement time
$T_{opr,max}$	[$^\circ$ C]	Max. ambient operating temperature
$T_{opr,min}$	[$^\circ$ C]	Min. ambient operating temperature
$U_{in,max}$	[V]	Max. input voltage
$U_{in,min}$	[V]	Min. input voltage
U_{max}	[V]	Max. mains voltage
U_{max}	[V]	Min. input voltage
U_{min}	[V]	Min. mains voltage
$U_{N, AC}$	[V]	Rated voltage
$U_{N, DC}$	[V]	Rated voltage
Z_{ro}	[Ω]	Rotor impedance
Z_{rs}	[Ω]	Impedance
Z_{so}	[Ω]	Stator impedance

MCS synchronous servo motors

General information



List of abbreviations


CE	Communauté Européenne
CSA	Canadian Standards Association
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UkrSEPRO	Certificate for Ukraine
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

MCS synchronous servo motors



General information

Product key

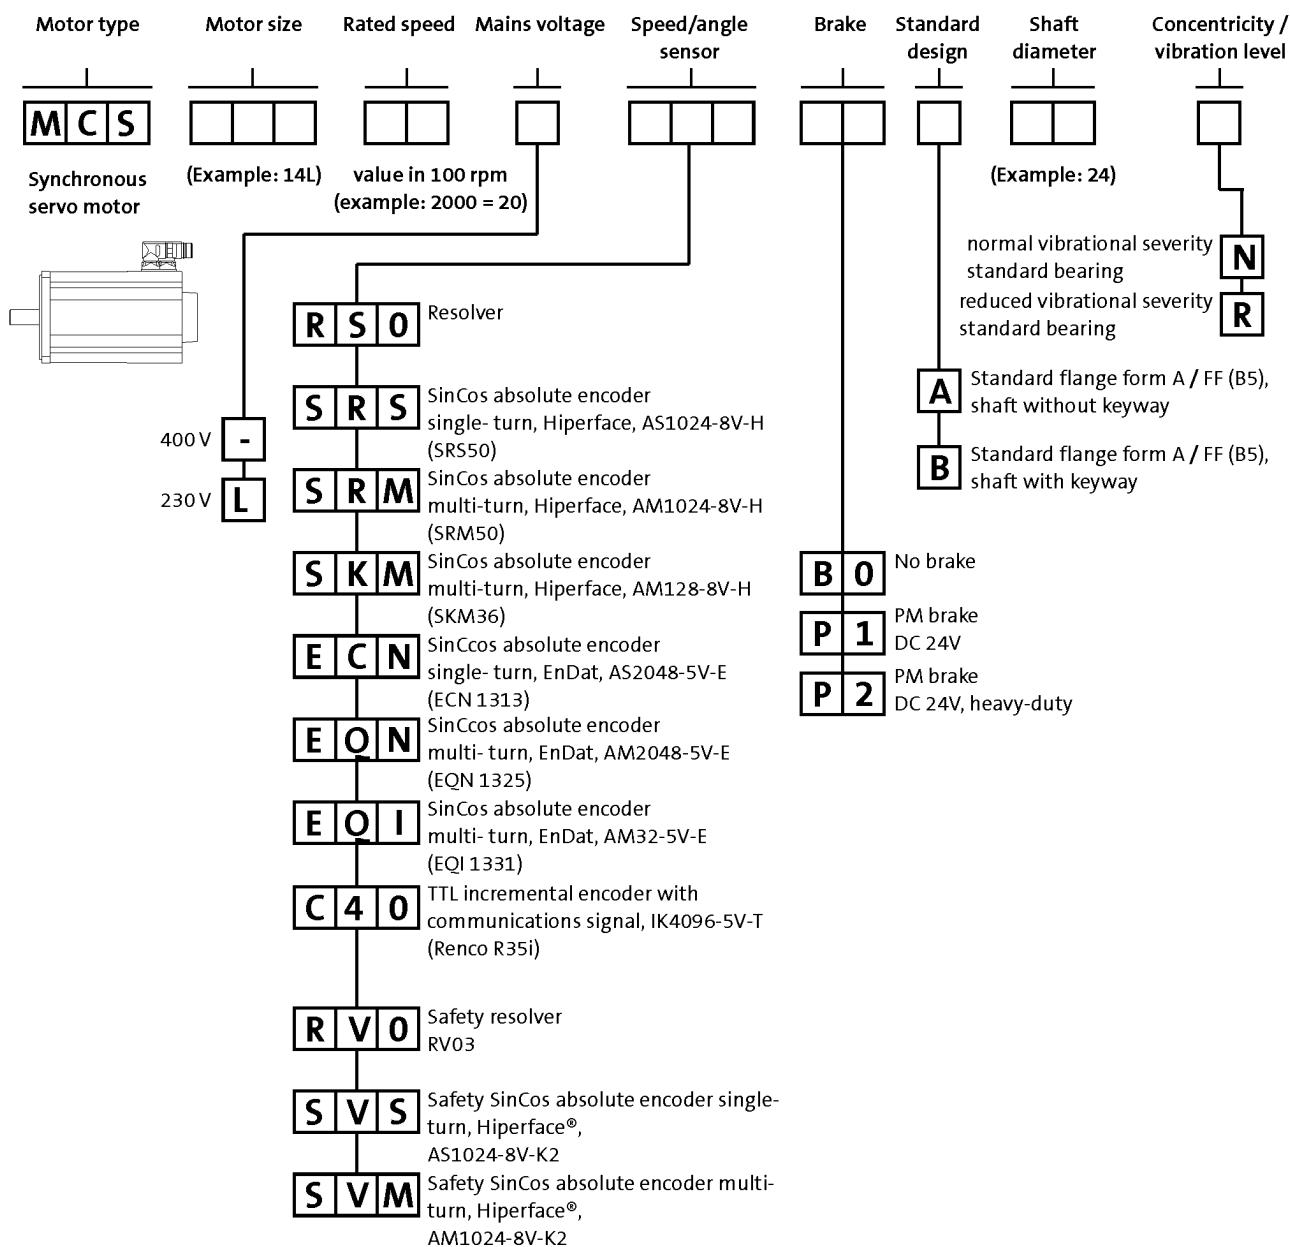


MCS synchronous servo motors



General information

Product key

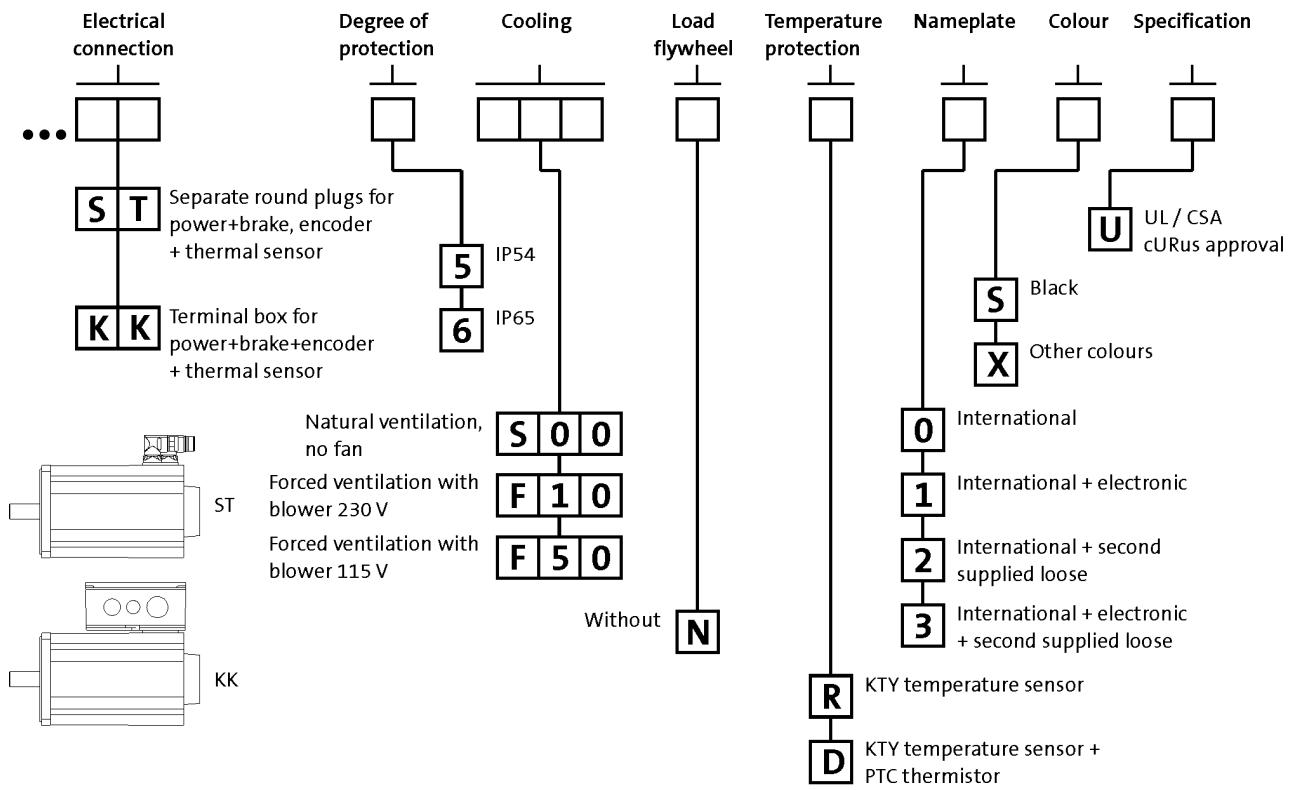

MCS synchronous servo motors

General information



Product information

When space is limited, but strict requirements in terms of dynamics and precision still have to be met, the MCS synchronous servo motors are the right choice.

With a power range from 0.25 kW to 15.8 kW and a rated torque range from 0.5 Nm to 72 Nm and peak torques of up to 190 Nm, these motors leave nothing to be desired in installations requiring compact and dynamic drive technology.

The stator winding of the MCS motors employs innovative Single Element Pole Technology – SEPT – and is made up of individual coils. High-quality magnetic materials and specially developed pole shapes set the conditions for their excellent drive characteristics. This results in a significant increase in power density, while at the same time reducing moments of inertia. The minimum detent torques offer exceptional smooth running characteristics and thereby secure excellent control behaviour.

The robust mechanical structure with reinforced bearings, the high degree of protection and the full stator encapsulation increase operational reliability, even in harsh ambient conditions.

Advantages

- High dynamic performance thanks to low moments of inertia
- Compact size with high power density
- Cooling with or without axial external fan
- Robust regenerative resolver system as standard
- Alternatively sin/cos encoder for the highest precision
- Easy to install and service friendly thanks to use of SpeedTec connectors
- Optional terminal box
- Protection: IP54, IP65 optional
- cURus-approved, GOST-certified, CE, RoHS compliant
- Smooth surface
- Single Element Pole Technology
- Optimum rotation characteristics
- Virtually free of detent torque
- Electronic nameplate



MCS09 synchronous servo motor

MCS synchronous servo motors



General information

Functions and features

	MCS06	MCS09	MCS12	MCS14	MCS19
Design	B5-FF75	B5-FF100	B5-FF130	B5-FF165	B5-FF215
Shaft end (with and without keyway)	11 x 23	14 x 30	19 x 40	24 x 50	28 x 60
A end shield			Not oil-tight		
Brake	DC 24 V		DC 24 V 24 V DC, reinforced		
Speed and angle encoder		Resolver SinCos single-turn/multi-turn			
Cooling					
Without blower		Naturally ventilated			
Axial blower, 1 phase			230 V; 50 Hz 115 V; 60 Hz		
Thermal sensor					
Thermal detector		KTY			
PTC thermistor			2x PTC additional (3-phase monitoring)		
Motor connection: plug connector	Power + brake Encoder + thermal sensor		Power + brake Encoder + thermal sensor Blower		
Motor connection: terminal box		Power + brake + encoder + thermal sensor			
Shaft bearings					
Bearing type	Deep-groove ball bearing with high-temperature resistant grease, sealing disc or cover plate				
Position of the locating bearing		Non-drive end			
Colour		RAL9005M			

► Terminal boxes not possible if blower is fitted.

MCS synchronous servo motors

General information



Dimensioning

Speed-dependent safety functions

Single encoder concepts with resolvers

Servo motors can perform speed-dependent safety functions for safe speed and / or safe relative position monitoring in a drive system with the Servo Drives 9400. The SM301 safety module, which can be integrated in the Servo Drives 9400, is used to implement these functions. When planning systems/installations of this kind, the following must always be observed:

When using just one single feedback system in the environment of these safety applications, the applicable safety engineering standard IEC 61800-5-2 [Adjustable speed electrical power drive systems - Part: 5-2: Safety requirements - Functional] stipulates special requirements for the connection between feedback system and motor shaft. This is due to the fact that two-channel safety systems at this point in the mechanical system are actually designed as single-channel systems. If this mechanical connection is designed with considerable overdimensioning, the standard permits exclusion of the fault "encoder-shaft breakage" or "encoder-shaft slip". As such, acceleration limit values must not be exceeded for the individual drive solutions. You can find the limit values in the corresponding feedback data of the individual motor ranges.

Speed-dependent safety functions in connection with the SM301 safety module

For the following speed-dependent safety functions, the motor-feedback system combinations listed in the following table are available:

- Safe stop 1 (SS1)
- Safe operational stop (SOS)
- Safely Limited Speed (SLS)
- Safe Maximum Speed (SMS)
- Safe direction (SDI)
- Operation mode selector (OMS) with confirmation (ES)
- Safe speed monitor (SSM)
- Safely limited increment (SLI).

Encoder type	Encoder type	Product key	Feedback	Safe speed monitoring
			Design	
SinCos absolute value	Single-turn	AS1024-8V-K2		PL d/SIL 2
	Multi-turn	AM1024-8V-K2		PL e/SIL 3
Resolver		RV03	2-encoder concept	up to PL e / SIL 3

MCS synchronous servo motors



General information

Dimensioning

Cooling effect of mounting flange

Mounting on a thermally conducting / insulating plate or machine chassis has an influence on heating up the motor, particularly when using naturally ventilated motors.

The motor rating data specified in the catalogue applies when mounting on a steel plate with free convection with the following dimensions:

- MCS06: 270 x 270 mm
- MCS09: 330 x 330 mm
- MCS12 / 14 / 19: 450 x 450 mm

Vibrational severity

		MCS06	MCS09	MCS12	MCS14	MCS19
Vibrational severity						
IEC/EN 60034-14				A		
Maximum r.m.s. value of the vibration velocity ¹⁾	[mm/s]			1.60		

¹⁾ Free suspension

► at n = 600 to 3,600 rpm


MCS synchronous servo motors



General information

Dimensioning

Concentricity and axial run-out of the mounting flanges and smooth running of the shaft ends

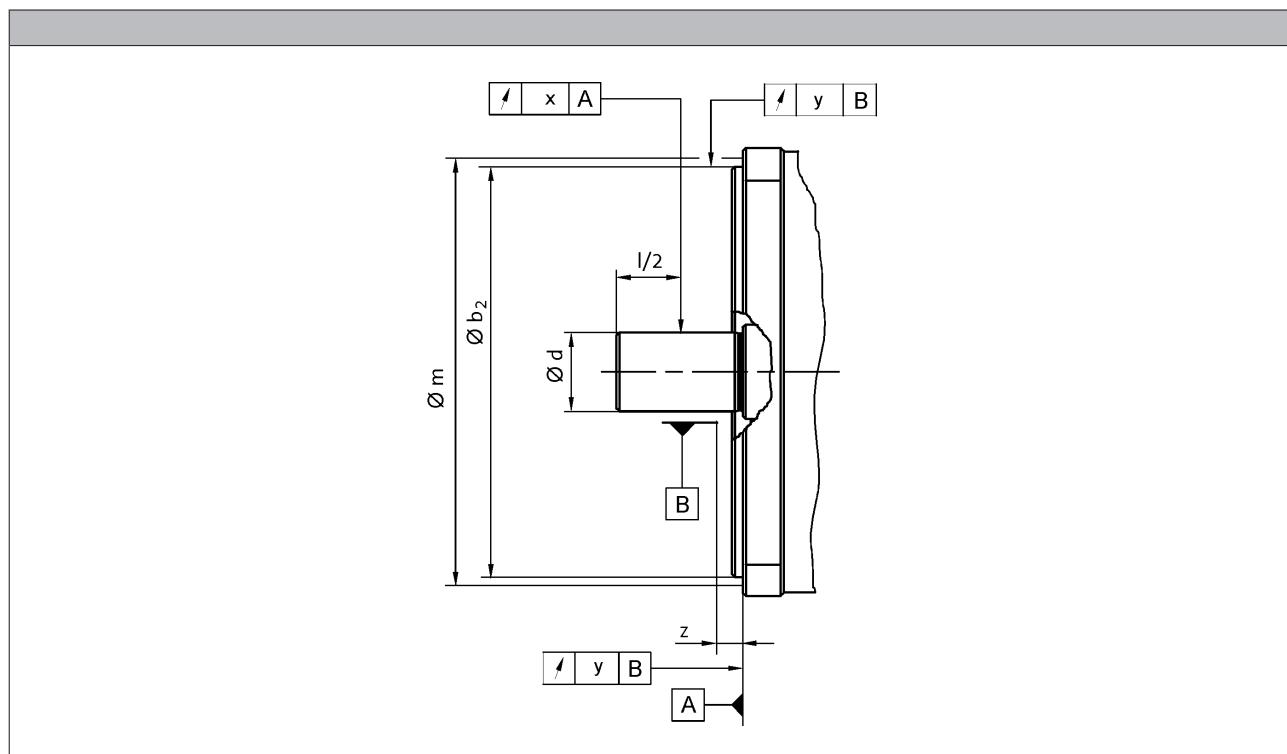

			MCS06	MCS09	MCS12	MCS14	MCS19	
Flange size			FF75	FF100	FF130	FF165	FF215	
Dimensions	b ₂	j6	[mm]	60	80	110	130	180
	d	k6	[mm]	11	14	19	24	28
Distance								
Measuring diameter	m		[mm]	65.0	85.0	115	135	185
Dial gauge holder for flange check	z	+/- 1	[mm]			10.0		
Concentricity								
IEC 60072					Normal class			
Value	y		[mm]	0.080		0.10		
Linear movement								
IEC 60072					Normal class			
Value	y		[mm]	0.080		0.10		
Smooth running								
IEC 60072					Normal class			
Value	x		[mm]	0.035		0.040		

- Limit values for checking the smooth running of the shaft ends as well as the concentricity and axial run-out of the mounting flange to IEC 60072


MCS synchronous servo motors



General information

Dimensioning

Notes on the selection tables

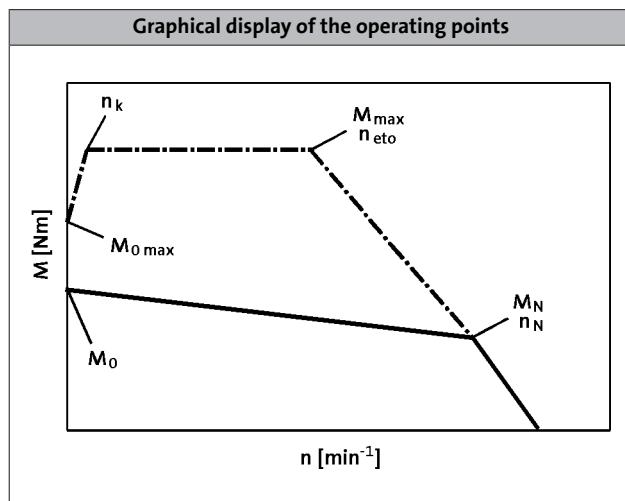

Please note:

- In case of an active load (e.g. vertical drive axes, hoists, test benches, unwinders), $M_{0\ max}$ has to be considered
- In case of a passive load (e.g. horizontal drive axes), M_{max} can be usually used
- In case of a speed $n < n_k$ and inverter-specifically, the achievable torque $M_{0\ max}$ is smaller than M_{max}
- In case of a speed $n = 0$, the standstill torque M_0 and the standstill current I_0 have to be reduced by 30% after 2 seconds. In case of applications which require a longer holding of M_0 , we recommend the drive to be held via the holding brake and reduce the current, e.g. by controller inhibit.
- In case of servo inverters, the switching frequency dependent overload capacity is considered in the default setting. For more information, see the servo inverter catalogue.

	n_k [r/min]
MCS	75.0
MDSKS	
MDFKS	100

Further selection tables with different switching frequencies are available with the following codes:

- DS_ZT_MCS_0001
- DS_ZT_MCA_0001
- DS_ZT_MDSKS_0001
- DS_ZT_MDFKS_0001

Simply enter this code (e.g. DS_ZT_MCS_0001) as a search string at www.lenze.de/dsc and you will be given the information immediately in the form of a PDF format.


MCS synchronous servo motors

General information



Dimensioning

Notes on the torque characteristics

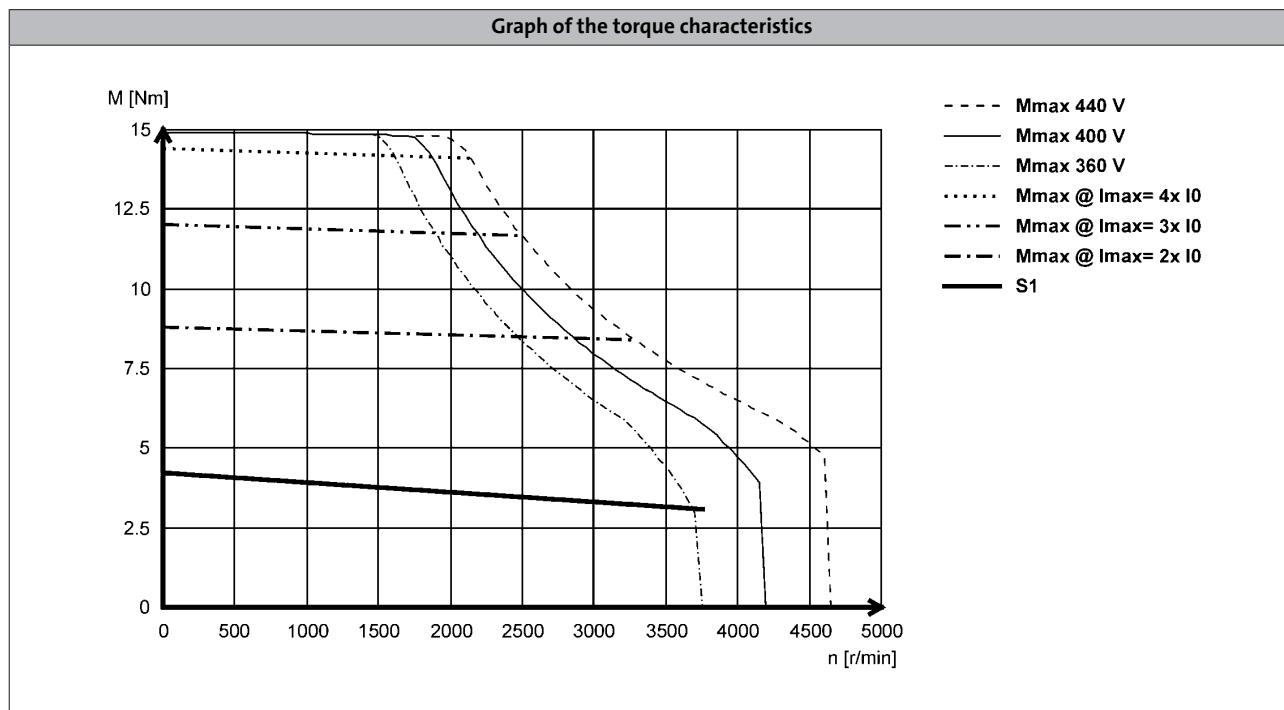

With synchronous servo motors, the limit torque characteristics that result from the selection of servo inverters with maximum currents are also shown alongside the characteristics for continuous operation (S1). These correspond to a multiple of the motor standstill current ($2 \times I_0$ to $4 \times I_0$).

Characteristics in the Internet

You can find the torque characteristic for inverter-motor combinations on the Internet at www.lenze.de/dsc. This lists all useful combinations with the servo inverters 9400, 9300, ECS and Inverter Drives 8400 TopLine. These characteristics are each determined using the factory default settings of the inverters:

- 9400 with variables switching frequency.
This means that up to 6-fold overcurrent can be applied in borderline cases.
- 9300 and ECS with fixed switching frequency.
- 8400 TopLine with variables switching frequency.

The continuous operation characteristics (S1) show the inverter-independent motor rating values

Further information on the terms switching frequency and factory default settings can be found in the operating manual of the respective servo inverter.

MCS synchronous servo motors




General information

Dimensioning

Influence of ambient temperature and site altitude

The information relating to the servo motors in the tables and graphs is valid for a maximum ambient temperature (T_{opr}) of 40 °C and a site altitude (H) up to 1000 m above sea level. The torque correction factor (k_{M1}) shall be applied to the S1 torque characteristic ($M_0 \dots M_N$) in the event of differing installation conditions.

- The maximum permissible ambient temperature (T_{opr}) for servo motors with blowers is 40 °C

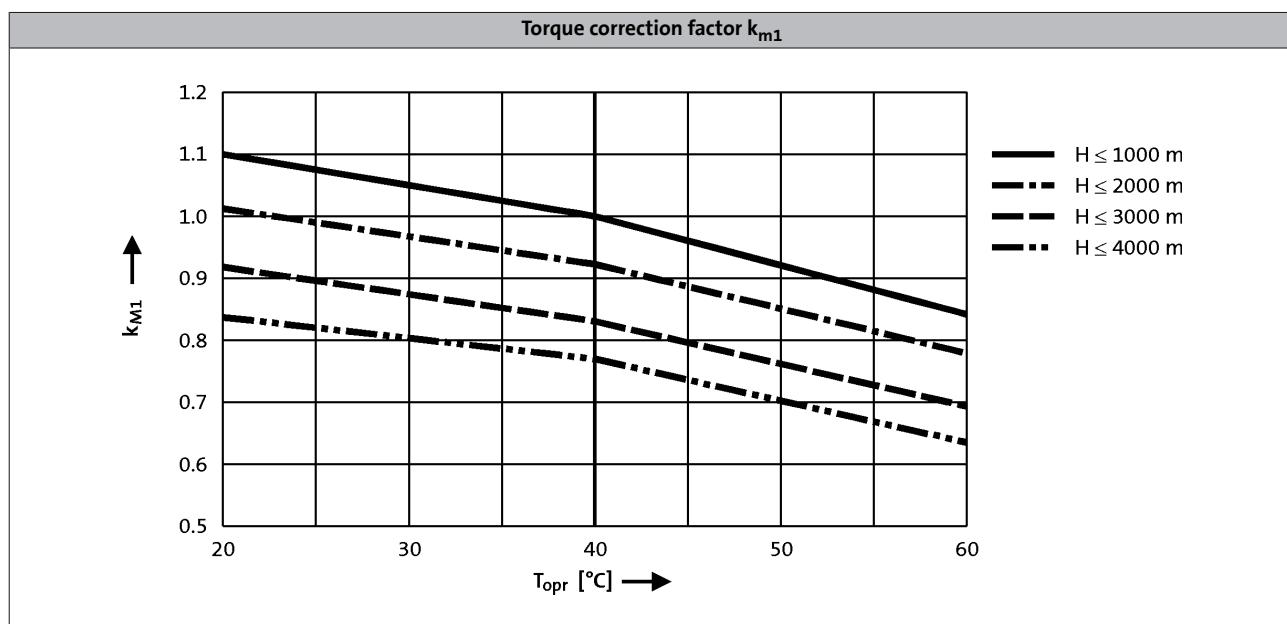

MCS synchronous servo motors

General information



MCS synchronous servo motors



Technical data

Standards and operating conditions


			MCS	
Cooling type			Naturally ventilated	Blower
Enclosure			IP54	IP54
EN 60529			IP65	
Temperature class			F	H
IEC/EN 60034-1; utilisation				
IEC/EN 60034-1; insulation system (enamel-insulated wire)				
Conformity			Low-Voltage Directive	
CE			2006/95/EC	
EAC			TP TC 004/2011 (TR C)	
Approval			UkrSEPRO	
CSA			CSA 22.2 No. 100	
cURus			UL 1004-1 UL 1004-6 Power Conversion Equipment (File-No. E210321)	
Max. voltage load			Pulse voltage limiting curve A	
IEC/TS 60034-25				
Smooth running			Normal class	
IEC 60072				
Linear movement			Normal class	
IEC 60072				
Concentricity			Normal class	
IEC 60072				
Mechanical ambient conditions (vibration)			3M6	
IEC/EN 60721-3-3				
Min. ambient operating temperature				
Without brake	T _{opr,min}	[°C]	-20	-15
With brake	T _{opr,min}	[°C]		-10
Max. ambient temperature for operation			40	
	T _{opr,max}	[°C]		
Max. surface temperature				
	T	[°C]	140	110
Mechanical tolerance				
Flange centring diameter			b ₂ ≤ 230 mm = j6 b ₂ > 230 mm = h6	
Shaft diameter			d ≤ 50 mm = k6 d > 50 mm = m6	
Site altitude				
Amsl	H _{max}	[m]	4000	

MCS synchronous servo motors



Technical data

Permissible radial and axial forces

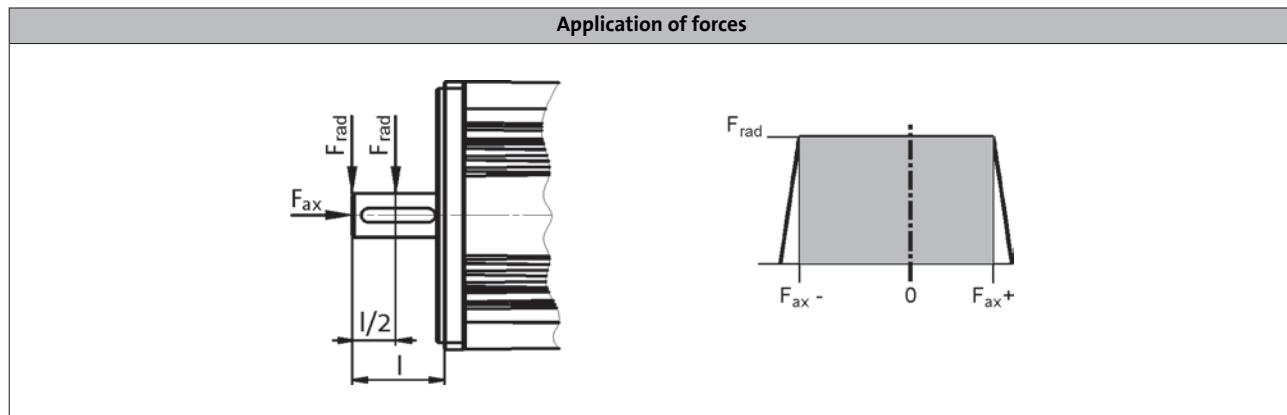

Application of force at $l/2$

Bearing service life L_{10}															
	5000 h		10000 h		20000 h		30000 h		50000 h						
	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]												
MCS06	740	-260	140	590	-210	80	470	-170	40	410	-150	30	340	-140	10
MCS09	1040	-700	470	830	-550	310	660	-440	200	580	-380	150	490	-330	90
MCS12	1030	-880	560	820	-690	370	650	-550	230	570	-490	160	480	-420	100
MCS14	1830	-1150	720	1450	-900	470	1150	-720	290	1010	-640	200	850	-550	120
MCS19	3840	-1550	950	3050	-1210	620	2430	-960	360	2120	-840	250	1790	-730	130

Application of force at l

Bearing service life L_{10}															
	5000 h		10000 h		20000 h		30000 h		50000 h						
	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]												
MCS06	630	-210	90	500	-170	50	400	-140	20	350	-130	0	290	-120	-10
MCS09	900	-630	400	710	-500	260	570	-400	160	500	-350	120	420	-300	70
MCS12	890	-820	490		-640	320	560	-520	190	490	-460	130		-400	
MCS14	1590	-1040	610	1260	-820	390	1000	-660	230	880	-580	150	740	-510	
MCS19	3330	-1320	730	2650	-1040	450	2100	-830	240	1840	-740	140	1550	-640	40

- The values for the bearing service life L_{10} refer to an average speed of 4000 r/min. Depending on the ambient temperatures, the service life of the bearings is also reduced by the grease lifetime.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS06C41-	4050	0.80	0.60	2.40	0.25	1.30	1.30	5.40	225	270
MCS06C60-	6000	0.80	0.50	2.40	0.31	2.50	2.40	10.8	135	400
MCS06F41-	4050	1.50	1.20	4.40	0.51	1.50	1.50	5.30	320	270
MCS06F60-	6000	1.50	0.90	4.40	0.57	2.90	2.50	10.5	180	400
MCS06I41-	4050	2.00	1.50	6.20	0.64	1.70	1.60	5.90	325	270
MCS06I60-	6000	2.00	1.20	6.20	0.75	3.40	2.90	11.8	190	400
MCS09D41-	4050	3.30	2.30	9.50	1.00	2.60	2.30	10.0	320	270
MCS09D60-	6000	3.30	1.80	9.50	1.10	5.30	3.80	20.0	210	400
MCS09F38-	3750	4.20	3.10	15.0	1.20	3.00	2.50	15.0	330	250
MCS09F60-	6000	4.20	2.40	15.0	1.50	6.00	4.50	30.0	230	400
MCS09H41-	4050	5.50	3.80	20.0	1.60	4.30	3.40	20.0	300	270
MCS09H60-	6000	5.50	3.00	20.0	1.90	8.50	6.00	40.0	190	400
MCS09L41-	4050	7.50	4.50	32.0	1.90	6.20	4.20	32.0	295	270
MCS09L51-	5100	7.50	3.60	32.0	1.90	12.4	6.90	64.0	180	340

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$K_E_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^2)$ [r/min]	$m^1)$ [kg]
MCS06C41-	65.0	0.14	36.6	27.1	36.5	51.0	0.66	8000	1.80
MCS06C60-	70.0	0.14	18.3	6.80	9.10	12.8	0.33	8000	1.80
MCS06F41-	77.0	0.22	60.1	21.9	29.5	63.5	1.05	8000	2.20
MCS06F60-	81.0	0.22	30.0	5.50	7.40	15.9	0.53	8000	2.20
MCS06I41-	81.0	0.30	73.4	18.8	25.4	60.2	1.21	8000	2.90
MCS06I60-	84.0	0.30	36.7	4.70	6.30	15.1	0.60	8000	2.90
MCS09D41-	87.0	1.10	71.2	7.00	9.40	25.1	1.25	7000	4.30
MCS09D60-	87.0	1.10	35.6	1.80	2.40	6.30	0.62	7000	4.30
MCS09F38-	91.0	1.50	79.8	5.20	7.00	24.6	1.40	7000	5.20
MCS09F60-	91.0	1.50	39.9	1.30	1.80	6.20	0.70	7000	5.20
MCS09H41-	91.0	1.90	75.7	3.20	4.30	16.1	1.29	7000	6.10
MCS09H60-	91.0	1.90	37.8	0.80	1.10	4.00	0.65	7000	6.10
MCS09L41-	91.0	2.80	71.7	1.80	2.40	9.90	1.21	7000	7.90
MCS09L51-	91.0	2.80	35.9	0.44	0.59	2.50	0.60	7000	7.90

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS12D20-	1950	6.40	5.50	18.0	1.10	2.70	2.60	10.0	345	130
MCS12D41-	4050	6.40	4.30	18.0	1.80	5.50	4.50	20.0	310	270
MCS12H15-	1500	11.4	10.0	29.0	1.60	4.10	3.80	12.0	300	100
MCS12H35-	3525	11.4	7.50	29.0	2.80	8.20	5.70	24.0	325	235
MCS12L20-	1950	15.0	13.5	56.0	2.80	6.20	5.90	28.0	330	130
MCS12L41-	4050	15.0	11.0	56.0	4.70	12.4	10.2	57.0	300	270
MCS14D15-	1500	11.0	9.20	29.0	1.45	5.00	4.50	17.0	305	100
MCS14D36-	3600	11.0	7.50	29.0	2.80	10.0	7.50	33.0	295	240
MCS14H15-	1500	21.0	16.0	55.0	2.50	8.50	6.60	26.0	325	100
MCS14H32-	3225	21.0	14.0	55.0	4.70	16.9	11.9	52.0	295	215
MCS14L15-	1500	28.0	23.0	77.0	3.60	12.0	9.70	37.0	315	100
MCS14L32-	3225	28.0	17.2	77.0	5.80	24.0	15.0	75.0	275	215
MCS14P14-	1350	37.0	30.0	105	4.20	12.2	10.8	46.0	340	90
MCS14P32-	3225	37.0	21.0	105	7.10	24.3	15.6	92.0	315	215

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$K_E_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^2)$ [r/min]	$m^1)$ [kg]
MCS12D20-	79.0	4.00	137	8.70	11.8	52.2	2.34	6000	6.40
MCS12D41-	84.0	4.00	68.6	2.20	2.90	13.0	1.17	6000	6.40
MCS12H15-	88.0	7.30	173	5.70	7.70	42.1	2.79	6000	9.50
MCS12H35-	91.0	7.30	86.5	1.40	1.90	10.5	1.40	6000	9.50
MCS12L20-	90.0	10.6	149	2.20	3.00	21.8	2.42	6000	12.6
MCS12L41-	91.0	10.6	74.6	0.55	0.75	5.50	1.21	6000	12.6
MCS14D15-	88.0	8.10	129	4.00	5.40	49.8	2.19	6000	10.7
MCS14D36-	92.0	8.10	64.2	1.00	1.35	12.5	1.09	6000	10.7
MCS14H15-	92.0	14.2	153	2.08	2.81	34.1	2.48	6000	15.5
MCS14H32-	93.0	14.2	76.3	0.52	0.70	8.50	1.24	6000	15.5
MCS14L15-	90.0	23.4	152	1.21	1.64	22.0	2.33	6000	20.1
MCS14L32-	93.0	23.4	76.2	0.30	0.41	5.50	1.16	6000	20.1
MCS14P14-	90.0	34.7	179	1.10	1.49	23.9	3.04	6000	24.9
MCS14P32-	93.0	34.7	89.4	0.28	0.37	6.00	1.52	6000	24.9

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS19F14-	1425	32.0	27.0	86.0	4.00	9.90	8.60	31.0	335	95
MCS19F30-	3000	32.0	21.0	86.0	6.60	19.8	14.0	63.0	300	200
MCS19J14-	1425	51.0	40.0	129	6.00	15.2	12.3	45.0	330	95
MCS19J30-	3000	51.0	29.0	129	9.10	30.5	18.5	90.0	300	200
MCS19P14-	1350	64.0	51.0	190	7.20	17.5	14.3	60.0	330	90
MCS19P30-	3000	64.0	32.0	190	10.0	34.9	19.0	120	320	200

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$KE_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^{2)}$ [r/min]	$m^1)$ [kg]
MCS19F14-	92.0	65.0	195	1.30	1.75	20.8	3.23	4000	23.0
MCS19F30-	93.0	65.0	97.2	0.32	0.44	5.20	1.62	4000	23.0
MCS19J14-	92.0	105	199	0.65	0.88	12.8	3.31	4000	30.0
MCS19J30-	93.0	105	99.5	0.16	0.22	3.20	1.65	4000	30.0
MCS19P14-	92.0	160	216	0.54	0.73	9.60	3.66	4000	40.0
MCS19P30-	93.0	160	108	0.14	0.18	2.40	1.83	4000	40.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 230 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS06C41L	4050	0.80	0.60	2.40	0.25	2.50	2.50	10.8	125	270
MCS06C60L	6000	0.80	0.50	2.40	0.31	4.30	4.00	18.5	85	400
MCS06F41L	4050	1.50	1.20	4.40	0.51	2.90	2.90	10.5	165	270
MCS06F60L	6000	1.50	0.90	4.40	0.57	3.80	3.40	16.5	125	400
MCS06I41L	4050	2.00	1.50	6.20	0.64	3.10	2.90	11.8	175	270
MCS06I60L	6000	2.00	1.20	6.20	0.75	4.20	3.60	16.0	150	400
MCS09D41L	4050	3.30	2.30	9.50	1.00	5.30	4.60	20.0	165	270
MCS09D60L	6000	3.30	1.80	9.50	1.10	10.3	7.00	39.0	110	400
MCS09F38L	3750	4.20	3.10	15.0	1.20	6.00	5.00	30.0	160	250
MCS09F60L	6000	4.20	2.40	15.0	1.50	10.5	7.90	53.0	125	400
MCS09H41L	4050	5.50	3.80	20.0	1.60	8.50	6.80	40.0	160	270
MCS09H60L	6000	5.50	3.00	20.0	1.90	12.0	8.00	57.0	145	400
MCS09L41L	4050	7.50	4.50	32.0	1.90	12.4	8.40	64.0	145	270

	$\eta_{100\%}$ [%]	$J^{1)}$ [kgcm ²]	$KE_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^{2)}$ [r/min]	$m^{1)}$ [kg]
MCS06C41L	65.0	0.14	21.5	6.00	8.00	12.8	0.33	8000	1.80
MCS06C60L	70.0	0.14	12.5	2.20	2.90	4.30	0.19	8000	1.80
MCS06F41L	81.0	0.22	34.5	5.50	7.40	15.9	0.62	8000	2.20
MCS06F60L	82.0	0.22	22.2	2.30	3.00	6.90	0.40	8000	2.20
MCS06I41L	81.0	0.30	38.0	4.70	6.20	15.1	0.64	8000	2.90
MCS06I60L	84.0	0.30	28.5	2.50	3.40	9.30	0.48	8000	2.90
MCS09D41L	87.0	1.10	35.6	1.80	2.40	6.30	0.62	7000	4.30
MCS09D60L	87.0	1.10	18.3	0.45	0.61	1.70	0.32	7000	4.30
MCS09F38L	90.0	1.50	39.9	1.30	1.80	6.20	0.70	7000	5.20
MCS09F60L	91.0	1.50	22.8	0.42	0.56	2.00	0.40	7000	5.20
MCS09H41L	91.0	1.90	37.8	0.80	1.10	4.00	0.65	7000	6.10
MCS09H60L	91.0	1.90	26.6	0.36	0.48	2.00	0.46	7000	6.10
MCS09L41L	91.0	2.80	35.9	0.44	0.59	2.50	0.60	7000	7.90

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 230 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS12D20L	1950	6.40	5.50	18.0	1.10	5.50	5.20	20.0	175	130
MCS12D41L	4050	6.40	4.30	18.0	1.80	10.7	8.80	40.0	155	270
MCS12H15L	1500	11.4	10.0	29.0	1.60	8.20	7.80	24.0	158	100
MCS12H30L	3000	11.4	8.00	29.0	2.50	13.5	10.5	39.0	165	200
MCS12L20L	1950	15.0	13.5	56.0	2.80	12.4	11.8	57.0	165	130

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$KE_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^{\ 2)}$ [r/min]	$m^{\ 1)}$ [kg]
MCS12D20L	79.0	4.00	68.6	2.20	2.90	13.0	1.17	6000	6.40
MCS12D41L	84.0	4.00	35.0	0.55	0.75	3.40	0.60	6000	6.40
MCS12H15L	82.0	7.30	86.5	1.41	1.90	10.5	1.40	6000	9.50
MCS12H30L	87.0	7.30	53.0	0.50	0.67	4.00	0.86	6000	9.50
MCS12L20L	90.0	10.6	76.9	0.55	0.75	5.50	1.21	6000	12.6

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS12D17-	1650	7.50	7.00	17.7	1.20	3.20	3.00	10.0	330	110
MCS12D35-	3525	7.50	6.00	17.7	2.20	6.40	5.60	20.0	300	235
MCS12H14-	1350	12.8	12.0	29.0	1.70	4.30	4.10	12.0	310	90
MCS12H34-	3375	12.8	10.5	29.0	3.70	8.50	7.50	24.0	320	225
MCS12L17-	1650	19.0	17.0	56.4	2.90	7.20	6.70	28.0	300	110
MCS12L39-	3900	19.0	14.0	56.4	5.70	14.4	11.7	57.0	295	260
MCS14D14-	1350	12.5	12.0	29.0	1.70	5.70	5.40	17.0	345	90
MCS14D30-	3000	12.5	10.5	29.0	3.30	11.4	9.70	33.0	325	200
MCS14H12-	1200	25.5	23.5	54.8	3.00	9.30	8.30	26.0	335	80
MCS14H28-	2775	25.5	20.5	54.8	6.00	18.4	15.0	52.0	325	185
MCS14L14-	1350	34.5	30.5	77.1	4.30	13.4	11.8	37.0	335	90
MCS14L30-	3000	34.5	25.5	77.1	8.00	26.7	20.8	75.0	310	200
MCS14P11-	1050	43.5	42.0	105	4.60	14.1	13.4	46.0	330	70
MCS14P26-	2625	43.5	33.0	105	9.10	28.3	21.9	92.0	325	175

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$K_E_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^2)$ [r/min]	$m^1)$ [kg]
MCS12D17-	75.0	4.00	137	8.72	11.8	52.2	2.34	6000	8.50
MCS12D35-	82.0	4.00	68.6	2.18	2.94	13.0	1.17	6000	8.50
MCS12H14-	80.0	7.30	173	5.72	7.72	42.1	2.98	6000	11.6
MCS12H34-	86.0	7.30	86.5	1.39	1.88	10.5	1.51	6000	11.6
MCS12L17-	90.0	10.6	149	2.22	2.99	21.8	2.64	6000	14.7
MCS12L39-	94.0	10.6	74.6	0.55	0.75	5.50	1.32	6000	14.7
MCS14D14-	84.0	8.10	129	4.00	5.40	49.8	2.19	6000	14.5
MCS14D30-	92.0	8.10	64.2	1.00	1.35	12.5	1.09	6000	14.5
MCS14H12-	87.0	14.2	153	2.08	2.81	34.1	2.75	6000	19.5
MCS14H28-	93.0	14.2	76.3	0.52	0.70	8.50	1.39	6000	19.5
MCS14L14-	88.0	23.4	152	1.21	1.64	22.0	2.57	6000	24.0
MCS14L30-	92.0	23.4	76.2	0.30	0.41	5.50	1.29	6000	24.0
MCS14P11-	86.0	34.7	179	1.10	1.49	23.9	3.08	6000	29.0
MCS14P26-	92.0	34.7	89.4	0.28	0.37	6.00	1.54	6000	29.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS19F12-	1200	41.5	38.0	86.0	4.80	12.2	11.3	31.0	320	80
MCS19F29-	2850	41.5	32.5	86.0	9.70	24.5	20.1	63.0	320	190
MCS19J12-	1200	70.5	62.5	129	7.90	20.3	18.3	45.0	320	80
MCS19J29-	2850	70.5	50.5	129	15.1	40.6	31.0	90.0	315	190
MCS19P12-	1200	86.0	72.0	190	9.00	22.4	21.3	60.0	310	80
MCS19P29-	2850	86.0	53.0	190	15.8	44.7	29.5	120	315	190

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$KE_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_0\ 150\ ^\circ C$ [Nm/A]	$n_{max}^2)$ [r/min]	$m^1)$ [kg]
MCS19F12-	90.4	65.0	195	1.30	1.75	20.8	3.40	4000	29.0
MCS19F29-	94.7	65.0	97.2	0.32	0.44	5.20	1.69	4000	29.0
MCS19J12-	89.3	105	199	0.65	0.88	12.8	3.47	4000	36.0
MCS19J29-	92.8	105	99.5	0.16	0.22	3.20	1.74	4000	36.0
MCS19P12-	90.3	160	216	0.54	0.73	9.60	3.84	4000	46.0
MCS19P29-	93.4	160	108	0.14	0.18	2.40	1.92	4000	46.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
06C41-	0.6	4050	1.3	0.25	M ₀	0.8										
					M _N	0.6										
					M _{0,max}	2.4										
					M _{max}	2.4										
					n _{eto}	-										
06C60-	0.5	6000	2.4	0.31	M ₀	0.6	0.8									
					M _N	0.4	0.5									
					M _{0,max}	1.5	2.3									
					M _{max}	1.5	2.3									
					n _{eto}	-	-									
06F41-	1.2	4050	1.5	0.51	M ₀	1.5										
					M _N	1.2										
					M _{0,max}	4.4										
					M _{max}	4.4										
					n _{eto}	-										
06F60-	0.9	6000	2.5	0.57	M ₀	1.0	1.5									
					M _N	0.7	0.9									
					M _{0,max}	3.0	4.3									
					M _{max}	3.0	4.3									
					n _{eto}	-	-									
06I41-	1.5	4050	1.6	0.64	M ₀	2.0										
					M _N	1.5										
					M _{0,max}	6.2										
					M _{max}	6.2										
					n _{eto}	-										
06I60-	1.2	6000	2.9	0.75	M ₀	1.1	1.8	2.0								
					M _N	0.8	1.2	1.2								
					M _{0,max}	3.3	5.5	6.2								
					M _{max}	3.3	5.5	6.2								
					n _{eto}	-	-	-								
09D41-	2.3	4050	2.3	1.00	M ₀	2.4	3.3									
					M _N	1.9	2.3									
					M _{0,max}	6.3	9.5									
					M _{max}	6.3	9.5									
					n _{eto}	-	-									
09D60-	1.8	6000	3.8	1.10	M ₀			3.1	3.3							
					M _N			1.8	1.8							
					M _{0,max}			8.0	9.5							
					M _{max}			8.0	9.5							
					n _{eto}			-	-							
09F38-	3.1	3750	2.5	1.20	M ₀			4.2	4.2							
					M _N			3.1	3.1							
					M _{0,max}			11.6	14.9							
					M _{max}			11.6	14.9							
					n _{eto}			-	-							

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594	
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0	
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0	
09F60-	2.4	6000	4.5	1.50	M ₀			3.5	4.2	4.2	4.2						
					M _N			2.4	2.4	2.4	2.4						
					M _{0,max}			9.8	12.0	14.4	14.9						
					M _{max}			9.8	12.0	14.4	14.9						
					n _{eto}			-	-	-	-						
09H41-	3.8	4050	3.4	1.60	M ₀			4.0	5.5	5.5							
					M _N			3.5	3.8	3.8							
					M _{0,max}			12.0	17.5	20.4							
					M _{max}			12.0	17.5	20.4							
					n _{eto}			-	-	-							
09H60-	3.0	6000	6.0	1.90	M ₀				5.5	5.5	5.5	5.5					
					M _N				3.0	3.0	3.0	3.0					
					M _{0,max}				12.5	15.8	20.1	20.4					
					M _{max}				12.5	15.8	20.1	20.4					
					n _{eto}				-	-	-	-					
09L41-	4.5	4050	4.2	1.90	M ₀				6.0	7.5	7.5						
					M _N				4.5	4.5	4.5						
					M _{0,max}				17.4	22.2	28.5						
					M _{max}				17.4	22.2	28.5						
					n _{eto}				-	-	-						
09L51-	3.6	5100	6.9	1.90	M ₀					5.3	7.0	7.5	7.5	7.5			
					M _N					3.6	3.6	3.6	3.6	3.6			
					M _{0,max}					11.9	15.5	20.9	25.8	29.7			
					M _{max}					11.9	15.5	20.9	25.8	29.7			
					n _{eto}					-	-	-	-	-			
12D20-	5.5	1950	2.6	1.10	M ₀					4.4	6.4						
					M _N					4.0	5.5						
					M _{0,max}					11.8	17.7						
					M _{max}					11.8	17.7						
					n _{eto}					-	-						
12D41-	4.3	4050	4.5	1.80	M ₀						5.9	6.4					
					M _N						4.3	4.3					
					M _{0,max}						14.7	17.7					
					M _{max}						14.7	17.7					
					n _{eto}						-	-					
12H15-	10.0	1500	3.8	1.60	M ₀						8.7	11.4					
					M _N						8.2	10.0					
					M _{0,max}						24.6	29.0					
					M _{max}						24.6	29.0					
					n _{eto}						-	-					
12H35-	7.5	3525	5.7	2.80	M ₀							7.0	11.4	11.4	11.4		
					M _N							6.6	7.5	7.5	7.5		
					M _{0,max}							20.1	25.8	29.0	29.0		
					M _{max}							20.1	25.8	29.0	29.0		
					n _{eto}							-	-	-	-		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
12L20-	13.5	1950	5.9	2.80	M ₀			12.1	15.0	15.0						
					M _N			11.4	13.5	13.5	13.5					
					M _{0,max}			35.5	44.6	55.7	56.4					
					M _{max}			35.5	44.6	55.7	56.4					
					n _{eto}			-	-	-	-					
12L41-	11.0	4050	10.2	4.70	M ₀				10.6	14.0	15.0	15.0	15.0			
					M _N				9.5	11.0	11.0	11.0	11.0			
					M _{0,max}			24.4	31.6	41.9	50.8	56.4				
					M _{max}			24.4	31.6	41.9	50.8	56.4				
					n _{eto}			-	-	-	-	-				
14D15-	9.2	1500	4.5	1.45	M ₀			11.0	11.0							
					M _N			9.2	9.2							
					M _{0,max}			28.3	29.0							
					M _{max}			28.3	29.0							
					n _{eto}			-	-							
14D36-	7.5	3600	7.5	2.80	M ₀				9.6	11.0	11.0					
					M _N				7.5	7.5	7.5					
					M _{0,max}			20.2	25.6	29.0						
					M _{max}			20.2	25.6	29.0						
					n _{eto}			-	-	-						
14H15-	16.0	1500	6.6	2.50	M ₀				12.4	21.0	21.0	21.0				
					M _N				12.1	16.0	16.0	16.0				
					M _{0,max}			37.1	46.6	54.8	54.8					
					M _{max}			37.1	46.6	54.8	54.8					
					n _{eto}			-	-	-	-					
14H32-	14.0	3225	11.9	4.70	M ₀					14.4	20.3	21.0	21.0			
					M _N					13.6	14.0	14.0	14.0			
					M _{0,max}					33.0	43.9	53.2	54.8			
					M _{max}					33.0	43.9	53.2	54.8			
					n _{eto}					-	-	-	-			
14L15-	23.0	1500	9.7	3.60	M ₀					20.5	27.1	28.0				
					M _N					20.9	23.0	23.0				
					M _{0,max}					48.0	61.4	77.1				
					M _{max}					48.0	61.4	77.1				
					n _{eto}					-	-	-				
14L32-	17.2	3225	15.0	5.80	M ₀						19.0	24.0	28.0	28.0	28.0	
					M _N						17.2	17.2	17.2	17.2	17.2	
					M _{0,max}						45.0	55.3	63.9	77.1	77.1	
					M _{max}						45.0	55.3	63.9	77.1	77.1	
					n _{eto}						-	-	-	-	-	
14P14-	30.0	1350	10.8	4.20	M ₀						26.7	35.2	37.0	37.0		
					M _N						24.4	30.0	30.0	30.0		
					M _{0,max}						56.1	71.7	93.3	105.1		
					M _{max}						56.1	71.7	93.3	105.1		
					n _{eto}						-	-	-	-	-	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594	
MCS	M _N	n _N	I _N	P _N	I _{max}	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0	
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0	
					M ₀					24.8	31.4	37.0	37.0	37.0	37.0	37.0	
					M _N					21.0	21.0	21.0	21.0	21.0	21.0	21.0	
					M _{0,max}					52.5	64.6	74.7	92.2	105.1			
					M _{max}					52.5	64.6	74.7	92.2	105.1			
					n _{eto}					-	-	-	-	-	-	-	
					M ₀				28.4	32.0	32.0						
					M _N				27.0	27.0	27.0						
					M _{0,max}				62.1	78.9	86.0						
					M _{max}				62.1	78.9	86.0						
					n _{eto}				-	-	-						
					M ₀					26.3	32.0	32.0	32.0				
					M _N					21.0	21.0	21.0	21.0				
					M _{0,max}					56.6	70.2	81.6	86.0				
					M _{max}					56.6	70.2	81.6	86.0				
					n _{eto}					-	-	-	-				
					M ₀					38.9	51.0	51.0					
					M _N					37.7	40.0	40.0					
					M _{0,max}					85.0	114.4	129.0					
					M _{max}					85.0	114.4	129.0					
					n _{eto}					-	-	-	-				
					M ₀						27.3	34.4	49.2	51.0	51.0		
					M _N						25.6	29.0	29.0	29.0	29.0		
					M _{0,max}						60.8	75.9	88.9	112.9	129.0		
					M _{max}						60.8	75.9	88.9	112.9	129.0		
					n _{eto}						-	-	-	-	-	-	
					M ₀						59.6	64.0	64.0	64.0			
					M _N						51.0	51.0	51.0	51.0			
					M _{0,max}						128.4	159.9	186.6	190.0			
					M _{max}						128.4	159.9	186.6	190.0			
					n _{eto}						-	-	-	-			
					M ₀						29.9	37.8	53.9	64.0	64.0	64.0	
					M _N						27.5	32.0	32.0	32.0	32.0	32.0	
					M _{0,max}						65.7	83.6	98.5	126.6	152.5	187.2	
					M _{max}						65.7	83.6	98.5	126.6	152.5	187.2	
					n _{eto}						-	-	-	-	-	-	
					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594	
MCS	M _N	n _N	I _N	P _N	I _{max}	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0	
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0	
					M ₀					24.8	31.4	37.0	37.0	37.0	37.0	37.0	
					M _N					21.0	21.0	21.0	21.0	21.0	21.0	21.0	
					M _{0,max}					52.5	64.6	74.7	92.2	105.1			
					M _{max}					52.5	64.6	74.7	92.2	105.1			
					n _{eto}					-	-	-	-	-	-	-	
					M ₀				28.4	32.0	32.0						
					M _N				27.0	27.0	27.0						
					M _{0,max}				62.1	78.9	86.0						
					M _{max}				62.1	78.9	86.0						
					n _{eto}				-	-	-						
					M ₀					26.3	32.0	32.0	32.0				
					M _N					21.0	21.0	21.0	21.0				
					M _{0,max}					56.6	70.2	81.6	86.0				
					M _{max}					56.6	70.2	81.6	86.0				
					n _{eto}					-	-	-	-				
					M ₀					38.9	51.0	51.0					
					M _N					37.7	40.0	40.0					
					M _{0,max}					85.0	114.4	129.0					
					M _{max}					85.0	114.4	129.0					
					n _{eto}					-	-	-	-				
					M ₀						27.3	34.4	49.2	51.0	51.0		
					M _N						25.6	29.0	29.0	29.0	29.0		
					M _{0,max}						60.8	75.9	88.9	112.9	129.0		
					M _{max}						60.8	75.9	88.9	112.9	129.0		
					n _{eto}						-	-	-	-	-	-	
					M ₀						59.6	64.0	64.0	64.0			
					M _N						51.0	51.0	51.0	51.0			
					M _{0,max}						128.4	159.9	186.6	190.0			
					M _{max}						128.4	159.9	186.6	190.0			
					n _{eto}						-	-	-	-	-	-	
					M ₀						29.9	37.8	53.9	64.0	64.0	64.0	
					M _N						27.5	32.0	32.0	32.0	32.0	32.0	
					M _{0,max}						65.7	83.6	98.5	126.6	152.5	187.2	
					M _{max}						65.7	83.6	98.5	126.6	152.5	187.2	
					n _{eto}						-	-	-	-	-	-	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
					I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
					M ₀	0.6	0.8							
					M _N	0.5	0.6							
					M _{0,max}	1.5	2.3							
					M _{max}	1.5	2.3							
					n _{eto}	-	-							
06C41L	0.6	4050	2.6	0.25	M ₀		0.6	0.8	0.8					
06C60L	0.5	6000	4.0	0.31	M _N		0.4	0.5	0.5					
06F41L	1.2	4050	2.9	0.51	M _{0,max}		1.5	2.2	2.4					
06F60L	0.9	6000	3.8	0.57	M _{max}		1.5	2.2	2.4					
06I41L	1.5	4050	3.2	0.64	n _{eto}		-	-	-					
06I60L	1.2	6000	3.8	0.75	M ₀		2.0	2.0						
09D41L	2.3	4050	4.6	1.00	M _N		1.5	1.5						
09D60L	1.8	6000	7.0	1.10	M _{0,max}		5.4	6.2						
09F38L	3.1	3750	5.0	1.20	M _{max}		5.4	6.2						
09F38L	3.1	3750	5.0	1.20	n _{eto}		-	-	-	-	-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
					I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
09F60L	2.4	6000	7.9	1.50	M ₀				3.5	4.2	4.2	4.2	4.2	
					M _N				2.4	2.4	2.4	2.4	2.4	
					M _{0,max}				7.8	9.8	12.6	14.5	15.0	
					M _{max}				7.8	9.8	12.6	14.5	15.0	
					n _{eto}				-	-	-	-	-	
09H41L	3.8	4050	6.8	1.60	M ₀				5.5	5.3	5.5	5.5		
					M _N				3.8	3.0	3.8	3.8		
					M _{0,max}				12.4	11.8	19.7	20.0		
					M _{max}				12.4	11.8	19.7	20.0		
					n _{eto}				-	-	-	-		
09H60L	3.0	6000	8.0	1.90	M ₀				4.0	5.5	5.5	5.5	5.5	
					M _N				3.0	3.8	3.0	3.0	3.0	
					M _{0,max}				9.2	15.6	15.4	18.3	20.0	
					M _{max}				9.2	15.6	15.4	18.3	20.0	
					n _{eto}				-	-	-	-	-	
09L41L	4.5	4050	8.4	1.90	M ₀				5.3	7.0	7.5	7.5	7.5	
					M _N				4.5	4.5	4.5	4.5	4.5	
					M _{0,max}				11.9	15.5	20.9	25.8	29.7	
					M _{max}				11.9	15.5	20.9	25.8	29.7	
					n _{eto}				-	-	-	-	-	
12D20L	5.5	1950	5.2	1.10	M ₀				5.9	6.4				
					M _N				5.3	5.5				
					M _{0,max}				14.9	17.7				
					M _{max}				14.9	17.7				
					n _{eto}				-	-				
12D41L	4.3	4050	8.8	1.80	M ₀				5.3	6.4	6.4	6.4		
					M _N				4.3	4.3	4.3	4.3		
					M _{0,max}				10.6	13.6	17.7	17.9		
					M _{max}				10.6	13.6	17.7	17.9		
					n _{eto}				-	-	-	-		
12H15L	10.0	1500	7.6	1.60	M ₀				11.4	11.4	10.0			
					M _N				10.0	10.0	11.4			
					M _{0,max}				25.8	29.0	29.0			
					M _{max}				25.8	29.0	29.0			
					n _{eto}				-	-	-			
12H30L	8.0	3000	10.5	2.50	M ₀				7.4	9.8	11.4			
					M _N				6.7	8.0	8.0			
					M _{0,max}				16.4	21.5	29.0			
					M _{max}				16.4	21.5	29.0			
					n _{eto}				-	-	-			
12L20L	13.5	1950	11.8	2.80	M ₀				10.6	14.0	15.0	15.0	15.0	
					M _N				10.1	13.3	13.5	13.5	13.5	
					M _{0,max}				24.4	31.5	41.8	50.5	56.0	
					M _{max}				24.4	31.5	41.8	50.5	56.0	
					n _{eto}				-	-	-	-	-	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
12D17-	7.0	1650	3.0	1.20	M ₀	4.4	7.3									
					M _N	4.0	7.0									
					M _{0,max}	11.8	17.7									
					M _{max}	11.8	17.7									
					n _{eto}	-	-									
12D35-	6.0	3525	5.6	2.20	M ₀			5.9	7.5							
					M _N			5.4	6.0							
					M _{0,max}			14.7	17.7							
					M _{max}			14.7	17.7							
					n _{eto}			-	-							
12H14-	12.0	1350	4.1	1.70	M ₀			8.7	12.8							
					M _N			8.2	12.0							
					M _{0,max}			24.6	29.0							
					M _{max}			24.6	29.0							
					n _{eto}			-	-							
12H34-	10.5	3375	7.5	3.70	M ₀			7.0	12.8	12.8	12.8					
					M _N			6.6	10.5	10.5	10.5					
					M _{0,max}			20.1	25.8	29.0	29.0					
					M _{max}			20.1	25.8	29.0	29.0					
					n _{eto}			-	-	-	-					
12L17-	17.0	1650	6.7	2.90	M ₀			12.1	19.0	19.0	19.0					
					M _N			11.4	17.0	17.0	17.0					
					M _{0,max}			35.5	44.6	55.7	56.4					
					M _{max}			35.5	44.6	55.7	56.4					
					n _{eto}			-	-	-	-					
12L39-	14.0	3900	11.7	5.70	M ₀			10.6	15.3	19.0	19.0	19.0				
					M _N			9.5	13.9	14.0	14.0	14.0	14.0			
					M _{0,max}			24.4	31.6	41.9	50.8	56.4				
					M _{max}			24.4	31.6	41.9	50.8	56.4				
					n _{eto}			-	-	-	-	-				
14D14-	12.0	1350	5.4	1.70	M ₀			11.0	12.5							
					M _N			11.0	12.0							
					M _{0,max}			28.3	29.0							
					M _{max}			28.3	29.0							
					n _{eto}			-	-							
14D30-	10.5	3000	9.7	3.30	M ₀			9.6	12.5	12.5						
					M _N			9.5	10.5	10.5						
					M _{0,max}			20.2	25.6	29.0						
					M _{max}			20.2	25.6	29.0						
					n _{eto}			-	-	-						
14H12-	23.5	1200	8.3	3.00	M ₀			12.4	24.1	25.5	25.5					
					M _N			12.1	23.5	23.5	23.5					
					M _{0,max}			37.1	46.6	54.8	54.8					
					M _{max}			37.1	46.6	54.8	54.8					
					n _{eto}			-	-	-	-					

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594	
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0	
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0	
14H28-	20.5	2775	15.0	6.00	M ₀					16.1	20.5	25.5	25.5				
					M _N					15.9	20.5	20.5	20.5				
					M _{0,max}					33.0	43.9	53.2	54.8				
					M _{max}					33.0	43.9	53.2	54.8				
					n _{eto}					-	-	-	-	-			
14L14-	30.5	1350	11.8	4.30	M ₀					20.5	30.0	34.5					
					M _N					20.5	30.0	30.5					
					M _{0,max}					48.0	61.4	77.1					
					M _{max}					48.0	61.4	77.1					
					n _{eto}					-	-	-					
14L30-	25.5	3000	20.8	8.00	M ₀						21.0	26.6	34.5	34.5	34.5		
					M _N						20.0	25.3	25.5	25.5	25.5		
					M _{0,max}						45.0	55.3	63.9	77.1	77.1		
					M _{max}						45.0	55.3	63.9	77.1	77.1		
					n _{eto}						-	-	-	-	-		
14P11-	42.0	1050	13.4	4.60	M ₀					26.7	36.4	43.5					
					M _N					24.4	36.4	42.0					
					M _{0,max}					56.1	71.7	93.3	105.1				
					M _{max}					56.1	71.7	93.3	105.1				
					n _{eto}					-	-	-	-	-			
14P26-	33.0	2625	21.9	9.10	M ₀						24.8	31.4	43.5	43.5	43.5		
					M _N						24.6	31.0	33.0	33.0	33.0		
					M _{0,max}						52.5	64.6	74.7	92.2	105.1		
					M _{max}						52.5	64.6	74.7	92.2	105.1		
					n _{eto}						-	-	-	-	-		
19F12-	38.0	1200	11.3	4.80	M ₀					29.9	39.5	41.5					
					M _N					29.3	38.0	38.0					
					M _{0,max}					62.1	78.9	86.0					
					M _{max}					62.1	78.9	86.0					
					n _{eto}					-	-	-					
19F29-	32.5	2850	20.1	9.70	M ₀						26.3	34.9	41.5	41.5			
					M _N						26.0	32.5	32.5	32.5			
					M _{0,max}						56.6	70.2	81.6	86.0			
					M _{max}						56.6	70.2	81.6	86.0			
					n _{eto}						-	-	-	-	-		
19J12-	62.5	1200	18.3	7.90	M ₀						56.6	70.5					
					M _N						55.7	62.5					
					M _{0,max}						114.4	129.0					
					M _{max}						114.4	129.0					
					n _{eto}						-	-					
19J29-	50.5	2850	31.0	15.10	M ₀							49.2	66.7	70.5			
					M _N							47.9	50.5	50.5			
					M _{0,max}							88.9	112.9	129.0			
					M _{max}							88.9	112.9	129.0			
					n _{eto}							-	-	-	-		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594	
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0	
19P12-	72.0	1200	21.3	9.00	M ₀						79.1	86.0	86.0				
					M _N						69.6	72.0	72.0				
					M _{0,max}						159.9	186.6	190.0				
					M _{max}						159.9	186.6	190.0				
					n _{eto}						-	-	-				
19P29-	53.0	2850	29.5	15.80	M ₀							56.5	73.9	86.0	86.0		
					M _N							52.8	53.0	53.0	53.0		
					M _{0,max}						98.5	126.6	152.5	187.2			
					M _{max}						98.5	126.6	152.5	187.2			
					n _{eto}						-	-	-	-	-	-	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
MCS	M _N	n _N	I _N	P _N	I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
					I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
					M ₀	0.8	0.8	0.8	0.8	0.8		
					M _N	0.6	0.6	0.6	0.6	0.6		
					M _{0,max}	1.4	1.7	2.3	2.4	2.4		
					M _{max}	1.4	1.7	2.3	2.4	2.4		
					n _{eto}	-	-	-	-	-		
06C41-	0.6	4050	1.3	0.25	M ₀			0.8	0.8	0.8	0.8	0.8
06C60-	0.5	6000	2.4	0.31	M _N			0.5	0.5	0.5	0.5	0.5
					M _{0,max}			1.3	1.6	2.0	2.4	2.4
					M _{max}			1.3	1.6	2.0	2.4	2.4
					n _{eto}			-	-	-	-	-
06F41-	1.2	4050	1.5	0.51	M ₀	1.3	1.5	1.5	1.5	1.5		
					M _N	1.0	1.2	1.2	1.2	1.2		
					M _{0,max}	2.3	3.2	4.3	4.4	4.4		
					M _{max}	2.3	3.2	4.3	4.4	4.4		
					n _{eto}	-	-	-	-	-		
06F60-	0.9	6000	2.5	0.57	M ₀			1.2	1.5	1.5	1.5	1.5
					M _N			0.9	0.9	0.9	0.9	0.9
					M _{0,max}			2.1	3.3	4.0	4.4	4.4
					M _{max}			2.1	3.3	4.0	4.4	4.4
					n _{eto}			-	-	-	-	-
06I41-	1.5	4050	1.6	0.64	M ₀	1.6	2.0	2.0	2.0	2.0		
					M _N	1.2	1.5	1.5	1.5	1.5		
					M _{0,max}	2.9	4.0	5.3	6.2	6.2		
					M _{max}	2.9	4.0	5.3	6.2	6.2		
					n _{eto}	-	-	-	-	-		
06I60-	1.2	6000	2.9	0.75	M ₀				2.0	2.0	2.0	2.0
					M _N				1.2	1.2	1.2	1.2
					M _{0,max}				3.6	4.4	5.7	5.7
					M _{max}				3.6	4.4	5.7	5.7
					n _{eto}				-	-	-	-
09D41-	2.3	4050	2.3	1.00	M ₀	2.2	3.1	3.3	3.3	3.3	3.3	
					M _N	1.7	2.3	2.3	2.3	2.3	2.3	
					M _{0,max}	4.0	5.3	6.7	8.2	9.4	9.4	
					M _{max}	4.0	5.3	6.7	8.2	9.4	9.4	
					n _{eto}	-	-	-	-	-	-	-
09D60-	1.8	6000	3.8	1.10	M ₀				2.0	2.4	3.3	3.3
					M _N				1.5	1.8	1.8	1.8
					M _{0,max}				3.5	4.2	6.3	7.8
					M _{max}				3.5	4.2	6.3	7.8
					n _{eto}				-	-	-	-
09F38-	3.1	3750	2.5	1.20	M ₀			3.4	4.2	4.2	4.2	4.2
					M _N			3.0	3.1	3.1	3.1	3.1
					M _{0,max}			6.6	8.4	10.2	12.0	12.0
					M _{max}			6.6	8.4	10.2	12.0	12.0
					n _{eto}			-	-	-	-	-

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I_N	P_N	I_N	n_N	M_N	MCS
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I_{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I_{max}					
								M₀					
								M_N					
								M_{0,max}	0.25	1.3	4050	0.6	06C41-
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}	0.31	2.4	6000	0.5	06C60-
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}	0.51	1.5	4050	1.2	06F41-
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}	0.57	2.5	6000	0.9	06F60-
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}	0.64	1.6	4050	1.5	06I41-
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}	0.75	2.9	6000	1.2	06I60-
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}	1.00	2.3	4050	2.3	09D41-
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}	1.10	3.8	6000	1.8	09D60-
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}	1.20	2.5	3750	3.1	09F38-
								M_{max}					
								n_{eto}					

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
MCS	M _N	n _N	I _N	P _N	I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
					I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
					M ₀						4.2	4.2
					M _N						2.4	2.4
					M _{0,max}						7.8	9.6
					M _{max}						7.8	9.6
					n _{eto}						-	-
					M ₀					4.7	5.0	5.5
					M _N					3.6	3.8	3.8
					M _{0,max}					8.1	9.9	14.0
					M _{max}					8.1	9.9	14.0
					n _{eto}					-	-	-
					M ₀						4.4	4.5
					M _N						3.0	3.0
					M _{0,max}						7.5	9.3
					M _{max}						7.5	9.3
					n _{eto}						-	-
					M ₀					3.9	4.7	7.5
					M _N					3.4	4.2	4.5
					M _{0,max}					7.3	8.9	13.1
					M _{max}					7.3	8.9	13.1
					n _{eto}					-	-	-
					M ₀							4.2
					M _N							3.6
					M _{0,max}							8.3
					M _{max}							8.3
					n _{eto}							-
					M ₀					5.7	6.4	6.4
					M _N					5.1	5.5	5.5
					M _{0,max}					9.6	12.6	15.3
					M _{max}					9.6	12.6	15.3
					n _{eto}					-	-	-
					M ₀					3.8	4.6	6.4
					M _N					3.0	3.7	4.3
					M _{0,max}					6.4	7.8	11.4
					M _{max}					6.4	7.8	11.4
					n _{eto}					-	-	-
					M ₀					9.2	10.9	11.4
					M _N					8.4	10.0	10.0
					M _{0,max}					16.4	20.0	29.0
					M _{max}					16.4	20.0	29.0
					n _{eto}					-	-	-
					M ₀						9.8	9.8
					M _N						7.5	7.5
					M _{0,max}						15.2	18.8
					M _{max}						15.2	18.8
					n _{eto}						-	-

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I_N	1.50	4.5	6000	2.4	09F60-
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	$I_{0,max}$					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I_{max}					
4.2	4.2							M_0					
2.4	2.4							M_N					
11.1	11.4							$M_{0,max}$					
11.1	11.4							M_{max}					
-	-							n_{eto}					
5.5	5.5							M_0					
3.8	3.8							M_N					
19.6	20.1							$M_{0,max}$					
19.6	20.1							M_{max}					
-	-							n_{eto}					
5.5	5.5							M_0	1.60	3.4	4050	3.8	09H41-
3.0	3.0							M_N					
11.4	11.7							$M_{0,max}$					
11.4	11.7							M_{max}					
-	-							n_{eto}					
7.5	7.5							M_0					
4.5	4.5							M_N					
20.3	20.8							$M_{0,max}$					
20.3	20.8							M_{max}					
-	-							n_{eto}					
7.5	7.5	7.5	7.5					M_0	1.90	6.0	6000	3.0	09H60-
3.6	3.6	3.6	3.6					M_N					
10.8	19.1	19.1	19.1					$M_{0,max}$					
10.8	19.1	19.1	19.1					M_{max}					
-	-	-	-					n_{eto}					
7.5								M_0					
3.6								M_N					
16.9								$M_{0,max}$					
16.9								M_{max}					
-								n_{eto}					
11.4	11.4							M_0	1.10	2.6	1950	5.5	12D20-
10.0	10.0							M_N					
28.3	29.0							$M_{0,max}$					
28.3	29.0							M_{max}					
-	-							n_{eto}					
11.4	11.4							M_0					
7.5	7.5							M_N					
23.5	24.1							$M_{0,max}$					
23.5	24.1							M_{max}					
-	-							n_{eto}					
11.4	11.4							M_0	1.80	4.5	4050	4.3	12D41-
7.5	7.5							M_N					
23.5	24.1							$M_{0,max}$					
23.5	24.1							M_{max}					
-	-							n_{eto}					

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
MCS	M _N	n _N	I _N	P _N	I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
					I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
12L20-	13.5	1950	5.9	2.80	M ₀						15.0	15.0
					M _N						13.5	13.5
					M _{0,max}						27.4	33.9
					M _{max}						27.4	33.9
					n _{eto}						-	-
12L41-	11.0	4050	10.2	4.70	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14D15-	9.2	1500	4.5	1.45	M ₀				7.0	8.5	11.0	11.0
					M _N				6.6	8.0	9.2	9.2
					M _{0,max}				13.1	16.0	22.7	28.1
					M _{max}				13.1	16.0	22.7	28.1
					n _{eto}				-	-	-	-
14D36-	7.5	3600	7.5	2.80	M ₀							8.0
					M _N							7.3
					M _{0,max}							15.2
					M _{max}							15.2
					n _{eto}							-
14H15-	16.0	1500	6.6	2.50	M ₀							17.3
					M _N							16.0
					M _{0,max}							35.3
					M _{max}							35.3
					n _{eto}							-
14H32-	14.0	3225	11.9	4.70	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14L15-	23.0	1500	9.7	3.60	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14L32-	17.2	3225	15.0	5.80	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14P14-	30.0	1350	10.8	4.20	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC	P _N	I _N	n _N	M _N	MCS
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}					
15.0	15.0							M ₀					
13.5	13.5							M _N					
40.8	41.9							M _{0,max}					
40.8	41.9							M _{max}					
-	-							n _{eto}					
14.0	15.0	15.0	15.0	15.0				M ₀					
10.2	11.0	11.0	11.0	11.0				M _N					
22.2	30.4	35.5	35.5	35.5				M _{0,max}					
22.2	30.4	49.6	49.6	49.6				M _{max}					
-	-	-	-	-				n _{eto}					
11.0	11.0							M ₀					
9.2	9.2							M _N					
28.3	29.0							M _{0,max}					
28.3	29.0							M _{max}					
-	-							n _{eto}					
11.0	11.0	11.0	11.0					M ₀					
7.5	7.5	7.5	7.5					M _N					
18.5	25.3	29.0	29.0					M _{0,max}					
18.5	22.2	22.2	22.2					M _{max}					
-	-	-	-					n _{eto}					
21.0	21.0							M ₀					
16.0	16.0							M _N					
42.8	43.9							M _{0,max}					
42.8	43.9							M _{max}					
-	-							n _{eto}					
12.9	16.2	21.0	21.0	21.0				M ₀					
11.2	14.0	14.0	14.0	14.0				M _N					
23.2	31.7	37.1	37.1	37.1				M _{0,max}					
23.2	31.7	51.9	51.9	51.9				M _{max}					
-	-	-	-	-				n _{eto}					
27.4	28.0	28.0	28.0					M ₀					
22.5	23.0	23.0	23.0					M _N					
43.8	52.9	52.9	52.9					M _{0,max}					
43.8	60.0	73.8	73.8					M _{max}					
-	-	-	-					n _{eto}					
15.2	27.4	27.4	28.0	28.0	28.0	28.0		M ₀					
14.9	17.2	17.2	17.2	17.2	17.2	17.2		M _N					
31.3	39.7	52.9	52.9	52.9	52.9	52.9		M _{0,max}					
31.3	57.6	73.9	73.9	73.9	73.9	73.9		M _{max}					
-	-	-	-	-	-	-		n _{eto}					
32.5	37.0	37.0	37.0	37.0				M ₀					
26.4	30.0	30.0	30.0	30.0				M _N					
51.2	70.0	80.0	80.0	80.0				M _{0,max}					
51.2	70.0	105.1	105.1	105.1				M _{max}					
-	-	-	-	-				n _{eto}					

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
MCS	M _N	n _N	I _N	P _N	I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
					I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
14P32-	21.0	3225	15.6	7.10	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19F14-	27.0	1425	8.6	4.00	M ₀						23.6	
					M _N						22.9	
					M _{0,max}						45.9	
					M _{max}						45.9	
					n _{eto}						-	
19F30-	21.0	3000	14.0	6.60	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19J14-	40.0	1425	12.3	6.00	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19J30-	29.0	3000	18.5	9.10	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19P14-	51.0	1350	14.3	7.20	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19P30-	32.0	3000	19.0	10.00	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC						
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I_N	7.10	P _N	I _N	n _N	M _N	MCS
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I_{0,max}						
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I_{max}						
19.8	35.8	35.8	37.0	37.0	37.0	37.0		M₀						
17.5	21.0	21.0	21.0	21.0	21.0	21.0		M_N						
36.5	46.3	61.8	61.8	61.8	61.8	61.8		M_{0,max}						
36.5	67.3	86.4	86.4	86.4	86.4	86.4		M_{max}						
-	-	-	-	-	-	-		n_{eto}						
32.0	32.0	32.0	32.0					M₀						
27.0	27.0	27.0	27.0					M_N						
56.7	68.3	68.3	68.3					M_{0,max}	4.00	P _N	I _N	n _N	M _N	MCS
56.7	77.6	86.0	86.0					M_{max}						
-	-	-	-					n_{eto}						
21.0	32.0	32.0	32.0					M₀						
19.5	21.0	21.0	21.0					M_N						
47.2	47.2	47.2	47.2					M_{0,max}	6.60	P _N	I _N	n _N	M _N	MCS
38.9	68.3	68.3	68.3					M_{max}						
-	-	-	-					n_{eto}						
43.6	51.0	51.0	51.0					M₀						
40.0	40.0	40.0	40.0					M_N						
81.1	96.0	96.0	96.0					M_{0,max}	6.00	P _N	I _N	n _N	M _N	MCS
81.1	129.0	129.0	129.0					M_{max}						
-	-	-	-					n_{eto}						
		39.3	51.0	51.0	51.0	51.0	51.0	M₀						
		29.0	29.0	29.0	29.0	29.0	29.0	M_N						
		73.6	79.5	79.5	79.5	79.5	79.5	M_{0,max}	9.10	P _N	I _N	n _N	M _N	MCS
		110.4	127.6	127.6	127.6	127.6	127.6	M_{max}						
		-	-	-	-	-	-	n_{eto}						
47.5	64.0	64.0	64.0					M₀						
46.4	51.0	51.0	51.0					M_N						
92.7	106.7	106.7	106.7					M_{0,max}	7.20	P _N	I _N	n _N	M _N	MCS
92.7	155.5	155.5	155.5					M_{max}						
-	-	-	-					n_{eto}						
		43.1	58.7	64.0	64.0	64.0	64.0	M₀						
		32.0	32.0	32.0	32.0	32.0	32.0	M_N						
		79.2	87.6	87.6	87.6	87.6	87.6	M_{0,max}	10.00	P _N	I _N	n _N	M _N	MCS
		118.6	144.3	144.3	144.3	144.3	144.3	M_{max}						
		-	-	-	-	-	-	n_{eto}						

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	1124	1524	2224	3024	4024	5524	7524	1134	1534	1834	2234	3034	
MCS	M _N	n _N	I _N	P _N	I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	
12D17-	7.0	1650	3.0	1.20	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	
					M ₀	7.5	7.5	7.5	7.5									
					M _N	7.0	7.0	7.0	7.0									
					M _{0,max}	12.6	15.3	17.7	17.7									
					M _{max}	12.6	15.3	17.7	17.7									
					n _{eto}	-	-	-	-									
12D35-	6.0	3525	5.6	2.20	M ₀	4.6	7.5	7.5	7.5	7.5								
					M _N	3.7	6.0	6.0	6.0	6.0								
					M _{0,max}	7.8	11.4	14.0	16.9	17.3								
					M _{max}	7.8	11.4	14.0	16.9	17.3								
					n _{eto}	-	-	-	-	-								
12H14-	12.0	1350	4.1	1.70	M ₀	8.9	10.9	12.8	12.8	12.8	12.8							
					M _N	8.5	10.3	12.0	12.0	12.0	12.0							
					M _{0,max}	16.4	20.0	29.0	29.0	28.3	29.0							
					M _{max}	16.4	20.0	29.0	29.0	28.3	29.0							
					n _{eto}	-	-	-	-	-	-							
12H34-	10.5	3375	7.5	3.70	M ₀				10.2	12.8	12.8							
					M _N				10.0	10.5	10.5							
					M _{0,max}				18.8	23.5	24.1							
					M _{max}				18.8	23.5	24.1							
					n _{eto}				-	-	-							
12L17-	17.0	1650	6.7	2.90	M ₀					18.5	19.0	19.0						
					M _N					17.0	17.0	17.0						
					M _{0,max}					33.9	40.8	41.9						
					M _{max}					33.9	40.8	41.9						
					n _{eto}					-	-	-						
12L39-	14.0	3900	11.7	5.70	M ₀						17.2	17.2	19.0	19.0	19.0			
					M _N						14.0	14.0	14.0	14.0	14.0			
					M _{0,max}						22.2	30.4	35.5	35.5	35.5			
					M _{max}						22.2	30.4	49.6	49.6	49.6			
					n _{eto}						-	-	-	-	-			
14D14-	12.0	1350	5.4	1.70	M ₀	8.5	12.5	12.5	12.5	12.5								
					M _N	8.0	12.0	12.0	12.0	12.0								
					M _{0,max}	16.0	22.7	28.1	28.3	29.0								
					M _{max}	16.0	22.7	28.1	28.3	29.0								
					n _{eto}	-	-	-	-	-								
14D30-	10.5	3000	9.7	3.30	M ₀					7.7	12.2	12.5	12.5	12.5				
					M _N					7.0	9.8	10.0	10.0	10.0				
					M _{0,max}					15.2	18.5	25.3	29.0	29.0				
					M _{max}					15.2	18.5	22.2	22.2	22.2				
					n _{eto}					-	-	-	-	-				
14H12-	23.5	1200	8.3	3.00	M ₀					18.0	25.5	25.5						
					M _N					17.9	23.5	23.5						
					M _{0,max}					35.3	42.8	43.9						
					M _{max}					35.3	42.8	43.9						
					n _{eto}					-	-	-						

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	1124	1524	2224	3024	4024	5524	7524	1134	1534	1834	2234	3034
MCS	M _N	n _N	I _N	P _N	I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
14H28-	20.5	2775	15.0	6.00	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
14L14-	30.5	1350	11.8	4.30	M ₀						16.2	25.5	25.5				
14L30-	25.5	3000	20.8	8.00	M _N						16.1	20.5	20.5				
14P11-	42.0	1050	13.4	4.60	M _{0,max}						31.7	37.1	37.1				
14P26-	33.0	2625	21.9	9.10	M _{max}						31.7	51.9	51.9				
19F12-	38.0	1200	11.3	4.80	n _{eto}						-	-	-				
19F29-	32.5	2850	20.1	9.70	M ₀						38.9	43.5	43.5				
19J12-	62.5	1200	18.3	7.90	M _N						38.8	42.0	42.0				
19J29-	50.5	2850	31.0	15.10	M _{0,max}						70.0	80.0	80.0				
					M _{max}						70.0	105.1	105.1				
					n _{eto}						-	-	-				

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□1124	□1524	□2224	□3024	□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034
MCS	M _N	n _N	I _N	P _N	I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
19P12-	72.0	1200	21.3	9.00	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
					M ₀						47.5		86.0	86.0			
					M _N						46.4		72.0	72.0			
					M _{0,max}						92.7		106.7	106.7			
					M _{max}						92.7		155.5	155.5			
					n _{eto}						-		-	-			
19P29-	53.0	2850	29.5	15.80	M ₀								58.7	86.0	86.0	86.0	
					M _N								53.0	53.0	53.0	53.0	
					M _{0,max}								87.6	87.6	87.6	87.6	
					M _{max}								144.3	144.3	144.3	144.3	
					n _{eto}								-	-	-	-	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
06C41-	0.6	4050	1.3	0.25	I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀	0.8					
					M _N	0.6					
					M _{0,max}	1.2					
					M _{max}	1.9					
					n _{eto}	2747					
06C60-	0.5	6000	2.4	0.31	M ₀	0.6	0.8				
					M _N	0.4	0.5				
					M _{0,max}	0.6	1.2				
					M _{max}	1.0	1.9				
					n _{eto}	7000	6814				
06F41-	1.2	4050	1.5	0.51	M ₀	1.5					
					M _N	1.2					
					M _{0,max}	2.0					
					M _{max}	3.6					
					n _{eto}	1902					
06F60-	0.9	6000	2.5	0.57	M ₀	1.0	1.5				
					M _N	0.7	0.9				
					M _{0,max}	1.0	2.0				
					M _{max}	1.8	3.7				
					n _{eto}	7000	4602				
06I41-	1.5	4050	1.6	0.64	M ₀	2.0	2.0				
					M _N	1.5	1.5				
					M _{0,max}	2.6	5.0				
					M _{max}	4.4	6.2				
					n _{eto}	1898	1384				
06I60-	1.2	6000	2.9	0.75	M ₀	1.2	2.0	2.0			
					M _N	0.8	1.2	1.2			
					M _{0,max}	1.3	2.6	5.2			
					M _{max}	2.2	4.7	6.2			
					n _{eto}	6407	4200	3157			
09D41-	2.3	4050	2.3	1.00	M ₀		3.3	3.3			
					M _N		2.3	2.3			
					M _{0,max}		5.0	8.8			
					M _{max}		8.0	9.4			
					n _{eto}		2361	2008			
09D60-	1.8	6000	3.8	1.10	M ₀		2.5	3.3			
					M _N		1.8	1.8			
					M _{0,max}		2.5	4.9			
					M _{max}		4.4	8.0			
					n _{eto}		7000	5217			
09F38-	3.1	3750	2.5	1.20	M ₀		4.2	4.2			
					M _N		3.1	3.1			
					M _{0,max}		6.2	10.8			
					M _{max}		9.8	14.9			
					n _{eto}		2589	1737			

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀		2.8	4.2	4.2		
					M _N		2.1	2.4	2.4		
					M _{0,max}		3.2	6.1	10.8		
					M _{max}		5.4	9.8	14.9		
					n _{eto}	7000	5906	3715			
09F60-	2.4	6000	4.5	1.50	M ₀	5.2	5.5				
09H41-	3.8	4050	3.4	1.60	M _N	3.8	3.8				
09H60-	3.0	6000	6.0	1.90	M _{0,max}	5.9	11.1				
09L41-	4.5	4050	4.2	1.90	M _{max}	9.9	17.5				
09L51-	3.6	5100	6.9	1.90	n _{eto}	3675	2231				
12D20-	5.5	1950	2.6	1.10	M ₀	4.8	7.5	7.5	7.5		
12D41-	4.3	4050	4.5	1.80	M _N	4.3	4.5	4.5	3.6		
12H15-	10.0	1500	3.8	1.60	M _{0,max}	5.2	10.3	15.1	19.6		
12H35-	7.5	3525	5.7	2.80	M _{max}	9.1	17.5	25.1	31.9		
					n _{eto}	4450	3188	1878			
					M ₀		4.8	7.5	7.5	7.5	
					M _N		3.6	3.6	3.6	3.6	
					M _{0,max}		5.2	10.3	15.1	19.6	
					M _{max}		9.1	17.5	25.1	31.9	
					n _{eto}		7000	7000	5647	4076	
					M ₀	4.7	6.4				
					M _N	4.2	5.5	5.5			
					M _{0,max}	4.6	9.1	17.0			
					M _{max}	8.0	15.3	17.7			
					n _{eto}	1730	1089	919			
					M ₀	4.7	6.4				
					M _N	3.8	4.3				
					M _{0,max}	4.6	8.8				
					M _{max}	7.8	14.7				
					n _{eto}	3902	2433				
					M ₀	11.2	11.4				
					M _N	10.0	10.0				
					M _{0,max}	11.9	22.6				
					M _{max}	20.1	29.0				
					n _{eto}	1220	918				
					M ₀	5.6	11.2	11.4			
					M _N	5.3	7.5	7.5			
					M _{0,max}	6.0	11.8	22.5			
					M _{max}	10.4	20.1	29.0			
					n _{eto}	3850	2838	2092			

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
12L20-	13.5	1950	5.9	2.80	M ₀			15.0	15.0		
					M _N			13.5	13.5		
					M _{0,max}			21.4	39.4		
					M _{max}			35.5	56.4		
					n _{eto}			1324	863		
12L41-	11.0	4050	10.2	4.70	M ₀			9.7	15.0	15.0	15.0
					M _N			8.6	11.0	11.0	11.0
					M _{0,max}			10.8	21.3	30.8	39.5
					M _{max}			19.0	35.5	49.6	56.4
					n _{eto}			4450	3013	2236	1907
14D15-	9.2	1500	4.5	1.45	M ₀			8.8	11.0		
					M _N			8.2	9.2		
					M _{0,max}			9.6	17.9		
					M _{max}			15.9	28.3		
					n _{eto}			1141	689		
14D36-	7.5	3600	7.5	2.80	M ₀			8.8	11.0		
					M _N			7.5	7.5		
					M _{0,max}			9.5	17.8		
					M _{max}			15.9	28.3		
					n _{eto}			2496	1614		
14H15-	16.0	1500	6.6	2.50	M ₀			19.8	21.0		
					M _N			16.0	16.0		
					M _{0,max}			22.3	41.2		
					M _{max}			37.1	54.8		
					n _{eto}			920	667		
14H32-	14.0	3225	11.9	4.70	M ₀				15.8	21.0	21.0
					M _N				14.0	14.0	14.0
					M _{0,max}				22.2	32.1	41.3
					M _{max}				37.1	51.9	54.8
					n _{eto}				1953	1471	1409
14L15-	23.0	1500	9.7	3.60	M ₀			18.7	28.0	28.0	
					M _N			19.0	23.0	23.0	
					M _{0,max}			21.9	42.1	59.9	
					M _{max}			37.6	68.5	77.1	
					n _{eto}			1284	828	767	
14L32-	17.2	3225	15.0	5.80	M ₀				14.8	19.8	23.3
					M _N				14.6	17.2	17.2
					M _{0,max}				21.8	32.4	42.2
					M _{max}				37.6	53.9	68.5
					n _{eto}				2801	2096	1757
14P14-	30.0	1350	10.8	4.20	M ₀				37.0	37.0	37.0
					M _N				30.0	30.0	30.0
					M _{0,max}				49.1	70.0	88.4
					M _{max}				80.0	105.1	105.1
					n _{eto}				710	573	573

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
14P32-	21.0	3225	15.6	7.10	I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀				19.3	25.9	30.5
					M _N				17.1	21.0	21.0
					M _{0,max}				25.4	37.9	49.3
					M _{max}				43.9	63.0	80.0
					n _{eto}				2469	1829	1495
19F14-	27.0	1425	8.6	4.00	M ₀			25.9	32.0		
					M _N			25.1	27.0		
					M _{0,max}			28.6	54.6		
					M _{max}			48.9	86.0		
					n _{eto}			1204	746		
19F30-	21.0	3000	14.0	6.60	M ₀				20.5	27.5	32.0
					M _N				19.0	21.0	21.0
					M _{0,max}				27.2	40.5	53.0
					M _{max}				47.2	68.3	86.0
					n _{eto}				2774	2033	1653
19J14-	40.0	1425	12.3	6.00	M ₀			42.6	51.0		
					M _N			40.0	40.0		
					M _{0,max}			58.9	82.8		
					M _{max}			96.0	129.0		
					n _{eto}			1063	839		
19J30-	29.0	3000	18.5	9.10	M ₀				28.4	33.4	
					M _N				26.6	29.0	
					M _{0,max}				42.6	56.9	
					M _{max}				73.8	96.0	
					n _{eto}				2850	2323	
19P14-	51.0	1350	14.3	7.20	M ₀			46.4	62.2	64.0	
					M _N			45.3	51.0	51.0	
					M _{0,max}			64.6	91.5	120.1	
					M _{max}			106.7	155.5	190.0	
					n _{eto}			1227	996	870	
19P30-	32.0	3000	19.0	10.00	M ₀				31.2	36.7	
					M _N				28.6	32.0	
					M _{0,max}				45.8	61.1	
					M _{max}				81.2	106.7	
					n _{eto}				2938	2715	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
06C41L	0.6	4050	2.6	0.25	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀	0.6	0.8				
					M _N	0.5	0.6				
					M _{0,max}	0.6	1.1				
					M _{max}	1.0	1.9				
					n _{eto}	6298	2835				
06C60L	0.5	6000	4.0	0.31	M ₀		0.7	0.8			
					M _N		0.5	0.5			
					M _{0,max}		0.7	1.3			
					M _{max}		1.2	2.2			
					n _{eto}		7000	1149			
06F41L	1.2	4050	2.9	0.51	M ₀	1.0	1.5	1.5			
					M _N	0.8	1.2	1.2			
					M _{0,max}	1.2	2.1	3.9			
					M _{max}	1.9	3.5	4.4			
					n _{eto}	3838	2118	2831			
06F60L	0.9	6000	3.8	0.57	M ₀		1.5	1.5			
					M _N		0.9	0.9			
					M _{0,max}		1.5	2.9			
					M _{max}		2.6	4.3			
					n _{eto}		6138	3182			
06I41L	1.5	4050	3.2	0.64	M ₀	1.3	2.0	2.0			
					M _N	1.0	1.5	1.5			
					M _{0,max}	1.4	2.8	5.0			
					M _{max}	2.4	4.4	6.2			
					n _{eto}	3549	1947	2831			
06I60L	1.2	6000	3.8	0.75	M ₀		1.9	2.0			
					M _N		1.2	1.2			
					M _{0,max}		2.1	4.1			
					M _{max}		3.6	6.2			
					n _{eto}		3417	1149			
09D41L	2.3	4050	4.6	1.00	M ₀	2.5	3.3	3.3			
					M _N	2.0	2.3	2.3			
					M _{0,max}	2.5	4.9	8.8			
					M _{max}	4.4	8.0	9.5			
					n _{eto}	4091	2547	2170			
09D60L	1.8	6000	7.0	1.10	M ₀			2.6	3.3	3.3	
					M _N			1.8	1.8	1.8	
					M _{0,max}			2.6	5.0	7.1	
					M _{max}			4.5	8.1	9.5	
					n _{eto}			7000	5373	4626	
09F38L	3.1	3750	5.0	1.20	M ₀			4.2	4.2		
					M _N			3.1	3.1		
					M _{0,max}			6.1	10.8		
					M _{max}			9.8	15.0		
					n _{eto}			1149	1951		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
09F60L	2.4	6000	7.9	1.50	M ₀		3.2	4.2	4.2	4.2	
					M _N		2.4	2.4	2.4	2.4	
					M _{0,max}		3.6	6.8	9.6	11.9	
					M _{max}		6.1	10.9	14.3	15.0	
					n _{eto}		6985	3448	2612	2397	
09H41L	3.8	4050	6.8	1.60	M ₀		5.2	5.5	5.5		
					M _N		3.8	3.8	3.8		
					M _{0,max}		5.9	11.0	15.3		
					M _{max}		9.9	17.2	20.0		
					n _{eto}		1149	2138	1852		
09H60L	3.0	6000	8.0	1.90	M ₀		3.7	5.5	5.5	5.5	
					M _N		3.0	3.0	3.0	3.0	
					M _{0,max}		4.1	8.0	11.5	14.5	
					M _{max}		7.2	13.2	17.9	20.0	
					n _{eto}		1149	4081	2984	2695	
09L41L	4.5	4050	8.4	1.90	M ₀		4.8	7.5	7.5	7.5	
					M _N		4.3	4.5	4.5	4.5	
					M _{0,max}		5.2	10.3	15.1	19.6	
					M _{max}		9.1	17.5	25.1	31.9	
					n _{eto}		4562	3243	2497	1909	
12D20L	5.5	1950	5.2	1.10	M ₀		4.7	6.4			
					M _N		4.2	5.5			
					M _{0,max}		4.6	9.0			
					M _{max}		8.0	14.9			
					n _{eto}		1878	1181			
12D41L	4.3	4050	8.8	1.80	M ₀		4.8	6.4	6.4		
					M _N		3.9	4.3	4.3		
					M _{0,max}		4.6	9.2	13.3		
					M _{max}		8.1	15.2	17.9		
					n _{eto}		4102	2535	2187		
12H15L	10.0	1500	7.6	1.60	M ₀		11.2	11.4			
					M _N		10.0	10.0			
					M _{0,max}		11.8	22.5			
					M _{max}		20.1	29.0			
					n _{eto}		1098	827			
12H30L	8.0	3000	10.5	2.50	M ₀		6.8	10.7	11.4		
					M _N		6.1	8.0	8.0		
					M _{0,max}		7.2	14.3	20.9		
					M _{max}		12.7	24.3	29.0		
					n _{eto}		2831	1849	1591		
12L20L	13.5	1950	11.8	2.80	M ₀				15.0	15.0	15.0
					M _N				13.5	13.5	13.5
					M _{0,max}				21.3	30.7	39.4
					M _{max}				35.4	49.3	56.0
					n _{eto}				1307	1004	866

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀	4.7	7.5	7.5			
					M _N	4.2	7.0	7.0			
					M _{0,max}	4.6	9.1	17.0			
					M _{max}	8.0	15.3	17.7			
					n _{eto}	1730	1089	919			
					M ₀		4.7	7.5			
					M _N		3.8	6.0			
					M _{0,max}		4.6	8.8			
					M _{max}		7.8	14.7			
					n _{eto}		3902	2433			
					M ₀			11.2	12.8		
					M _N			10.6	12.0		
					M _{0,max}			11.9	22.6		
					M _{max}			20.1	29.0		
					n _{eto}			1220	918		
					M ₀		5.6	11.2	12.8		
					M _N		5.3	10.0	7.5		
					M _{0,max}		6.0	11.8	22.5		
					M _{max}		10.4	20.1	29.0		
					n _{eto}		3850	2838	2092		
					M ₀			19.0	19.0		
					M _N			17.0	17.0		
					M _{0,max}			21.4	39.4		
					M _{max}			35.5	56.4		
					n _{eto}			1324	863		
					M ₀			9.7	16.7	19.0	19.0
					M _N			8.6	14.0	14.0	14.0
					M _{0,max}			10.8	21.3	30.8	39.5
					M _{max}			19.0	35.5	49.6	56.4
					n _{eto}			4450	3013	2236	1907
					M ₀		8.8	12.5			
					M _N		8.2	12.0			
					M _{0,max}		9.6	17.9			
					M _{max}		15.9	28.3			
					n _{eto}		1141	689			
					M ₀			8.8	11.4		
					M _N			8.6	9.7		
					M _{0,max}			9.5	17.8		
					M _{max}			15.9	28.3		
					n _{eto}			2496	1614		
					M ₀			19.8	25.5		
					M _N			19.6	23.5		
					M _{0,max}			22.3	41.2		
					M _{max}			37.1	54.8		
					n _{eto}			920	667		
12D17-	7.0	1650	3.0	1.20							
12D35-	6.0	3525	5.6	2.20							
12H14-	12.0	1350	4.1	1.70							
12H34-	10.5	3375	7.5	3.70							
12L17-	17.0	1650	6.7	2.90							
12L39-	14.0	3900	11.7	5.70							
14D14-	12.0	1350	5.4	1.70							
14D30-	10.5	3000	9.7	3.30							
14H12-	23.5	1200	8.3	3.00							

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀				15.8	23.5	25.5
					M _N				15.6	20.5	20.5
					M _{0,max}				22.2	32.1	41.3
					M _{max}				37.1	51.9	54.8
					n _{eto}				1953	1471	1409
					M ₀			18.7	32.7	34.5	
					M _N			19.0	30.5	30.5	
					M _{0,max}			21.9	42.1	59.9	
					M _{max}			37.6	68.5	77.1	
					n _{eto}			1284	828	767	
					M ₀					19.8	23.3
					M _N					19.7	23.3
					M _{0,max}					32.4	42.2
					M _{max}					53.9	68.5
					n _{eto}					2096	1757
					M ₀			39.1	43.5	43.5	
					M _N			38.9	42.0	42.0	
					M _{0,max}			49.1	70.0	88.4	
					M _{max}			80.0	105.1	105.1	
					n _{eto}			710	573	573	
					M ₀					25.9	30.5
					M _N					25.6	30.1
					M _{0,max}					37.9	49.3
					M _{max}					63.0	80.0
					n _{eto}					1829	1495
					M ₀			25.9	41.5		
					M _N			25.1	38.0		
					M _{0,max}			28.6	54.6		
					M _{max}			48.9	86.0		
					n _{eto}			1204	746		
					M ₀					27.5	33.9
					M _N					27.4	32.5
					M _{0,max}					40.5	53.0
					M _{max}					68.3	86.0
					n _{eto}					2033	1653
					M ₀					59.0	69.4
					M _N					58.1	62.5
					M _{0,max}					82.8	82.8
					M _{max}					129.0	129.0
					n _{eto}					839	839
					M ₀						34.3
					M _N						32.6
					M _{0,max}						56.9
					M _{max}						96.0
					n _{eto}						2323

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀					62.2	76.8
					M _N					57.5	67.6
					M _{0,max}					91.5	120.1
					M _{max}					155.5	190.0
					n _{eto}					996	870
					M ₀						36.7
					M _N						35.9
					M _{0,max}						61.1
					M _{max}						106.7
					n _{eto}						2715
19P12-	72.0	1200	21.3	9.00							
19P29-	53.0	2850	29.5	15.80							

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321-E	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
06C41-	0.6	4050	1.3	0.25	M ₀	0.8	0.8	0.8						
					M _N	0.6	0.6	0.6						
					M _{0,max}	1.2	1.8	2.4						
					M _{max}	1.2	1.8	2.4						
					n _{eto}	4635	2871	2019						
06C60-	0.5	6000	2.4	0.31	M ₀			0.8	0.8	0.8				
					M _N			0.5	0.5	0.5				
					M _{0,max}			1.0	1.5	2.4				
					M _{max}			1.0	1.5	2.4				
					n _{eto}			7000	7000	5368				
06F41-	1.2	4050	1.5	0.51	M ₀	1.5	1.5	1.5						
					M _N	1.2	1.2	1.2						
					M _{0,max}	2.0	3.4	4.4						
					M _{max}	2.0	3.4	4.4						
					n _{eto}	2819	1973	1562						
06F60-	0.9	6000	2.5	0.57	M ₀			1.3	1.5	1.5				
					M _N			0.9	0.9	0.9				
					M _{0,max}			1.7	3.0	4.4				
					M _{max}			1.7	3.0	4.4				
					n _{eto}			7000	5714	3773				
06I41-	1.5	4050	1.6	0.64	M ₀	1.8	2.0	2.0						
					M _N	1.4	1.5	1.5						
					M _{0,max}	2.6	4.2	6.2						
					M _{max}	2.6	4.2	6.2						
					n _{eto}	2994	1980	1384						
06I60-	1.2	6000	2.9	0.75	M ₀			1.5	2.0	2.0				
					M _N			1.0	1.2	1.2				
					M _{0,max}			2.1	3.3	5.7				
					M _{max}			2.1	3.3	5.7				
					n _{eto}			7000	5486	3414				
09D41-	2.3	4050	2.3	1.00	M ₀	3.1	3.3	3.3						
					M _N	2.3	2.3	2.3						
					M _{0,max}	4.2	6.2	9.4						
					M _{max}	4.2	6.2	9.4						
					n _{eto}	4895	2937	2008						
09D60-	1.8	6000	3.8	1.10	M ₀			2.4	3.3	3.3				
					M _N			1.8	1.8	1.8				
					M _{0,max}			3.2	5.6	9.3				
					M _{max}			3.2	5.6	9.3				
					n _{eto}			7000	7000	4492				
09F38-	3.1	3750	2.5	1.20	M ₀	3.5	4.2	4.2						
					M _N	3.1	3.1	3.1						
					M _{0,max}	5.2	7.7	12.0						
					M _{max}	5.2	7.7	12.0						
					n _{eto}	4000	3250	2173						

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321-E	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
09F60-	2.4	6000	4.5	1.50	M ₀				4.2	4.2				
					M _N				2.4	2.4				
					M _{0,max}				6.9	11.4				
					M _{max}				6.9	11.4				
					n _{eto}				7000	5035				
09H41-	3.8	4050	3.4	1.60	M ₀				5.0	5.5	5.5			
					M _N				3.8	3.8	3.8			
					M _{0,max}				7.5	12.5	20.1			
					M _{max}				7.5	12.5	20.1			
					n _{eto}				4250	2977	1988			
09H60-	3.0	6000	6.0	1.90	M ₀				4.5	5.5				
					M _N				3.0	3.0				
					M _{0,max}				6.7	11.7				
					M _{max}				6.7	11.7				
					n _{eto}				7000	7000				
09L41-	4.5	4050	4.2	1.90	M ₀				4.7	7.5	7.5			
					M _N				4.2	4.5	4.5			
					M _{0,max}				6.7	11.7	20.8			
					M _{max}				6.7	11.7	20.8			
					n _{eto}				4450	4154	2796			
09L51-	3.6	5100	6.9	1.90	M ₀				4.2	7.5	7.5			
					M _N				3.6	3.6	3.6			
					M _{0,max}				6.0	11.1	13.2			
					M _{max}				6.0	11.1	19.1			
					n _{eto}				7000	7000	7000			
12D20-	5.5	1950	2.6	1.10	M ₀				5.9	6.4	6.4			
					M _N				5.3	5.5	5.5			
					M _{0,max}				7.6	11.6	17.7			
					M _{max}				7.6	11.6	17.7			
					n _{eto}				1790	1358	919			
12D41-	4.3	4050	4.5	1.80	M ₀				4.6	6.4	6.4			
					M _N				3.7	4.3	4.3			
					M _{0,max}				5.9	10.1	17.3			
					M _{max}				5.9	10.1	17.3			
					n _{eto}				4344	3275	2116			
12H15-	10.0	1500	3.8	1.60	M ₀				10.9	11.4	11.4			
					M _N				10.0	10.0	10.0			
					M _{0,max}				15.1	25.8	29.0			
					M _{max}				15.1	25.8	29.0			
					n _{eto}				1676	1013	918			
12H35-	7.5	3525	5.7	2.80	M ₀				9.8	11.4				
					M _N				7.5	7.5				
					M _{0,max}				13.5	24.1				
					M _{max}				13.5	24.1				
					n _{eto}				3618	2447				

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321-E	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E	
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5	
12L20-	13.5	1950	5.9	2.80	M ₀				15.0	15.0					
					M _N				13.5	13.5					
					M _{0,max}				24.4	41.9					
					M _{max}				24.4	41.9					
					n _{eto}				1718	1158					
12L41-	11.0	4050	10.2	4.70	M ₀					15.0	15.0	15.0			
					M _N					11.0	11.0	11.0			
					M _{0,max}					22.8	27.0	35.5			
					M _{max}					22.8	38.5	49.6			
					n _{eto}					4287	2799	2236			
14D15-	9.2	1500	4.5	1.45	M ₀				8.5	11.0	11.0				
					M _N				8.0	9.2	9.2				
					M _{0,max}				12.1	20.2	29.0				
					M _{max}				12.1	20.2	29.0				
					n _{eto}				1437	928	676				
14D36-	7.5	3600	7.5	2.80	M ₀					7.7	11.0	11.0			
					M _N					7.0	7.5	7.5			
					M _{0,max}					10.9	19.0	22.2			
					M _{max}					10.9	19.0	29.0			
					n _{eto}					3479	2159	1593			
14H15-	16.0	1500	6.6	2.50	M ₀					17.3	21.0				
					M _N					16.0	16.0				
					M _{0,max}					25.4	43.9				
					M _{max}					25.4	43.9				
					n _{eto}					1247	800				
14H32-	14.0	3225	11.9	4.70	M ₀						16.2	21.0	21.0		
					M _N						14.0	14.0	14.0		
					M _{0,max}						23.8	28.2	37.1		
					M _{max}						23.8	40.2	51.9		
					n _{eto}						2875	1817	1471		
14L15-	23.0	1500	9.7	3.60	M ₀						28.0	28.0			
					M _N						23.0	23.0			
					M _{0,max}						45.0	52.9			
					M _{max}						45.0	73.8			
					n _{eto}						1126	788			
14L32-	17.2	3225	15.0	5.80	M ₀						15.2	27.4	28.0	28.0	
					M _N						14.9	17.2	17.2	17.2	
					M _{0,max}						23.5	28.3	37.6	52.9	
					M _{max}						23.5	41.0	53.9	73.9	
					n _{eto}						3953	2608	2096	1672	
14P14-	30.0	1350	10.8	4.20	M ₀						37.0	37.0	37.0		
					M _N						30.0	30.0	30.0		
					M _{0,max}						52.5	61.8	80.0		
					M _{max}						52.5	86.3	105.1		
					n _{eto}						998	668	573		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321-E	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
14P32-	21.0	3225	15.6	7.10	M₀					19.8	35.8	37.0	37.0	
					M_N					17.5	21.0	21.0	21.0	
					M_{0,max}					27.4	33.0	43.9	61.8	
					M_{max}					27.4	47.9	63.0	86.4	
					n_{eto}					3300	2299	1829	1404	
19F14-	27.0	1425	8.6	4.00	M₀					22.6	32.0	32.0		
					M_N					22.0	27.0	27.0		
					M_{0,max}					33.0	58.2	68.3		
					M_{max}					33.0	58.2	86.0		
					n_{eto}					1459	1056	746		
19F30-	21.0	3000	14.0	6.60	M₀					21.0	32.0	32.0		
					M_N					19.5	21.0	21.0		
					M_{0,max}					29.2	35.2	47.2		
					M_{max}					29.2	51.5	68.3		
					n_{eto}					3352	2573	2033		
19J14-	40.0	1425	12.3	6.00	M₀					43.6	51.0	51.0		
					M_N					40.0	40.0	40.0		
					M_{0,max}					60.8	72.4	96.0		
					M_{max}					60.8	104.5	129.0		
					n_{eto}					1376	996	839		
19J30-	29.0	3000	18.5	9.10	M₀					39.3	51.0	51.0	51.0	
					M_N					29.0	29.0	29.0	29.0	
					M_{0,max}					36.8	50.2	72.4	79.5	
					M_{max}					55.2	73.8	104.7	127.6	
					n_{eto}					3150	2850	2162	1817	
19P14-	51.0	1350	14.3	7.20	M₀					47.5	64.0	64.0		
					M_N					46.4	51.0	51.0		
					M_{0,max}					69.5	79.6	106.7		
					M_{max}					69.5	116.7	155.5		
					n_{eto}					1400	1187	996		
19P30-	32.0	3000	19.0	10.00	M₀					43.1	58.7	64.0	64.0	
					M_N					32.0	32.0	32.0	32.0	
					M_{0,max}					39.6	53.9	79.6	87.6	
					M_{max}					59.3	81.2	116.9	144.3	
					n_{eto}					3000	2938	2638	2298	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
					I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
					M ₀	5.9	7.5	7.5					
					M _N	5.3	7.0	7.0					
					M _{0,max}	7.6	11.6	17.7					
					M _{max}	7.6	11.6	17.7					
					n _{eto}	1790	1358	919					
					M ₀		4.6	7.5	7.5				
					M _N		3.7	6.0	6.0				
					M _{0,max}		5.9	10.1	17.3				
					M _{max}		5.9	10.1	17.3				
					n _{eto}		4344	3275	2116				
					M ₀			10.9	12.8	12.8			
					M _N			10.3	12.0	12.0			
					M _{0,max}			15.1	25.8	29.0			
					M _{max}			15.1	25.8	29.0			
					n _{eto}			1676	1013	918			
					M ₀				9.8	12.8			
					M _N				9.6	10.5			
					M _{0,max}				13.5	24.1			
					M _{max}				13.5	24.1			
					n _{eto}				3618	2447			
					M ₀					18.5	19.0		
					M _N					17.0	17.0		
					M _{0,max}					24.4	41.9		
					M _{max}					24.4	41.9		
					n _{eto}					1718	1158		
					M ₀						17.2	19.0	
					M _N						14.0	14.0	
					M _{0,max}						22.8	27.0	
					M _{max}						22.8	38.5	
					n _{eto}						4287	2799	
					M ₀							2236	
					M _N								
					M _{0,max}								
					M _{max}								
					n _{eto}								
					M ₀						8.5	12.5	
					M _N						8.0	12.0	
					M _{0,max}						12.1	20.2	
					M _{max}						12.1	20.2	
					n _{eto}						1437	928	
					M ₀							676	
					M _N								
					M _{0,max}								
					M _{max}								
					n _{eto}								
					M ₀						7.7	12.5	
					M _N						7.0	10.0	
					M _{0,max}						10.9	19.0	
					M _{max}						10.9	19.0	
					n _{eto}						3479	2159	
					M ₀								
					M _N								
					M _{0,max}								
					M _{max}								
					n _{eto}								
					M ₀						17.3	25.5	
					M _N						17.2	23.5	
					M _{0,max}						25.4	43.9	
					M _{max}						25.4	43.9	
					n _{eto}						1247	800	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
					I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
14H28-	20.5	2775	15.0	6.00	M ₀				16.2	25.5	25.5		
					M _N				16.1	20.5	20.5		
					M _{0,max}				23.8	28.2	37.1		
					M _{max}				23.8	40.2	51.9		
					n _{eto}				2875	1817	1471		
14L14-	30.5	1350	11.8	4.30	M ₀				33.4	34.5			
					M _N				30.5	30.5			
					M _{0,max}				45.0	52.9			
					M _{max}				45.0	73.8			
					n _{eto}				1126	788			
14L30-	25.5	3000	20.8	8.00	M ₀				27.4	34.5	34.5		
					M _N				25.5	25.5	25.5		
					M _{0,max}				28.3	37.6	52.9		
					M _{max}				41.0	53.9	73.9		
					n _{eto}				2608	2096	1672		
14P11-	42.0	1050	13.4	4.60	M ₀				40.1	43.5	43.5		
					M _N				40.0	42.0	42.0		
					M _{0,max}				52.5	61.8	80.0		
					M _{max}				52.5	86.3	105.1		
					n _{eto}				998	668	573		
14P26-	33.0	2625	21.9	9.10	M ₀				35.8	43.5	43.5		
					M _N				33.0	33.0	33.0		
					M _{0,max}				33.0	43.9	61.8		
					M _{max}				47.9	63.0	86.4		
					n _{eto}				2299	1829	1404		
19F12-	38.0	1200	11.3	4.80	M ₀				22.6	41.5	41.5		
					M _N				22.0	38.0	38.0		
					M _{0,max}				33.0	58.2	68.3		
					M _{max}				33.0	58.2	86.0		
					n _{eto}				1459	1056	746		
19F29-	32.5	2850	20.1	9.70	M ₀				39.9	41.5			
					M _N				32.5	32.5			
					M _{0,max}				35.2	47.2			
					M _{max}				51.5	68.3			
					n _{eto}				2573	2033			
19J12-	62.5	1200	18.3	7.90	M ₀				43.6	70.5	70.5		
					M _N				43.4	62.5	62.5		
					M _{0,max}				60.8	72.4	96.0		
					M _{max}				60.8	104.5	129.0		
					n _{eto}				1376	996	839		
19J29-	50.5	2850	31.0	15.10	M ₀				55.5	70.5	70.5		
					M _N				50.5	50.5	50.5		
					M _{0,max}				50.2	72.4	79.5		
					M _{max}				73.8	104.7	127.6		
					n _{eto}				2850	2162	1817		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
MCS	M _N	n _N	I _N	P _N	I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
					I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
19P12-	72.0	1200	21.3	9.00	M ₀				47.5	86.0	86.0		
					M _N				46.4	72.0	72.0		
					M _{0,max}				69.5	79.6	106.7		
					M _{max}				69.5	116.7	155.5		
					n _{eto}				1400	1187	996		
19P29-	53.0	2850	29.5	15.80	M ₀					58.7	86.0	86.0	
					M _N					53.0	53.0	53.0	
					M _{0,max}					53.9	79.6	87.6	
					M _{max}					81.2	116.9	144.3	
					n _{eto}					2938	2638	2298	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06C41- (non-ventilated)

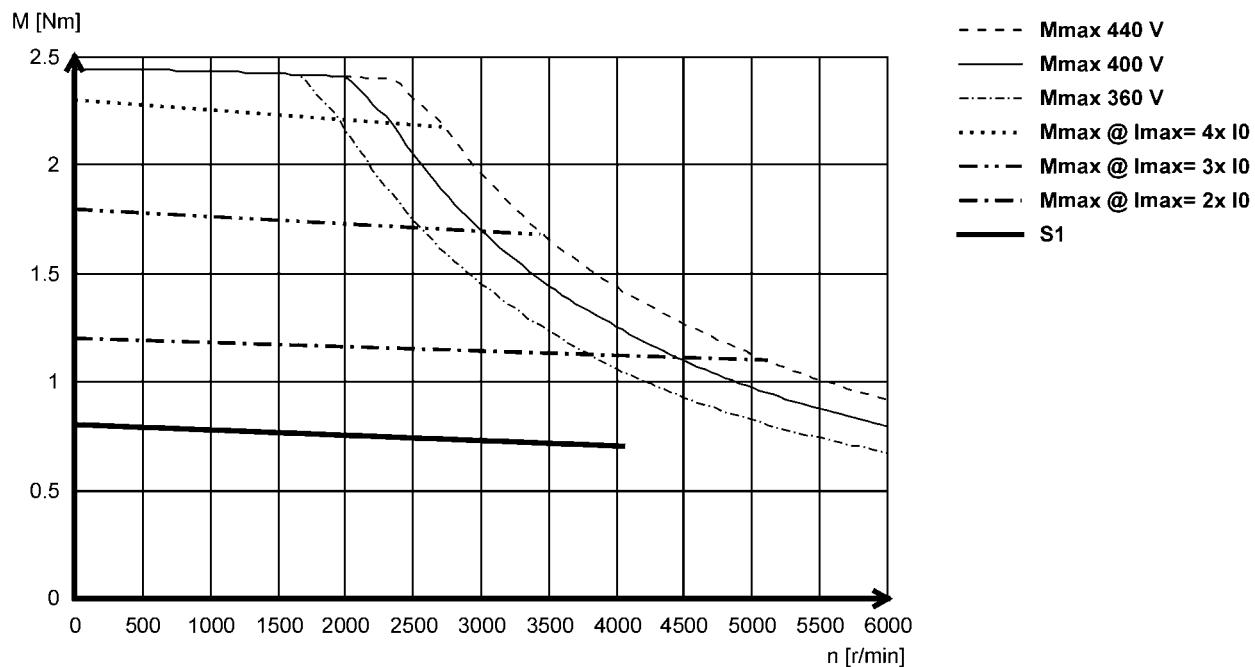

MCS06C60- (non-ventilated)

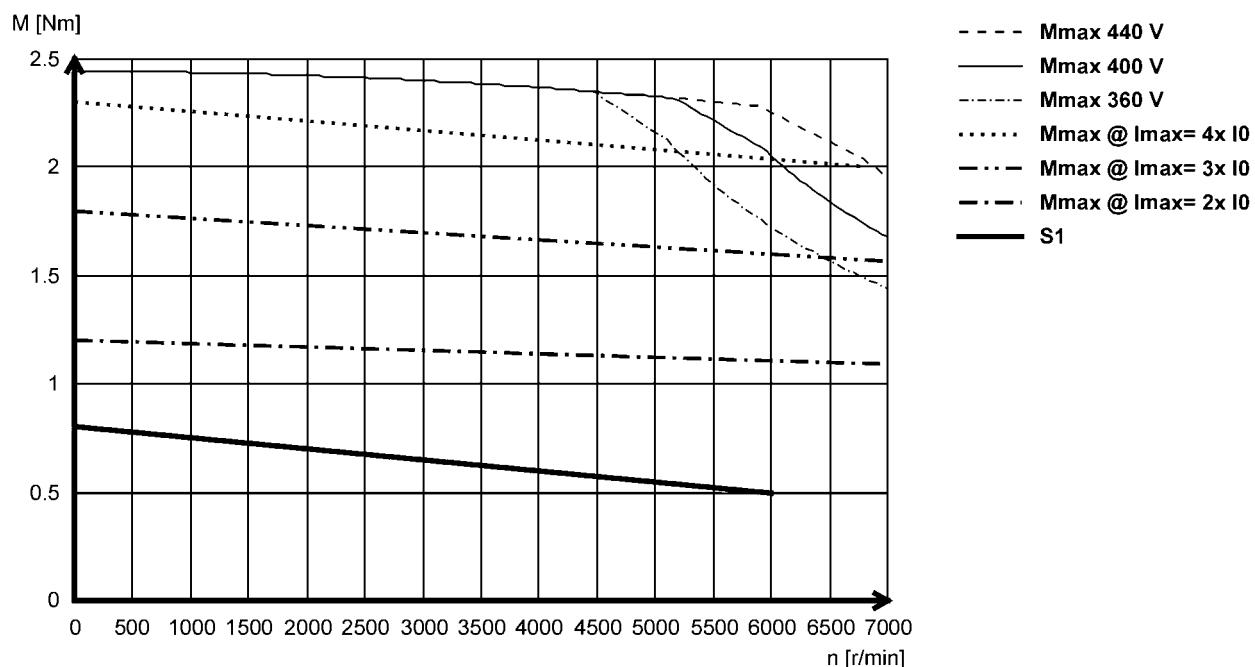

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06F41- (non-ventilated)

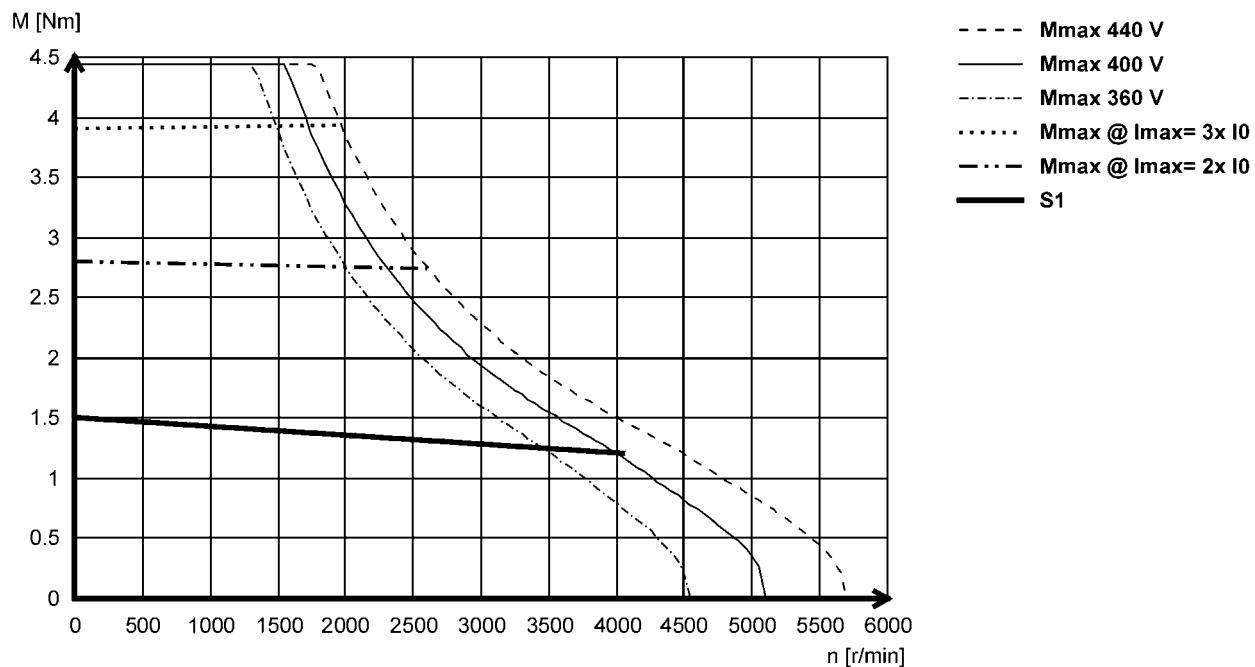

MCS06F60- (non-ventilated)

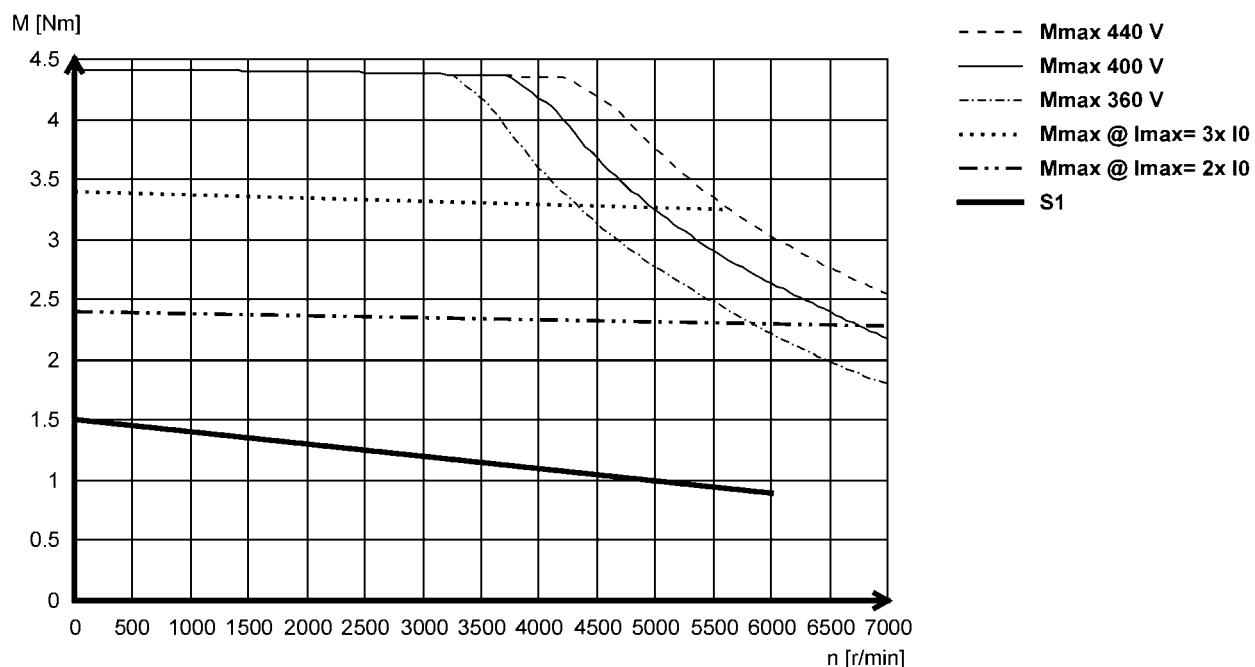

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06I41- (non-ventilated)

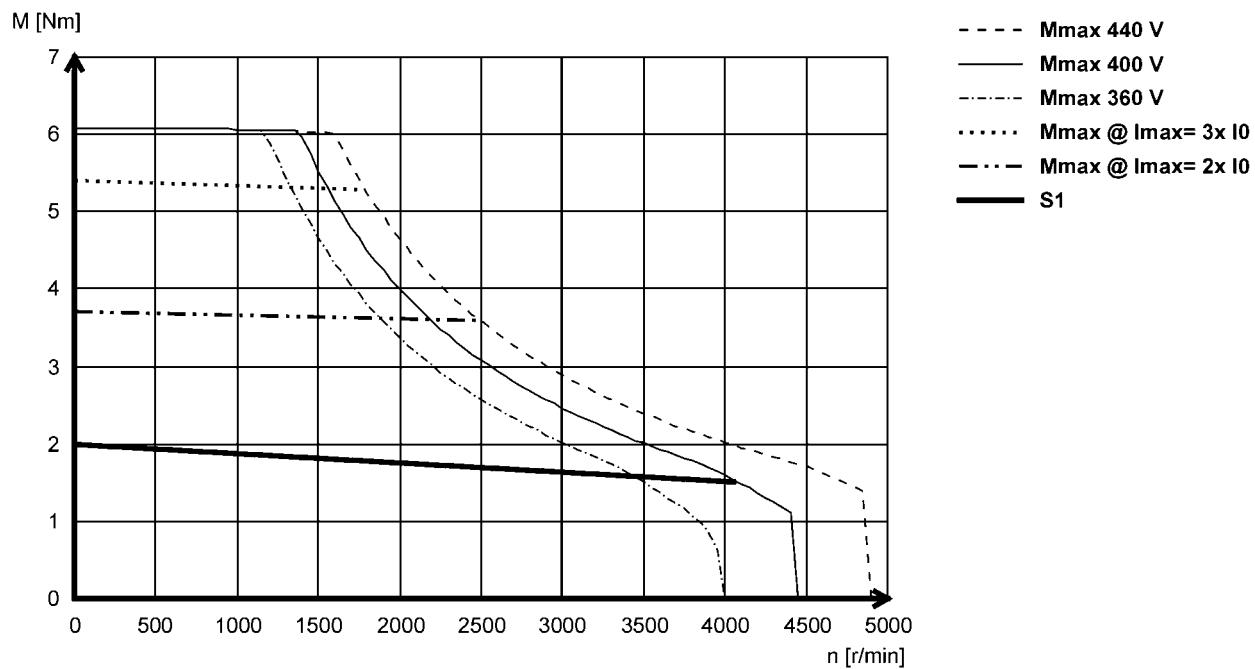

MCS06I60- (non-ventilated)

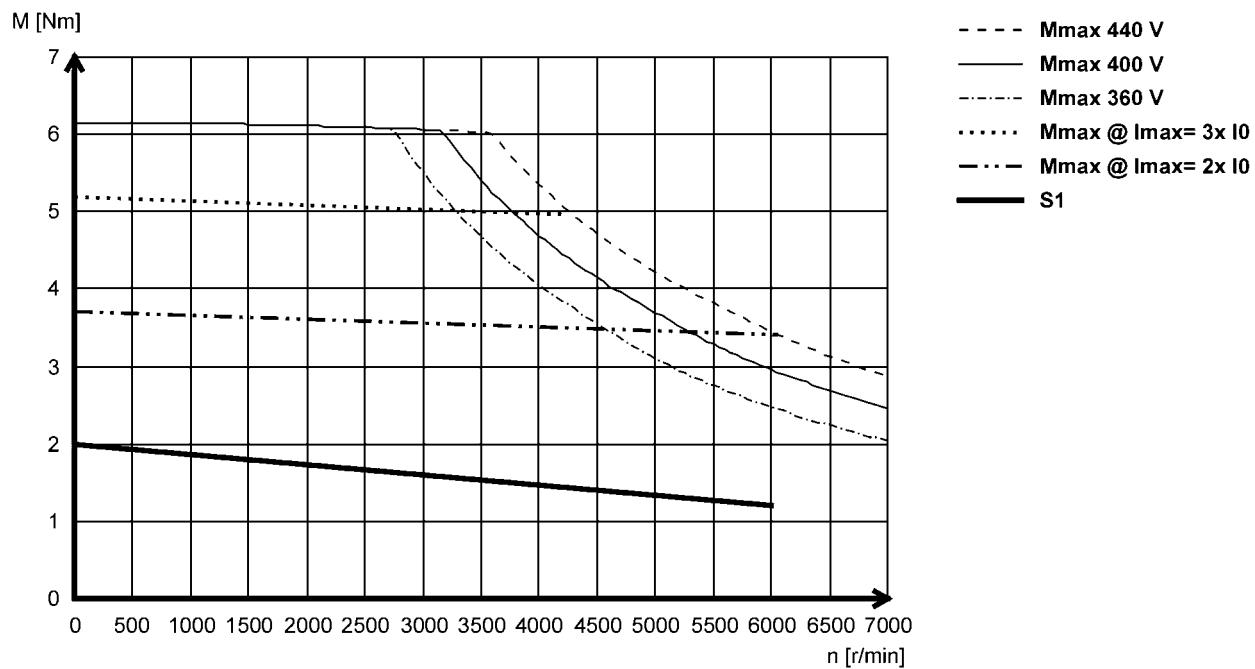

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09D41- (non-ventilated)

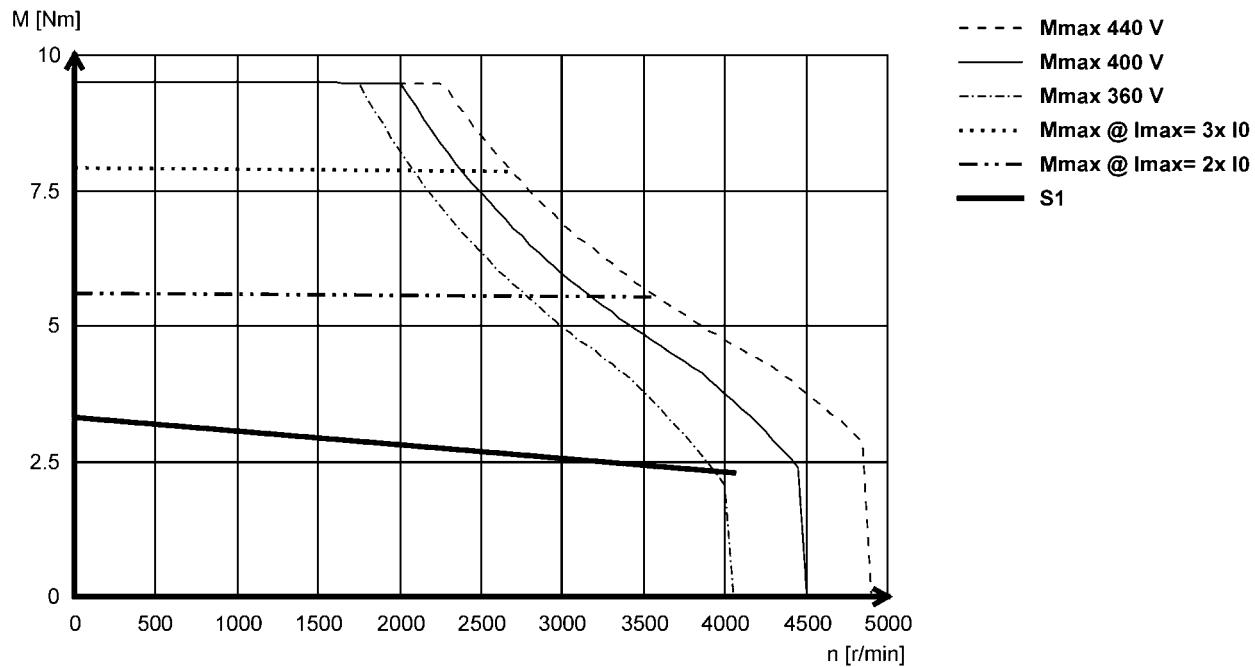

MCS09D60- (non-ventilated)

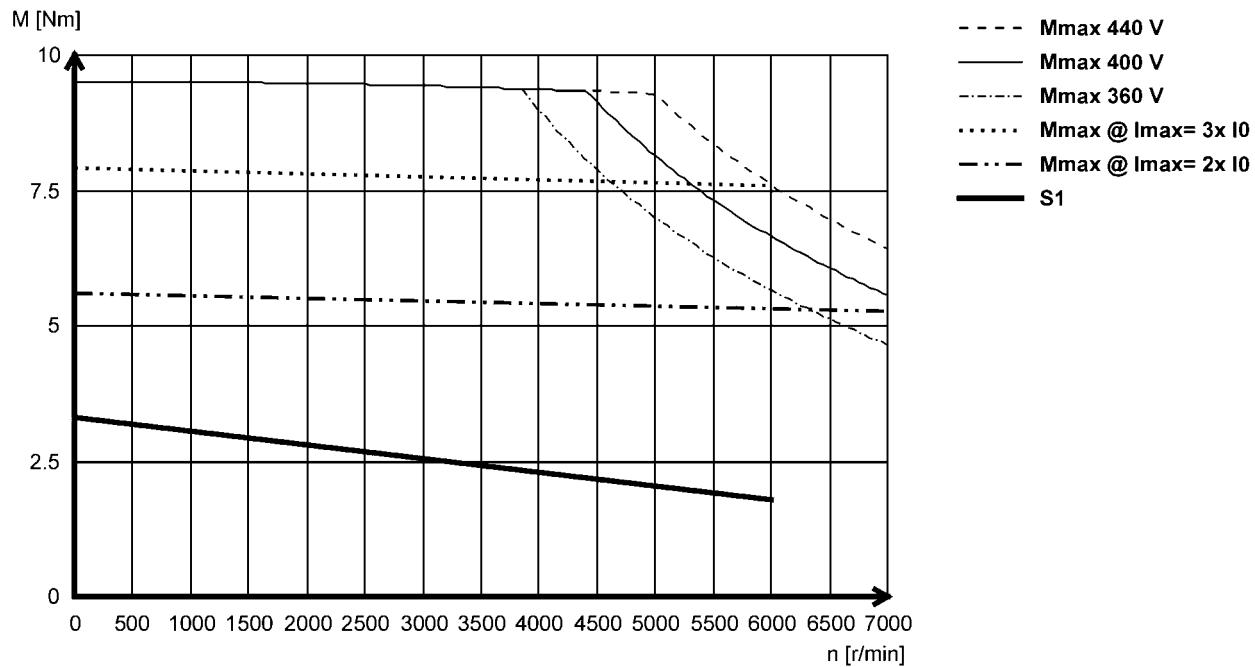

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09F38- (non-ventilated)

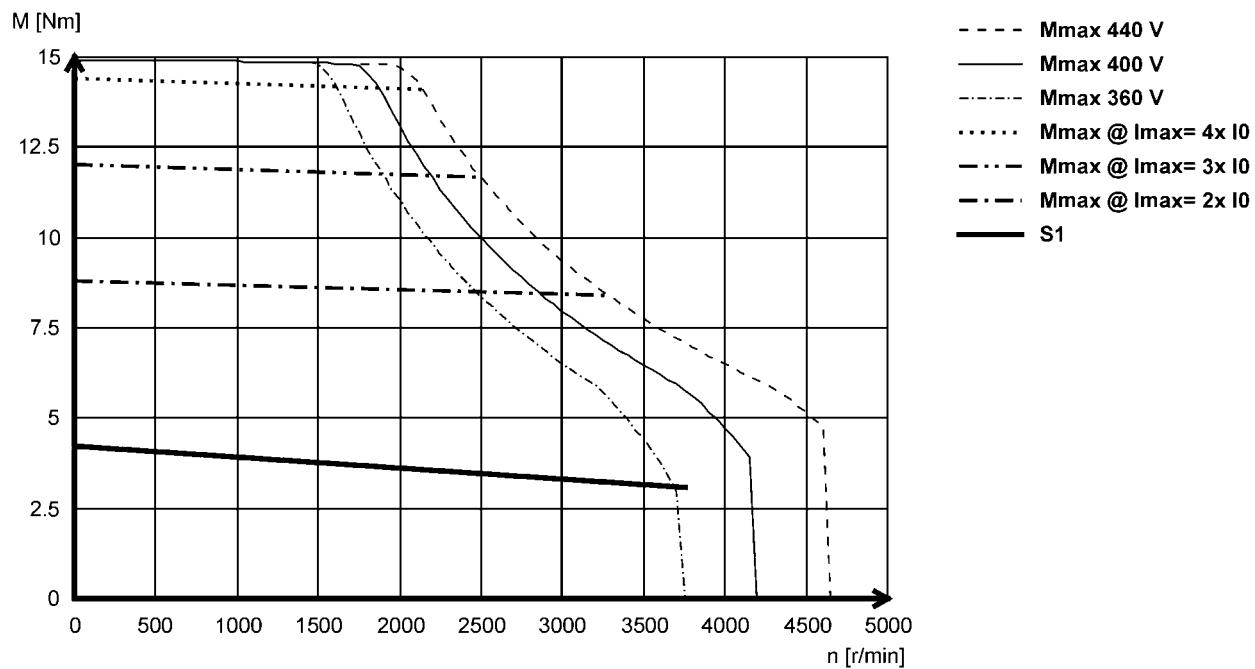

MCS09F60- (non-ventilated)

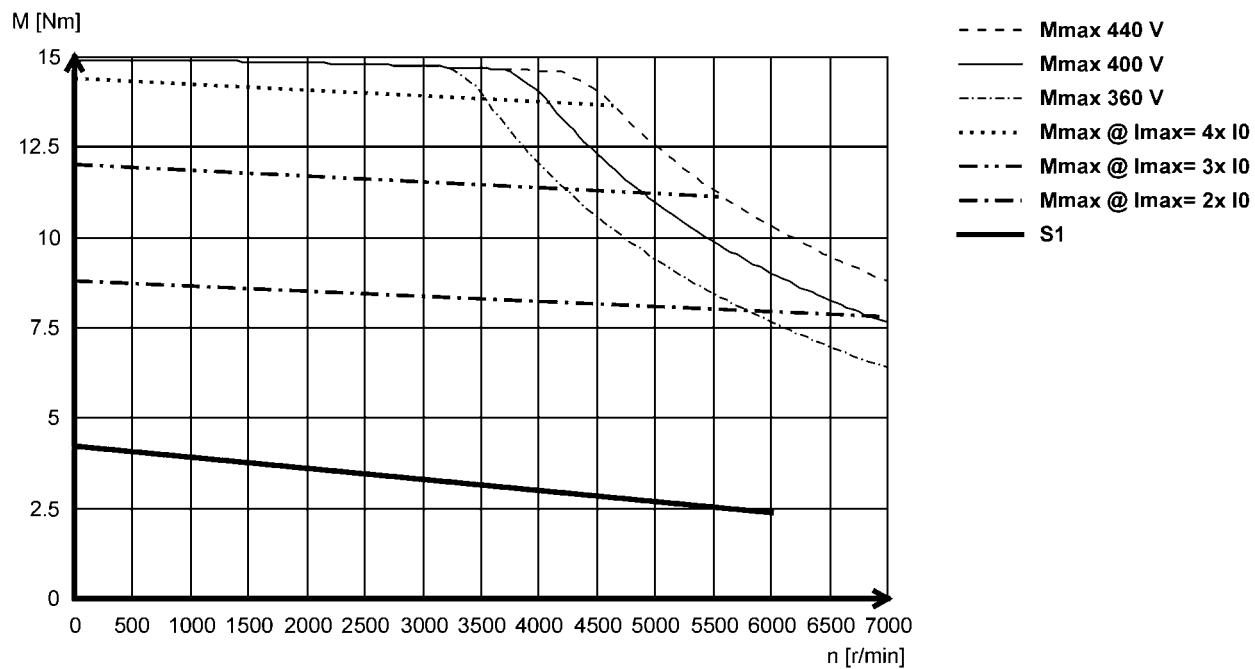

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09H41- (non-ventilated)

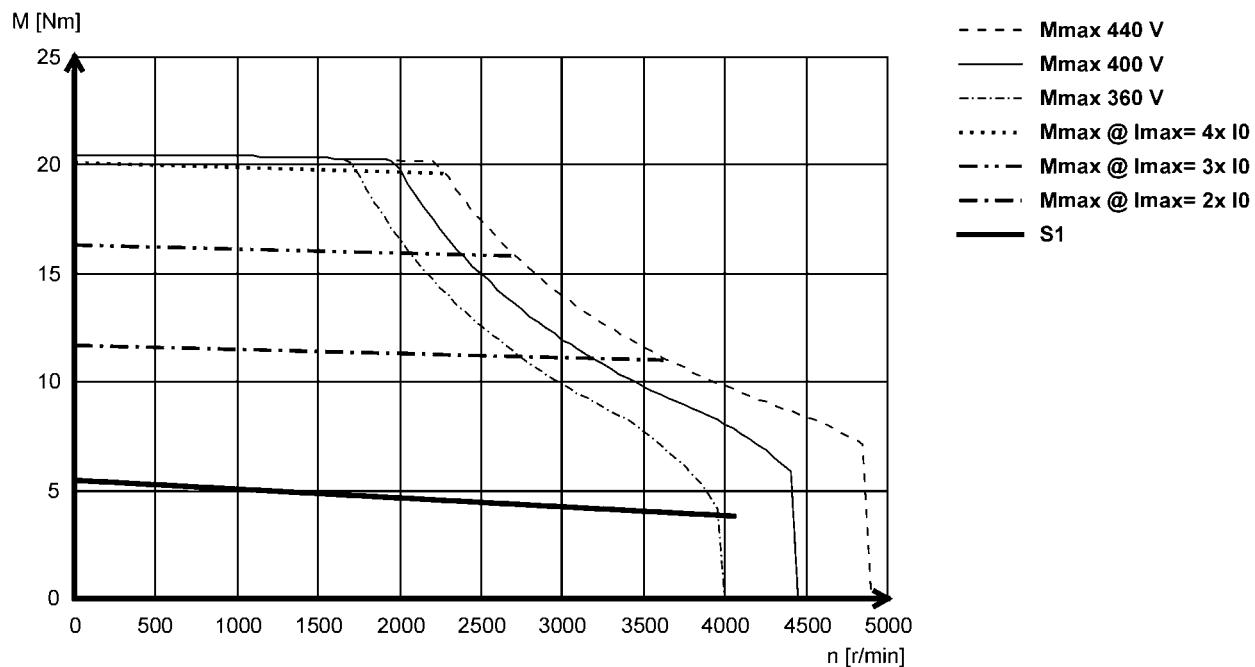

MCS09H60- (non-ventilated)

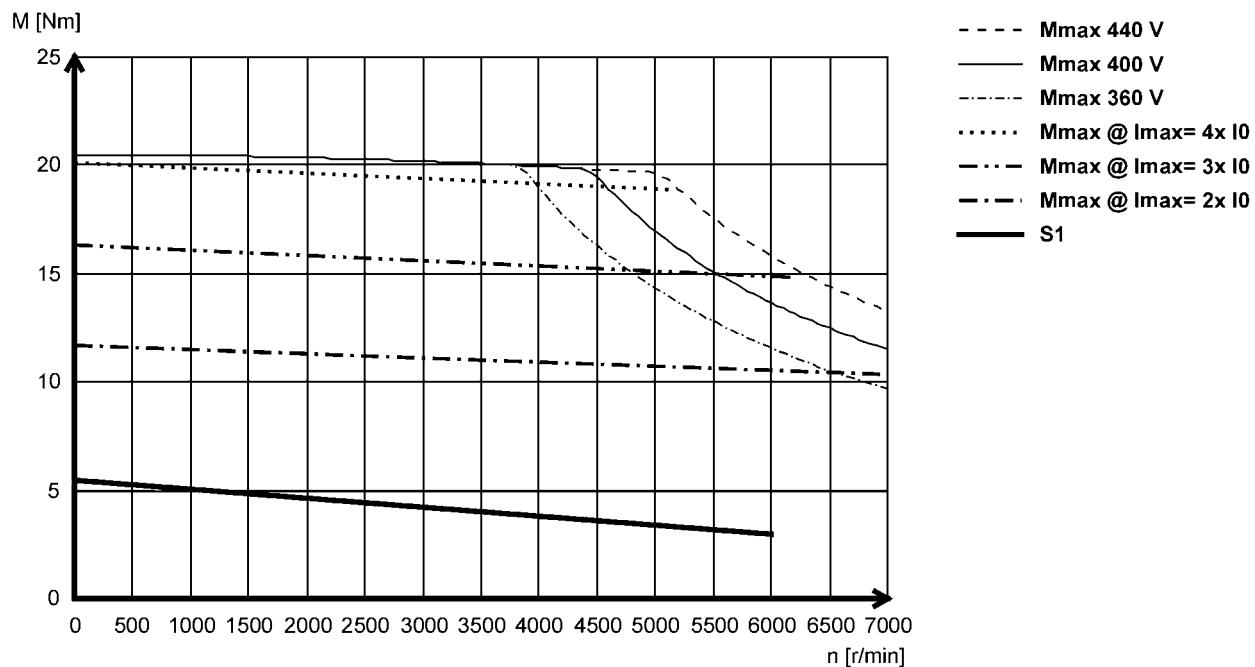

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09L41- (non-ventilated)

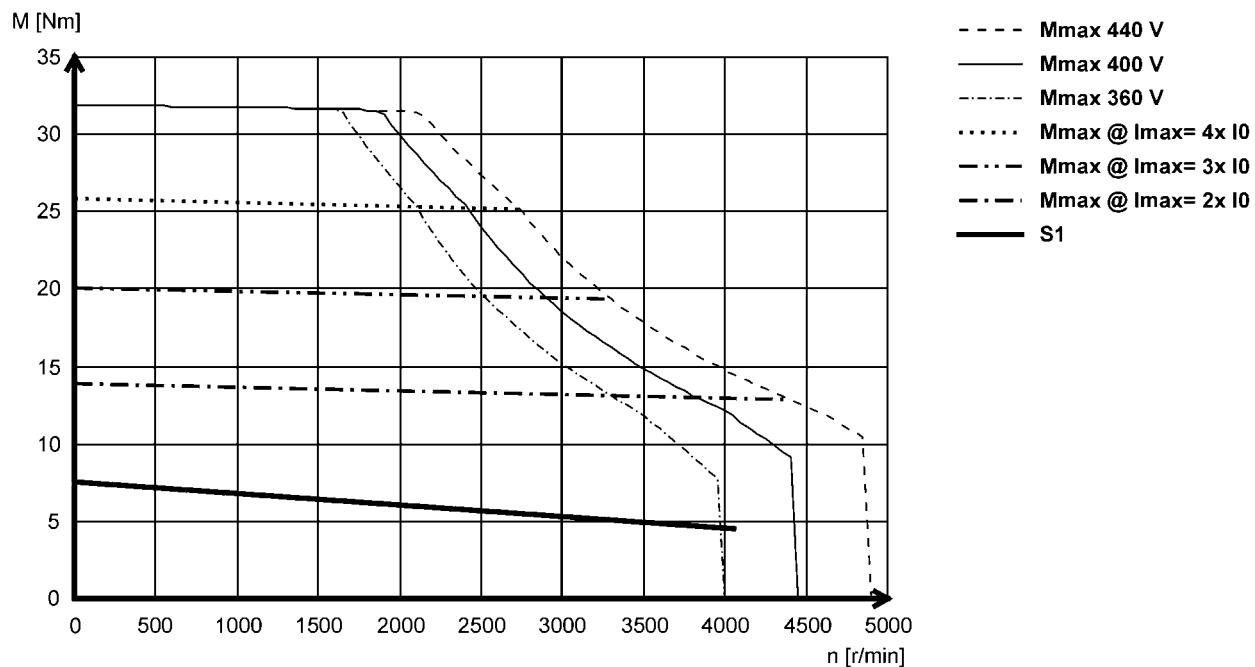

MCS09L51- (non-ventilated)

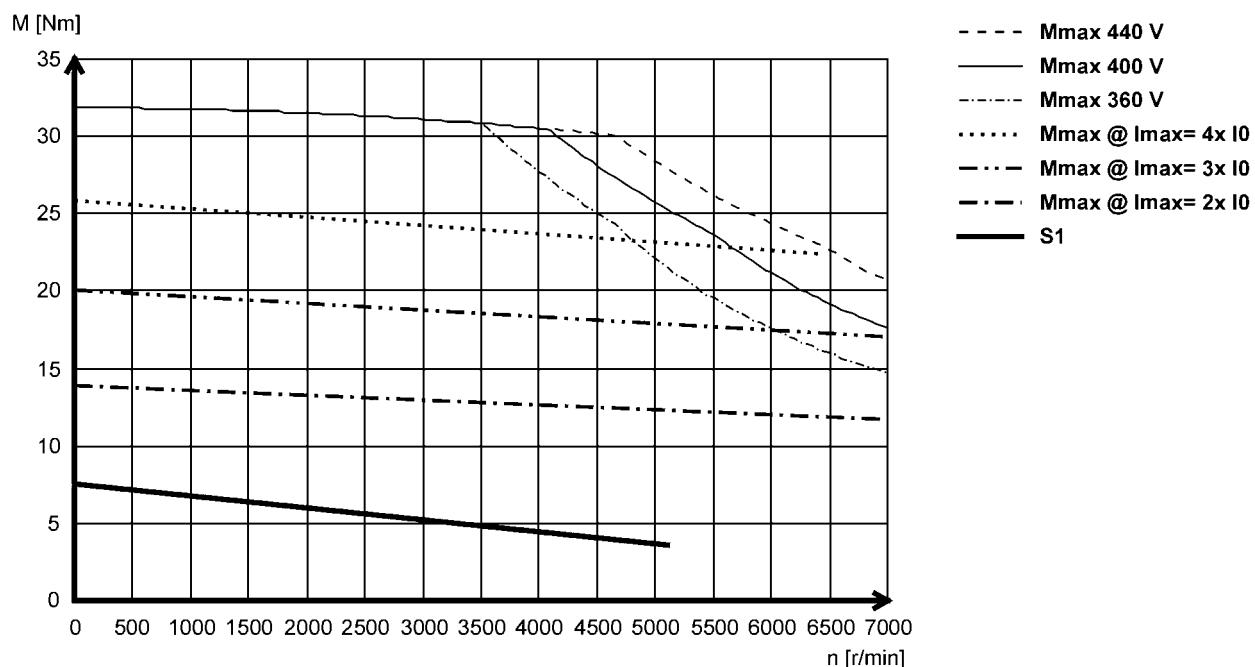

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D17 (forced ventilated)

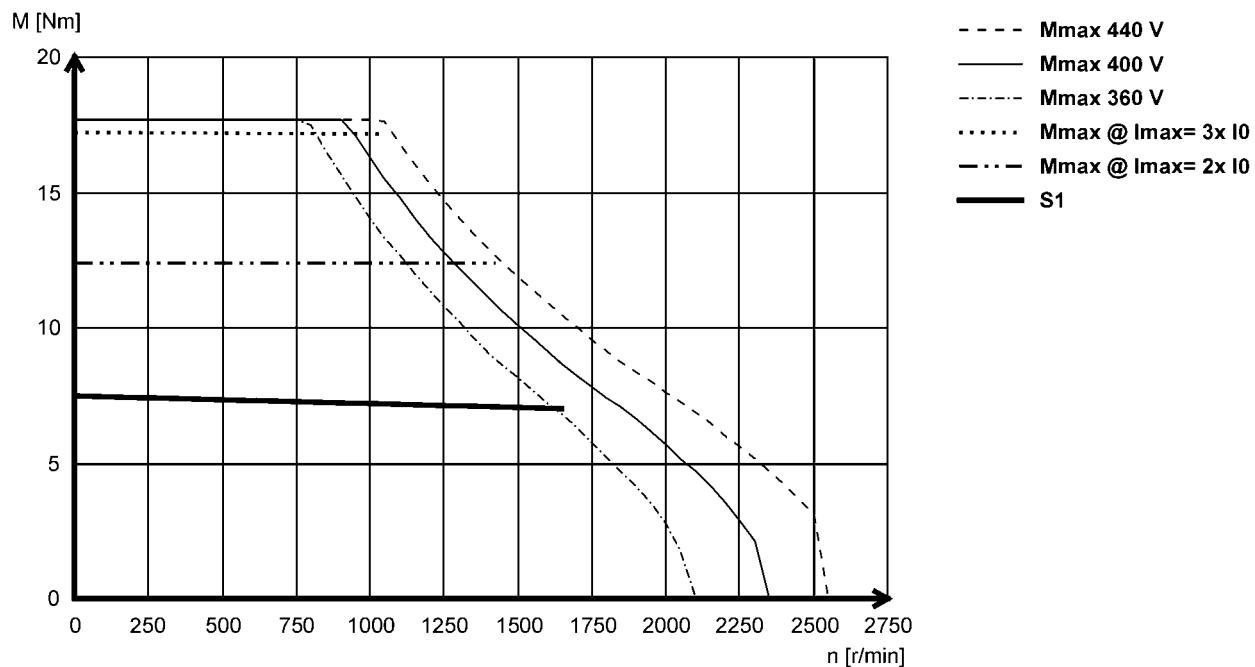

MCS12D20- (non-ventilated)

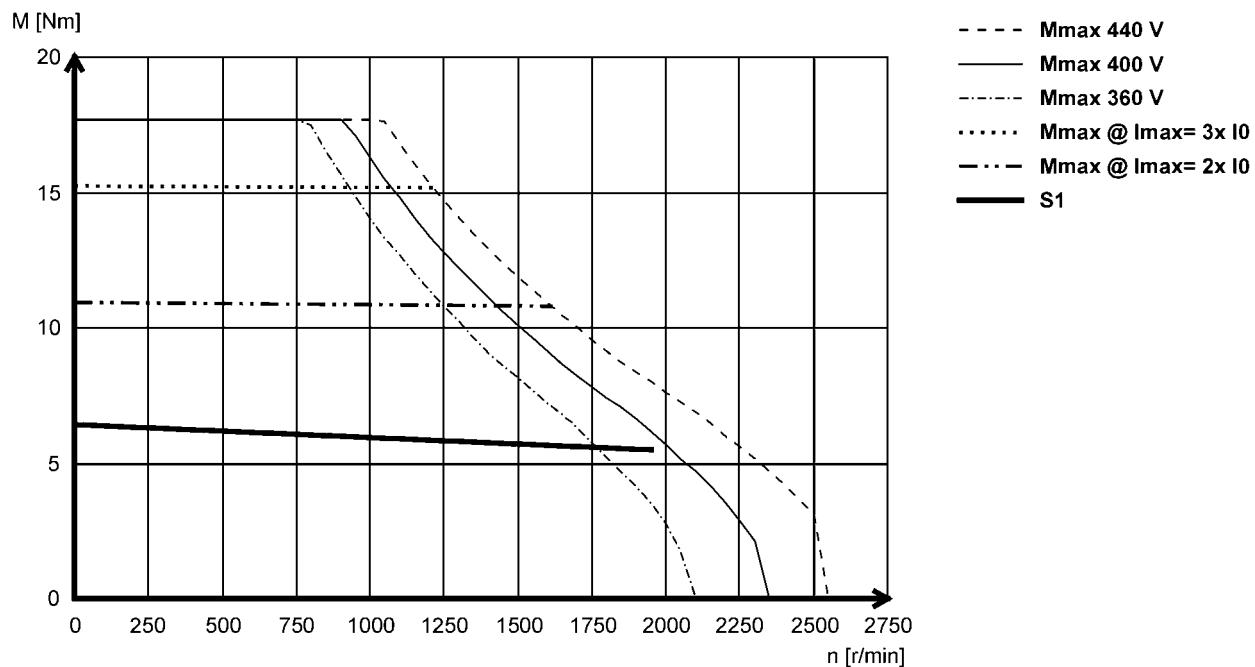

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D35- (forced ventilated)

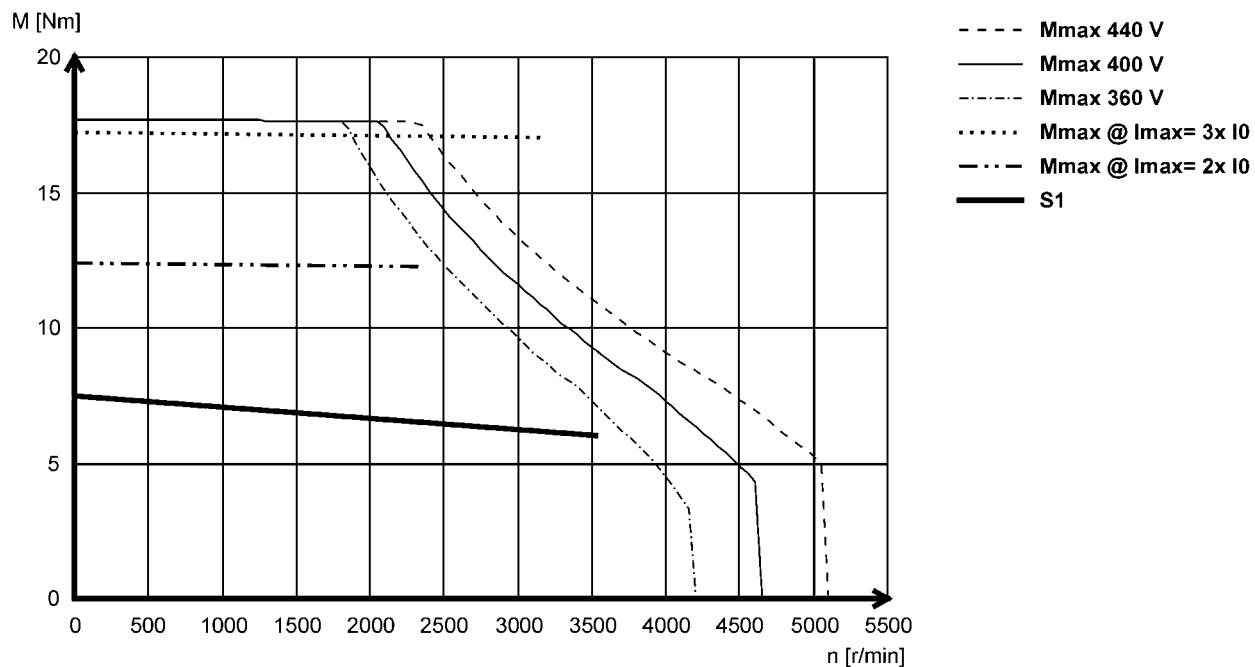

MCS12D41- (non-ventilated)

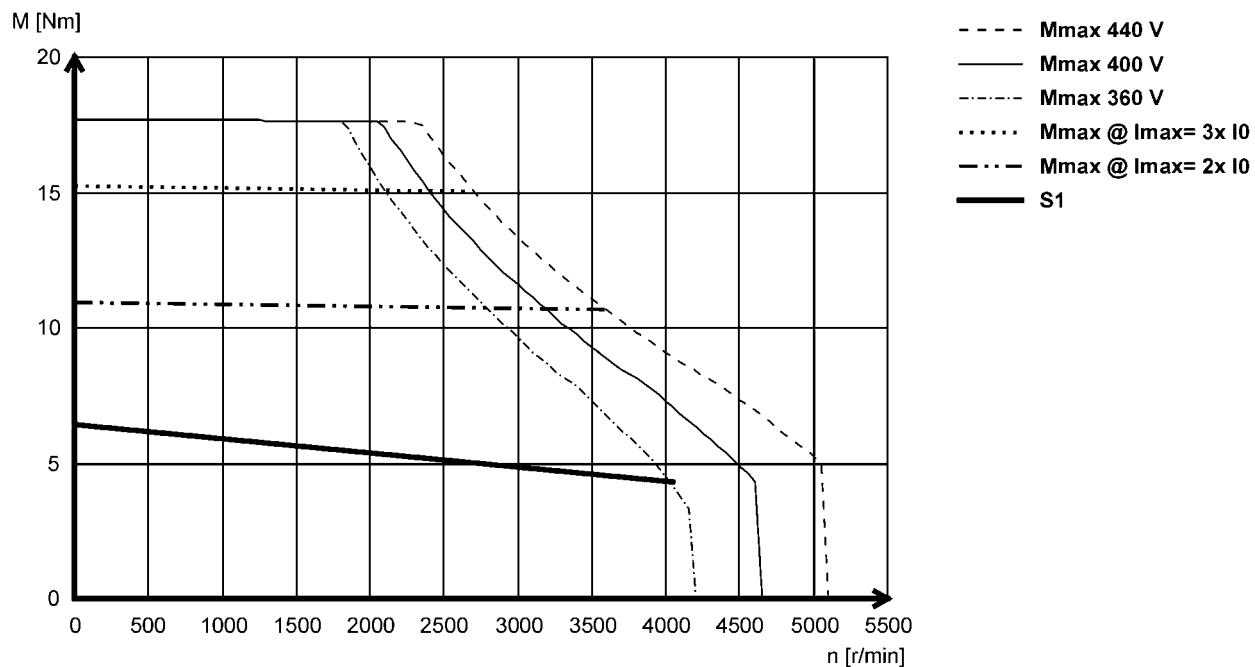

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H14- (forced ventilated)

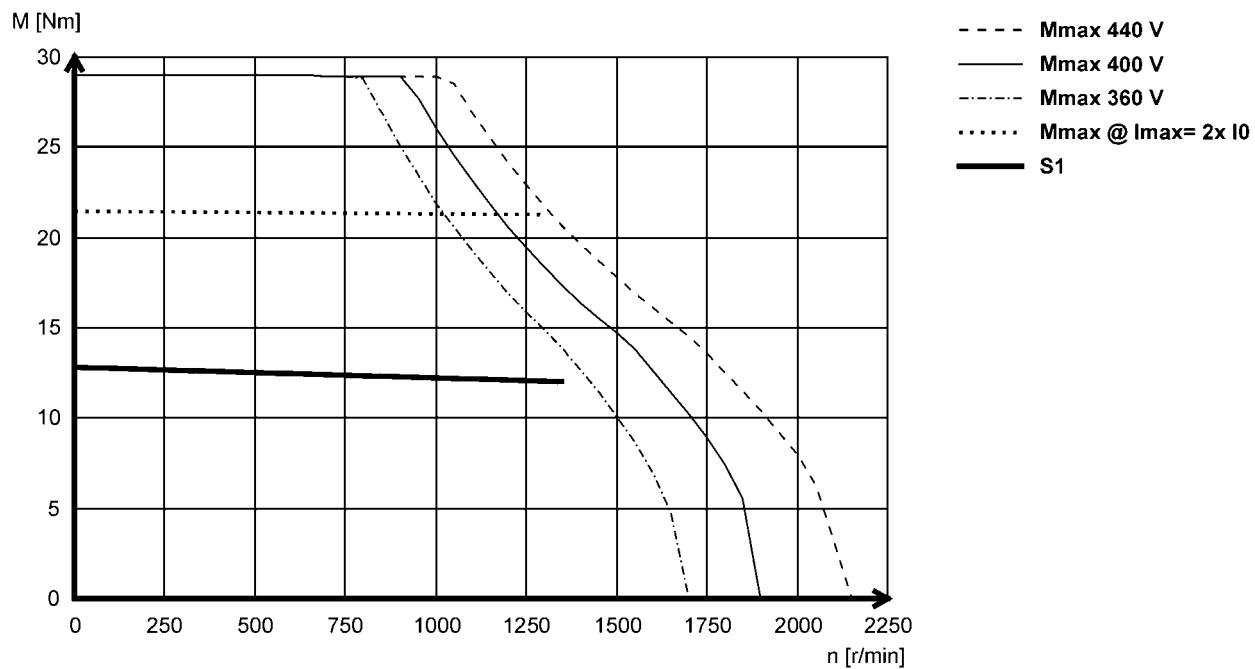

MCS12H15- (non-ventilated)

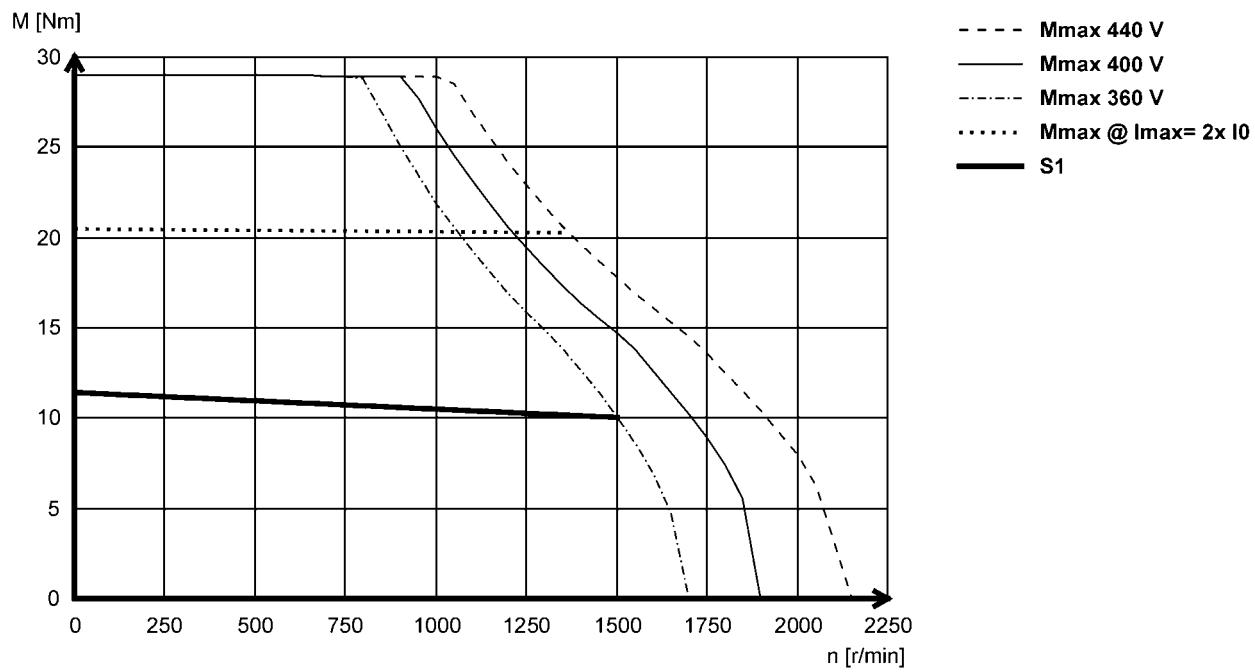

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H34- (forced ventilated)

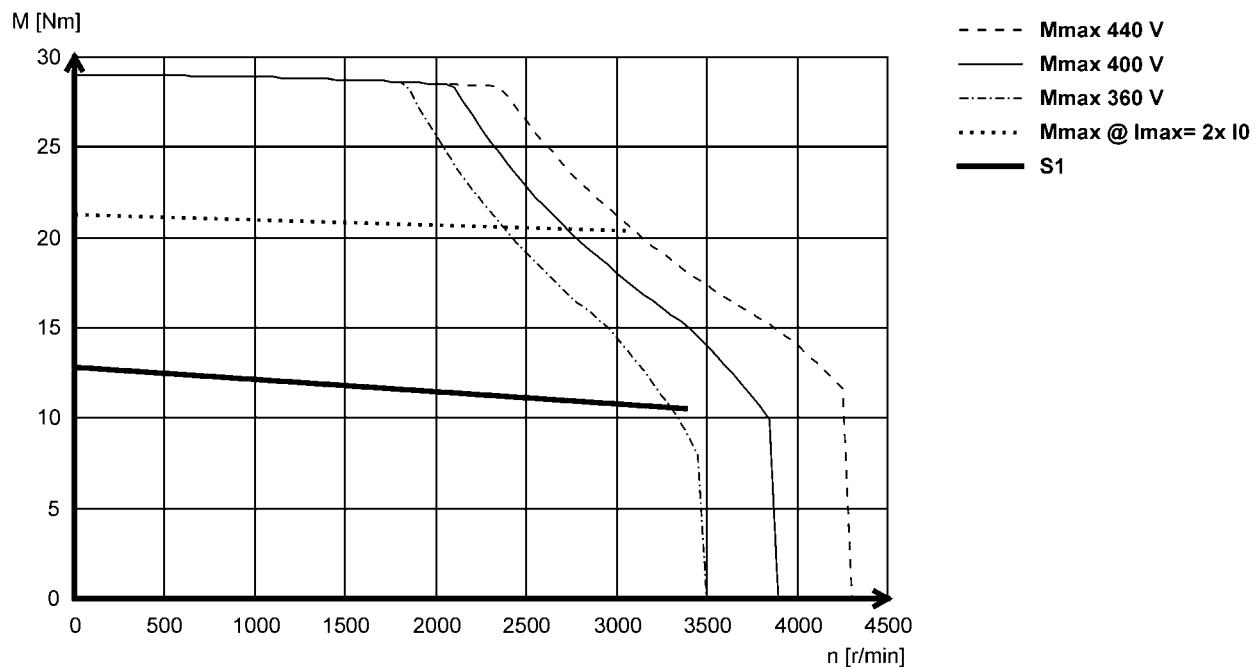

MCS12H35- (non-ventilated)

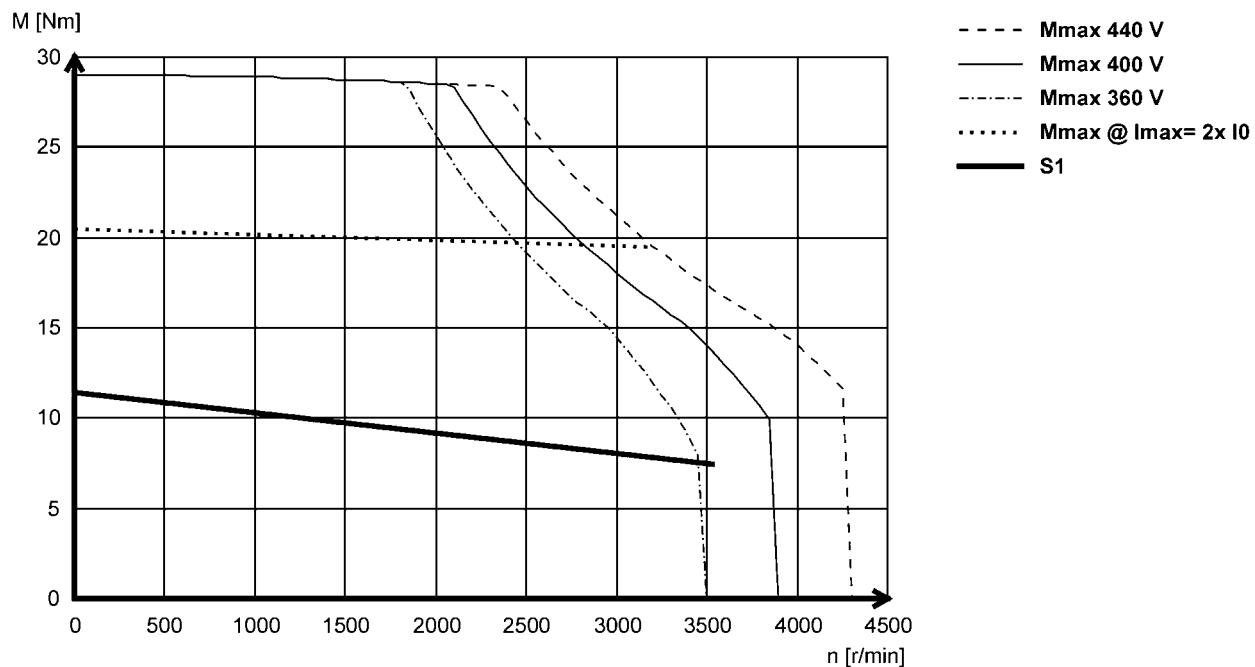

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L17- (forced ventilated)

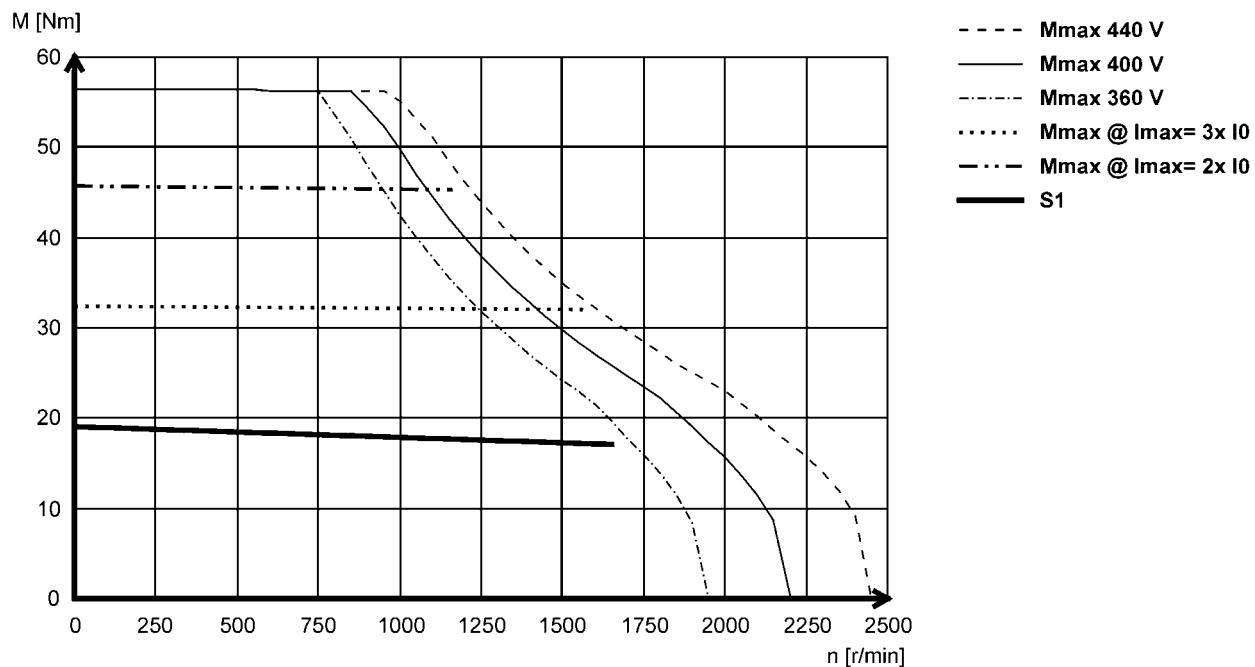

MCS12L20- (non-ventilated)

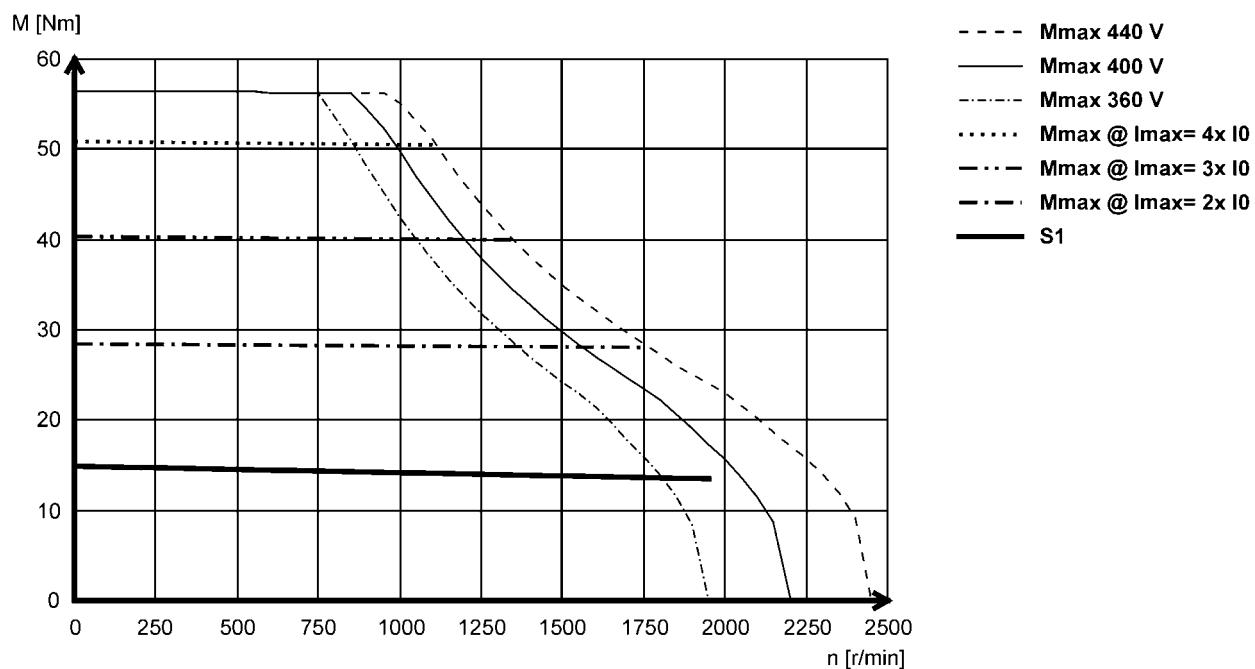

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L39- (forced ventilated)

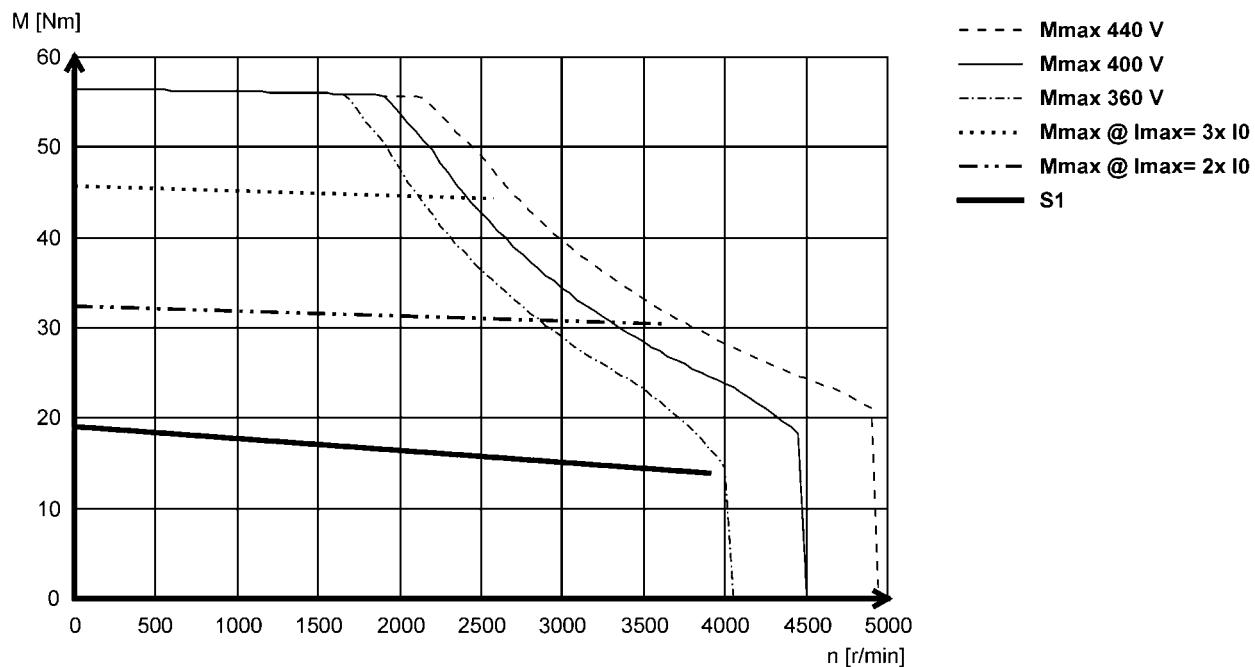

MCS12L41- (non-ventilated)

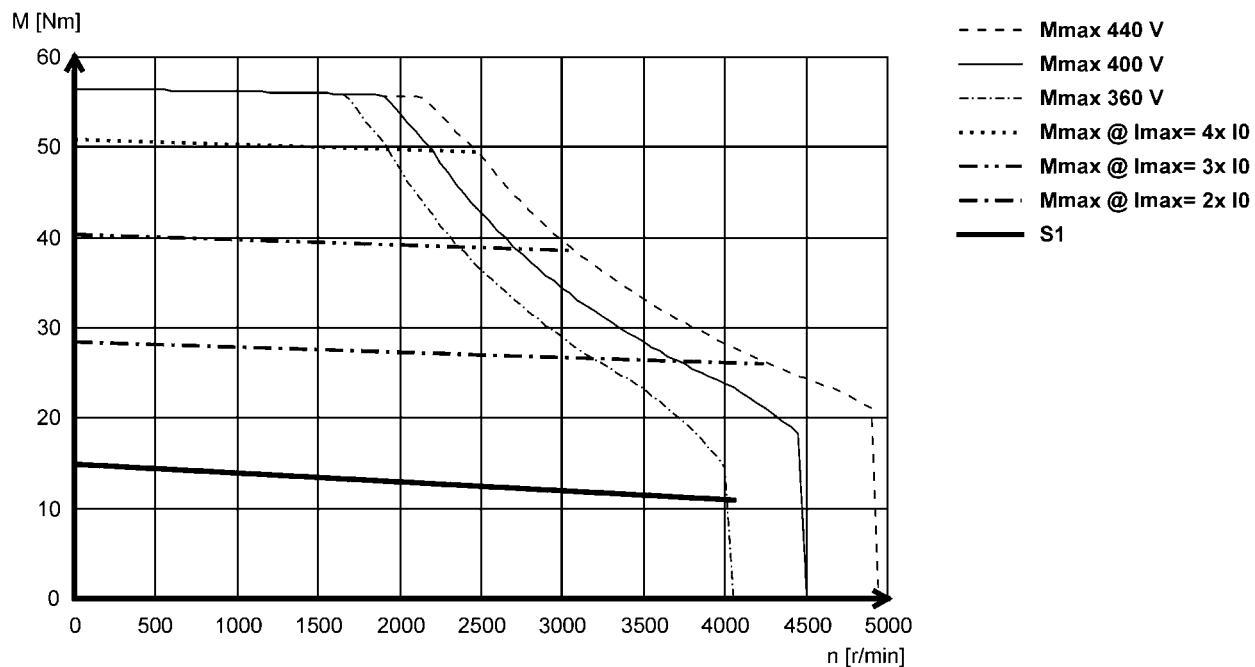

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14D14- (forced ventilated)

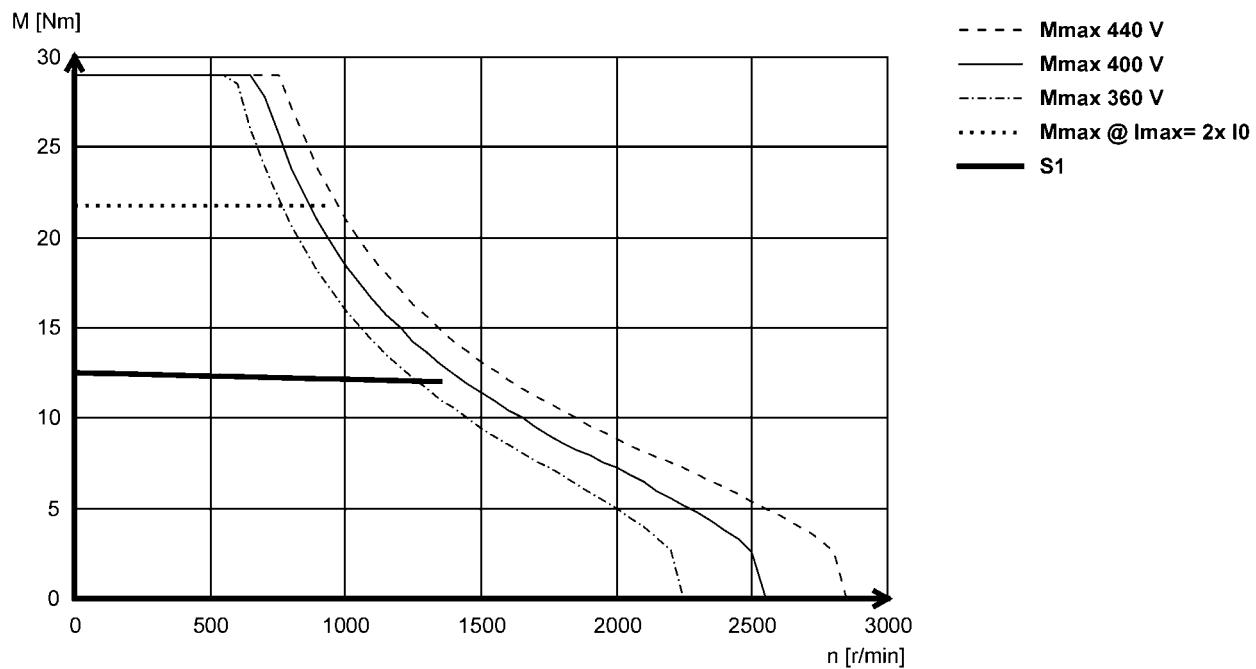

MCS14D15- (non-ventilated)

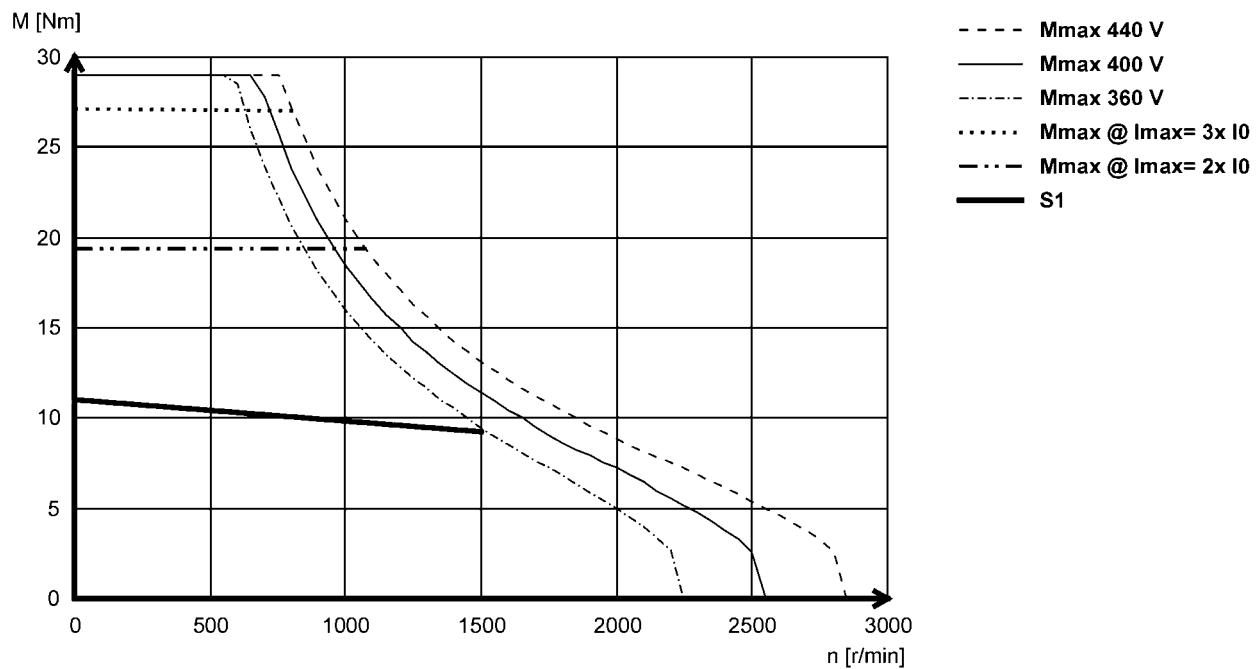

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14D30 (forced ventilated)

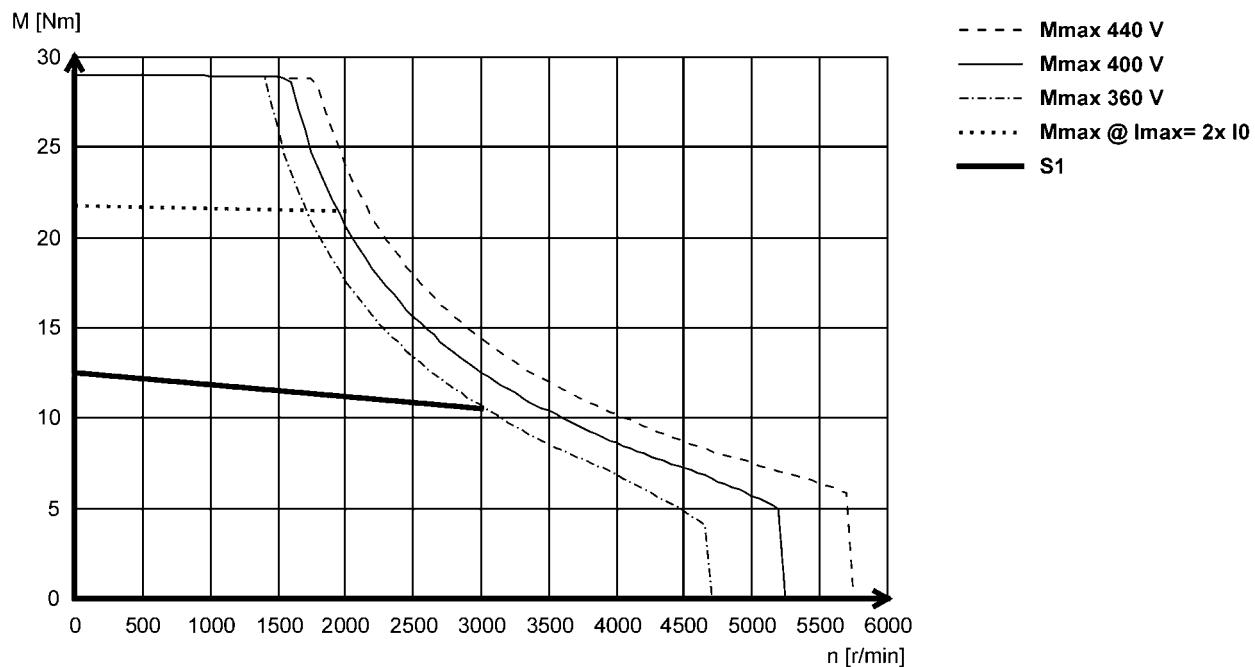

MCS14D36- (non-ventilated)

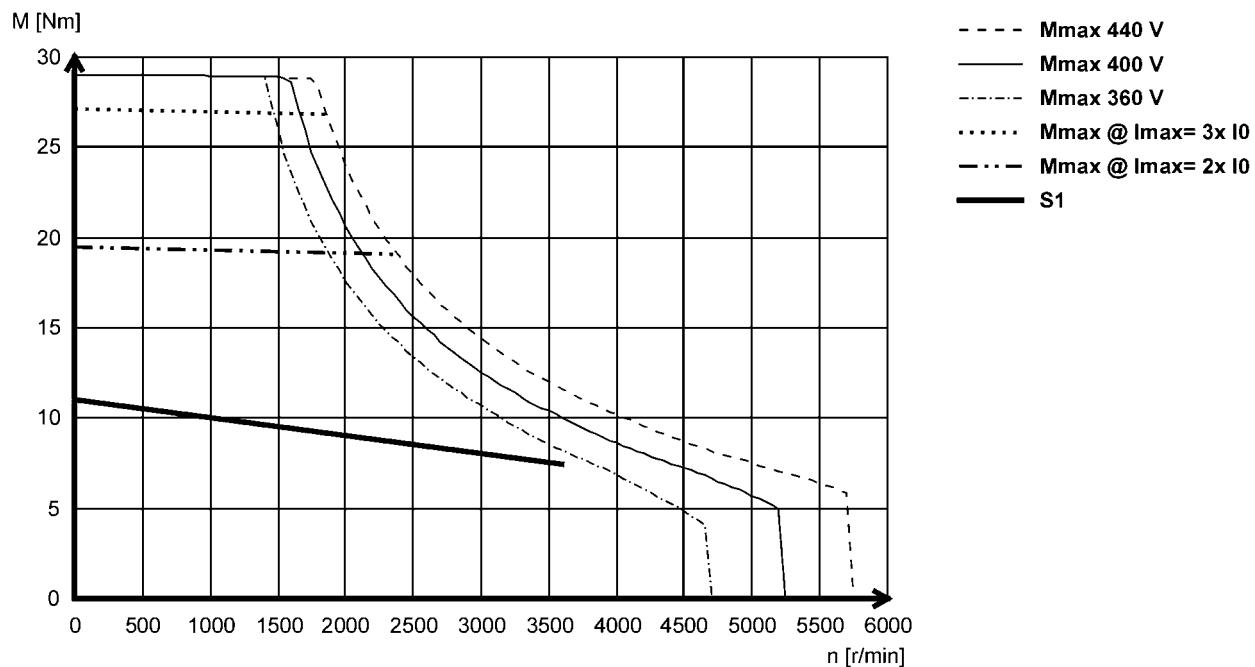

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14H12- (forced ventilated)

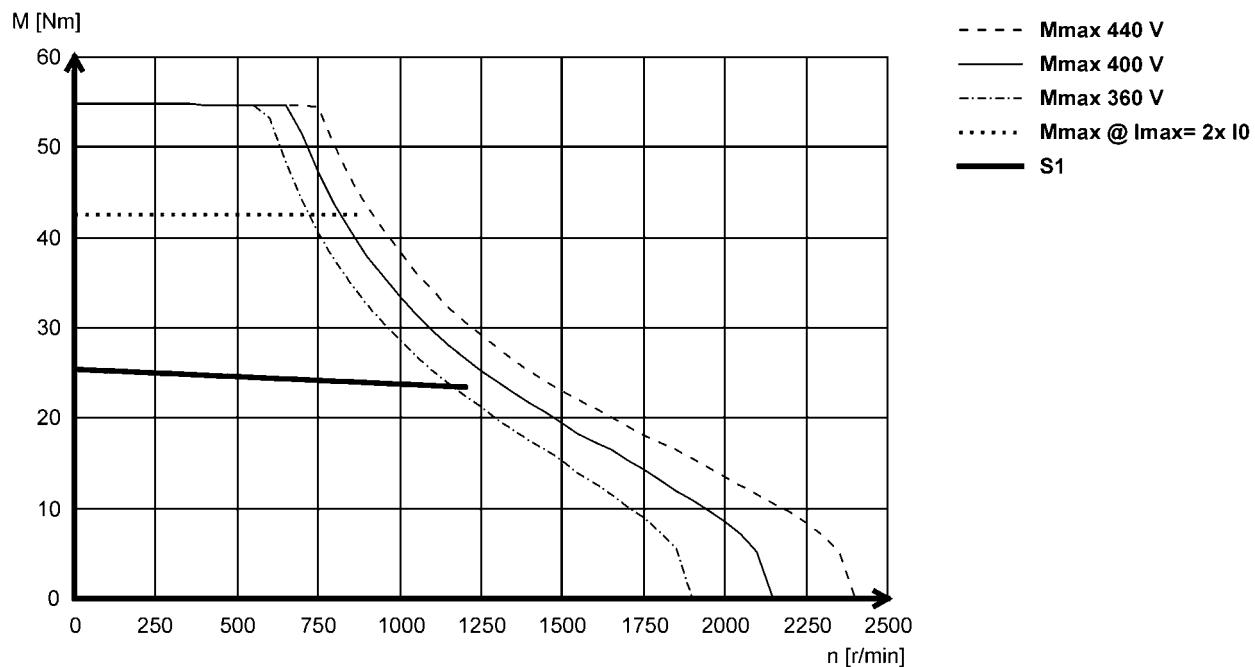

MCS14H15- (non-ventilated)

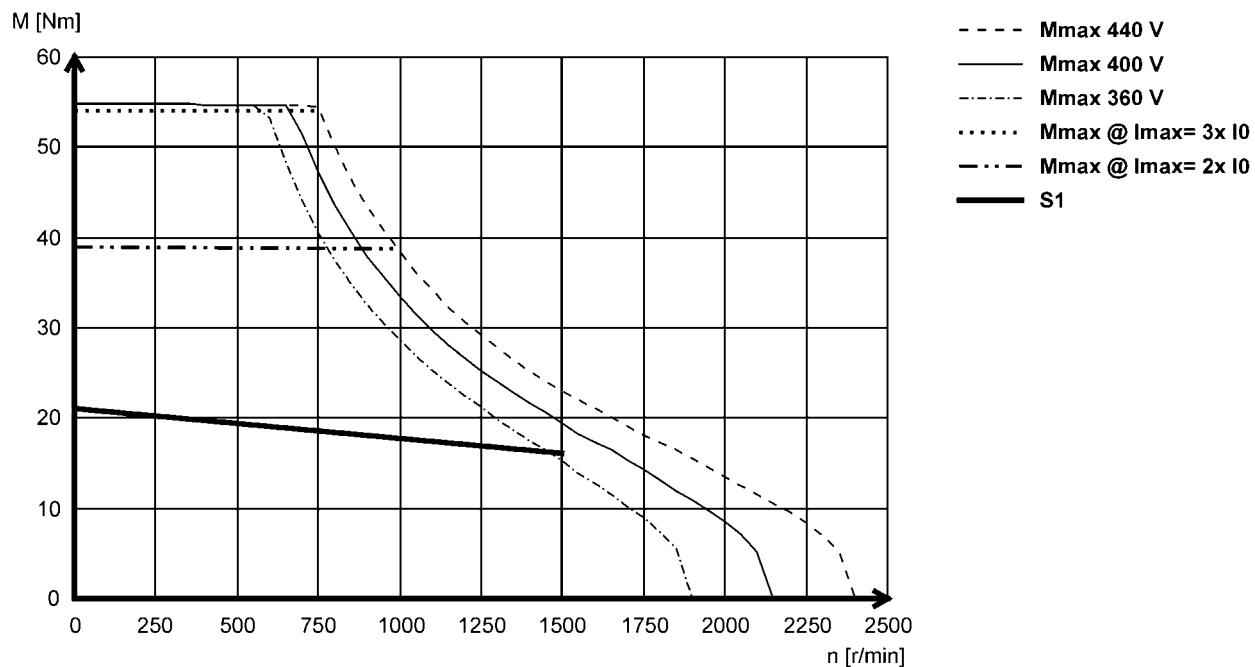

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14H28- (forced ventilated)

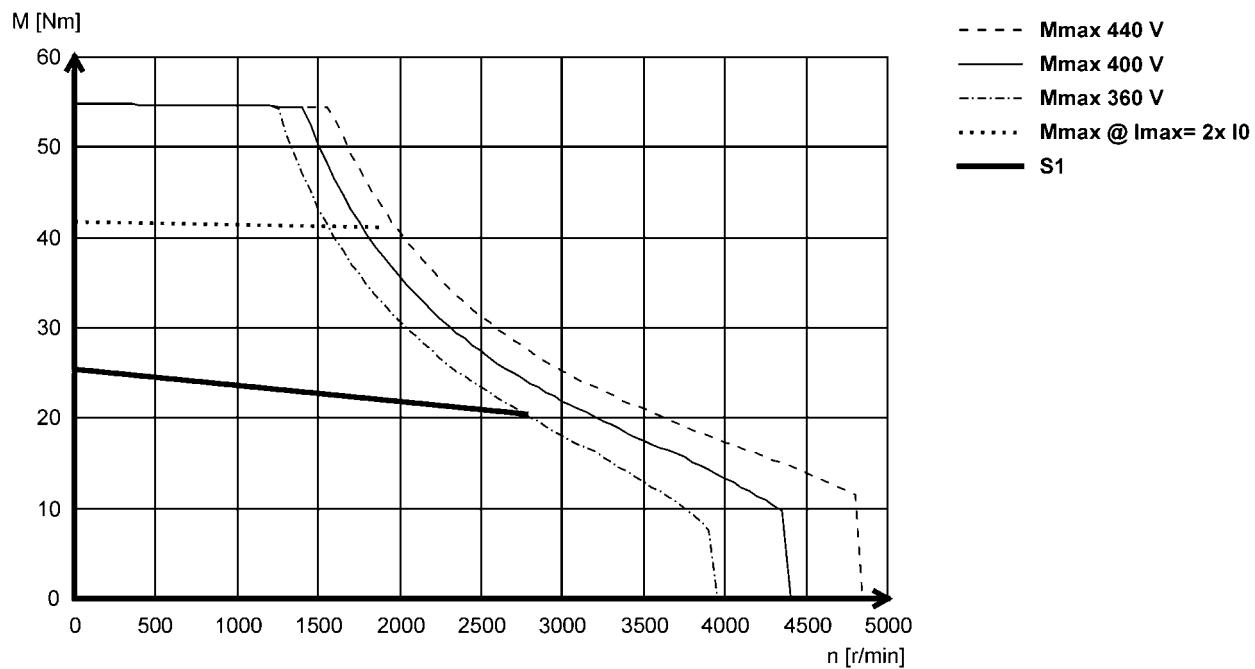

MCS14H32- (non-ventilated)

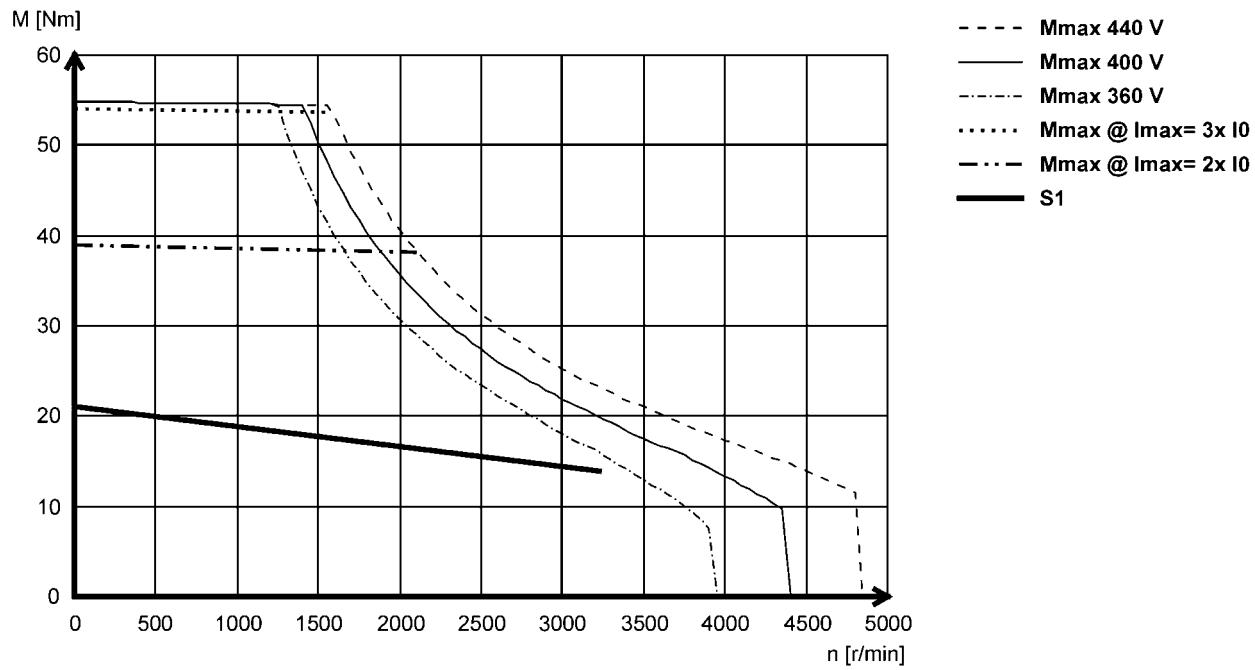

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14L14- (forced ventilated)

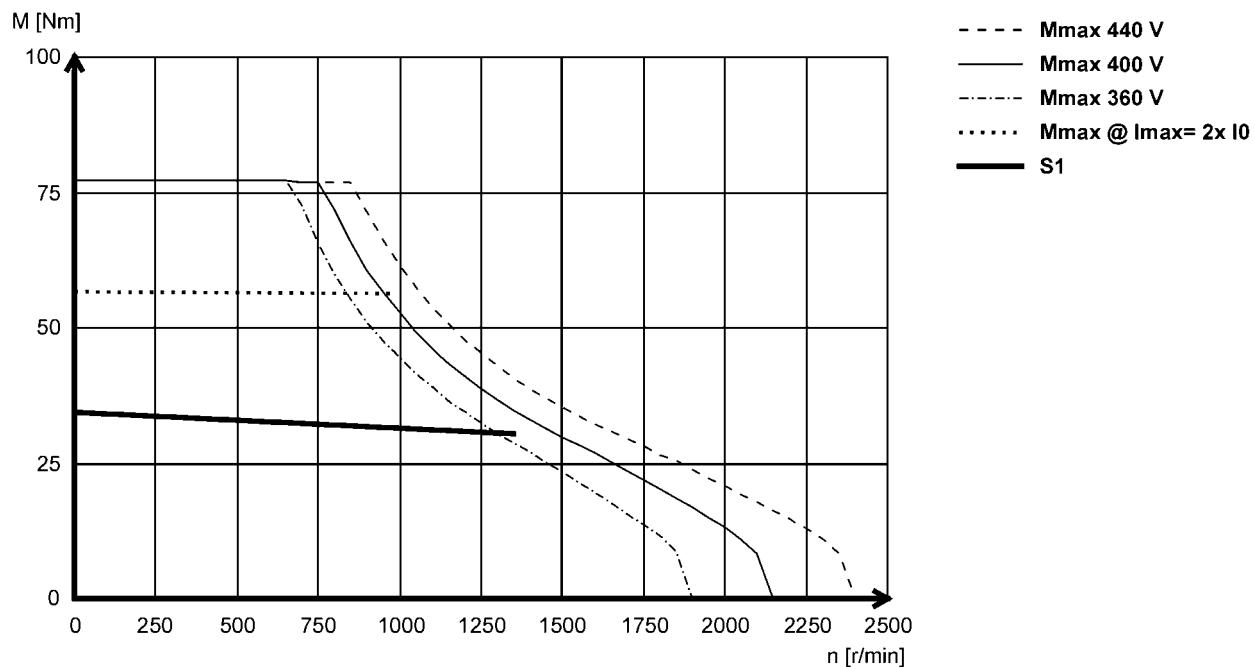

MCS14L15- (non-ventilated)

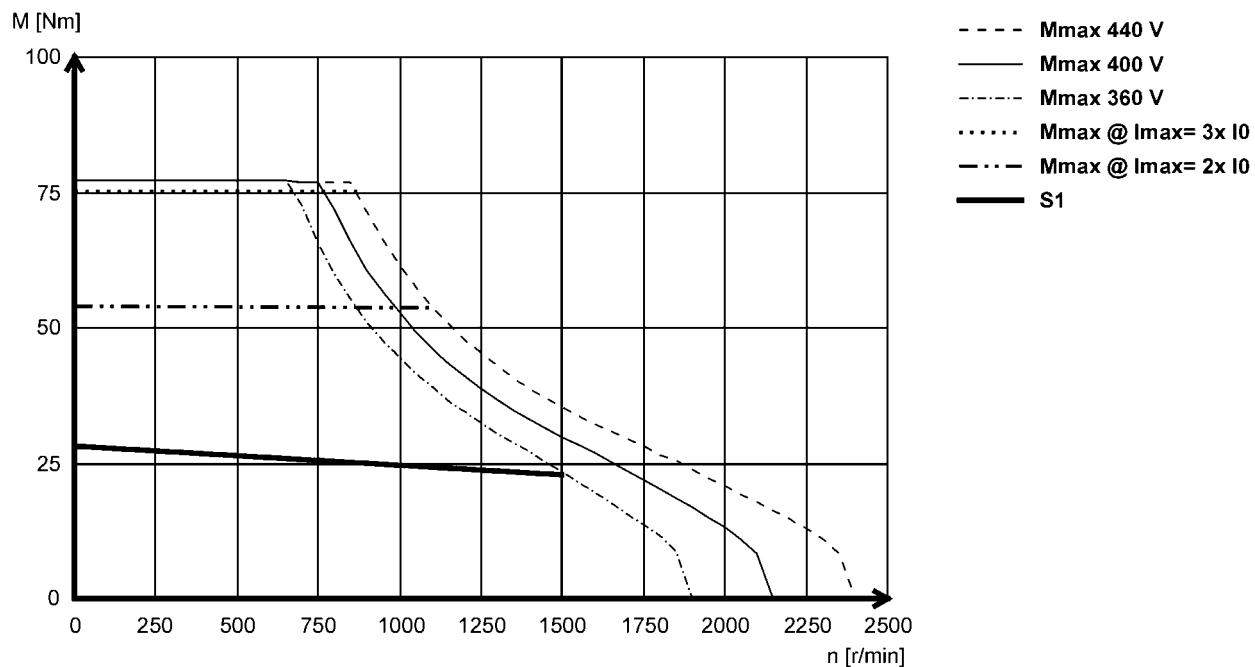

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14L30- (forced ventilated)

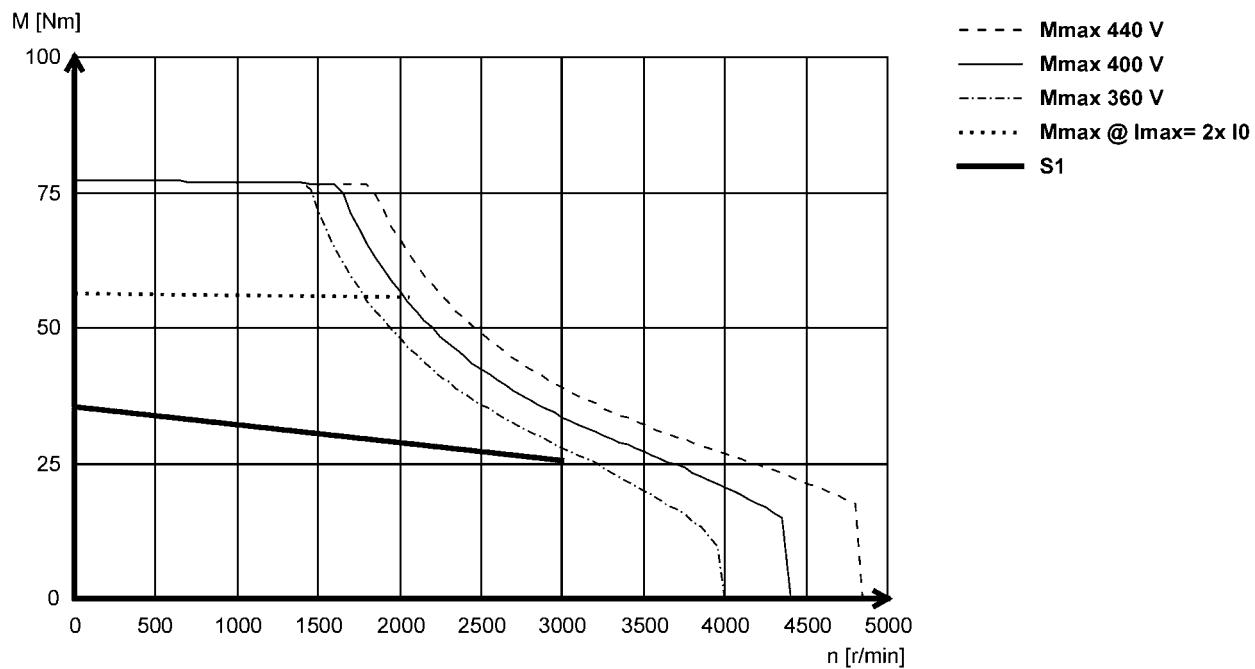

MCS14L32- (non-ventilated)

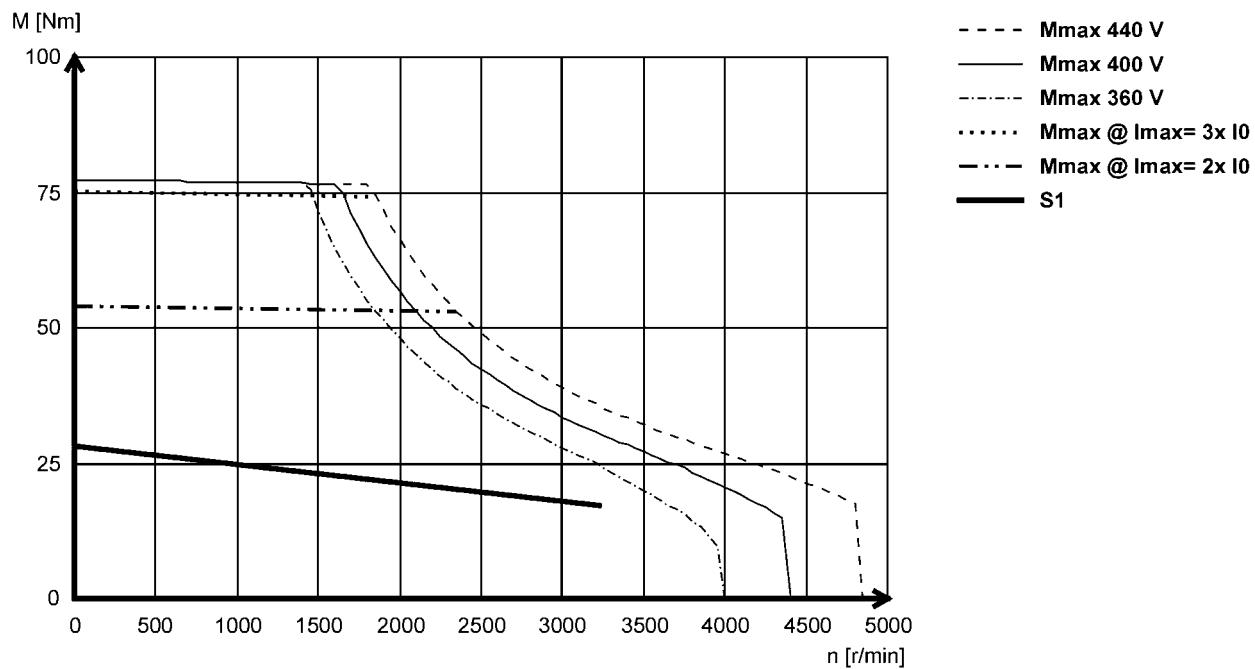

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14P11- (forced ventilated)

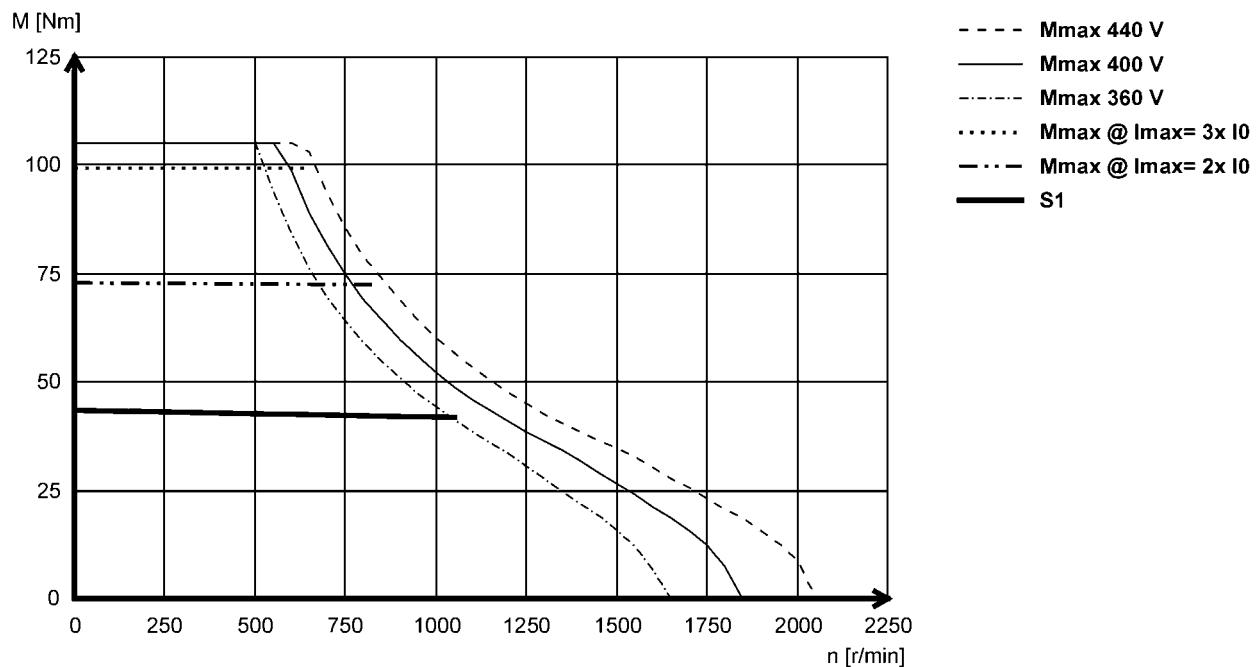

MCS14P14- (non-ventilated)

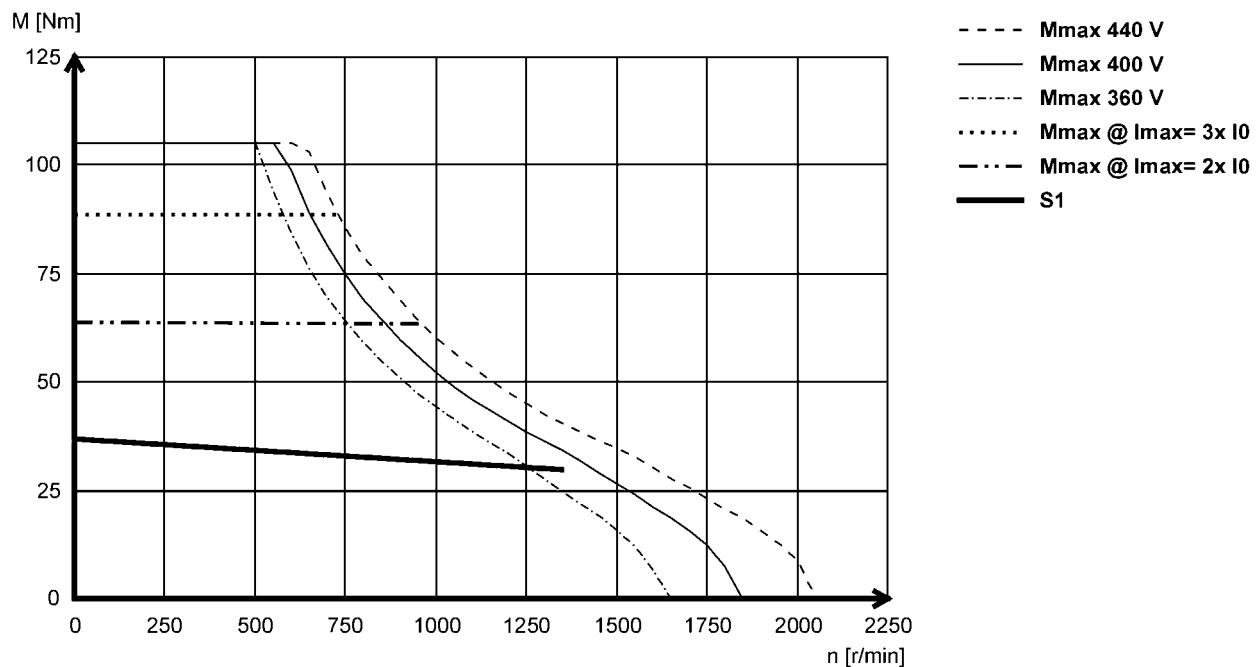

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14P26- (forced ventilated)

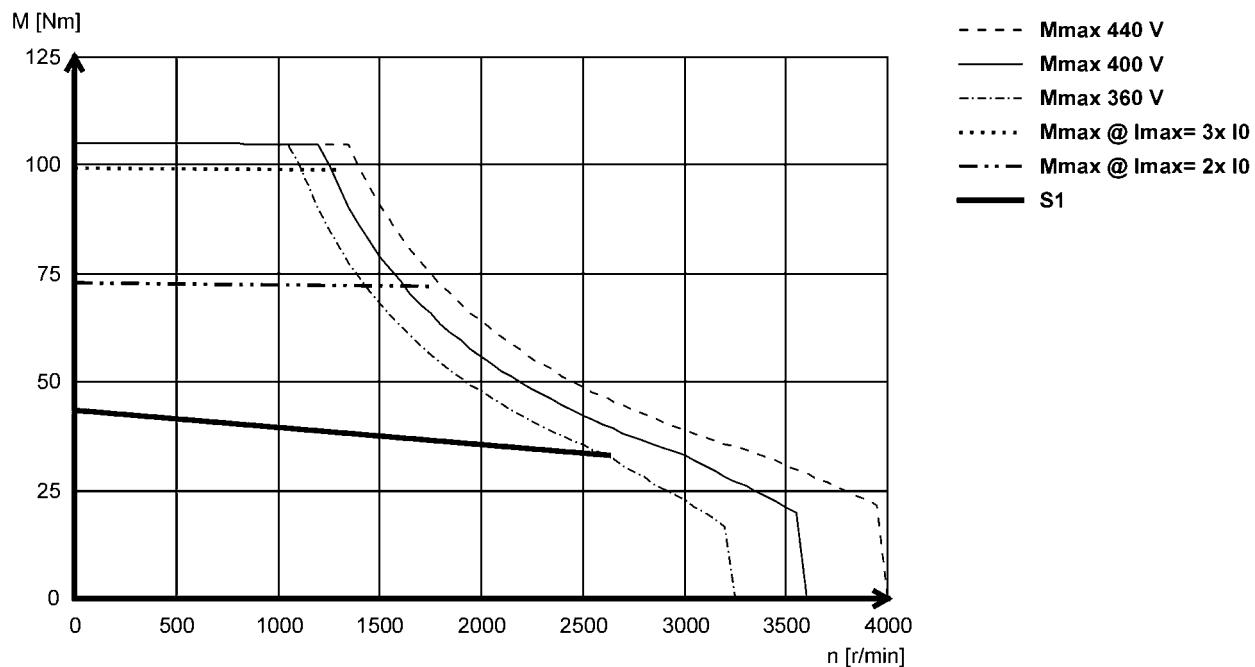

MCS14P32- (non-ventilated)

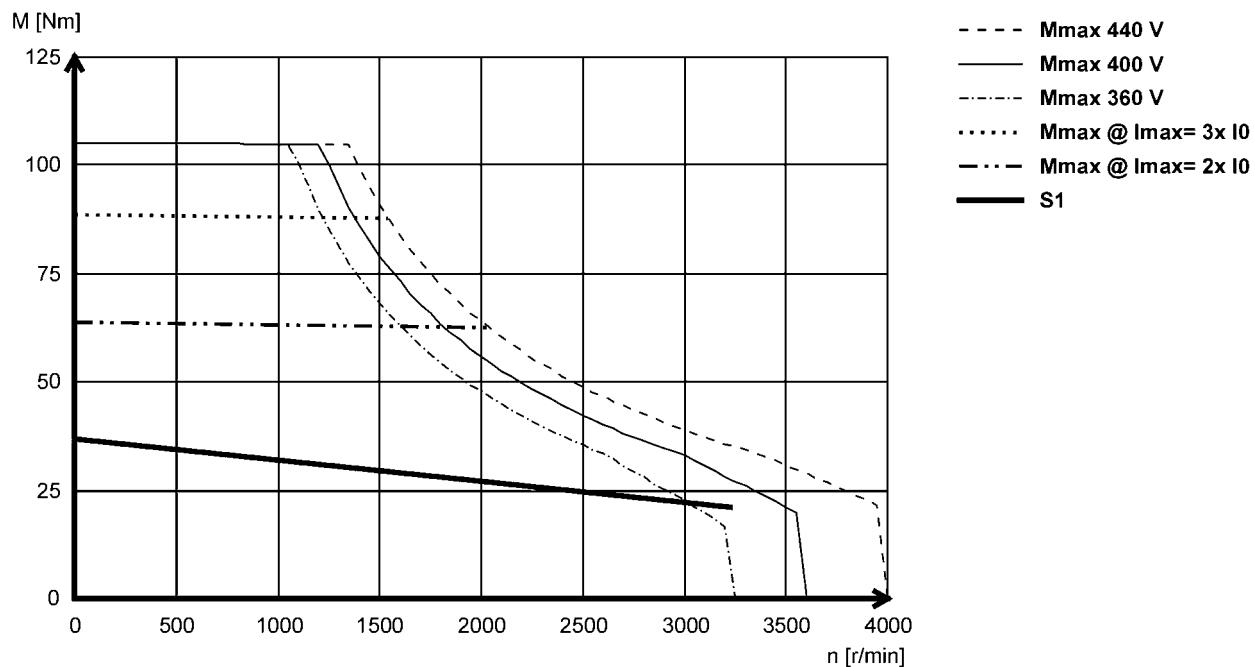

6.11

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19F12- (forced ventilated)

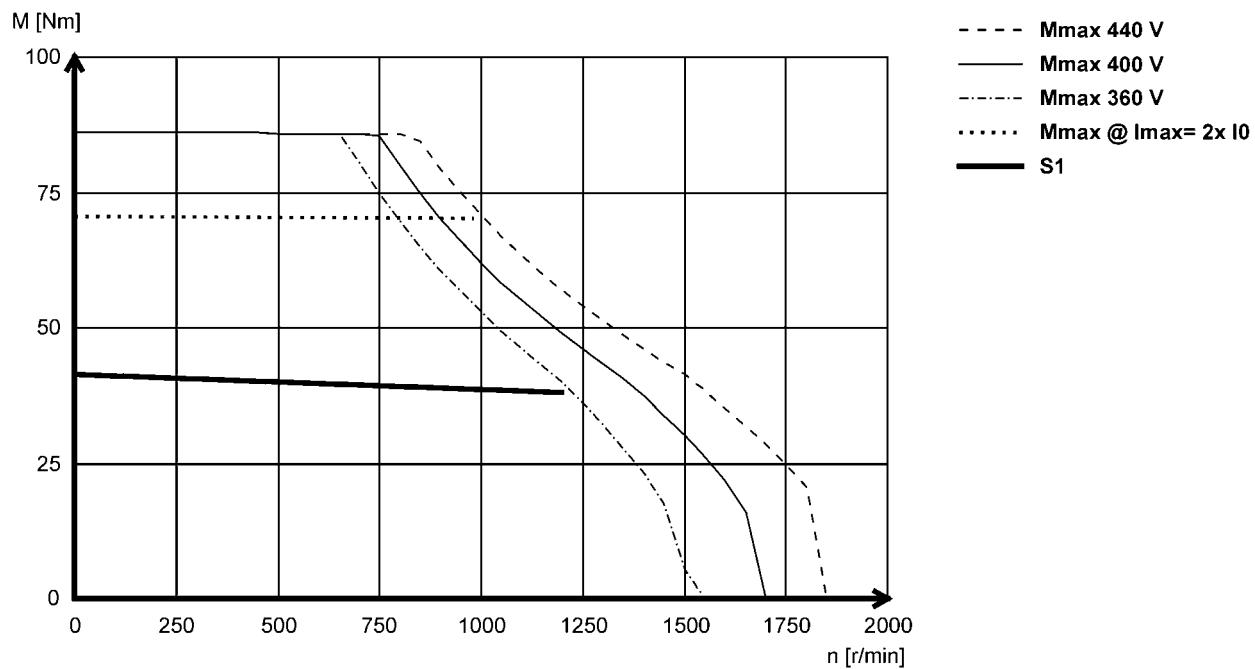

MCS19F14- (non-ventilated)

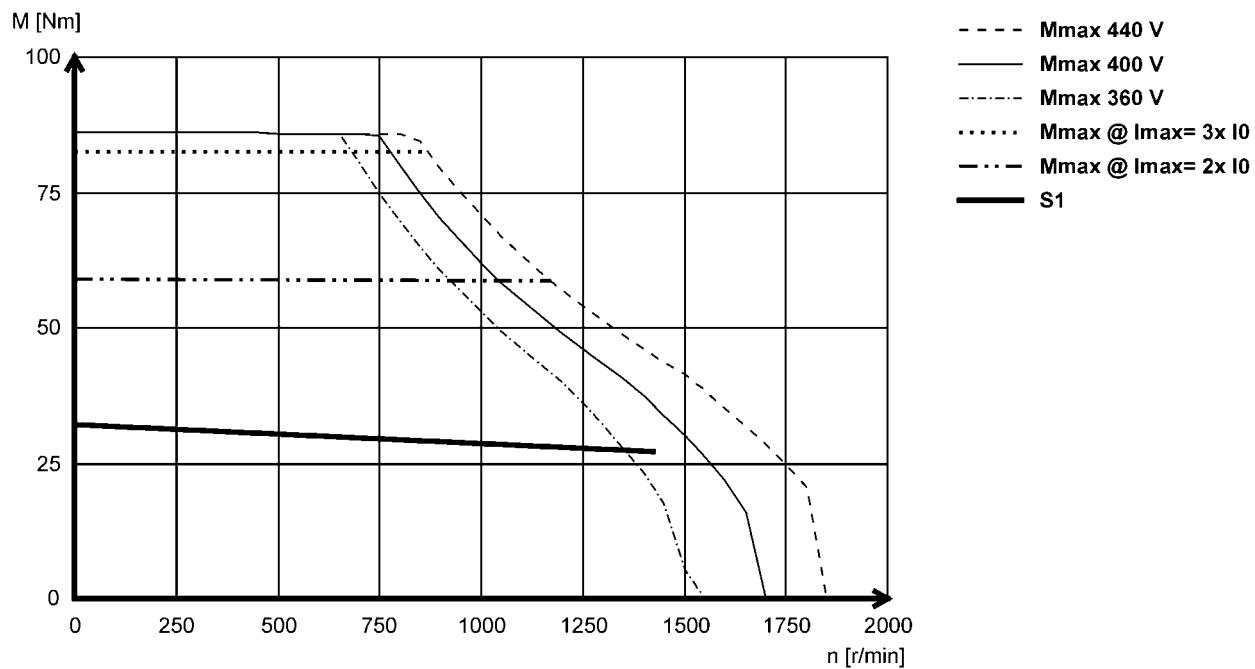

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19F29- (forced ventilated)

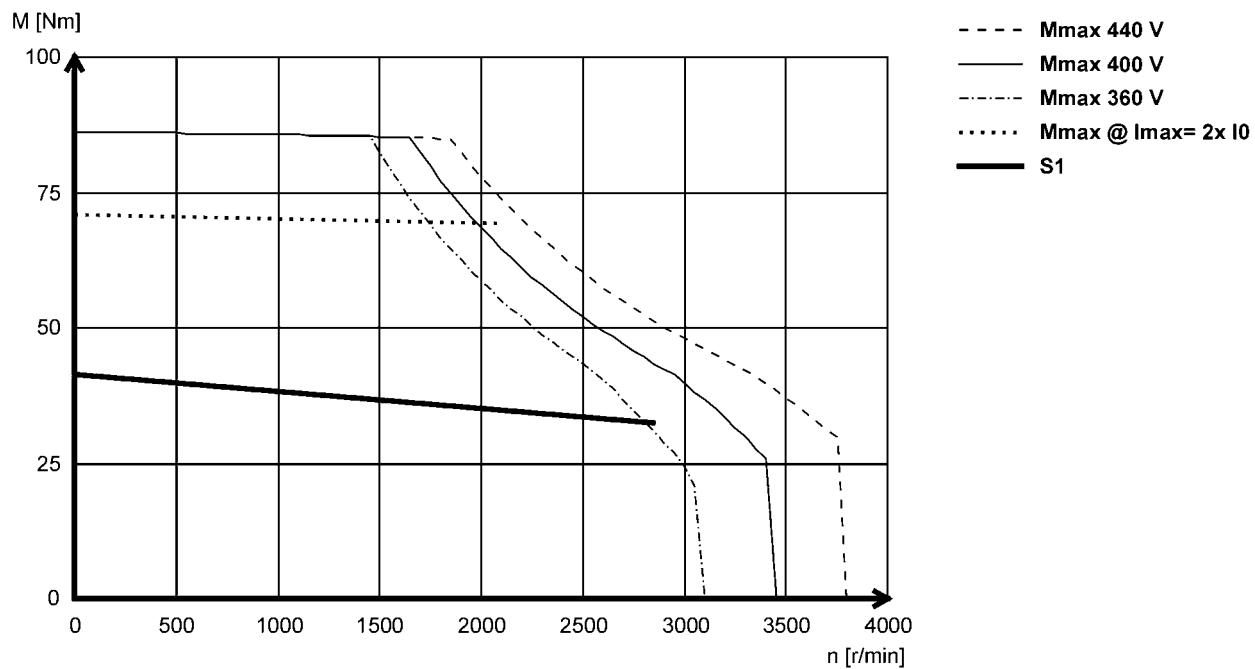

MCS19F30- (non-ventilated)

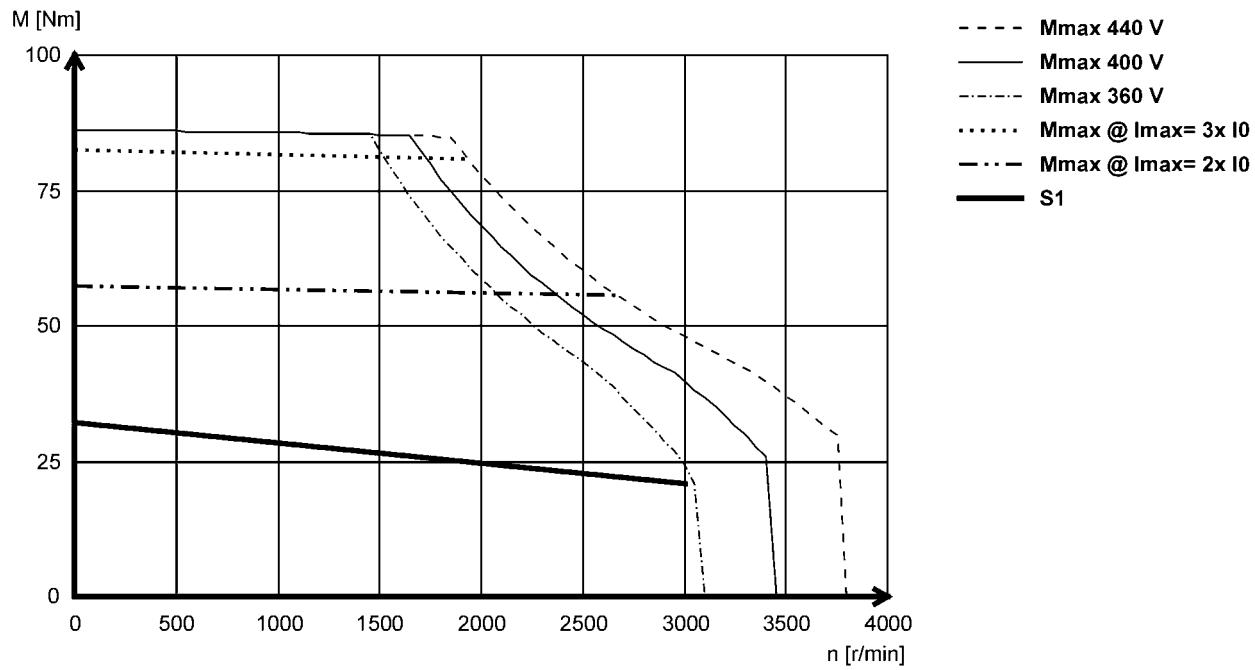

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19J12- (forced ventilated)

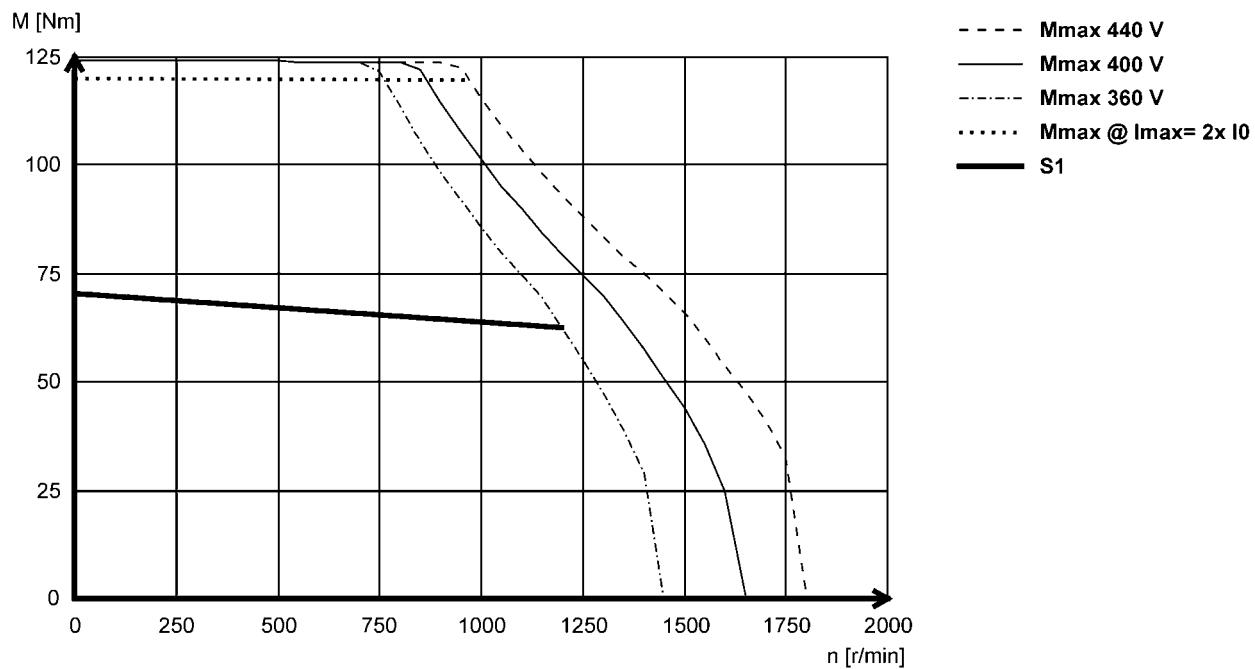

MCS19J14- (non-ventilated)

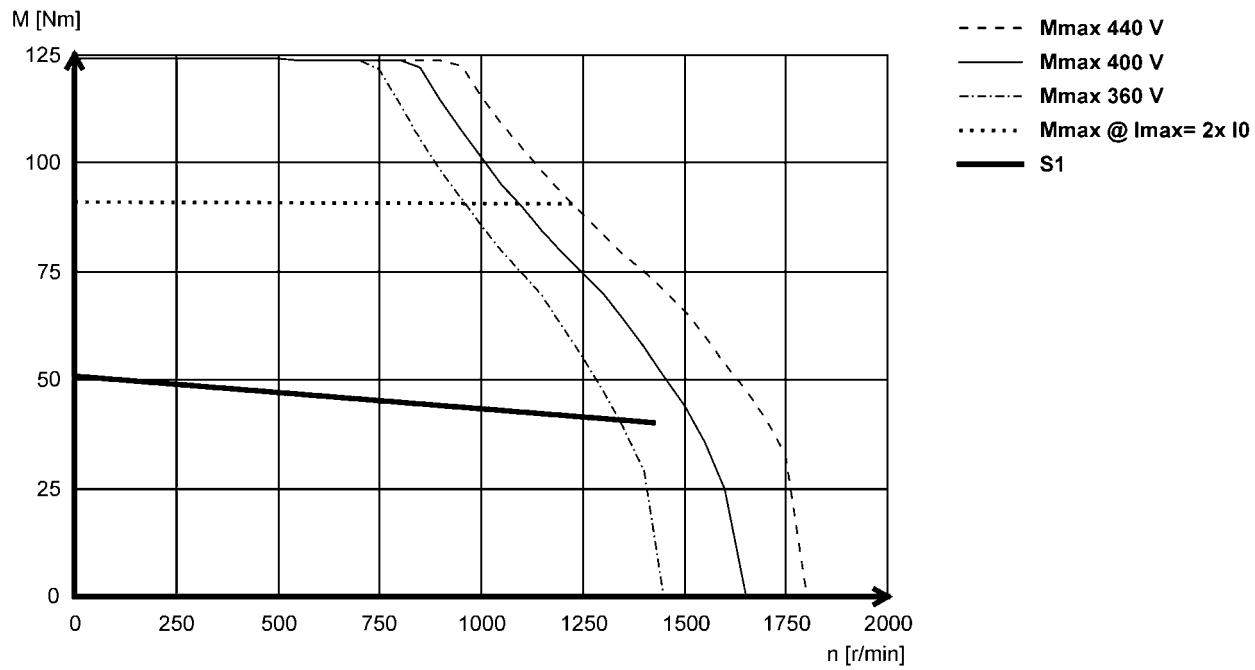

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19J29- (forced ventilated)

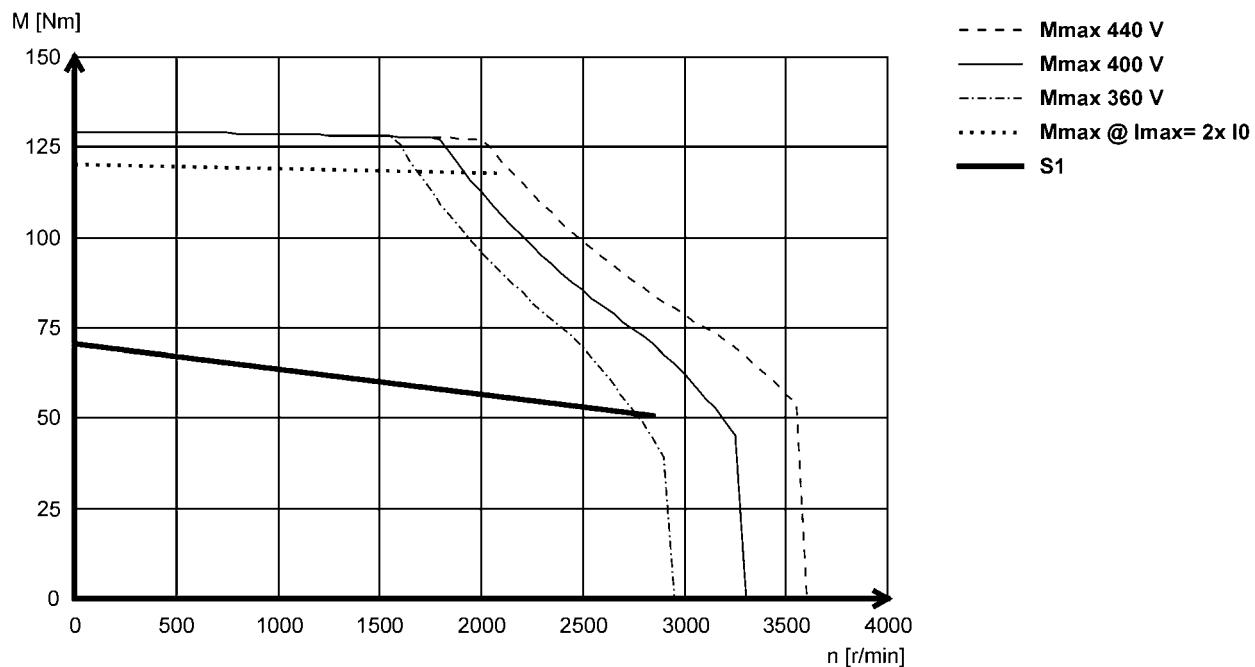

MCS19J30- (non-ventilated)

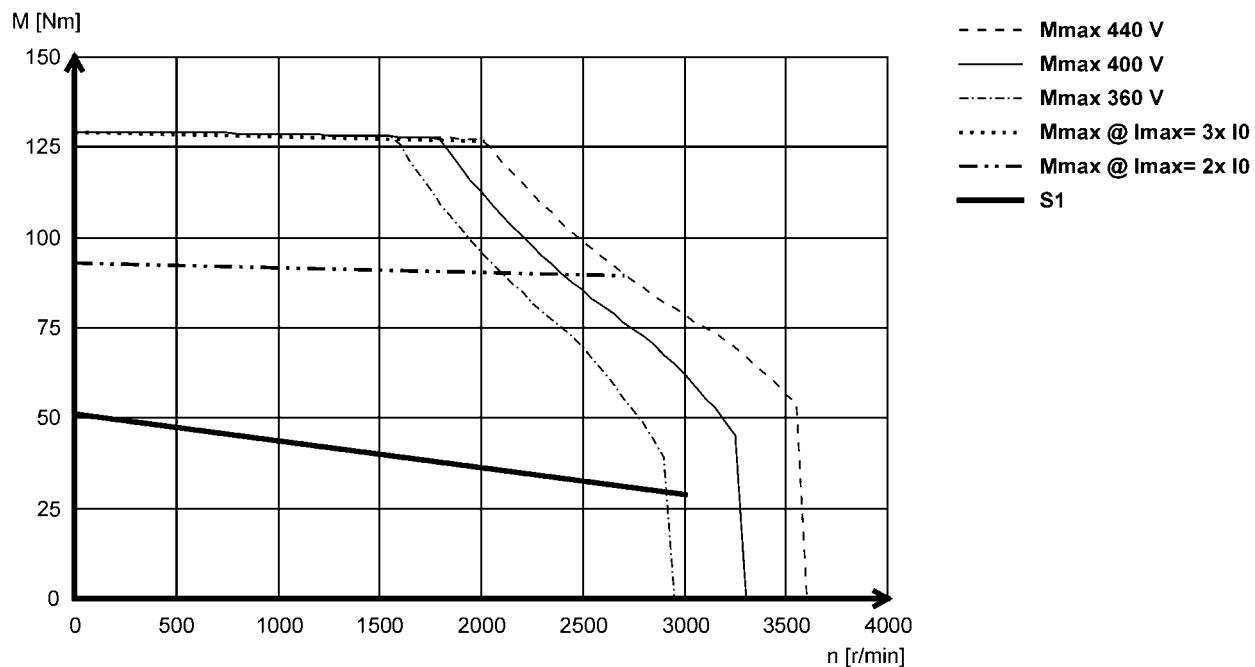

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19P12 (forced ventilated)

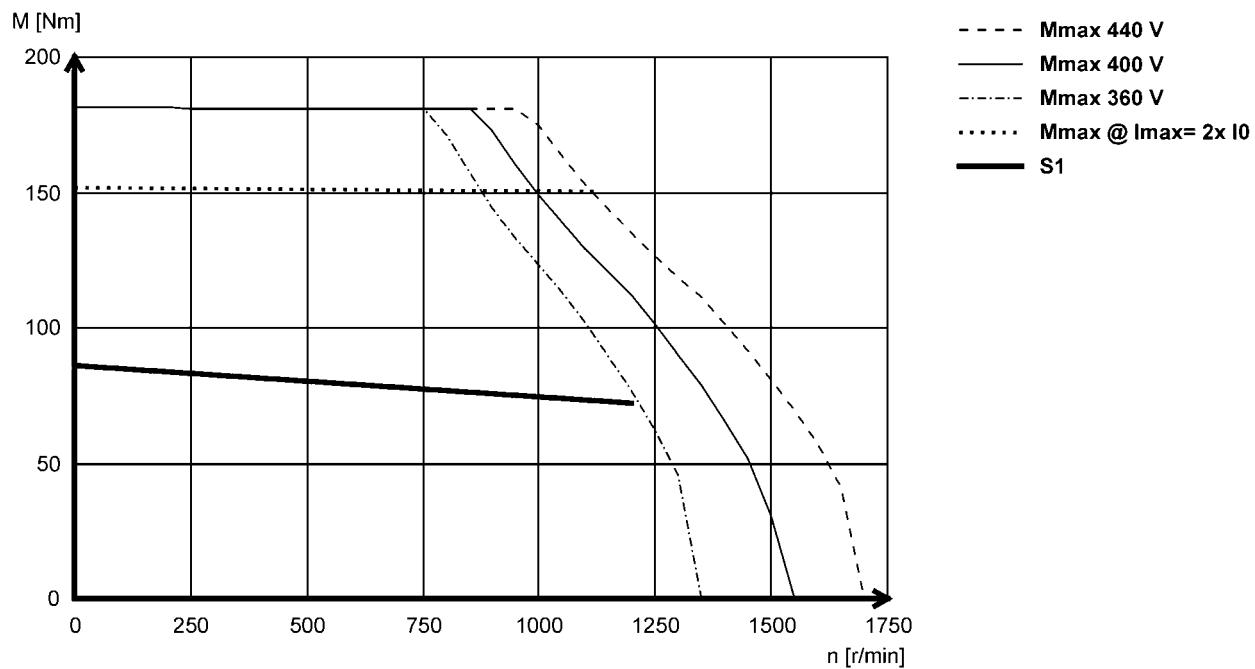

MCS19P14- (non-ventilated)

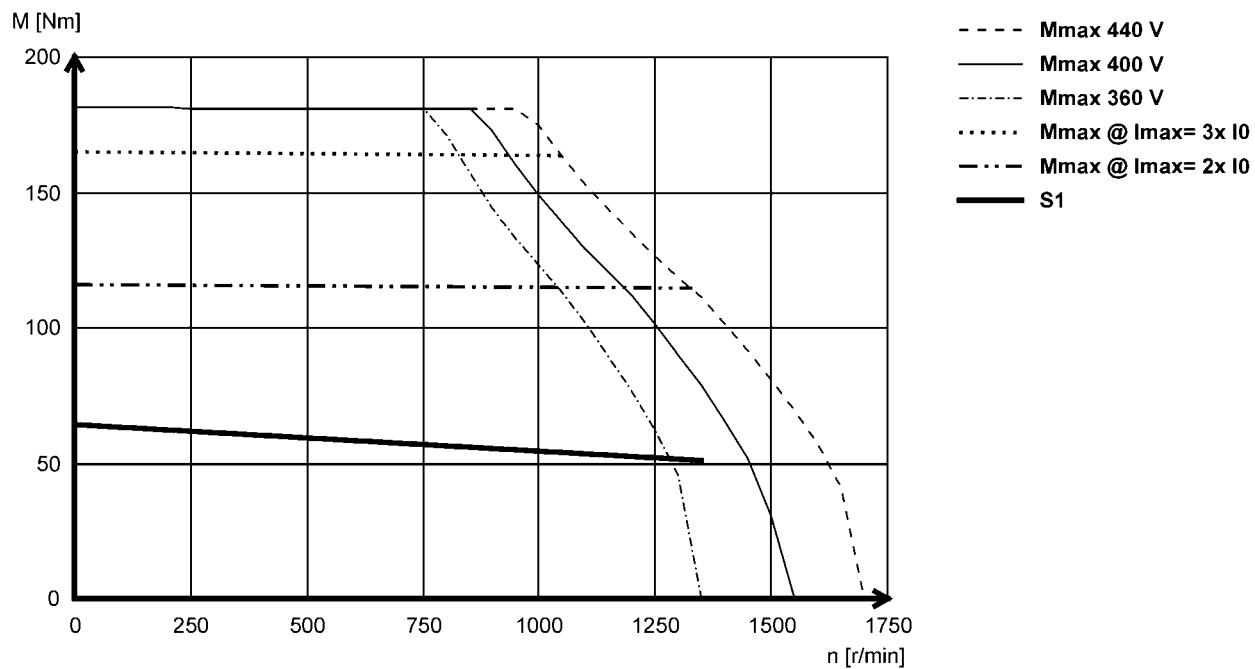

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19P29- (forced ventilated)

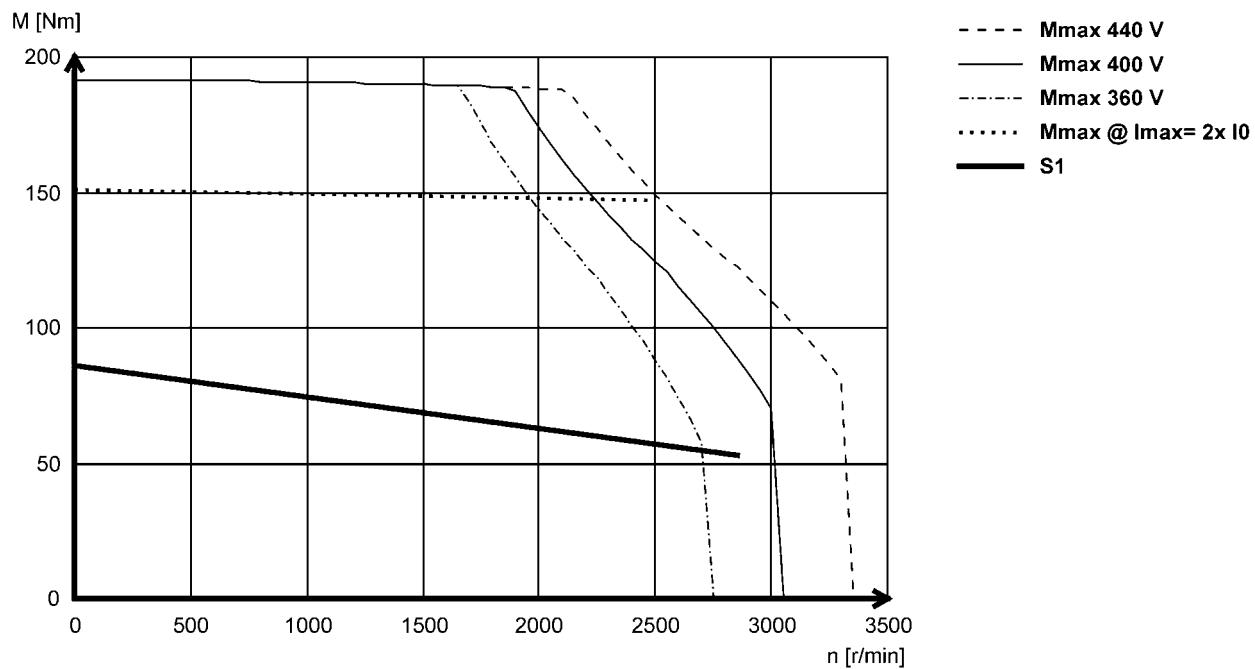

MCS19P30- (non-ventilated)

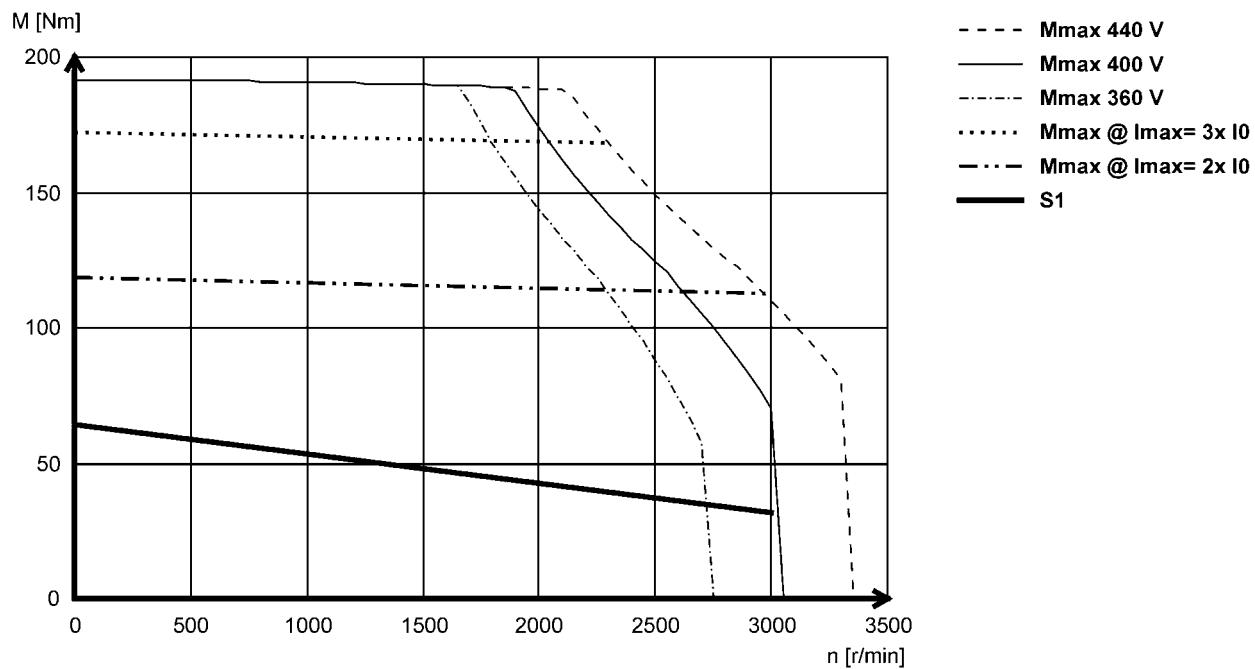

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06C41L (non-ventilated)

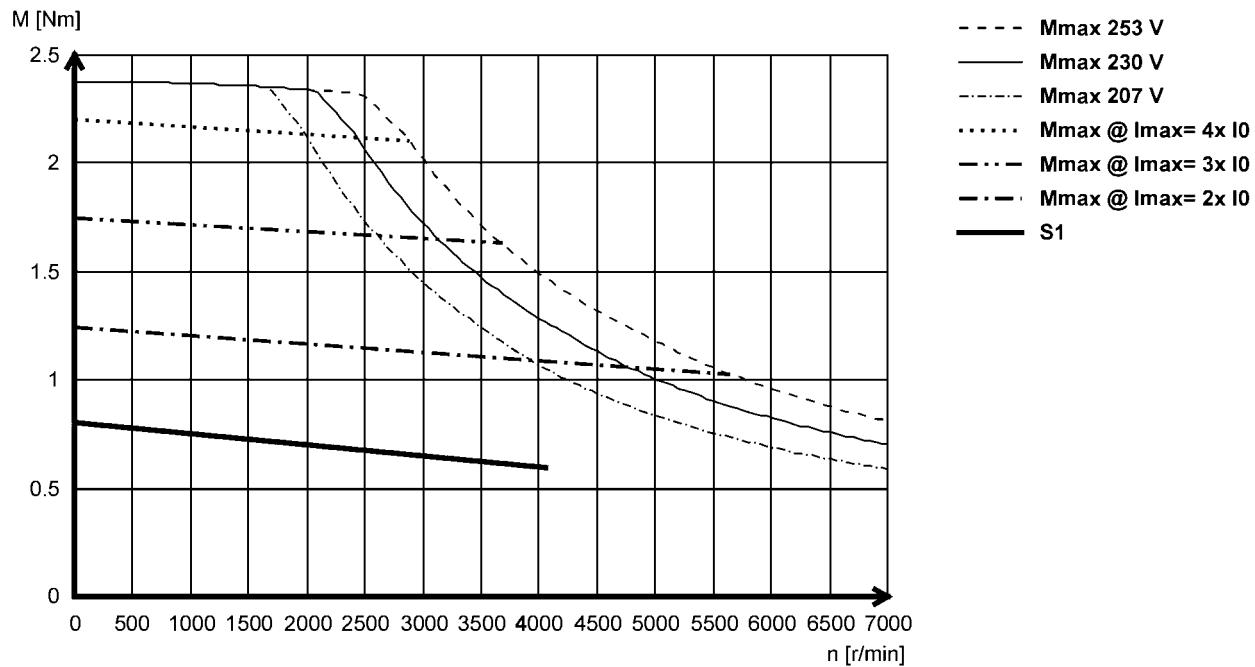

MCS06C60L (non-ventilated)

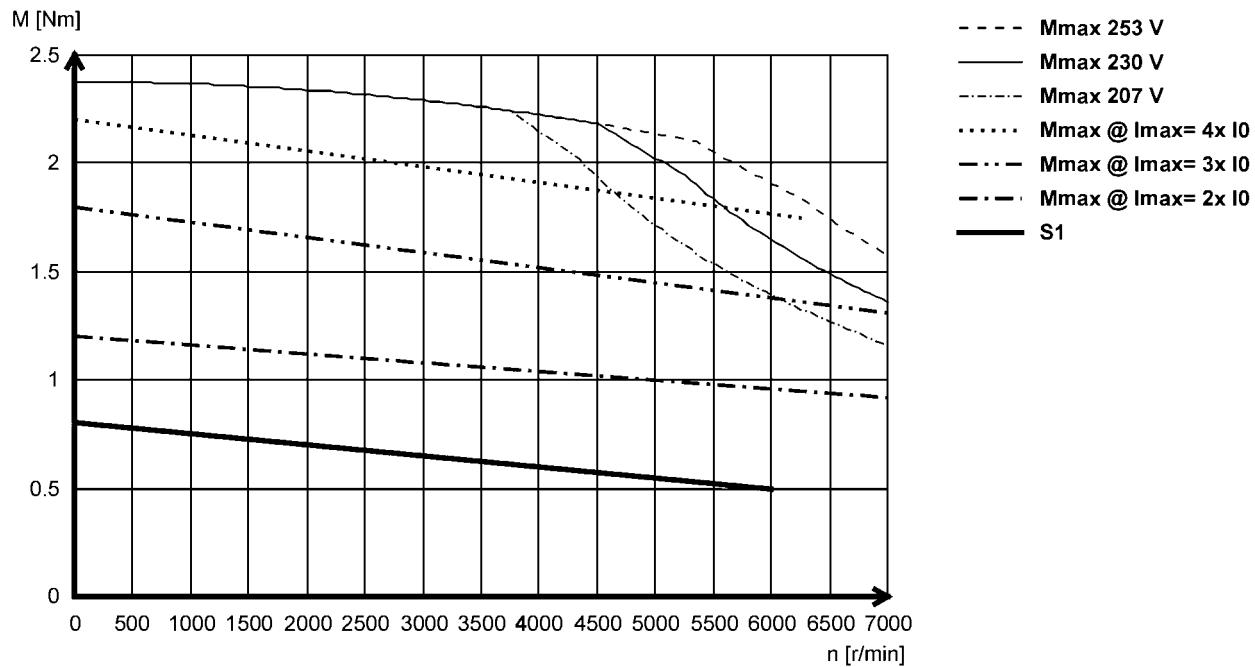

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06F41L (non-ventilated)

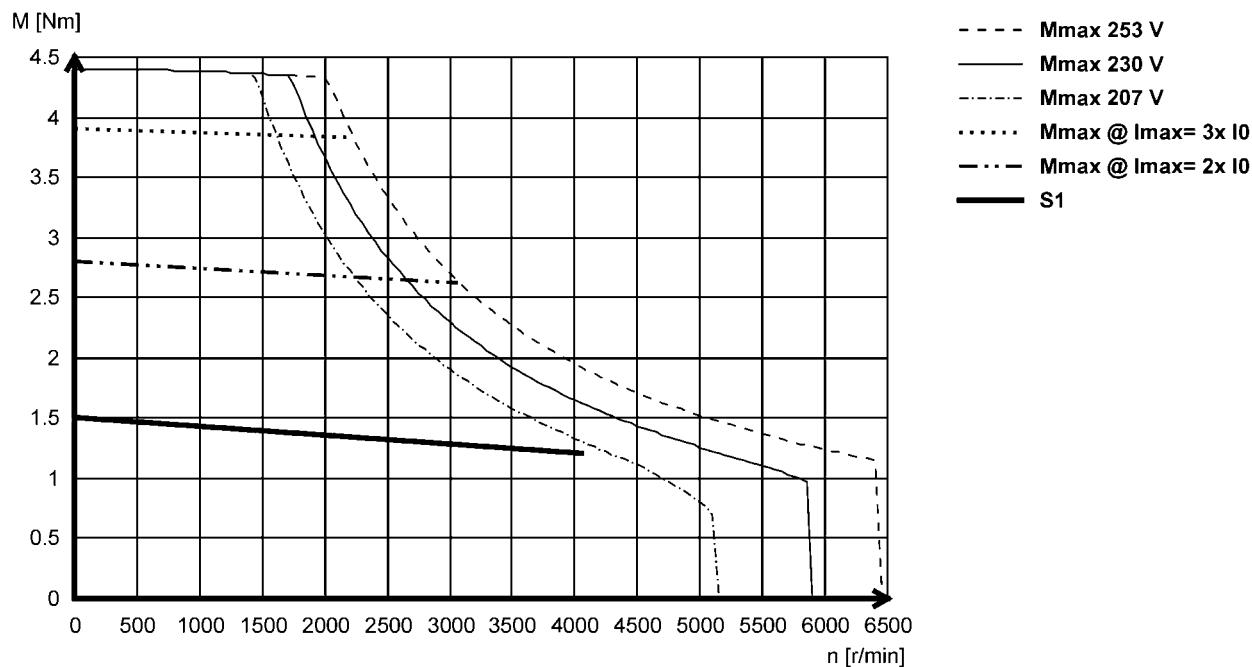

MCS06F60L (non-ventilated)

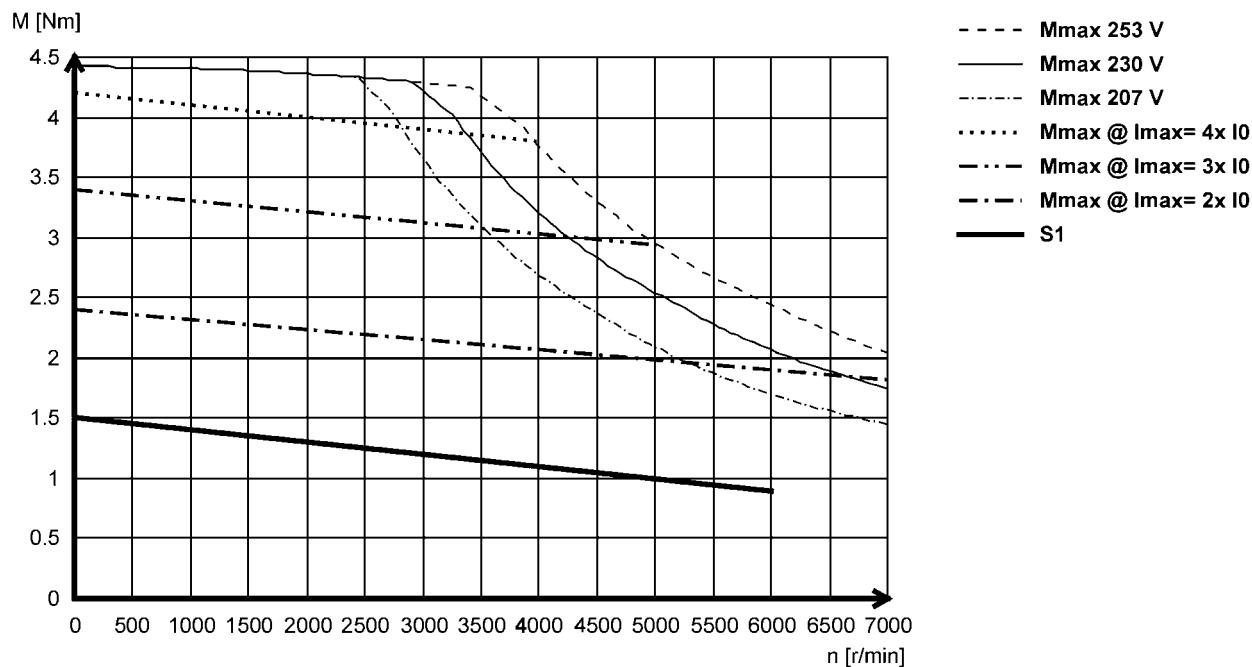

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06I41L (non-ventilated)

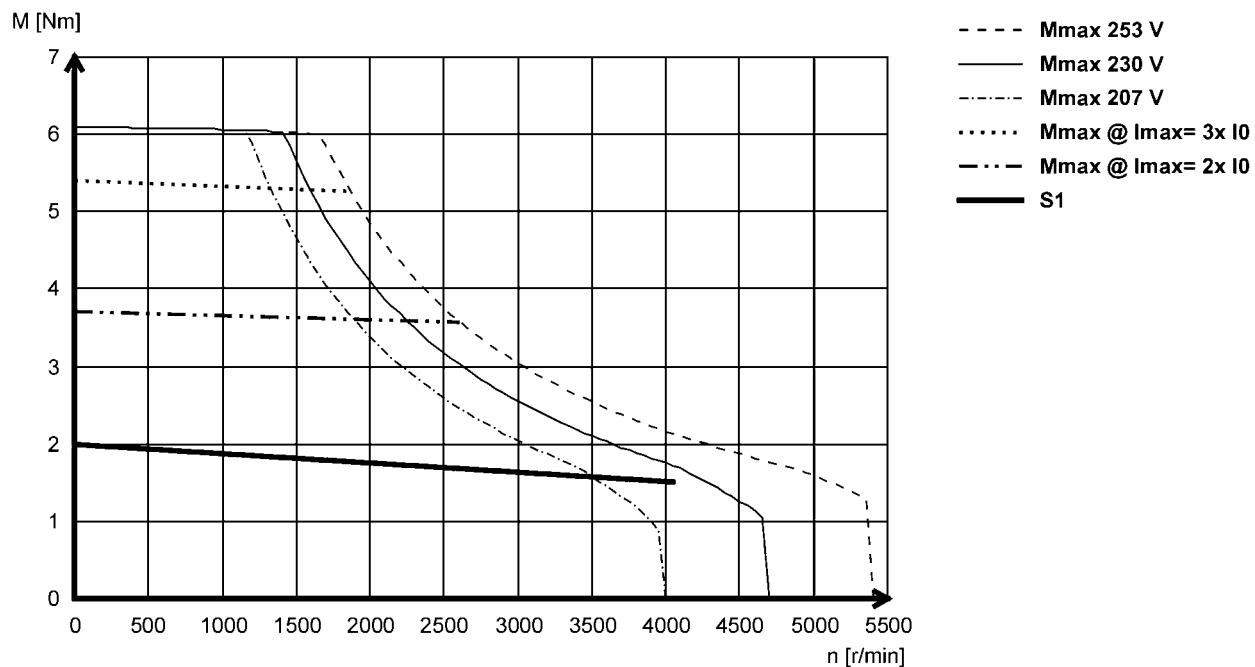

MCS06I60L (non-ventilated)

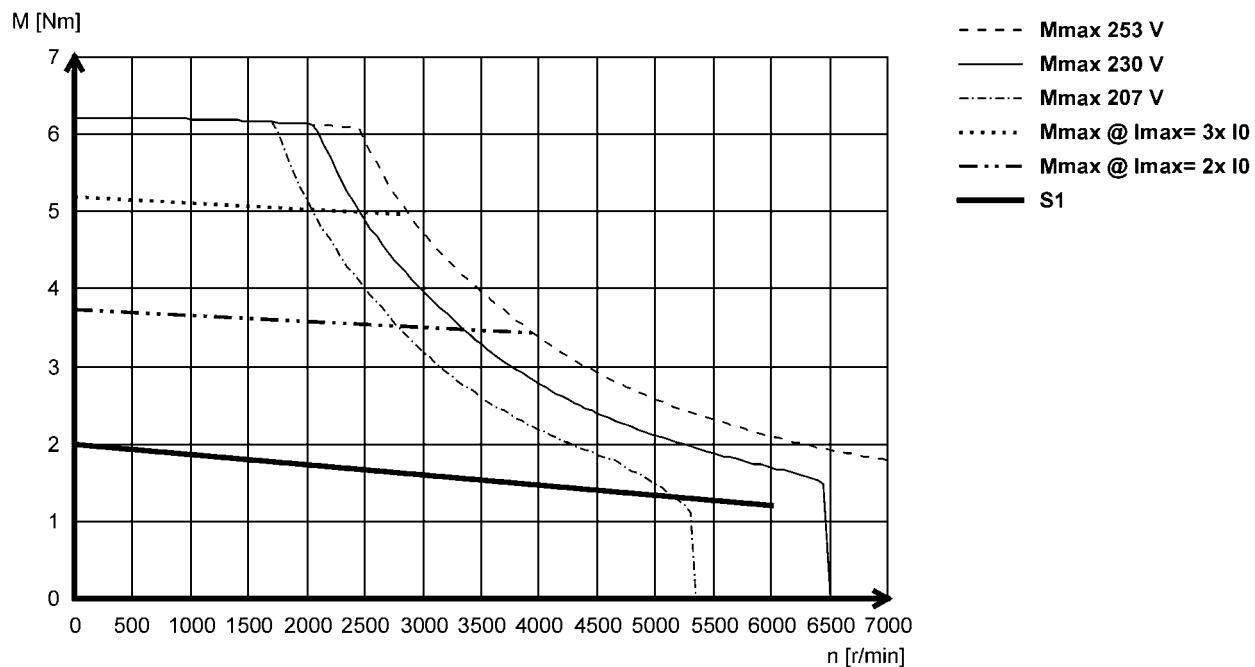

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09D41L (non-ventilated)

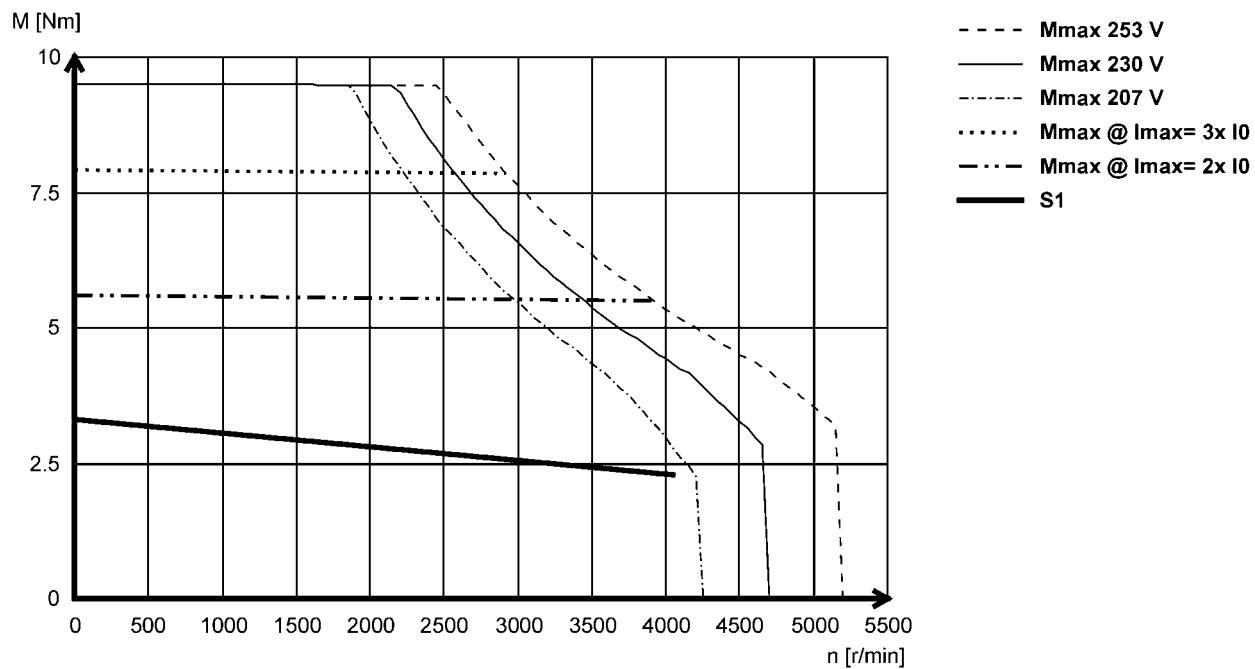

MCS09D60L (non-ventilated)

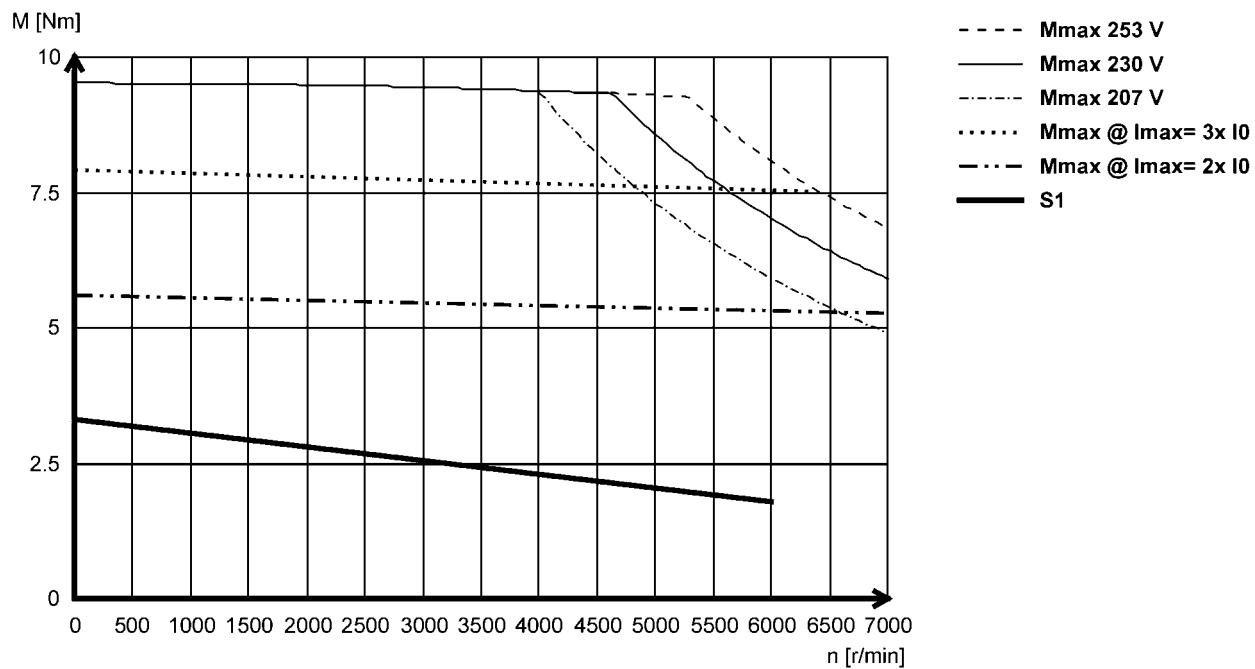

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09F38L (non-ventilated)

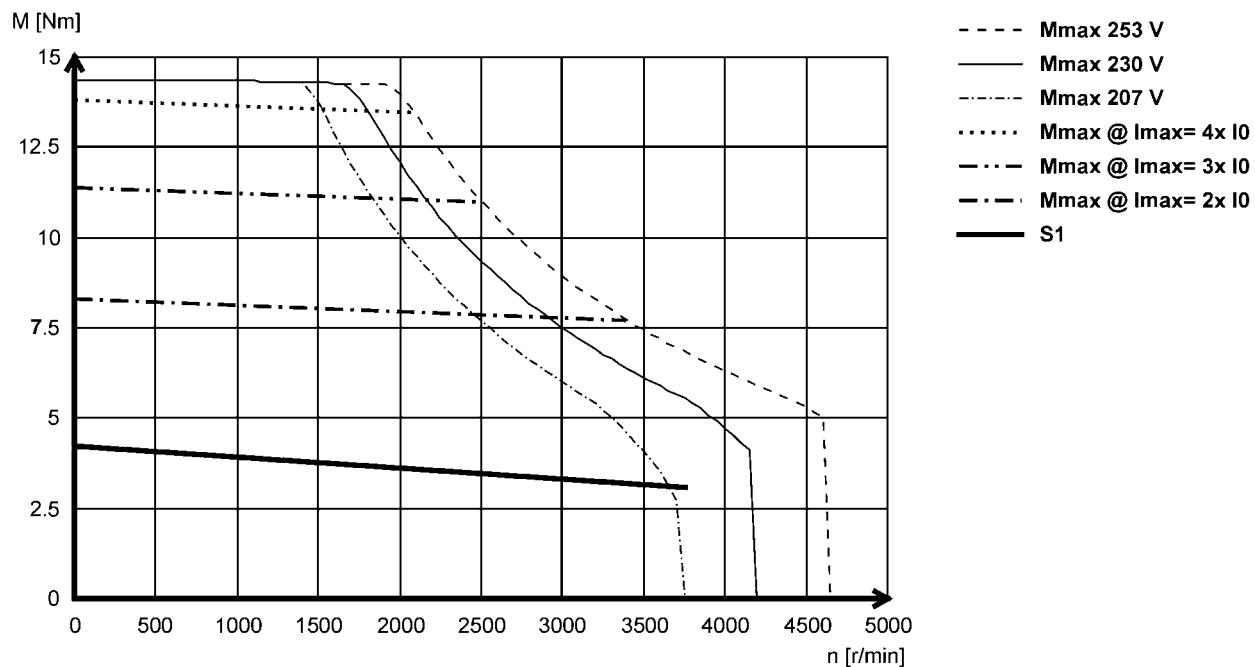

MCS09F60L (non-ventilated)

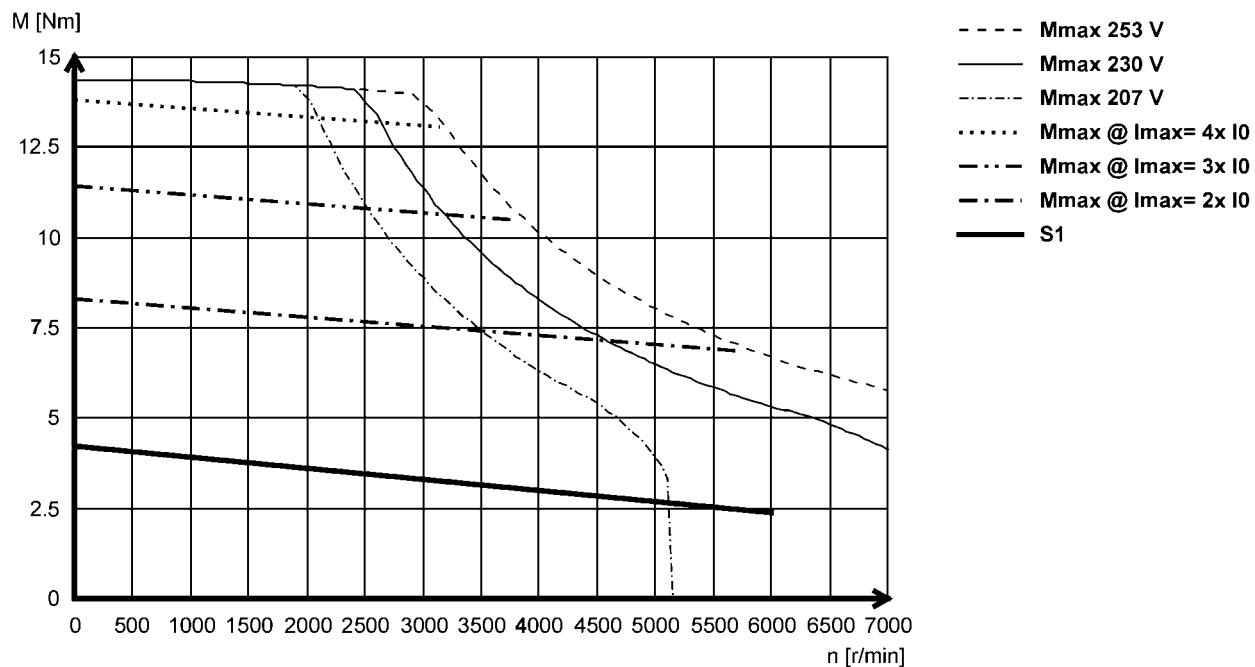

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09H41L (non-ventilated)

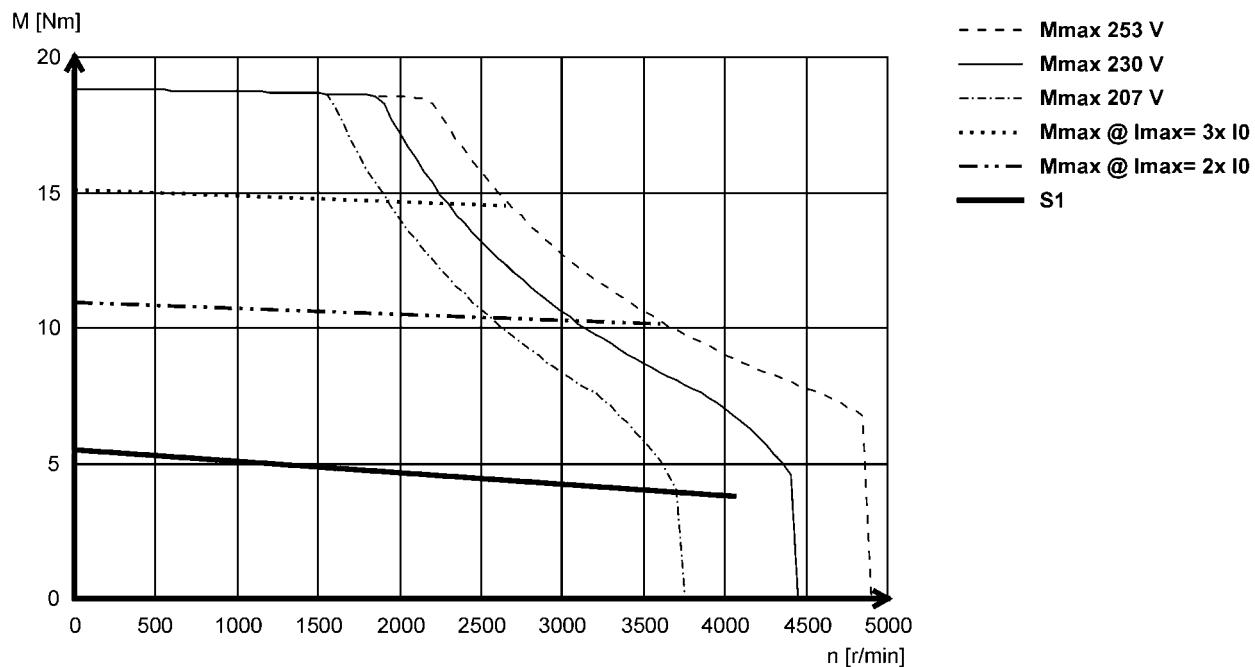

MCS09H60L (non-ventilated)

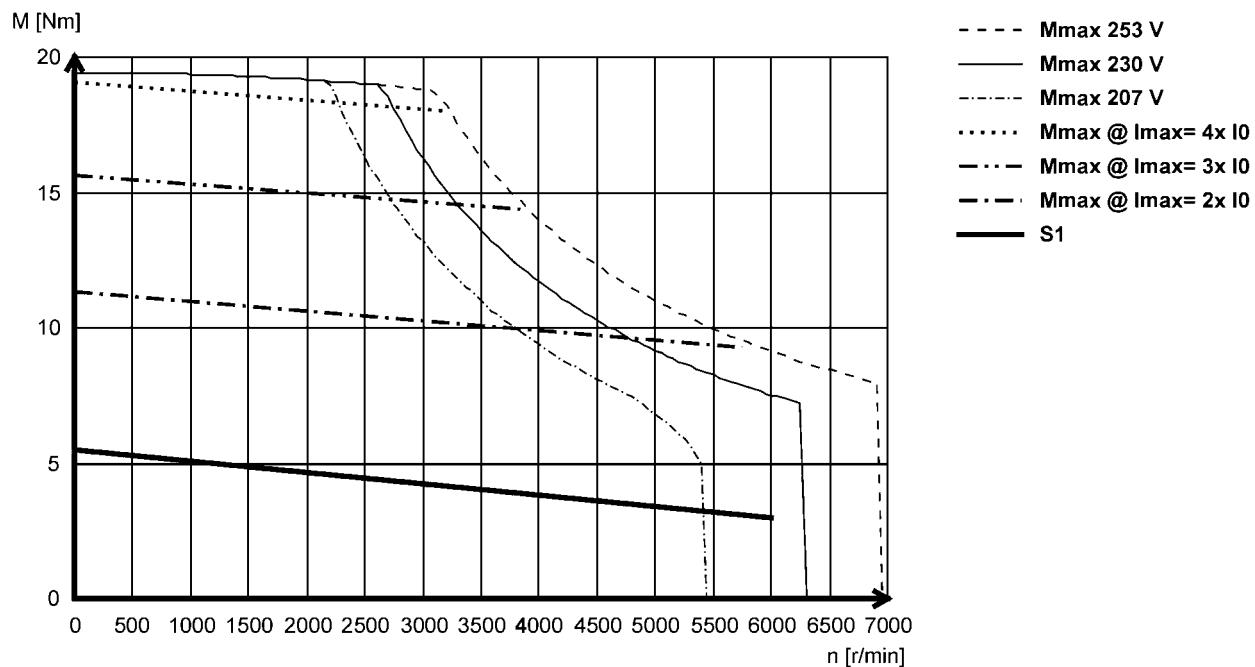

MCS synchronous servo motors




Technical data

Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09L41L (non-ventilated)

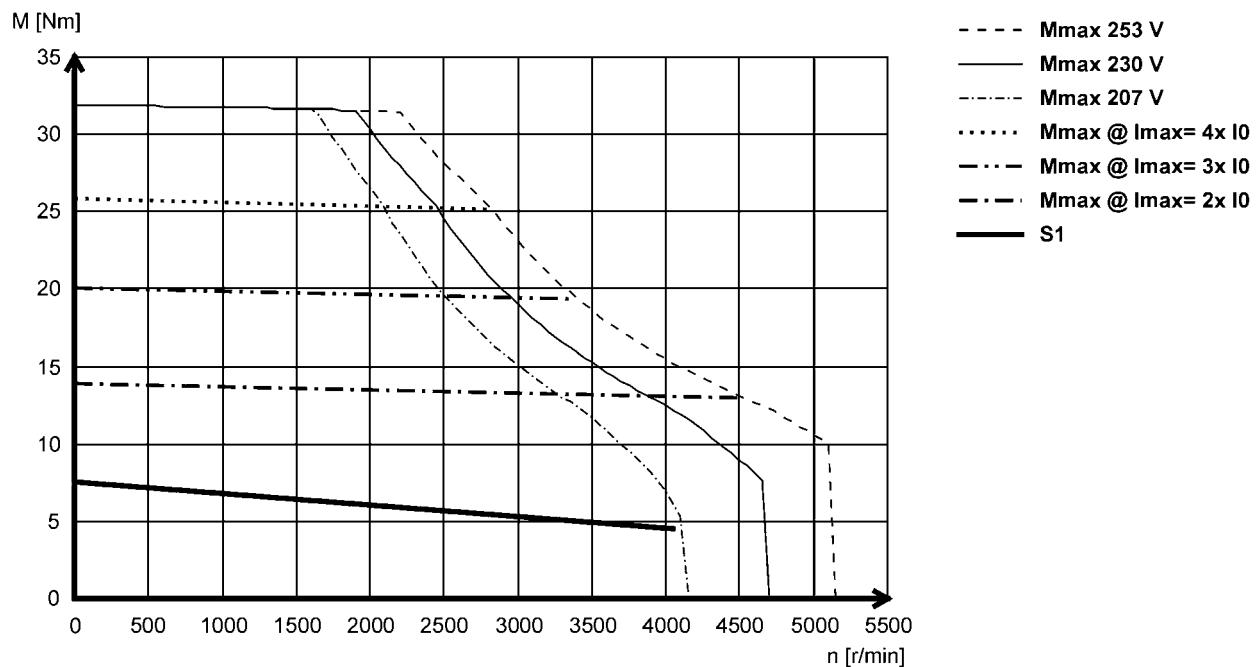

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D20L (non-ventilated)

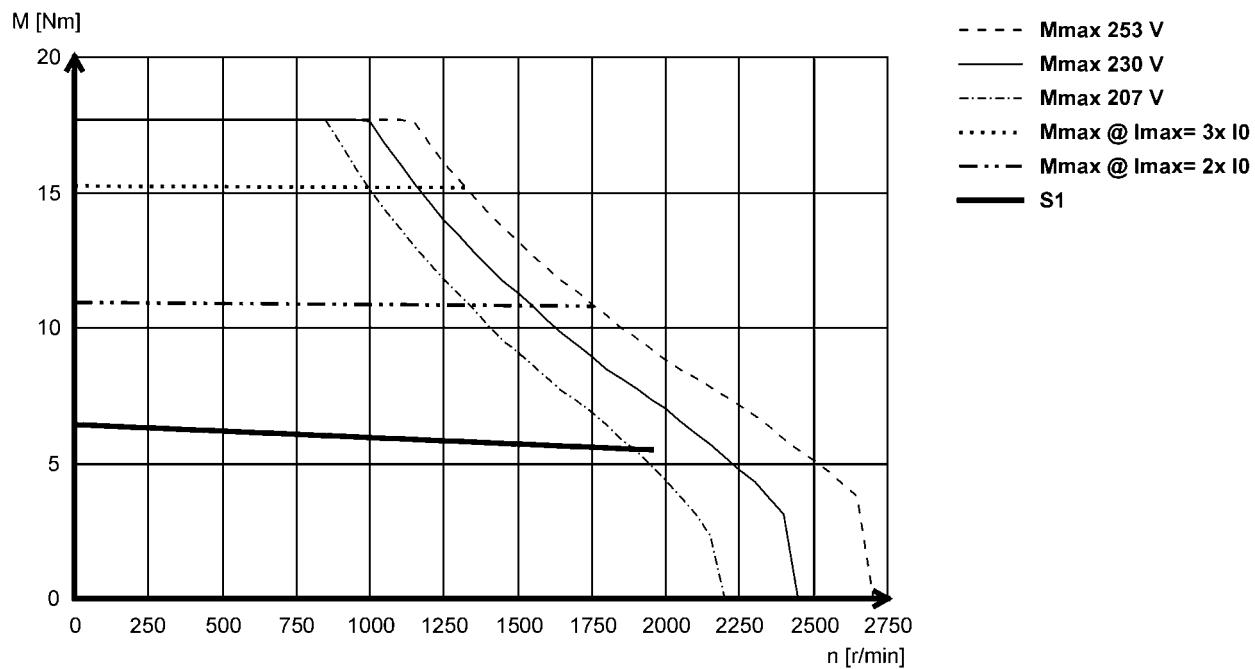

MCS12D41L (non-ventilated)

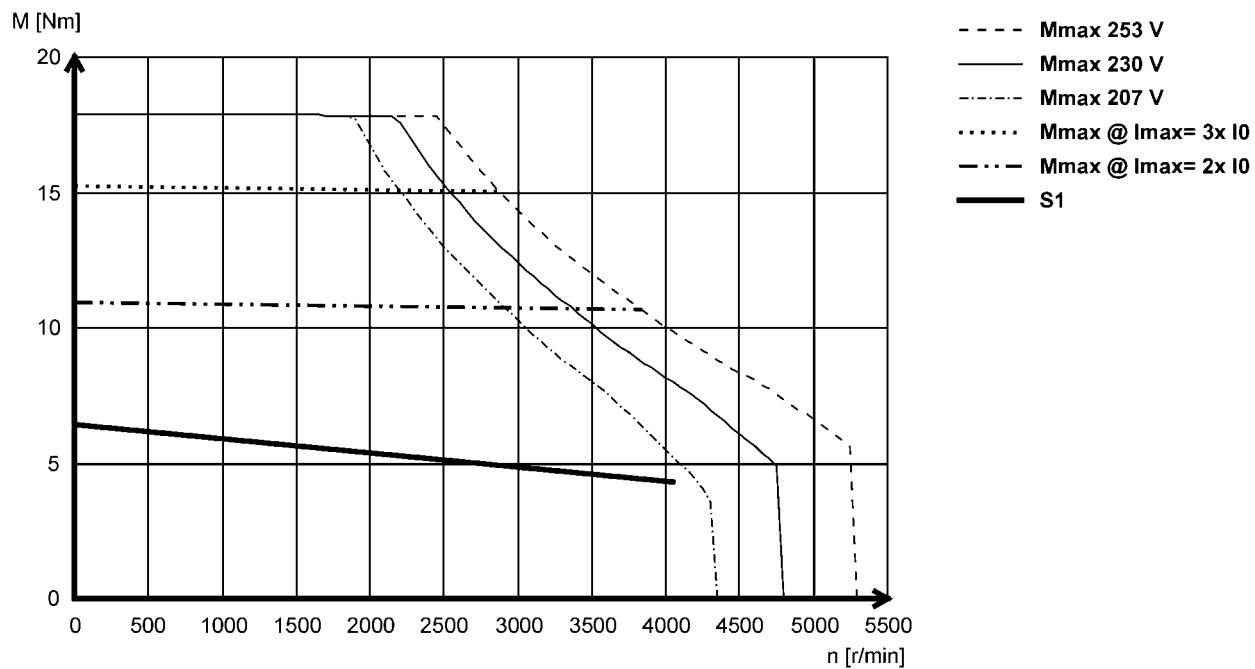

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H15L (non-ventilated)

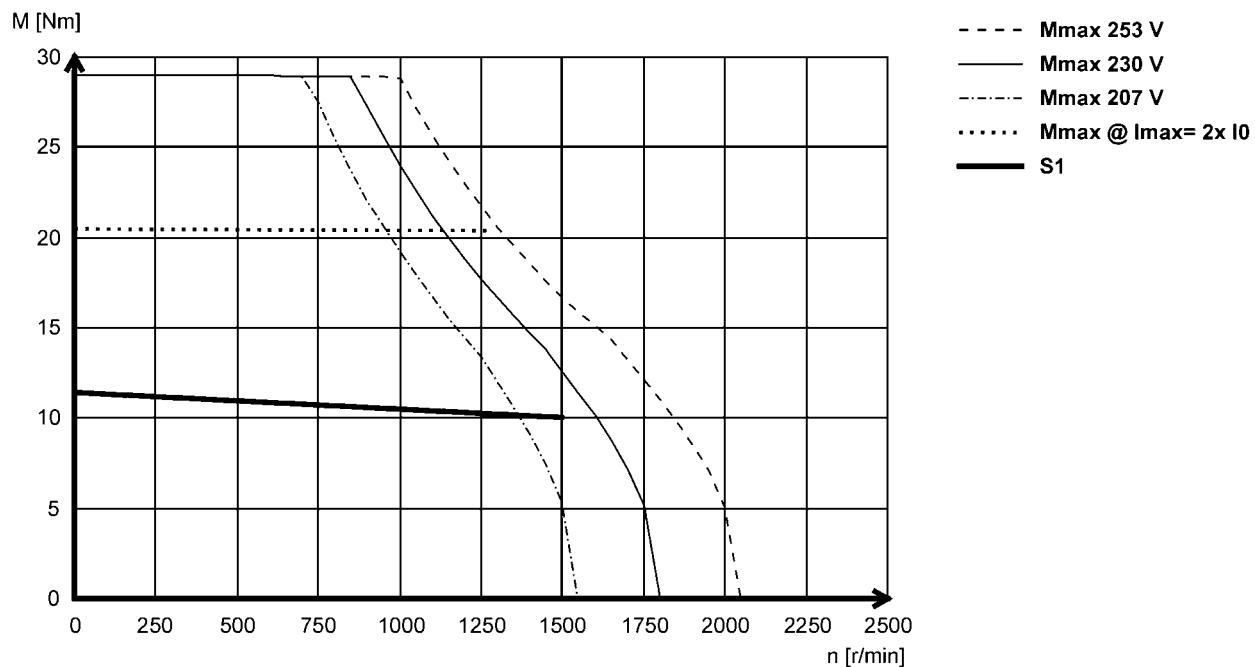

MCS12H30L- (non-ventilated)

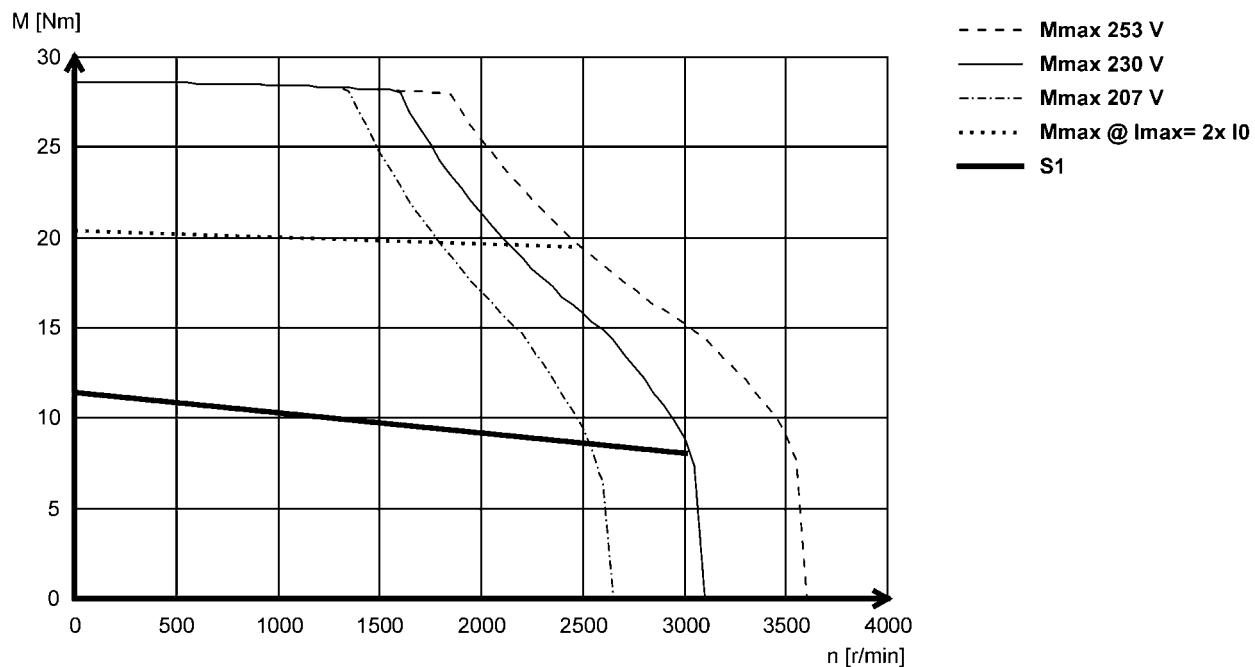

MCS synchronous servo motors




Technical data

Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L20L (non-ventilated)

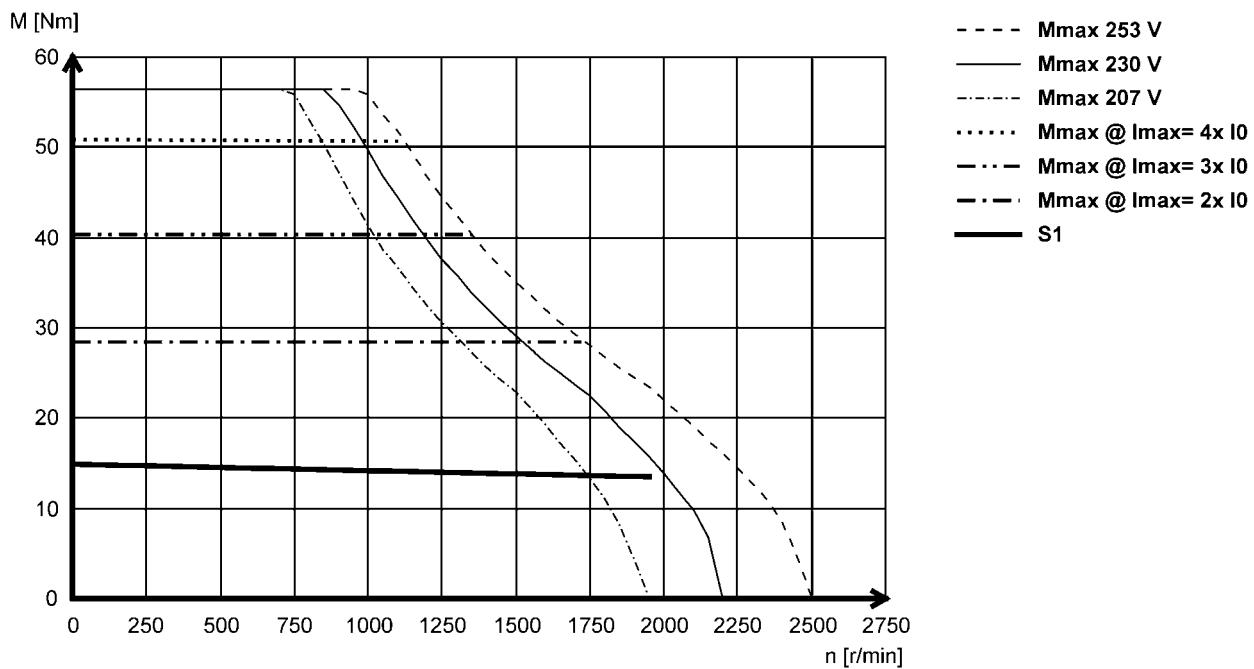


MCS synchronous servo motors

Technical data



Dimensions, self-ventilated

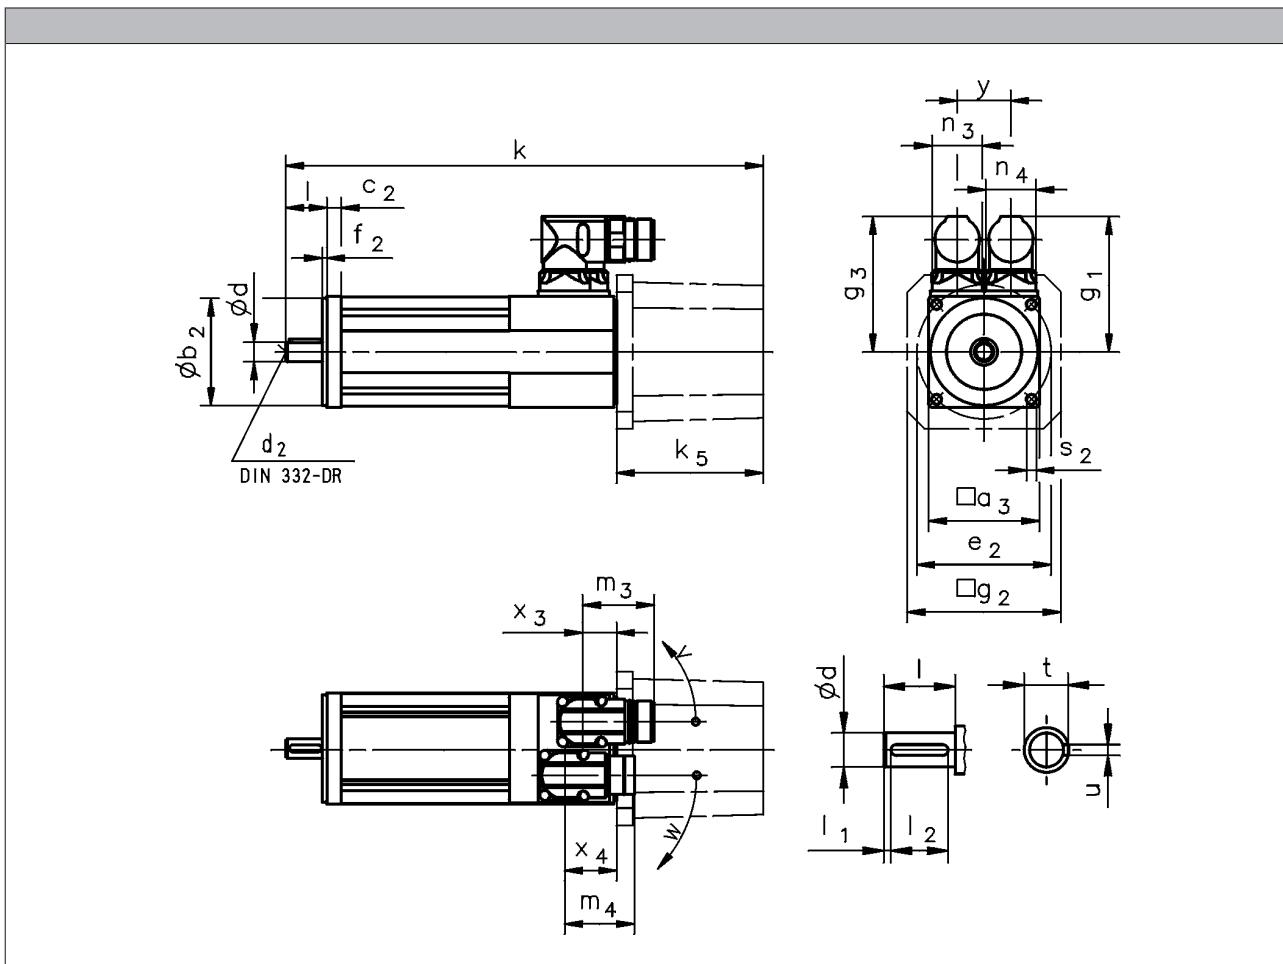

			MCS06C	MCS06F	MCS06I
R□0 / C40 BO	k	[mm]	155	185	215
R□0 / C40 P□	k	[mm]	174	204	233
SR□ / SV□ / E□□ BO	k	[mm]	237	266	297
SR□ / SV□ / E□□ P□	k	[mm]	255	285	315
SR□ / SV□ / E□□	k ₅	[mm]		82.0	
	g ₂	[mm]		86.0	
SKM BO	k	[mm]	190	220	250
SKM P□	k	[mm]	209	239	268
SKM	k ₅	[mm]		35.0	
	g ₂	[mm]		62.0	

- Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- Brake: BO / P□

MCS synchronous servo motors

Technical data



Dimensions, self-ventilated

	g_1 [mm]	g_3 [mm]	x_3 [mm]	x_4 [mm]	m_3 [mm]	m_4 [mm]	n_3 [mm]	n_4 [mm]	y [mm]	v [°]	w [°]
MCS06	77	77	19	29	40	40	28	28	30	190	230

	d k6 [mm]	d_2 [mm]	l -0.7 ... 0.3	l_1 [mm]	l_2 [mm]	u [mm]	t [mm]
MCS06	11	M4	23	2.0	18	4.0	12.5


	a_3 j6 [mm]	b_2 [mm]	c_2 [mm]	e_2 [mm]	f_2 [mm]	s_2 [mm]
MCS06	62	60	8	75	2.5	5.5

MCS synchronous servo motors

Technical data



Dimensions, self-ventilated

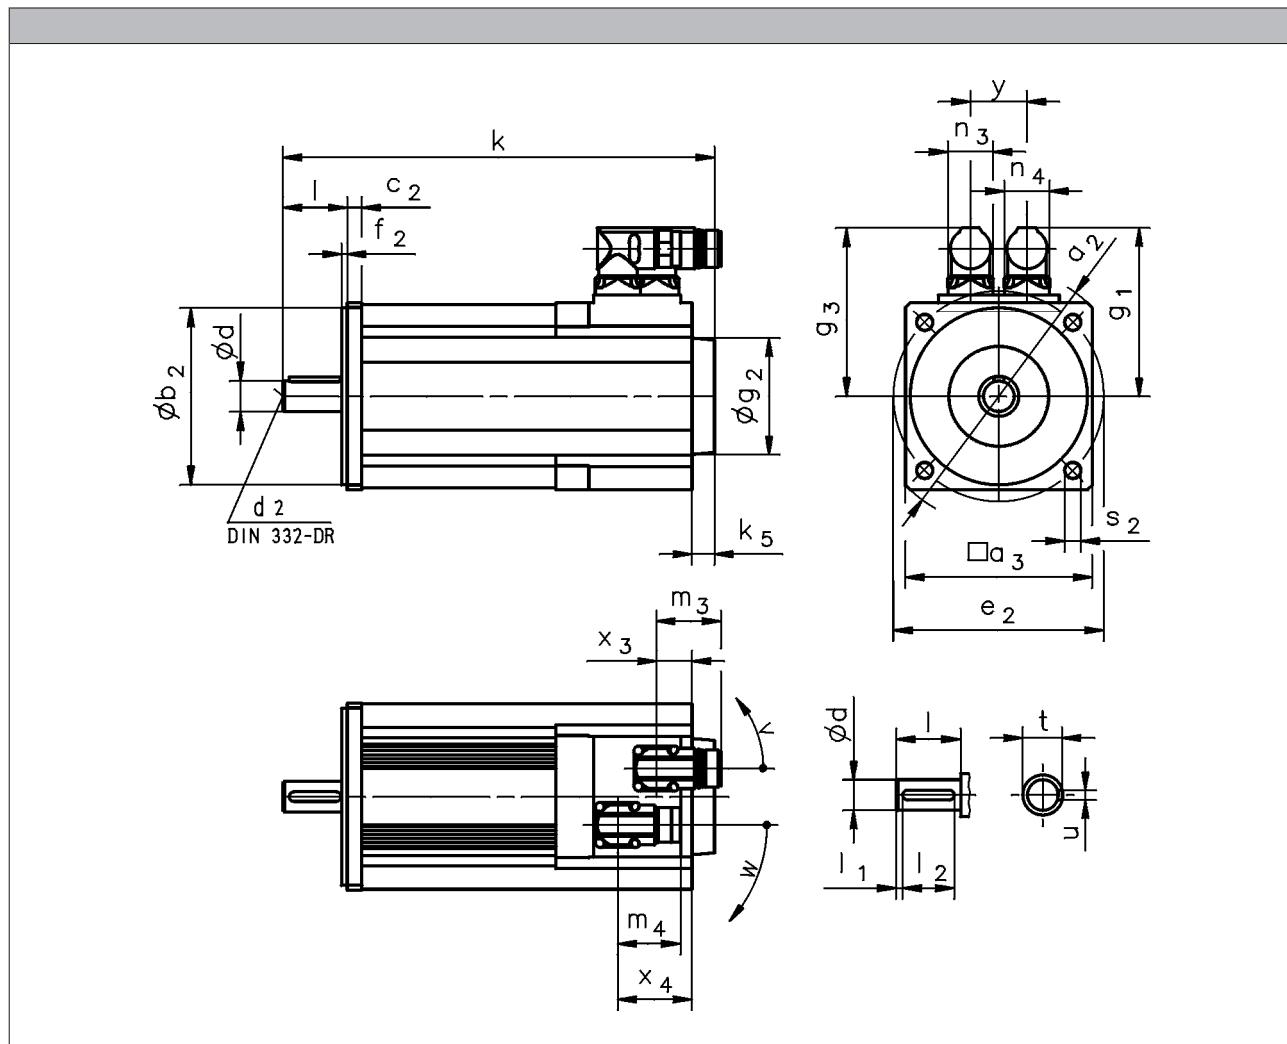

		MCS09D	MCS09F	MCS09H	MCS09L	MCS12D	MCS12H	MCS12L
R□0 / C40 B0	k [mm]	213	233	253	293	228	268	308
R□0 / C40 P□	k [mm]	233	253	273	313	248	288	328
R□0 / C40	k ₅ [mm]	13				14		
	g ₂ [mm]	67				72		
S□□ / E□□ B0	k [mm]	264	284	304	344	277	317	357
S□□ / E□□ P□	k [mm]	284	304	324	364	297	337	377
S□□ / E□□	k ₅ [mm]	64				63		
	g ₂ [mm]	81				89		

		MCS14D	MCS14H	MCS14L	MCS14P	MCS19F	MCS19J	MCS19P
R□0 / C40 B0	k [mm]	251	291	331	371	280	320	380
R□0 / C40 P□	k [mm]	279	319	359	399	314	364	424
R□0 / C40	k ₅ [mm]	24				15		
	g ₂ [mm]	78						
S□□ / E□□ B0	k [mm]	301	341	381	421	329	369	429
S□□ / E□□ P□	k [mm]	329	369	409	449	363	413	473
S□□ / E□□	k ₅ [mm]	74				64		
	g ₂ [mm]	101						

- ▶ Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- ▶ Brake: B0 / P□

MCS synchronous servo motors



Technical data

Dimensions, self-ventilated

	g_1 [mm]	g_3 [mm]	x_3 [mm]	x_4 [mm]	m_3 [mm]	m_4 [mm]	n_3 [mm]	n_4 [mm]	y [mm]	v [°]	w [°]
MCS09	90	90	20	44		40		28	28	35	195
MCS12	105	105	22	46							260

	g_1 [mm]	g_3 [mm]	x_3 [mm]	x_4 [mm]	m_3 [mm]	m_4 [mm]	n_3 [mm]	n_4 [mm]	y [mm]	v [°]	w [°]
MCS14D15-											
MCS14D36-											
MCS14H15-	117	117	24	48		40		28		195	260
MCS14H32-											
MCS14L15-											
MCS14L32-	146	126	29	36		75		45		180	205
MCS14P14-	117	117	24	48		40		28		195	260
MCS14P32-	146	126	29	36		75		45		180	205
MCS19F14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19F30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205
MCS19J14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19J30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205
MCS19P14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19P30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205

	d	d_2	l	l_1	l_2	u	t
	k_6		-0.7 ... 0.3				
	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCS09	14	M5	30	2.5	25	5.0	16.0
MCS12	19	M6	40	4.0	32	6.0	21.5
MCS14	24	M8	50		40		27.0
MCS19	28	M10	60	5.0	50	8.0	31.0

	a_2 [mm]	a_3 [mm]	b_2 [mm]	c_2 [mm]	e_2 [mm]	f_2 [mm]	s_2 [mm]
			j6				
	[mm]						
MCS09	120	89	80	8	100	3.0	7.0
MCS12	160	116	110	9	130		10.0
MCS14	188	143	130	13	165		12.0
MCS19	250	192	180	11	215	4.0	14.0


¹⁾ On version with brake (P□)

MCS synchronous servo motors

Technical data



Dimensions, forced ventilated

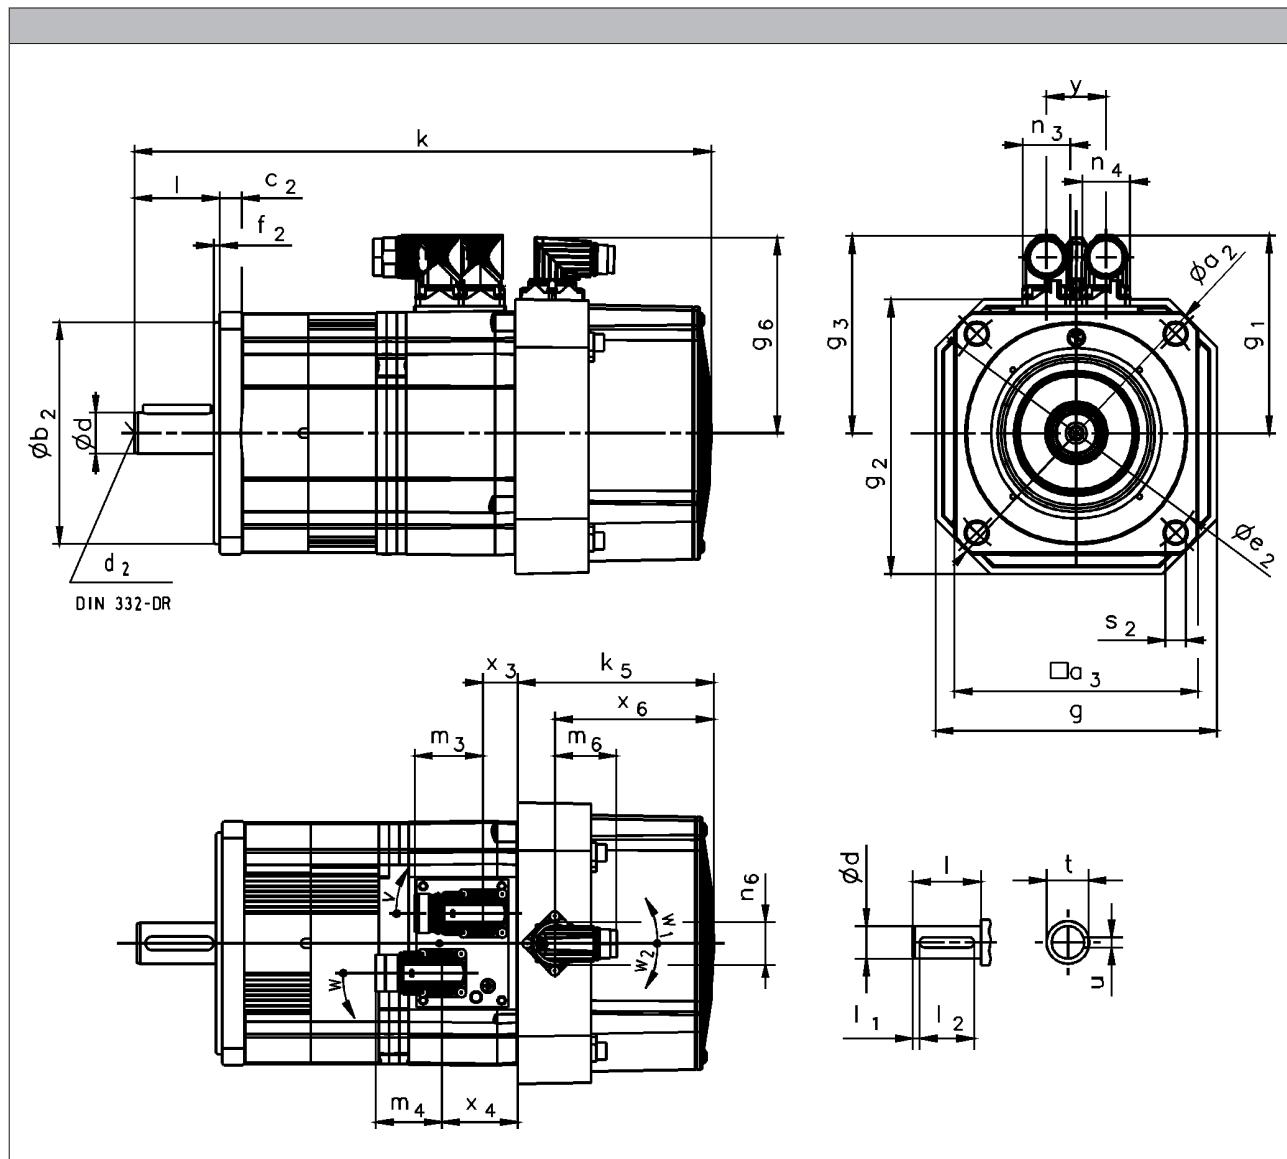

		MCS12D	MCS12H	MCS12L	MCS14D	MCS14H	MCS14L	MCS14P	MCS19F	MCS19J	MCS19P
R□0 / C40 B0	k [mm]	301	341	381	339	379	419	459	387	427	487
R□0 / C40 P□	k [mm]	321	361	401	368	408	448	488	421	471	531
R□0 / C40	k ₅ [mm]	92			115				126		
S□□ / E□□ B0	k [mm]	344	384	424	392	432	472	512	425	465	525
S□□ / E□□ P□	k [mm]	364	404	444	421	461	501	541	459	509	569
S□□ / E□□	k ₅ [mm]	135			169				165		
	g [mm]	140			167				212		
	g ₂ [mm]	140			163				210		

- Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- Brake: B0 / P□

MCS synchronous servo motors



Technical data

Dimensions, forced ventilated

	g_1 [mm]	g_3 [mm]	g_6 [mm]	x_3 [mm]	x_4 [mm]	x_6 [mm]	m_3 [mm]	m_4 [mm]	m_6 [mm]	n_3 [mm]	n_4 [mm]	n_6 [mm]	y [mm]	v [°]	w [°]	w_1 [°]	w_2 [°]
MCS12D17																	
MCS12D35	105	105	107	16	40	67											
MCS12H14																	
MCS12H34																	
MCS12L17																	
MCS12L39																	
MCS14D14																	
MCS14D30	117	117		20	44												
MCS14H12																	
MCS14H28	146	126	115	24	31		40	75		28	45						
MCS14L14	117	117		20	44		37	40		28	28						
MCS14L30	146	126		24	31		93	75		45	45						
MCS14P11	117	117		20	44			40		28	28						
MCS14P26	146	126		24	31			75		45	45						
MCS19F12	142	142		19 46 ¹⁾	43 70 ¹⁾		96	40		28	28						
MCS19F29			142	24 51 ¹⁾	31 58 ¹⁾			75		45							
MCS19J12																	
MCS19J29																	
MCS19P12																	
MCS19P29																	

	d k6 [mm]	d_2 [mm]	l -0.7 ... 0.3	l_1 [mm]	l_2 [mm]	u [mm]	t [mm]
MCS12	19	M6	40	4.0	32	6.0	21.5
MCS14	24	M8	50		40		27.0
MCS19	28	M10	60	5.0	50	8.0	31.0

	a_2 [mm]	a_3 [mm]	b_2 j6 [mm]	c_2 [mm]	e_2 [mm]	f_2 [mm]	s_2 [mm]
MCS12	160	116	110	9	130		10.0
MCS14	188	143	130	13	165	3.5	12.0
MCS19	250	192	180	11	215	4.0	14.0

¹⁾ On version with brake (P□)

MCS synchronous servo motors

Technical data



6.11

MCS synchronous servo motors



Accessories

Permanent magnet holding brake

The synchronous servo motor can be fitted with integral permanent magnet holding brakes.

In the case of permanent magnet brakes, the rated torque applies solely as holding torque at standstill. This is due to the nature of their design. During braking from full motor speed, e.g. in the event of emergency stops, the braking torque is significantly reduced.

As such, they may not be used as safety elements (particularly with lifting axes) without additional measures being implemented.

The brakes are activated when the supply voltage is disconnected (closed-circuit principle). When using the brakes purely as holding brakes, virtually no wear occurs on the friction surfaces.

For traversing axes, adherence to the permissible load/brake motor (J_L / J_{MB}) moment of inertia ensures that the permissible maximum switching rate of the brake will not be exceeded and at least 2,000 emergency stop functions can be performed from a speed of 3,000 rpm.

For lifting axes, the load torque resulting from the weight acts additionally. In this case the specifications for J_L / J_{MB} do not apply.

Caution:

The brakes used are not safety brakes in the sense that a reduction in torque may arise as a result of disruptive factors that cannot be influenced, e.g. oil ingress.

The ohmic voltage drop along the cable must be taken into consideration in long motor supply cables and must be compensated for by a higher voltage at the line input.

The following applies for Lenze system cables:

$$U[V] = U_B[V] + 0.08 \frac{[V]}{[A] \cdot [m]} \cdot l_g[m] \cdot I_B[A]$$

If no suitable voltage (incorrect value, incorrect polarity) is applied to the brake, the brake will be applied and can be overheated and destroyed by the motor continuing to rotate.

The shortest switching times of the brakes are achieved by DC switching of the voltage. A spark suppressor is required to suppress interference and to increase the service life of the relay contacts here.



Permanent magnet holding brake

MCS synchronous servo motors



Accessories

Permanent magnet holding brake

Rated data with standard braking torque

	$U_{N, DC}^{3, 5)}$	M_N	M_N	M_{av}	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{4)}$	m	J_{MB}	J_L/J_{MB}
	[V]	20 °C	120 °C	120 °C								
	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm²]	[ms]	[ms]	[J]	[kg]	[kgcm²]	
MCS06C	24	2.20	2.00	0.60	0.34	0.12	15.0	30.0	30.0	0.30	0.26	22.1
MCS06F		8.00	6.00	4.50	0.65	1.07	20.0	40.0	400	0.80	0.34	16.6
MCS06I		12.0	10.0	7.00			13.0	43.0			0.42	13.3
MCS09D		22.0	18.0	8.00	0.88	3.20	15.0	150	640	1.90	2.17	36.4
MCS09F		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	2.57	30.5
MCS09H		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	2.97	26.3
MCS09L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	3.87	19.9
MCS12D		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	5.07	15.0
MCS12H		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	8.40	8.70
MCS12L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	11.7	5.90
MCS14D		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	11.3	10.5
MCS14H		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	17.4	6.50
MCS14L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	26.6	3.90
MCS14P		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	37.9	2.40
MCS19F		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	77.4	5.20

Rated data with increased braking torque

	$U_{N, DC}^{3, 5)}$	M_N	M_N	M_{av}	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{4)}$	m	J_{MB}	J_L/J_{MB}
	[V]	20 °C	120 °C	120 °C								
	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm²]	[ms]	[ms]	[J]	[kg]	[kgcm²]	
MCS09D	24	12.0	10.0	7.00	0.65	1.07	20.0	40.0	400	0.80	2.17	36.4
MCS09F		24.0	19.0	12.0	0.71	3.13	16.0	90.0	890	1.20	2.57	30.5
MCS09H		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	2.97	26.3
MCS09L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	3.87	19.9
MCS12D		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	7.10	24.3
MCS12H		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	10.4	16.3
MCS12L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	13.7	12.1
MCS14D		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	20.5	22.2
MCS14H		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	26.6	16.9
MCS14L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	35.8	12.3
MCS14P		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	47.1	9.10
MCS19J		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	135	2.20
MCS19P		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	190	1.20

¹⁾ Engagement and disengagement times are valid for rated voltage ($\pm 0\%$) and protective circuit for brakes with varistor for DC switching. The times may increase without a protective circuit.

²⁾ The currents are the maximum values when the brake is cold (value used for dimensioning the current supply). The values for a motor at operating temperature are considerably lower.

³⁾ With 24V DC brake: smoothed DC voltage, ripple $\leq 1\%$.

⁴⁾ Maximum switching energy per emergency stop at $n = 3000$ r/min for at least 2000 emergency stops.

⁵⁾ Voltage tolerance: -10% to +5%

MCS synchronous servo motors



Accessories

Resolver

Stator-fed resolver with two stator windings offset by 90° and one rotor winding with transformer winding.

Speed/angle sensor				
	1)			
Product key			RS0	RV0
			RS0	RV03
Resolution				
Angle		[°]		0.80
Accuracy		[°]		-10 ... 10
Absolute positioning				1 revolution
Max. speed				
	n_{\max}	[r/min]		8000
Max. input voltage				
DC	$U_{in,\max}$	[V]		10.0
Max. input frequency				
	$f_{in,\max}$	[kHz]		4.00
Ratio				
Stator / rotor		± 5 %		0.30
Rotor impedance				
	Z_{ro}	[Ω]		51 + j90
Stator impedance				
	Z_{so}	[Ω]		102 + j150
Impedance				
	Z_{rs}	[Ω]		44 + j76
Min. insulation resistance				
At DC 500 V	R	[MΩ]		10.0
Number of pole pairs				1
Max. angle error		[°]		-10 ... 10
Inverter assignment				E84AVTC E94A ECS EVS93

1) 6 - Product key > speed/angle sensor

Speed-dependent safety functions

Suitable for safety function			No	Yes
Max. permissible angular acceleration				
MCS06	α	[rad/s ²]		56 000
MCS09 ... MCS19 ²⁾	α	[rad/s ²]		19 000
Functional safety				
IEC 61508				SIL3
EN 13849-1				Up to Performance Level e

2) 10 - Single encoder concepts with resolvers

MCS synchronous servo motors



Accessories

Incremental encoder and SinCos absolute value encoder

Encoder type		TTL incremental	SinCos absolute value		
Speed/angle sensor		C40	EQI	SRS	SVS
Product key	1)	IK4096-5V-T	AM32-5V-E	AS1024-8V-H	AS1024-8V-K2
Encoder type		Single-turn	Multi-turn	Single-turn	
Pulses		4096	32	1024	
Output signals		TTL	1 Vss		
Interfaces			EnDat	Hiperface	
Absolute revolutions		0	4096	1	
Resolution		1.30	0.40		
Angle ²⁾	[°]	-1 ... 1	-5 ... 5	-0.8 ... 0.8	
Min. input voltage					
DC	U _{in,min} [V]	4.50	4.75	7.00	
Max. input voltage					
DC	U _{in,max} [V]	5.50	5.25	12.0	
Max. speed	n _{max} [r/min]	7324	12000	6000	
Max. current consumption	I _{max} [A]	0.075	0.17	0.080	
Limit frequency	f _{max} [kHz]	500	6.00	200	
Inverter assignment		E94P	E94A	E84AVTC E94A ECS EVS93	

1) 6 - Product key > speed/angle sensor

2) Inverter-dependent.

Speed-dependent safety functions

Suitable for safety function		No	No	No	Yes
Max. permissible angular acceleration					
MCS06	α [rad/s ²]				970000
MCS09 ... MCS19	α [rad/s ²]				240000
Functional safety					
IEC 61508					SIL2
EN 13849-1					Up to Performance Level d

MCS synchronous servo motors



Accessories

Incremental encoder and SinCos absolute value encoder

Encoder type			SinCos absolute value							
Speed/angle sensor			SKM	SRM	SVM	ECN	EQN			
Product key			AM128-8V-H	AM1024-8V-H	AM1024-8V-K2	AS2048-5V-E	AM2048-5V-E			
Encoder type			Multi-turn		Single-turn		Multi-turn			
Pulses			128	1024	2048					
Output signals			1 Vss							
Interfaces			Hiperface			EnDat				
Absolute revolutions			4096		1	4096				
Resolution			0.40							
Angle		[°]	-1.3 ... 1.3							
Accuracy		[°]	-0.8 ... 0.8		-0.6 ... 0.6					
Min. input voltage			7.00		4.75					
DC	$U_{in,min}$	[V]	12.0							
Max. input voltage			5.25							
DC	$U_{in,max}$	[V]	9000		6000	12000				
Max. speed		n_{max} [r/min]	0.060		0.080	0.15	0.25			
Max. current consumption		I_{max} [A]	200							
Limit frequency		f_{max} [kHz]	E84AVTC E94A ECS EVS93							
Inverter assignment			E94A							

¹⁾ Inverter-dependent.

Speed-dependent safety functions

Suitable for safety function			No	No	Yes	No	No	
Max. permissible angular acceleration								
MCS06	α	[rad/s ²]			970000			
MCS09 ... MCS19	α	[rad/s ²]			240000			
Functional safety			SIL2					
IEC 61508								
EN 13849-1			Up to Performance Level d					

MCS synchronous servo motors



Accessories

Blowers

Rated data for 50 Hz

		Enclosure	Number of phases					
				U _{min}	U _{max}	U _{N, AC}	P _N	I _N
				[V]	[V]	[V]	[kW]	[A]
MCS12	F10		1	210	240	230	0.019	0.12
	F50			104	122	115	0.018	0.22
MCS14	F10	IP54	1	210	240	230	0.040	0.25
	F50			104	122	115		0.53
MCS19	F10		1	210	240	230	0.060	0.26
	F50			104	122	115	0.047	0.45

Rated data for 60 Hz

		Enclosure	Number of phases					
				U _{min}	U _{max}	U _{N, AC}	P _N	I _N
				[V]	[V]	[V]	[kW]	[A]
MCS12	F10		1	210	240	230	0.019	0.12
	F50			104	122	115	0.018	0.22
MCS14	F10	IP54	1	210	240	230	0.040	0.25
	F50			104	122	115		0.53
MCS19	F10		1	210	240	230	0.060	0.26
	F50			104	122	115	0.047	0.45

MCS synchronous servo motors



Accessories

Temperature monitoring


The thermal sensors used in the MCS motors continuously monitor the motor temperature. The temperature signal is transmitted over the system cable of the feedback system to the servo controller. Because of the different physical conditions, there are two temperature monitoring mechanisms on the MCS motors (there is no complete motor protection in either case)

MCS06

on this motor, the winding temperature of one winding phase is monitored with a KTY 83-110 type thermal sensor.

MCS09 to 19

These motors are monitored by three thermal sensors (1x KTY 83-110 + 2x PTC 150 °C) connected in series. This means that the temperature of the motor is determined with great accuracy in the permitted operating range and at the same time the overtemperature response configured in the controller is executed in the event of overtemperature in one of the winding phases.

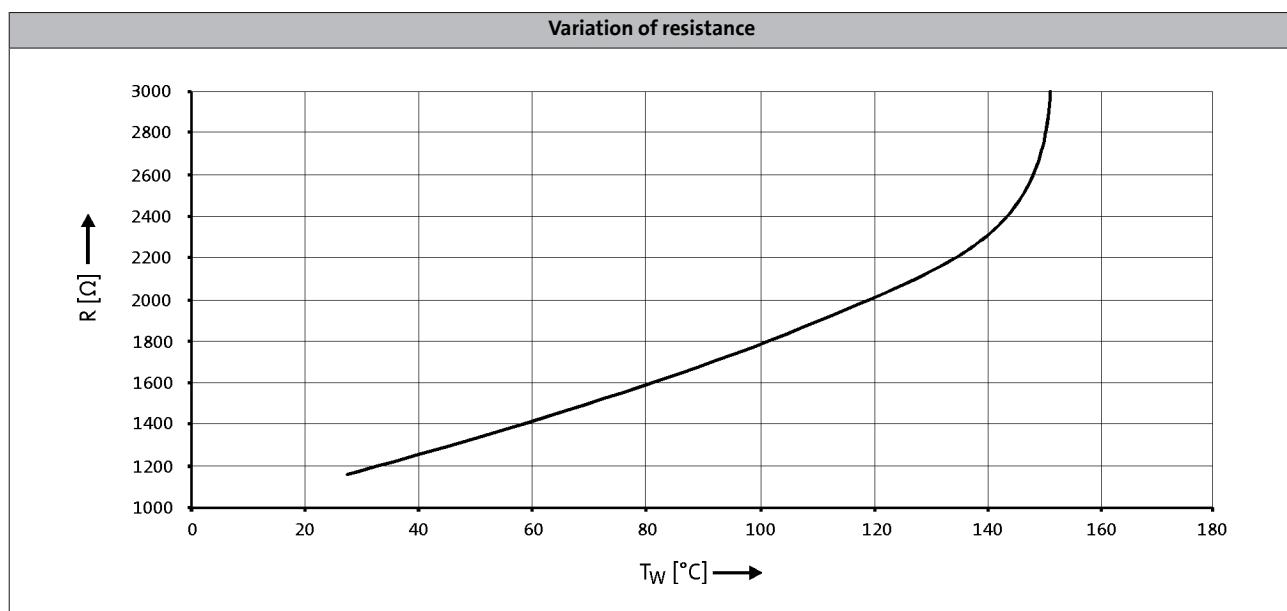

- If the detector is supplied with a measured current of 1 mA, the above relationship between the temperature and the resistance applies.

MCS synchronous servo motors




Accessories

Terminal box

If a servo motor is to be connected to an existing cable or plug connectors are not to be used for other reasons, the connection can also be made via a terminal box.

The terminals are designed as tension spring terminals to ensure here the long-term vibration resistance of the cable contacts with adequate contact pressure required.

Connections

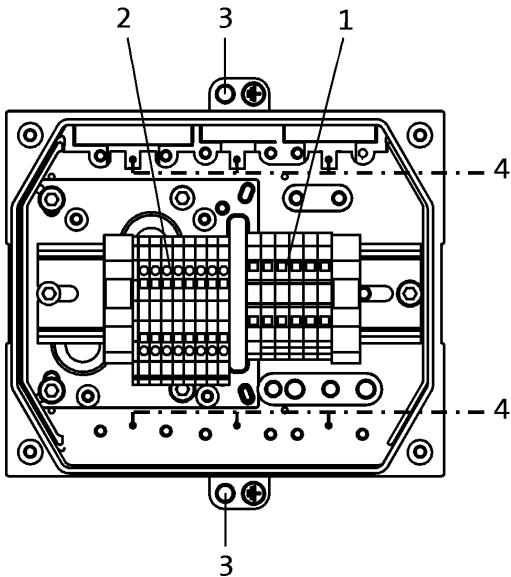

1: Power connection (terminals loadable up to 65 A) + brake connection.

2: Angle/speed sensor connection + thermal sensor connection.


3: PE connection.

4: Large area shield contact.

5: Openings for 2x M32, 2x M25, 2x M20 fittings. The openings are plugged and can be opened up as required by the customer.

The terminal boxes have generously dimensioned space for the customer's own wiring and large surface shield connection areas to ensure a secure EMC-compliant connection. The cable outlet may be to the left or to the right, depending on requirements.

It is not possible to attach a terminal box to the MCS06 or to models with the blower.

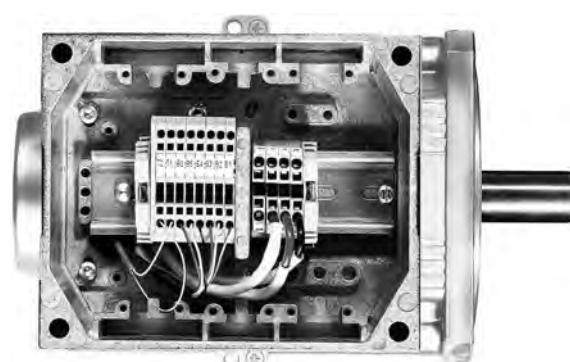


MCS synchronous servo motors

Accessories



Terminal box

Dimensions

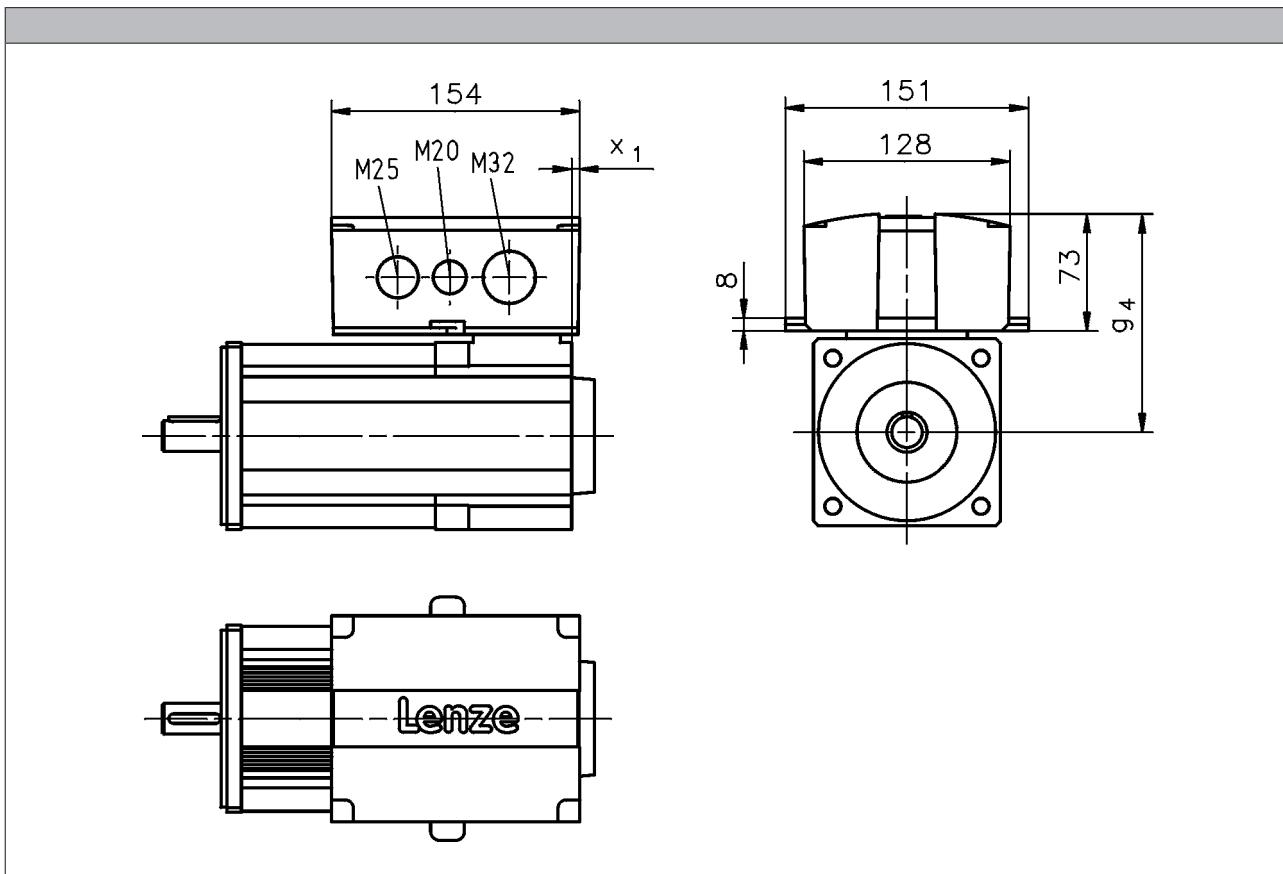

	g_4 [mm]	x_1 [mm]
MCS09	121	8
MCS12	136	5
MCS14	147	3
MCS19	172	

MCS synchronous servo motors



Accessories

ICN connector

An ICN connector is used as standard for the electrical connection to the servo motors.


A connector is used for the connection of motor and brake. The connections to the feedback system/temperature monitoring and the blower each employ a separate connector.

The connectors can be rotated through 270° and are fitted with a bayonet catch for SpeedTec connectors. As the connector fixing is also compatible with conventional union nuts. Existing mating connectors can therefore still be used without difficulty.

Connection for power and brake


- MCS06 to 12

Pin assignment		
Contact	Designation	Meaning
1	BD1	Holding brake +
2	BD2	Holding brake -
PE	PE	PE conductor
4	U	Phase U power
5	V	Phase V power
6	W	Phase W power



- MCS14 to 19

Pin assignment		
Contact	Designation	Meaning
1		Not assigned
2		
+	BD1	Holding brake +
-	BD2	Holding brake -
PE	PE	PE conductor
U	U	Phase U power
V	V	Phase V power
W	W	Phase W power



MCS synchronous servo motors




Accessories

ICN connector

Feedback connection


- Resolver

Pin assignment		
Contact	Designation	Meaning
1	+Ref	Transformer windings
2	-Ref	
3	+VCC ETS	Supply: Electronic nameplate
4	+COS	Cosine stator windings
5	-COS	
6	+SIN	Sine stator windings
7	-SIN	
8		
9		Not assigned
10		
11	+KTY	KTY temperature sensor
12	-KTY	



- Hiperface incremental encoder and SinCos absolute value encoder

Pin assignment		
Contact	Designation	Meaning
1	B	Track B/+SIN
2	A ⁻	Track A inverse/-COS
3	A	Track A/+COS
4	+U _B	Supply +
5	GND	Mass
6	Z ⁻	Zero track inverse/-RS485
7	Z	Zero track/+RS485
8		Not assigned
9	B ⁻	Track B inverse/-SIN
10		Not assigned
11	+KTY	KTY temperature sensor
12	-KTY	



MCS synchronous servo motors




Accessories

ICN connector

Feedback connection


- ▶ SinCos absolute value encoder with EnDat interface

Pin assignment		
Contact	Designation	Meaning
1	U _P sensor	Supply: UP sensor
2		Not assigned
3		
4	0 V sensor	Supply: 0 V sensor
5	+KTY	KTY temperature sensor
6	-KTY	
7	+U _B	Supply +
8	Cycle	EnDat interface cycle
9	Cycle ⁻	EnDat interface inverse cycle
10	GND	Mass
11	Shield	Encoder housing screen
12	B	Track B
13	B ⁻	Track B inverse/-SIN
14	Data	EnDat interface data
15	A	Track A
16	A ⁻	Track A inverse
17	Data ⁻	EnDat interface inverse data



Blower connection

Pin assignment		
Contact	Designation	Meaning
PE	PE	PE conductor
1	U1	
2	U2	Fan
3		
4		
5		
6		



MCS synchronous servo motors

Accessories



6.11

MCS synchronous servo motors

Accessories



6.11

Motors

MCA asynchronous servo motors

2 to 1,100 Nm



MCA asynchronous servo motors



Contents

General information	List of abbreviations	6.11 - 4
	Product key	6.11 - 6
	Product information	6.11 - 8
	Functions and features	6.11 - 9
	Dimensioning	6.11 - 11
Technical data	Standards and operating conditions	6.11 - 19
	Permissible radial and axial forces	6.11 - 20
	Rated data, non-ventilated	6.11 - 22
	Rated data, IP54 forced ventilated	6.11 - 23
	Rated data, IP23s forced ventilated	6.11 - 24
	Selection tables, Servo Drives 9400 HighLine	6.11 - 25
	Selection tables, Inverter Drives 8400 TopLine	6.11 - 32
	Selection tables, Servo Drives ECS	6.11 - 38
	Selection tables, Servo Inverter 9300	6.11 - 41
	Torque characteristics	6.11 - 47
	Dimensions, self-ventilated	6.11 - 66
	Dimensions, forced ventilated	6.11 - 68
Accessories	Permanent magnet holding brake	6.11 - 75
	Spring-applied holding brake	6.11 - 78
	Resolver	6.11 - 80
	Incremental encoder and SinCos absolute value encoder	6.11 - 81
	Blowers	6.11 - 83
	Temperature monitoring	6.11 - 84
	Terminal box	6.11 - 85
	ICN connector	6.11 - 87

MCA asynchronous servo motors



General information

List of abbreviations

$\eta_{100\%}$	[%]	Efficiency
$\cos \phi$		Power factor
dU/dt	[kV/ μ s]	Insulation resistance
$F_{ax,-}$	[N]	Min. axial force
$F_{ax,+}$	[N]	Max. axial force
$f_{in,max}$	[Hz]	Max. input frequency
f_{max}	[kHz]	Limit frequency
f_{max}	[kHz]	Max. switching frequency
f_N	[Hz]	Rated frequency
F_{rad}	[N]	Max. radial force
H_{max}	[m]	Site altitude
I_0	[A]	Standstill current
I_{max}	[A]	Max. short-time DC-bus current
I_{max}	[A]	Max. current
I_{max}	[A]	Max. current consumption
I_{max}	[A]	Max. current
I_{max}	[A]	Max. DC-bus current
I_N	[A]	Rated current
J	[kgcm ²]	Moment of inertia
J_{MB}	[kgcm ²]	Moment of inertia
$KE_{LL\ 150\ ^\circ C}$	[V /1000 rp]	Voltage constant
$Kt_{0\ 150\ ^\circ C}$	[Nm/A]	Torque constant
L	[mH]	Mutual inductance
$L_{1\sigma}$	[mH]	Stator leakage inductance
$L_{2\sigma}$	[mH]	Rotor leakage inductance
L_N	[mH]	Rated inductance
m	[kg]	Mass
M_0	[Nm]	Stall torque
$M_{0,\ max}$	[Nm]	Max. standstill torque
M_{av}	[Nm]	Average dynamic torque
M_{max}	[Nm]	Max. torque
M_N	[Nm]	Rated torque
n_{eto}	[r/min]	Transition speed
n_k	[r/min]	Speed
n_{max}	[r/min]	Max. speed

n_N	[r/min]	Rated speed
P_N	[kW]	Rated power
Q_E	[J]	Maximum switching energy
R	[Ω]	Insulation resistance
R	[Ω]	Min. insulation resistance
R_1	[Ω]	Stator impedance
R_2	[Ω]	Charging resistor
R_2	[Ω]	Rotor impedance
$R_{UV\ 150\ ^\circ C}$	[Ω]	Stator impedance
$R_{UV\ 20\ ^\circ C}$	[Ω]	Stator impedance
$S_{hü}$	[1/h]	Transition operating frequency
T	[$^\circ$ C]	Operating temperature
T	[$^\circ$ C]	Rated temperature
T	[$^\circ$ C]	Max. ambient temperature of bearing
T	[$^\circ$ C]	Max. surface temperature
T	[$^\circ$ C]	Max. ambient temperature for transport
T	[$^\circ$ C]	Min. ambient storage temperature
T	[$^\circ$ C]	Min. ambient temperature for transport
T	[$^\circ$ C]	Ambient temperature
t_1	[ms]	Engagement time
t_2	[ms]	Disengagement time
$T_{opr,max}$	[$^\circ$ C]	Max. ambient operating temperature
$T_{opr,min}$	[$^\circ$ C]	Min. ambient operating temperature
$U_{in,max}$	[V]	Max. input voltage
$U_{in,min}$	[V]	Min. input voltage
U_{max}	[V]	Max. mains voltage
U_{max}	[V]	Min. input voltage
U_{min}	[V]	Min. mains voltage
$U_{N, AC}$	[V]	Rated voltage
$U_{N, DC}$	[V]	Rated voltage
Z_{ro}	[Ω]	Rotor impedance
Z_{rs}	[Ω]	Impedance
Z_{so}	[Ω]	Stator impedance

MCA asynchronous servo motors

General information



List of abbreviations


CE	Communauté Européenne
CSA	Canadian Standards Association
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UkrSEPRO	Certificate for Ukraine
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

MCA asynchronous servo motors



General information

Product key

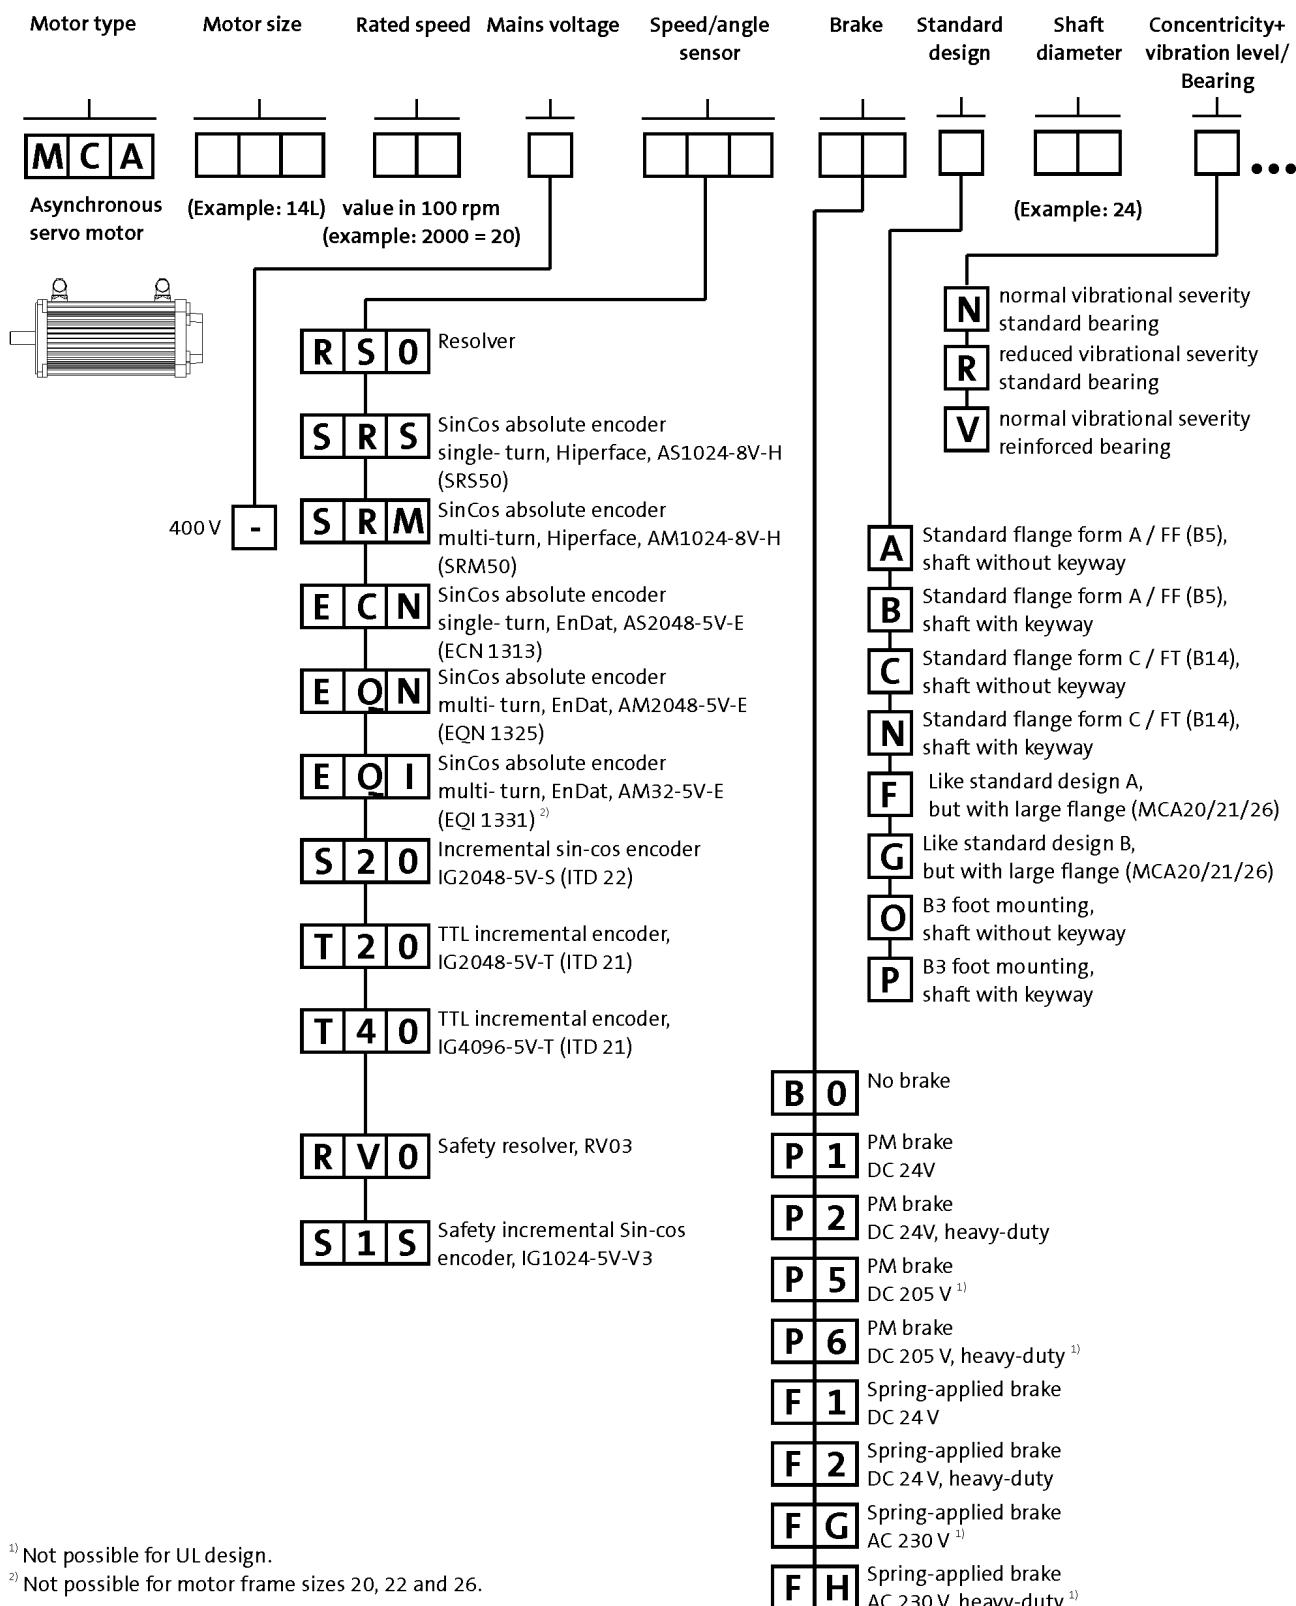

¹⁾ Not possible for UL design.


²⁾ Not possible for motor frame sizes 20, 22 and 26.

MCA asynchronous servo motors



General information

Product key

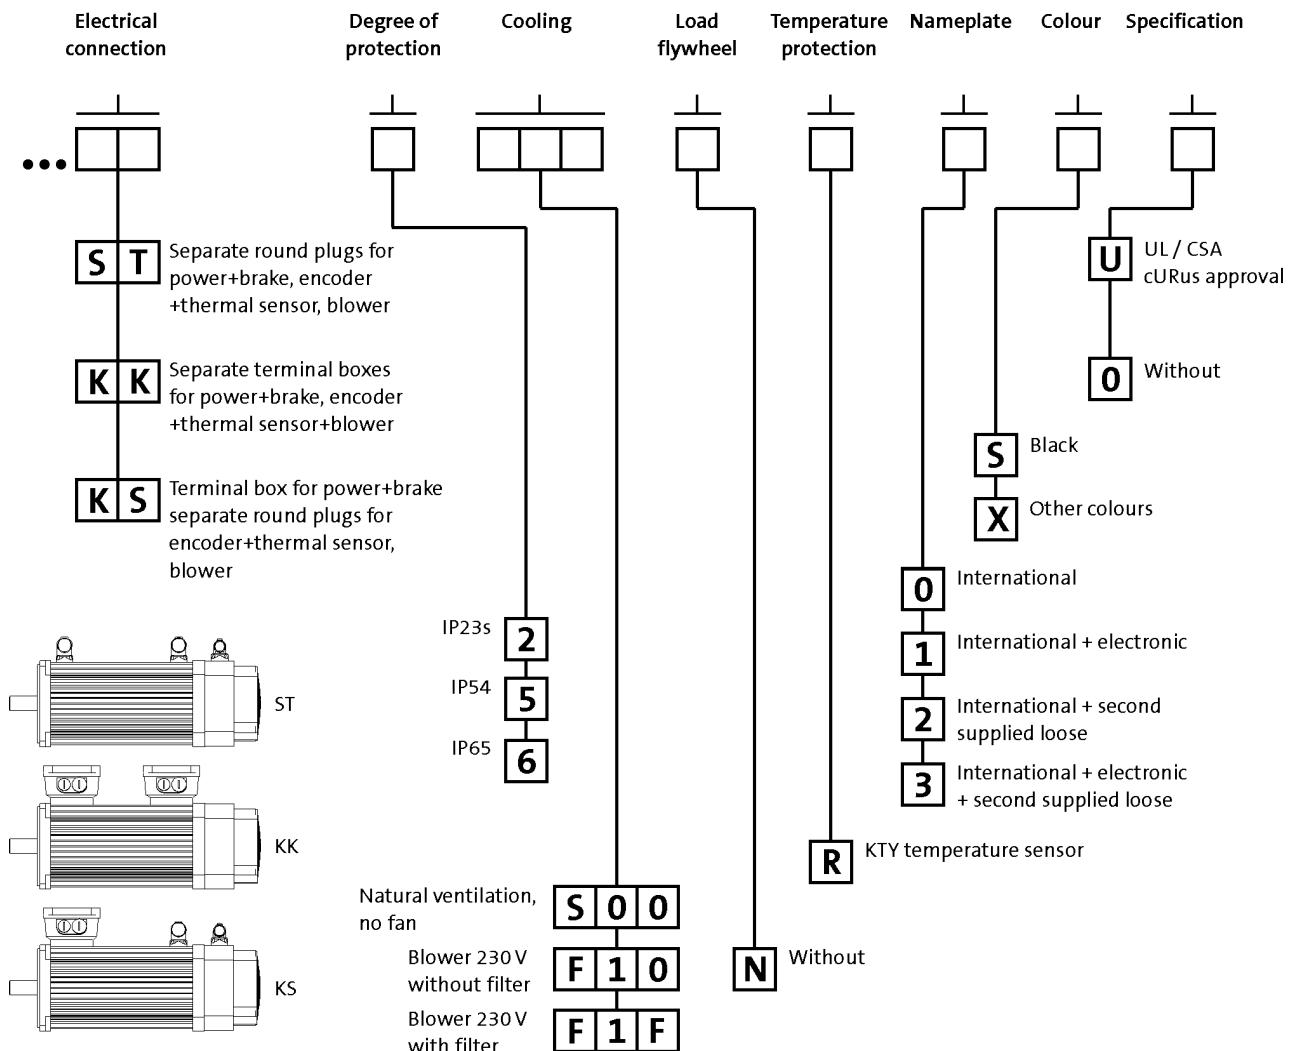

MCA asynchronous servo motors

General information



Product information


An application-oriented structure, low moments of inertia, compact dimensions and a high degree of intrinsic operational reliability characterise these robust and dynamic motors.

The compact design and the low moment of inertia allow these motors to be used in dynamic applications. If your application calls for a broad speed setting range and a robust construction, then the choice is easy: MCA asynchronous servo motors from Lenze.

Whether as a self-ventilated version or with a blower – with a power range from 0.8 to 53.8 kW, the MCA asynchronous servo motors offer rated torque values of up to 280 Nm and peak torque values of up to 1100 Nm. In comparison to standard three-phase AC motors, these servo motors have the edge in terms of lower moments of inertia, lower weight and higher maximum speeds.

Advantages

- High dynamic performance thanks to low moments of inertia
- Compact size with high power density
- Robust regenerative resolver system – alternatively SinCos and incremental encoder for the highest precision
- Easy to install and service friendly thanks to use of SpeedTec connectors
- Terminal box optional up to MCA21 MCA22 and 26 with three-part terminal box
- Protection: IP23, IP54, IP65 optional for naturally ventilated servo motors
- cURus-approved, GOST-certified, CE, RoHS-compliant
- High maximum speeds
- Wide speed setting range
- Field weakening operation usable
- Electronic nameplate

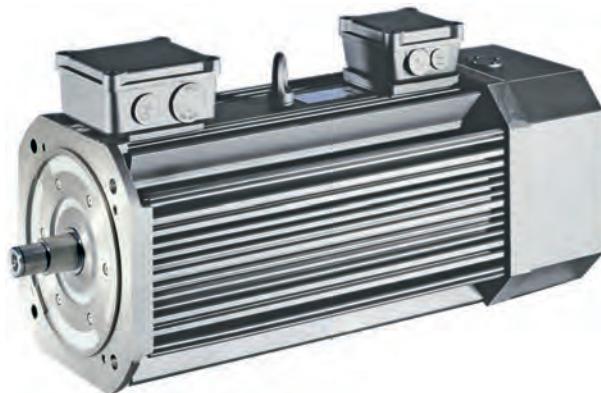

MCA21 asynchronous servo motor

MCA asynchronous servo motors



General information

Functions and features

	MCA10	MCA13	MCA14	MCA17	MCA19
Design	B14-FT85 B5-FF100	B14-FT130 B5-FF130	B14-FT130 B5-FF165	B14-FT130 B5-FF215	
Shaft end (with and without keyway)	14 x 30	19 x 40	24 x 50	28 x 60	
A end shield			Oil-tight Not oil-tight		
Brake					
Spring-applied brake					
Permanent magnetic brake			DC 24 V AC 230 V ¹⁾ DC 205 V ¹⁾		
Speed and angle encoder			Resolver SinCos single-turn/multi-turn Incremental encoder		
Cooling					
Without blower			Naturally ventilated		
Axial blower, 1 phase			230 V; 50 Hz		
Thermal sensor					
Thermal detector			KTY		
Motor connection: plug connector			Power + brake Encoder + thermal sensor Blower		
Motor connection: terminal box	Power + brake Encoder + thermal sensor		Power + brake Encoder + thermal sensor + blower		
Motor connection: Terminal box + plug connector			Power + brake Encoder + thermal sensor		
Terminal box					
Plug connector			Blower		
Shaft bearings					
Bearing type			Deep-groove ball bearing with high-temperature resistant grease, sealing disc or cover plate		
Position of the locating bearing			Drive end Standard motors (B3, B5, B14): side B Motors for gearbox direct mounting: side A		
Installation of the locating bearing					
Colour			RAL9005M		

¹⁾ Not possible for UR version.

MCA asynchronous servo motors



General information

Functions and features

	MCA20	MCA21	MCA22	MCA26
Design	B3 B35-FF215 B35-FF265	B14-FT130 B5-FF215 B5-FF265	B3 B35-FF265	B3 B35-FF265 B35-FF350
Shaft end (with and without keyway)		38 x 80		55 x 110
A end shield		Oil-tight Not oil-tight		
Brake				
Spring-applied brake	DC 24 V AC 230 V ¹⁾			DC 24 V AC 230 V ¹⁾
Permanent magnetic brake		DC 24 V AC 230 V ¹⁾ DC 205 V ¹⁾		
Speed and angle encoder		Resolver SinCos single-turn/multi-turn Incremental encoder		
Cooling				
Without blower		Naturally ventilated		
Axial blower, 1 phase	230 V; 50 Hz 230 V; 60 Hz	230 V; 50 Hz		230 V; 50 Hz 230 V; 60 Hz
Thermal sensor				
Thermal detector		KTY		
Motor connection: plug connector		Power + brake Encoder + thermal sensor Blower		
Motor connection: terminal box		Power + brake Encoder + thermal sensor + blower		
Motor connection: Terminal box + plug connector				
Terminal box	Power + brake	Power + brake Encoder + thermal sensor		Power + brake
Plug connector	Encoder + thermal sensor Blower	Blower		Encoder + thermal sensor Blower
Shaft bearings				
Bearing type	Deep-groove ball bearing with high-temperature resistant grease, sealing disc or cover plate			
Position of the locating bearing	Non-drive end	Drive end Standard motors (B3, B5, B14): side B Motors for gearbox direct mounting: side A		Non-drive end
Installation of the locating bearing	insulation			insulation
Colour	RAL9005M			

¹⁾ Not possible for UR version.

MCA asynchronous servo motors



General information

Dimensioning

Speed-dependent safety functions

Single encoder concepts with resolvers

Servo motors can perform speed-dependent safety functions for safe speed and / or safe relative position monitoring in a drive system with the Servo Drives 9400. The SM301 safety module, which can be integrated in the Servo Drives 9400, is used to implement these functions. When planning systems/installations of this kind, the following must always be observed:

When using just one single feedback system in the environment of these safety applications, the applicable safety engineering standard IEC 61800-5-2 [Adjustable speed electrical power drive systems - Part: 5-2: Safety requirements - Functional] stipulates special requirements for the connection between feedback system and motor shaft. This is due to the fact that two-channel safety systems at this point in the mechanical system are actually designed as single-channel systems. If this mechanical connection is designed with considerable overdimensioning, the standard permits exclusion of the fault "encoder-shaft breakage" or "encoder-shaft slip".

As such, acceleration limit values must not be exceeded for the individual drive solutions. You can find the limit values in the corresponding feedback data of the individual motor ranges.

Speed-dependent safety functions in connection with the SM301 safety module

For the following speed-dependent safety functions, the motor-feedback system combinations listed in the following table are available:

- Safe stop 1 (SS1)
- Safe operational stop (SOS)
- Safely Limited Speed (SLS)
- Safe Maximum Speed (SMS)

- Safe direction (SDI)
- Operation mode selector (OMS) with confirmation (ES)
- Safe speed monitor (SSM)
- Safely limited increment (SLI).

Encoder type	Encoder type	Product key	Feedback	Safe speed monitoring
			Design	
SinCos incremental	Single-turn	IG1024-5V-V3		PL e/SIL 3
Resolver		RV03	2-encoder concept	up to PL e / SIL 3

MCA asynchronous servo motors

General information



Dimensioning

Cooling effect of mounting flange

Mounting on a thermally conducting / insulating plate or machine chassis has an influence on heating up the motor, particularly when using naturally ventilated motors.

The motor rating data specified in the catalogue applies when mounting on a steel plate with free convection with the following dimensions:

- MCA10 / 13: 270 x 270 mm
- MCA14 / 17: 330 x 330 mm
- MCA19 to 26: 450 x 450 mm

Vibrational severity

		MCA10	MCA13	MCA14	MCA17	MCA19	MCA20	MCA21	MCA22	MCA26
Vibrational severity										
IEC/EN 60034-14		A		B		A	B		A	
Maximum r.m.s. value of the vibration velocity ¹⁾	[mm/s]	1.60		0.70		1.60	0.70		1.60	

¹⁾ Free suspension

► at n = 600 to 3,600 rpm


MCA asynchronous servo motors



General information

Dimensioning

Concentricity and axial run-out of the mounting flanges and smooth running of the shaft ends

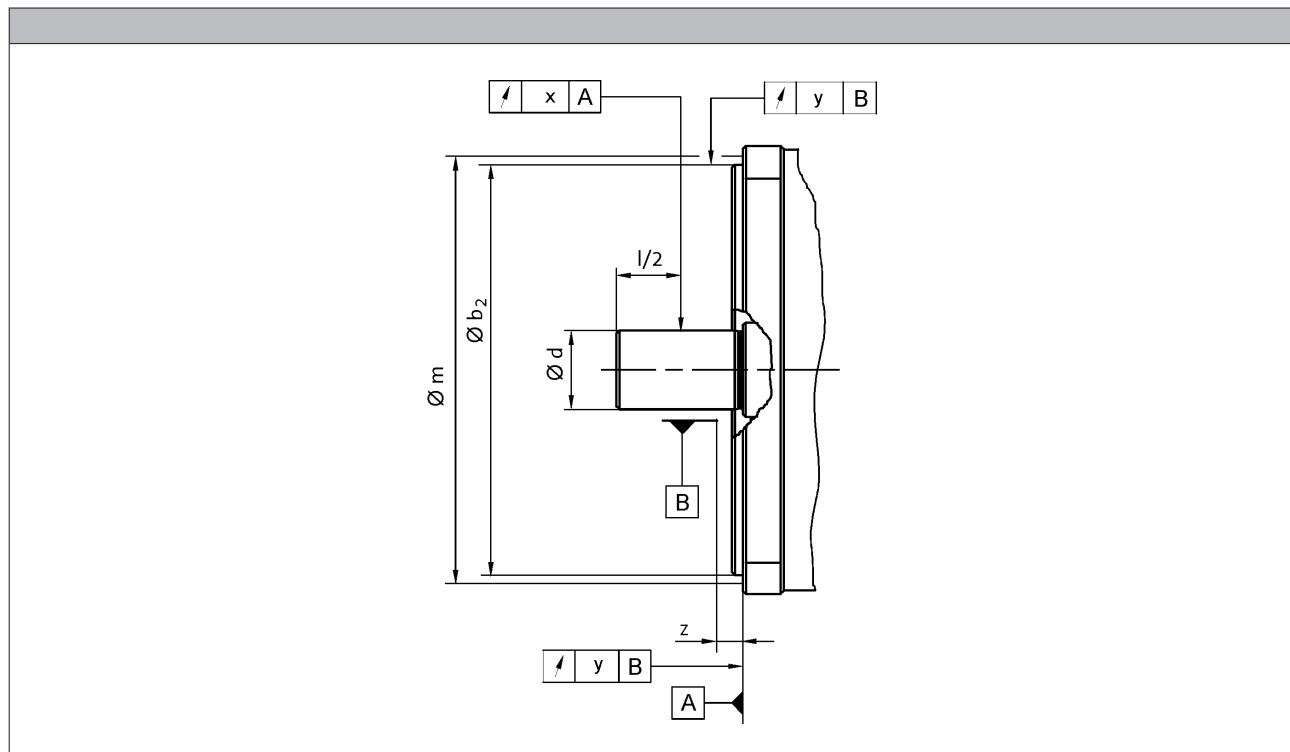

			MCA10	MCA13	MCA14	MCA17	MCA19
Flange size			FF100	FT85	FF130	FT130	FF165
Dimensions			80	70	110	130	110
	b ₂	j6	[mm]				
	b ₂	h6	[mm]				
	d	k6	[mm]	14	19		24
	d	m6	[mm]				28
Distance							
Measuring diameter	m		[mm]	113	98.0	149	188
Dial gauge holder for flange check	z	+/- 1	[mm]			10.0	149
Concentricity							
IEC 60072				Normal class		Precision class	
Value	y		[mm]	0.080	0.10		0.050
Linear movement							
IEC 60072				Normal class		Precision class	
Value	y		[mm]	0.080	0.10		0.050
Smooth running							
IEC 60072				Normal class		Precision class	
Value	x		[mm]	0.035	0.040		0.021

- Limit values for checking the smooth running of the shaft ends as well as the concentricity and axial run-out of the mounting flange to IEC 60072

MCA asynchronous servo motors



General information

Dimensioning

Concentricity and axial run-out of the mounting flanges and smooth running of the shaft ends

			MCA20		MCA21			MCA22		MCA26	
Flange size			FF215	FF265	FF215	FF265	FT130	FF265	FF350		
Dimensions			b ₂	j6 [mm]	180	230	180	230	110	230	
			b ₂	h6 [mm]							300
			d	k6 [mm]			38				
			d	m6 [mm]							55
Distance											
Measuring diameter	m		[mm]	239	289	239	289	149	289	384	
Dial gauge holder for flange check	z	+/- 1	[mm]			10.0					
Concentricity					Normal class	Precision class		Normal class			
IEC 60072											
Value	y		[mm]	0.10		0.050		0.10			
Linear movement					Normal class	Precision class		Normal class			
IEC 60072											
Value	y		[mm]	0.10		0.050		0.10			
Smooth running					Normal class	Precision class		Normal class			
IEC 60072											
Value	x		[mm]	0.050		0.060		0.050	0.060		

- Limit values for checking the smooth running of the shaft ends as well as the concentricity and axial run-out of the mounting flange to IEC 60072


MCA asynchronous servo motors



General information

Dimensioning

Notes on the selection tables

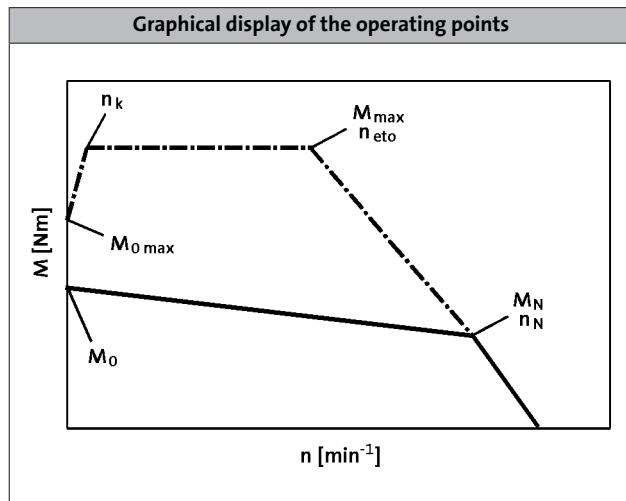

Please note:

- With an active load (e.g. vertical drive axes, hoists, test benches, unwinders), $M_0 \text{ max}$ must be taken into account
- With a passive load (e.g. horizontal drive axes), M_{max} can generally be used
- At speeds $< n_k$, the inverter-specific torque $M_0 \text{ max}$ that can be achieved is lower than M_{max}
- On the servo inverters, the switching frequency-dependent overload capacity has been taken into account in the factory settings. For further information, please refer to the Servo-Inverters catalogue.

	n_k [r/min]
MCA	150
MQA	

Further selection tables with different switching frequencies are available with the following codes:

- DS_ZT_MCS_0001
- DS_ZT_MCA_0001
- DS_ZT_MDSKS_0001
- DS_ZT_MDFKS_0001

Simply enter this code (e.g. DS_ZT_MCS_0001) as a search string at www.lenze.de/dsc and you will be given the information immediately in the form of a PDF format.


MCA asynchronous servo motors



General information

Dimensioning

Notes on the torque characteristics

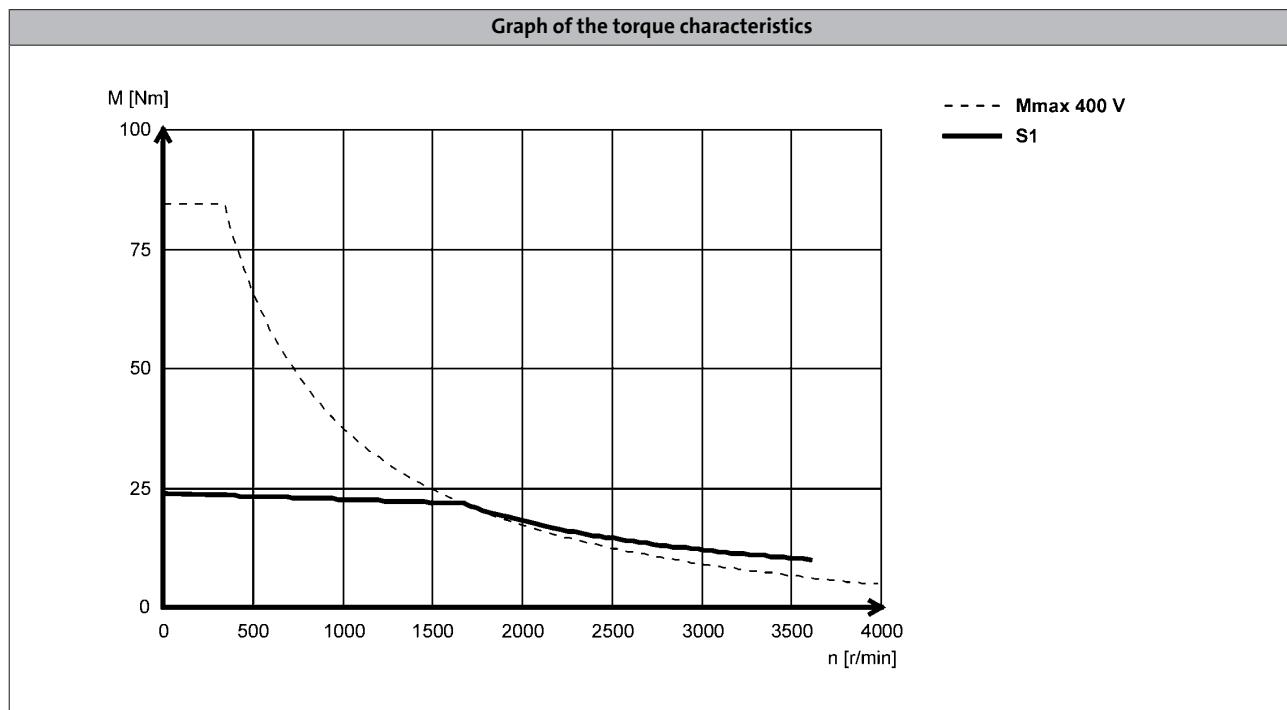

With asynchronous servo motors, two characteristics are shown in each case. The characteristics for continuous operation (S1) show the speed-dependent constant torque of the motor when operating with a servo inverter that itself is operated at a constant switching frequency. The limit torque characteristics correspond to those that come about during operation of the motor with the largest possible 9400 Servo Drive in each case (see selection tables). The servo inverter is set to a variable switching frequency here.

Characteristics in the Internet

You can find the torque characteristic for inverter-motor combinations on the Internet at www.lenze.de/dsc. This lists all useful combinations with the servo inverters 9400, 9300, ECS and Inverter Drives 8400 TopLine. These characteristics are each determined using the factory default settings of the inverters:

- 9400 with variables switching frequency.
This means that up to 6-fold overcurrent can be applied in borderline cases.
- 9300 and ECS with fixed switching frequency.
- 8400 TopLine with variables switching frequency.

The continuous operation characteristics (S1) show the inverter-independent motor rating values

Further information on the terms switching frequency and factory default settings can be found in the operating manual of the respective servo inverter.

MCA asynchronous servo motors




General information

Dimensioning

Influence of ambient temperature and site altitude

The information relating to the servo motors in the tables and graphs is valid for a maximum ambient temperature (T_{opr}) of 40 °C and a site altitude (H) up to 1000 m above sea level. The torque correction factor (k_{M1}) shall be applied to the S1 torque characteristic ($M_0 \dots M_N$) in the event of differing installation conditions.

- The maximum permissible ambient temperature (T_{opr}) for servo motors with blowers is 40 °C

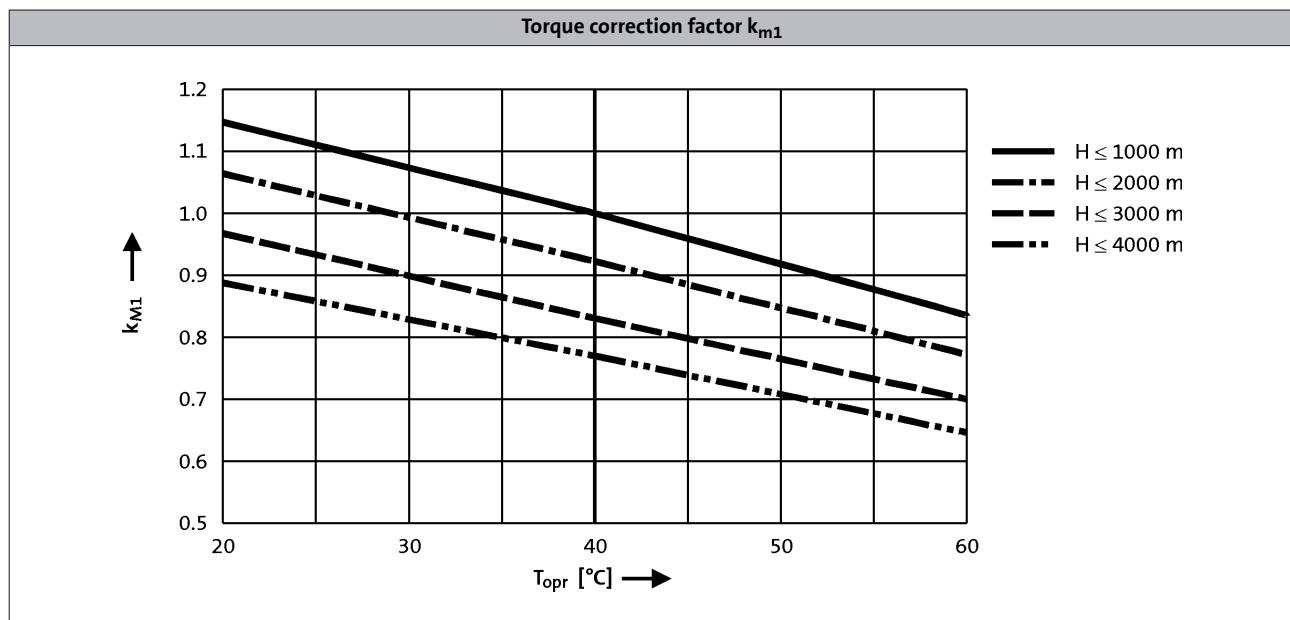

MCA asynchronous servo motors

General information



MCA asynchronous servo motors

Technical data



Standards and operating conditions

MCA			
Cooling type		Naturally ventilated	Blower
Enclosure			
EN 60529		IP54 IP65	IP54 IP23s ²⁾
Temperature class			
IEC/EN 60034-1; utilisation		F	
IEC/EN 60034-1; insulation system (enamel-insulated wire)		H	
Conformity			
CE		Low-Voltage Directive 2006/95/EC	
EAC		TP TC 004/2011 (TR C)	
Approval			
CSA		CSA 22.2 No. 100	
cURus ³⁾		UL 1004-1 UL 1004-6 Power Conversion Equipment (File-No. E210321)	
Max. voltage load			
IEC/TS 60034-25		Pulse voltage limiting curve A	
Smooth running			
IEC 60072		Precision class ¹⁾ Normal class	
Linear movement			
IEC 60072		Precision class ¹⁾ Normal class	
Concentricity			
IEC 60072		Precision class ¹⁾ Normal class	
Mechanical ambient conditions (vibration)			
IEC/EN 60721-3-3		3M6 3M6	
Min. ambient operating temperature			
Without brake	T _{opr,min}	[°C]	-20
With brake	T _{opr,min}	[°C]	-10
Max. ambient temperature for operation			
	T _{opr,max}	[°C]	40
Max. surface temperature			
	T	[°C]	140
			110
Mechanical tolerance			
Flange centring diameter			b ₂ ≤ 230 mm = j6 b ₂ > 230 mm = h6
Shaft diameter			d ≤ 50 mm = k6 d > 50 mm = m6
Site altitude			
Amsl	H _{max}	[m]	4000

¹⁾ MCA14, 17, 19 and 21.

²⁾ MCA20, 22 and 26.


³⁾ MCA20X29, MCA21X35 with circular connector for motor connection only
UR

MCA asynchronous servo motors



Technical data

Permissible radial and axial forces

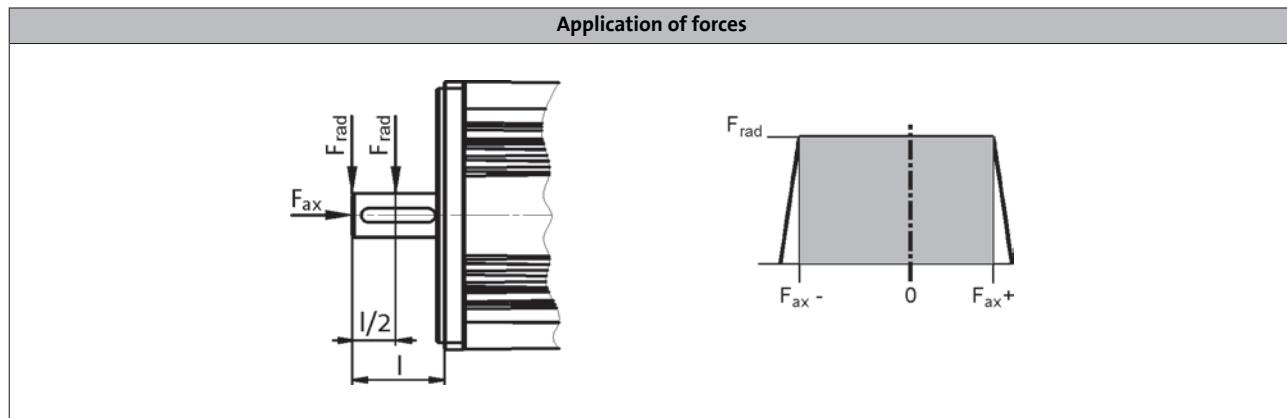

Application of force at $l/2$

	Bearing service life L_{10}												
	5000 h		10000 h		20000 h		30000 h		50000 h				
	F_{rad} [N]	$F_{\text{ax},-}$ [N]	$F_{\text{ax},+}$ [N]	F_{rad} [N]	$F_{\text{ax},-}$ [N]	$F_{\text{ax},+}$ [N]	F_{rad} [N]	$F_{\text{ax},-}$ [N]	$F_{\text{ax},+}$ [N]	F_{rad} [N]	$F_{\text{ax},-}$ [N]	$F_{\text{ax},+}$ [N]	
MCA10	630	-130	320	500	-60	250	400	-30	210	330	-10	190	230
MCA13	850	-110	570	700	-10	450	470	0	450	0	450		
MCA14	1000	-140	500	780	-60	420	550	-30	380	400	-10	360	250
MCA17	1380	-180	790	1040	-70	680	660	-40	650	440	-20	630	280
MCA19	1880	-50	1530	1080	-30	1510	500	-100	1490	160	0	1470	
MCA20	3400	-1330	690	2500	-1020	380	1950	-780	140	1700	-690	40	
MCA21	3200	-260	1740	2360	-70	1550	1470	-20	1504	1030	0	1480	
MCA22	3600	-2370	1700	2800	-1740	1090	2200	-1280	640	1900	-1080	440	1600
MCA26	6950	-2500	1580	5400	-1800	880	4300	-1300	380	3700	-1090	160	

Application of force at l

	Bearing service life L_{10}												
	5000 h		10000 h		20000 h		30000 h		50000 h				
	F_{rad} [N]	$F_{\text{ax},-}$ [N]	$F_{\text{ax},+}$ [N]	F_{rad} [N]	$F_{\text{ax},-}$ [N]	$F_{\text{ax},+}$ [N]	F_{rad} [N]	$F_{\text{ax},-}$ [N]	$F_{\text{ax},+}$ [N]	F_{rad} [N]	$F_{\text{ax},-}$ [N]	$F_{\text{ax},+}$ [N]	
MCA10	590	-130	320	470	-60	250	370	-30	210	310	-10	190	220
MCA13	780	-110	570	640	-10	450	430	0	450	300	0	450	
MCA14	930	-140	500	710	-60	420	490	-30	380	370	-10	360	230
MCA17	1270	-180	790	960	-70	680	610	-40	650	400	-20	630	260
MCA19	1740	-50	1530	1000	-30	1510	420	-100	1490	140	0	1470	
MCA20	3150	-1170	530	2300	-920	280	1800	-710	70	1400	-650	0	
MCA21	2940	-260	1740	2160	-70	1550	1350	-20	1504	950	0	1480	
MCA22	3500	-2240	1600	2600	-1640	1100	2050	-1200	560	1800	-1020	380	1450
MCA26	6400	-2080	1150	5000	-1600	680	4000	-1160	230	3400	-1090	50	

- The values for the bearing service life L_{10} relate to an average speed of 4000 r/min. For MCA20/22/26 the speed is 3000 r/min. Depending on the ambient temperatures, the service life of the bearings is also reduced by the grease lifetime.


MCA asynchronous servo motors



Technical data

Permissible radial and axial forces

- Reinforced bearings

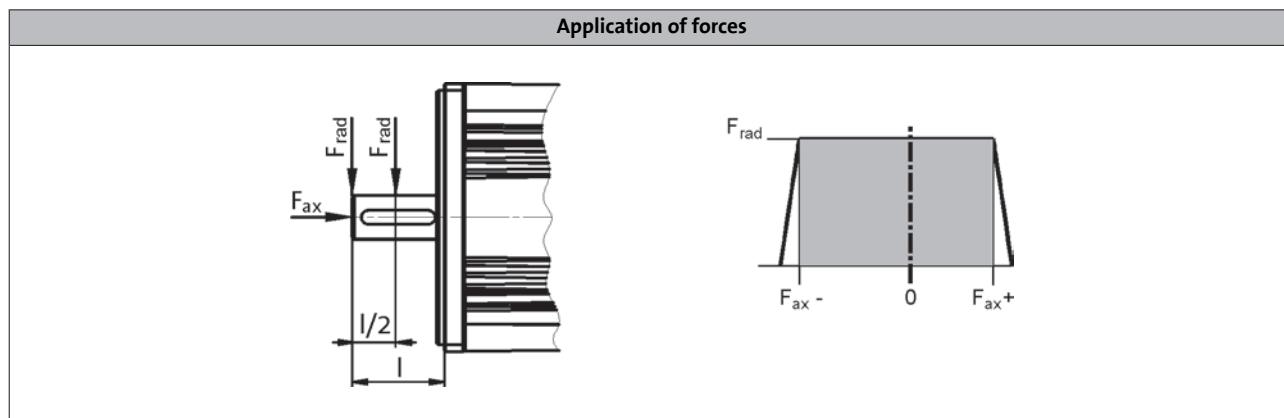

Application of force at $l/2$

Bearing service life L_{10}															
	5000 h			10000 h			20000 h			30000 h			50000 h		
	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]												
MCA20	7100	-970	330	5100	-800	160	3900	-640	0						
MCA22	8500	-1850	1200	7000	-1400	760	5600	-1030	390	4350	-930	290	3200	-800	160
MCA26	10500	-2180	1250	8370	-1530	600	6670	-1130	200	5840	-960	30			

Application of force at l

Bearing service life L_{10}															
	5000 h			10000 h			20000 h			30000 h			50000 h		
	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]												
MCA20	6350	-720	80	4100	-680	40	2800	-640	0						
MCA22	7000	-1750	1100	5500	-1300	660	4700	-920	280	3900	-820	180	3000	-700	60
MCA26	9600	-2200	1280	7700	-1280	360	6000	-960	30						

- The values for the bearing service life L_{10} refer to an average speed of 3000 r/min. Depending on the ambient temperatures, the service life of the bearings is also reduced by the grease lifetime.

MCA asynchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.


	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	$U_{N, AC}$ [V]	f_N [Hz]	$J^{1)}$ [kgcm ²]	$\eta_{100\%}$ [%]
MCA10I40	3950	2.30	2.00	10.0	0.80	2.60	2.40	390	140	2.40	0.70
MCA13I41	4050	4.60	4.00	32.0	1.70	4.60	4.40	390	140	8.30	75.0
MCA14L20	2000	8.00	6.70	60.0	1.40	3.90	3.30	390	70	19.2	84.0
MCA14L41	4100	8.00	5.40	60.0	2.30	7.70	5.80	390	140	19.2	78.0
MCA17N23	2300	12.8	10.8	100	2.60	6.00	5.50	390	80	36.0	86.0
MCA17N41	4110	12.8	9.50	100	4.10	12.0	10.2	350	140	36.0	83.0
MCA19S23	2340	22.5	16.3	180	4.00	9.90	8.20	390	80	72.0	90.0
MCA19S42	4150	22.5	12.0	180	5.20	19.7	14.0	330	140	72.0	83.0
MCA21X25	2490	39.0	24.6	300	6.40	15.9	13.5	390	85	180	85.0
MCA21X42	4160	39.0	17.0	300	7.40	31.8	19.8	320	140	180	84.0

	R_1 [Ω]	$R_{UV\ 20^\circ C}$ [Ω]	$R_{UV\ 150^\circ C}$ [Ω]	R_2 [Ω]	$L_{1\sigma}$ [mH]	L [mH]	$L_{2\sigma'}$ [mH]	$n_{max}^{2)}$ [r/min]	$m^{1)}$ [kg]
MCA10I40	4.70	9.40	12.7	5.20	9.80	169	10.0	8000	6.40
MCA13I41	1.70	3.40	4.60	1.41	5.40	92.6	4.90		10.4
MCA14L20	3.00	6.00	8.10	3.13	10.0	269	10.0		15.1
MCA14L41	0.75	1.50	2.00	0.78	2.50	65.8	2.50		22.9
MCA17N23	1.52	3.04	4.10	1.37	6.20	176	6.80		44.7
MCA17N41	0.38	0.76	1.00	0.34	1.50	43.4	1.70		60.0
MCA19S23	0.69	1.38	1.90	0.62	3.20	111	3.90		
MCA19S42	0.18	0.35	0.50	0.15	0.80	28.0	1.00		
MCA21X25	0.36	0.72	1.00	0.36	2.30	78.1	2.80		
MCA21X42	0.090	0.18	0.20	0.090	0.60	19.5	0.70		

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

The data in the R_1 , $L_{1\sigma}$, L , R_2 ' and $L_{2\sigma'}$ columns is based on a single-phase equivalent circuit diagram at 20°C.

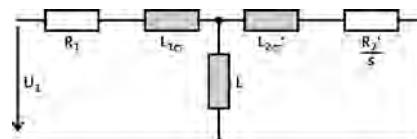

MCA asynchronous servo motors



Technical data

Rated data, IP54 forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.


	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	$U_{N, AC}$ [V]	f_N [Hz]	$J^1)$ [kgcm ²]	$\eta_{100\%}$ [%]
MCA13I34	3410	7.00	6.30	32.0	2.20	6.30	6.00	390	120	8.30	72.0
MCA14L16	1635	13.5	12.0	60.0	2.10	5.30	4.80	390	60	19.2	80.0
MCA14L35	3455	13.5	10.8	60.0	3.90	10.5	9.10	390	120	19.2	79.0
MCA17N17	1680	23.9	21.5	100	3.80	9.10	8.50	390	60	36.0	83.0
MCA17N35	3480	23.9	19.0	100	6.90	18.1	15.8	390	120	36.0	81.0
MCA19S17	1700	40.0	36.3	180	6.40	15.4	13.9	390	60	72.0	82.0
MCA19S35	3510	40.0	36.0	180	13.2	30.8	28.7	390	120	72.0	85.0
MCA21X17	1710	75.0	61.4	300	11.0	25.8	22.5	390	60	180	85.0
MCA21X35	3520	75.0	55.0	300	20.3	49.5	42.5	390	120	180	88.0
MCA22P08...5F□□	760	120	110	500	8.75	23.4	22.1	345	28	487	80.0
MCA22P14...5F□□	1425	120	107	500	16.0	40.5	37.7	350	50	487	87.0
MCA22P17...5F□□	1670	120	106	500	18.5	46.7	42.7	360	58	487	88.0
MCA22P29...5F□□	2935	120	100	500	30.7	80.9	72.1	360	100	487	87.0
MCA26T05...5F□□	550	220	216	1100	12.4	35.4	34.9	350	19	1335	83.0
MCA26T10...5F□□	1030	220	210	1100	22.7	62.9	61.5	350	36	1335	88.0
MCA26T12...5F□□	1200	220	207	1100	26.0	78.4	75.1	350	41	1335	87.0
MCA26T22...5F□□	2235	220	195	1100	45.6	125	113	340	76	1335	92.0

	R_1 [Ω]	$R_{UV\ 20^\circ C}$ [Ω]	$R_{UV\ 150^\circ C}$ [Ω]	R_2 [Ω]	$L_{1\sigma}$ [mH]	L [mH]	$L_{2\sigma}$ [mH]	$n_{max}^{2)}$ [r/min]	$m^1)$ [kg]	
MCA13I34	1.70	3.40	4.60	1.41	4.90	76.7	4.40	8000	12.0	
MCA14L16	3.00	6.00	8.10	3.13	9.50	224	9.30		16.9	
MCA14L35	0.75	1.50	2.00	0.78	2.40	56.7	2.30		25.5	
MCA17N17	1.52	3.04	4.10	1.37	5.60	144	6.00		48.2	
MCA17N35	0.38	0.76	1.00	0.34	1.40	36.9	1.50		63.5	
MCA19S17	0.69	1.38	1.90	0.62	2.60	80.9	3.10			
MCA19S35	0.18	0.35	0.50	0.15	0.70	20.3	0.80			
MCA21X17	0.36	0.72	1.00	0.36	2.10	68.9	2.60			
MCA21X35	0.090	0.18	0.20	0.090	0.50	16.8	0.60	6500		
MCA22P08...5F□□	0.54	1.07	1.62	0.48	3.56	94.9	4.80			
MCA22P14...5F□□		0.36	0.54		3.60	94.2	4.85		105	
MCA22P17...5F□□	0.13	0.27	0.40	0.12	0.90	23.4	1.21	194		
MCA22P29...5F□□		0.080	0.12		0.90	22.9				
MCA26T05...5F□□	0.29	0.59	0.89	0.25	2.86	66.8	5.04			
MCA26T10...5F□□		0.20	0.30		2.93	69.2	5.12			
MCA26T12...5F□□	0.080	0.15	0.23	0.062	0.74	18.1	1.29			
MCA26T22...5F□□		0.050	0.075		0.78	19.8				

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

The data in the R_1 , $L_{1\sigma}$, L , R_2 and $L_{2\sigma}$ columns is based on a single-phase equivalent circuit diagram at 20°C.

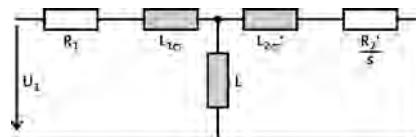

MCA asynchronous servo motors



Technical data

Rated data, IP23s forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.


	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	$U_{N, AC}$ [V]	f_N [Hz]	$J^1)$ [kgcm ²]	$\eta_{100\%}$ [%]
MCA20X14...2F□□	1420	68.0	61.0	250	9.07	26.0	23.0	350	50	171	82.0
MCA20X29...2F□□	2930	68.0	53.5	250	16.4	52.0	42.4	350	100	171	87.0
MCA22P08...2F□□	760	135	120	500	9.55	26.0	23.5	355	28	487	80.0
MCA22P14...2F□□	1425	135	115	500	17.2	45.1	40.0	360	50	487	86.0
MCA22P17...2F□□	1670	135	112	500	19.6	52.1	44.5	360	58	487	88.0
MCA22P29...2F□□	2935	135	110	500	33.8	90.2	77.8	360	100	487	89.0
MCA26T05...2F□□	550	290	280	1100	16.1	44.0	42.4	350	20	1335	81.0
MCA26T10...2F□□	1030	290	260	1100	28.0	78.0	69.6	350	36	1335	87.0
MCA26T12...2F□□	1200	290	255	1100	32.0	101	83.3	350	41	1335	87.0
MCA26T22...2F□□	2235	290	230	1100	53.8	160	127	340	76	1335	92.0

	R_1 [Ω]	$R_{UV\ 20^\circ C}$ [Ω]	$R_{UV\ 150^\circ C}$ [Ω]	R_2 [Ω]	$L_{1\sigma}$ [mH]	L [mH]	$L_{2\sigma}$ [mH]	$n_{max}^{2)}$ [r/min]	$m^1)$ [kg]		
MCA20X14...2F□□	0.37	0.73	1.10	0.36	2.01	60.2	2.14	6500	64.0		
MCA20X29...2F□□	0.090	0.18	0.28	0.090	0.50	14.3	0.54				
MCA22P08...2F□□	0.54	1.07	1.62	0.48	3.50	91.9	4.74				
MCA22P14...2F□□		0.36	0.54		3.55	90.9	4.79				
MCA22P17...2F□□	0.13	0.27	0.40	0.12	0.90	23.5	1.22				
MCA22P29...2F□□		0.080	0.12			22.9	1.21				
MCA26T05...2F□□	0.29	0.59	0.89	0.25	3.11	72.1	5.08				
MCA26T10...2F□□		0.20	0.30		3.17	71.4	5.14				
MCA26T12...2F□□	0.080	0.15	0.23	0.062	0.78	18.6	1.30				
MCA26T22...2F□□		0.050	0.077			20.2					

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

The data in the R_1 , $L_{1\sigma}$, L , R_2 ' and $L_{2\sigma}'$ columns is based on a single-phase equivalent circuit diagram at 20°C.

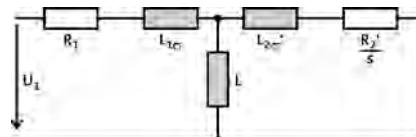

MCA asynchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
MCA	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
					I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
					M ₀	1.1	2.3							
					M _N	1.0	2.0							
					M _{0,max}	6.9	10.0							
					M _{max}	6.9	10.0							
					n _{eto}	-	-							
10I40	2.0	3950	2.4	0.80	M ₀			4.6	4.6					
13I41	4.0	4050	4.4	1.70	M _N			4.0	4.0					
					M _{0,max}			18.9	20.8					
					M _{max}			18.9	20.8					
					n _{eto}			-	-					
14L20	6.7	2000	3.3	1.40	M ₀			5.1	8.0					
14L41	5.4	4100	5.8	2.30	M _N			4.4	6.7					
					M _{0,max}			25.0	42.8					
					M _{max}			25.0	42.8					
					n _{eto}			-	-					
17N23	10.8	2300	5.5	2.60	M ₀			3.5	8.0	8.0				
17N41	9.5	4110	10.2	4.10	M _N			3.5	5.4	5.4				
					M _{0,max}			21.5	27.0	31.3				
					M _{max}			21.5	27.0	31.3				
					n _{eto}			-	-	-				
19S23	16.3	2340	8.2	4.00	M ₀				7.1	11.5	12.8	12.8		
19S42	12.0	4150	14.0	5.20	M _N				6.7	9.5	9.5	9.5		
					M _{0,max}				24.0	33.3	45.8	49.9		
					M _{max}				24.0	33.3	45.8	49.9		
					n _{eto}				-	-	-	-		
21X25	24.6	2490	13.5	6.40	M ₀					18.4	22.5	22.5		
21X25	24.6	2490	13.5	6.40	M _N					15.6	16.3	16.3		
					M _{0,max}					55.0	73.7	86.0		
					M _{max}					55.0	73.7	86.0		
					n _{eto}					-	-	-		
					M ₀						21.4	39.0	39.0	39.0
					M _N						19.6	24.6	24.6	24.6
					M _{0,max}						71.7	96.0	126.0	136.0
					M _{max}						71.7	96.0	126.0	136.0
					n _{eto}						-	-	-	-

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
			I _N		I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
			I _{0,max}		I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
			I _{max}		I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
			M ₀		M ₀								31.3	39.0
			M _N		M _N								17.0	17.0
			M _{0,max}		M _{0,max}								71.7	91.0
			M _{max}		M _{max}								71.7	91.0
			n _{eto}		n _{eto}								-	-
21X42	17.0	4160	19.8	7.40										

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594	E0864
MCA	M _N	n _N	I _N	P _N	I _N	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0	86.0
					I _{0,max}	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0	172.0
					I _{max}	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0	172.0
					M ₀	4.6	7.0	7.0							
					M _N	4.4	6.3	6.3							
					M _{0,max}	20.8	26.0	29.2							
					M _{max}	20.8	26.0	29.2							
					n _{eto}	-	-	-							
					M ₀	12.0	13.5								
					M _N	12.0	12.0								
					M _{0,max}	45.4	52.6								
					M _{max}	45.4	52.6								
					n _{eto}	-	-								
					M ₀	10.1	13.5	13.5							
					M _N	9.7	10.8	10.8							
					M _{0,max}	32.4	46.0	60.0							
					M _{max}	32.4	46.0	60.0							
					n _{eto}	-	-	-							
					M ₀	21.6	23.9	23.9							
					M _N	21.5	21.5	21.5							
					M _{0,max}	59.4	81.4	84.5							
					M _{max}	59.4	81.4	84.5							
					n _{eto}	-	-	-							
					M ₀				19.4	23.9	23.9				
					M _N				19.0	19.0	19.0				
					M _{0,max}				59.2	75.0	90.0				
					M _{max}				59.2	75.0	90.0				
					n _{eto}				-	-	-				
					M ₀				40.0	40.0	40.0				
					M _N				36.3	36.3	36.3				
					M _{0,max}				105.0	133.0	148.0				
					M _{max}				105.0	133.0	148.0				
					n _{eto}				-	-	-				
					M ₀					36.9	40.0	40.0	40.0		
					M _N					36.0	36.0	36.0	36.0		
					M _{0,max}					82.0	112.0	132.0	160.0		
					M _{max}					82.0	112.0	132.0	160.0		
					n _{eto}					-	-	-	-		
					M ₀					54.4	75.0	75.0	75.0		
					M _N					50.4	61.4	61.4	61.4		
					M _{0,max}					134.0	158.0	215.0	246.0		
					M _{max}					134.0	158.0	215.0	246.0		
					n _{eto}					-	-	-	-		
					M ₀						63.9	75.0	75.0		
					M _N						55.0	55.0	55.0		
					M _{0,max}						134.0	167.0	232.0		
					M _{max}						134.0	167.0	232.0		
					n _{eto}						-	-	-		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E94A□□	E0174	E0244	E0324	E0474	E0594	E0864	E1044	E1454	E1724	E2024	E2454	
MCA	M _N	n _N	I _N	P _N	I _N	16.5	23.5	32.0	41.0	41.0	73.0	78.0	102.0	120.0	131.0	160.0	
22P08-...5F□□	110.0	760	22.1	8.80	I _{0,max}	49.5	58.8	76.8	94.0	118.0	172.0	208.0	261.0	310.0	364.0	441.0	
					I _{max}	49.5	58.8	76.8	94.0	118.0	172.0	208.0	261.0	310.0	364.0	441.0	
					M ₀	64.0	110.0	120.0									
					M _N	64.0	110.0	110.0									
					M _{0,max}	261.0	313.0	402.0									
					M _{max}	261.0	313.0	402.0									
					n _{eto}	-	-	-									
22P14-...5F□□	107.0	1425	37.7	16.00	M ₀			82.0	120.0	120.0							
					M _N			82.0	107.0	107.0							
					M _{0,max}			242.0	300.0	372.0							
					M _{max}			242.0	300.0	372.0							
					n _{eto}			-	-	-							
22P17-...5F□□	105.0	1670	42.7	18.50	M ₀				99.0	120.0							
					M _N				99.0	106.0							
					M _{0,max}				325.0	463.0							
					M _{max}				325.0	463.0							
					n _{eto}				-	-							
22P29-...5F□□	100.0	2935	72.1	30.70	M ₀						110.0	120.0	120.0				
					M _N						100.0	100.0	100.0				
					M _{0,max}						335.0	416.0	465.0				
					M _{max}						335.0	416.0	465.0				
					n _{eto}						-	-	-				
26T05-...5F□□	216.0	550	34.9	12.40	M ₀			191.0	220.0	220.0	220.0						
					M _N			191.0	216.0	216.0	216.0						
					M _{0,max}			531.0	665.0	826.0	1010.0						
					M _{max}			531.0	665.0	826.0	1010.0						
					n _{eto}			-	-	-	-						
26T10-...5F□□	210.0	1030	61.5	22.70	M ₀				77.0	220.0	220.0	220.0					
					M _N				77.0	210.0	210.0	210.0					
					M _{0,max}				472.0	713.0	855.0	1044.0					
					M _{max}				472.0	713.0	855.0	1044.0					
					n _{eto}				-	-	-	-					
26T12-...5F□□	207.0	1200	75.1	26.00	M ₀					204.0	219.0	220.0	220.0				
					M _N					204.0	207.0	207.0	207.0				
					M _{0,max}					502.0	609.0	739.0	819.0				
					M _{max}					502.0	609.0	739.0	819.0				
					n _{eto}					-	-	-	-				
26T22-...5F□□	195.0	2235	112.9	45.60	M ₀						154.0	211.0	220.0	220.0			
					M _N						154.0	195.0	195.0	195.0			
					M _{0,max}						523.0	611.0	711.0	843.0			
					M _{max}						523.0	611.0	711.0	843.0			
					n _{eto}						-	-	-	-			

- I... [A], M... [Nm], n... [r/min], P... [kW]
- If the motors are operated at a lower switching frequency, please contact your Lenze sales office!
- When operating at 4 kHz, the motor generates just 95 % of its rated torque with increased noise emissions.

MCA asynchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP23s motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E94A□□	E0174	E0244	E0324	E0474	E0594	E0864	E1044	E1454	E1724	E2024	E2454	E2924
MCA	M _N	n _N	I _N	P _N	I _N	16.5	23.5	32.0	41.0	41.0	73.0	78.0	102.0	120.0	131.0	160.0	191.0
					I _{0,max}	49.5	58.8	76.8	94.0	118.0	172.0	208.0	261.0	310.0	364.0	441.0	526.0
20X14-...2F□□	61.0	1420	23.0	9.10	M ₀	32.5	66.0										
					M _N	32.5	61.0										
					M _{0,max}	154.2	190.0										
					M _{max}	154.2	190.0										
					n _{eto}	-	-										
20X29-...2F□□	53.5	2930	42.4	16.40	M ₀			28.0	51.6	51.6							
					M _N			28.0	51.6	51.6							
					M _{0,max}			116.0	148.2	192.8							
					M _{max}			116.0	148.2	192.8							
					n _{eto}			-	-	-							
22P08-...2F□□	120.0	760	23.5	9.60	M ₀			120.0	135.0								
					M _N			120.0	120.0								
					M _{0,max}			313.0	402.0								
					M _{max}			313.0	402.0								
					n _{eto}			-	-								
22P14-...2F□□	115.0	1425	40.0	17.20	M ₀				118.0	118.0							
					M _N				115.0	115.0							
					M _{0,max}				300.0	372.0							
					M _{max}				300.0	372.0							
					n _{eto}				-	-							
22P17-...2F□□	112.0	1670	44.5	19.60	M ₀					99.0	135.0						
					M _N					99.0	112.0						
					M _{0,max}					325.0	463.0						
					M _{max}					325.0	463.0						
					n _{eto}					-	-						
22P29-...2F□□	110.0	2935	77.8	33.80	M ₀						110.0	135.0	135.0				
					M _N						110.0	110.0	110.0				
					M _{0,max}						335.0	416.0	486.0				
					M _{max}						335.0	416.0	486.0				
					n _{eto}						-	-	-				
26T05-...2F□□	280.0	550	42.4	16.10	M ₀				268.0	268.0	290.0						
					M _N				268.0	268.0	280.0						
					M _{0,max}				665.0	826.0	1100.0						
					M _{max}				665.0	826.0	1100.0						
					n _{eto}				-	-	-						
26T10-...2F□□	260.0	1030	69.6	28.00	M ₀					270.0	290.0	290.0					
					M _N					260.0	260.0	260.0					
					M _{0,max}					713.0	855.0	1044.0					
					M _{max}					713.0	855.0	1044.0					
					n _{eto}					-	-	-					

- I... [A], M... [Nm], n... [r/min], P... [kW]
- If the motors are operated at a lower switching frequency, please contact your Lenze sales office!
- When operating at 4 kHz, the motor generates just 95 % of its rated torque with increased noise emissions.

MCA asynchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP23s motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E94A□□	E0174	E0244	E0324	E0474	E0594	E0864	E1044	E1454	E1724	E2024	E2454	E2924
MCA	M _N	n _N	I _N	P _N	I _N	16.5	23.5	32.0	41.0	41.0	73.0	78.0	102.0	120.0	131.0	160.0	191.0
26T12-...2F□□	255.0	1200	83.3	32.00	I _{0,max}	49.5	58.8	76.8	94.0	118.0	172.0	208.0	261.0	310.0	364.0	441.0	526.0
					M ₀						204.0	219.0	290.0	290.0			
					M _N						204.0	219.0	255.0	255.0			
					M _{0,max}						502.0	609.0	739.0	840.0	896.0		
					M _{max}						502.0	609.0	739.0	840.0	896.0		
					n _{eto}						-	-	-	-	-	-	
26T22-...2F□□	230.0	2235	126.7	53.80	M ₀								211.0	242.0	290.0	290.0	
					M _N								211.0	230.0	230.0	230.0	
					M _{0,max}								611.0	711.0	843.0	10010	
					M _{max}								611.0	711.0	843.0	10010	
					n _{eto}								-	-	-	-	

- I... [A], M... [Nm], n... [r/min], P... [kW]
- If the motors are operated at a lower switching frequency, please contact your Lenze sales office!
- When operating at 4 kHz, the motor generates just 95 % of its rated torque with increased noise emissions.

MCA asynchronous servo motors

Technical data



MCA asynchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	5514	7514	1124	1524	2224	3024	4024	5524	7524	1134	1534	1834		
MCA	M _N	n _N	I _N	P _N	I _N	1.8	2.4	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0		
					I _{0,max}	2.7	3.6	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0		
10I40	2.0	3950	2.4	0.80	I _{max}	3.6	4.8	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0		
					M ₀	-	2.3	2.3	2.3	2.3									
					M _N	-	1.9	1.9	1.9	1.9									
					M _{0,max}	4.2	5.8	8.0	9.8	10.0									
					M _{max}	4.2	5.8	8.0	9.8	10.0									
					n _{eto}	-	-	-	-	-									
13I41	4.0	4050	4.4	1.70	M ₀			-	-	4.6	4.6	4.6							
					M _N			-	-	4.0	4.0	4.0							
					M _{0,max}			7.6	9.6	14.3	18.9	22.9							
					M _{max}			7.6	9.6	14.3	18.9	22.9							
					n _{eto}			-	-	-	-	-							
14L20	6.7	2000	3.3	1.40	M ₀			-	-	8.0	8.0	8.0							
					M _N			-	-	6.7	6.7	6.7							
					M _{0,max}	11.6	16.2	20.1	29.4	34.7									
					M _{max}	11.6	16.2	20.1	29.4	34.7									
					n _{eto}	-	-	-	-	-									
14L41	5.4	4100	5.8	2.30	M ₀					-	8.0	8.0	8.0						
					M _N					-	5.4	5.4	5.4						
					M _{0,max}					14.1	19.0	25.1	31.0						
					M _{max}					14.1	19.0	25.1	31.0						
					n _{eto}					-	-	-	-						
17N23	10.8	2300	5.5	2.60	M ₀					-	12.8	12.8	12.8						
					M _N					-	10.8	10.8	10.8						
					M _{0,max}					17.1	25.3	33.3	43.8	51.1					
					M _{max}					17.1	25.3	33.3	43.8	51.1					
					n _{eto}					-	-	-	-	-					
17N41	9.5	4110	10.2	4.10	M ₀						-	-	12.8	12.8	12.8				
					M _N						-	-	9.5	9.5	9.5				
					M _{0,max}						16.5	22.3	31.1	39.9	49.5				
					M _{max}						16.5	22.3	31.1	39.9	49.5				
					n _{eto}						-	-	-	-	-				
19S23	16.3	2340	8.2	4.00	M ₀						-	22.5	22.5	22.5					
					M _N						-	16.3	16.3	16.3					
					M _{0,max}						32.8	43.6	60.9	77.5					
					M _{max}						32.8	43.7	61.0	77.5					
					n _{eto}						-	-	-	-					
19S42	12.0	4150	14.0	5.20	M ₀							-	22.5	22.5	22.5				
					M _N							-	12.0	12.0	12.0				
					M _{0,max}							28.5	37.0	53.7	64.7				
					M _{max}							28.5	37.0	53.8	64.7				
					n _{eto}							-	-	-	-				
21X25	24.6	2490	13.5	6.40	M ₀							-	39.0	39.0	39.0				
					M _N							-	24.5	24.5	24.5				
					M _{0,max}							33.6	46.7	59.3	85.9	97.3			
					M _{max}							33.6	46.7	59.3	85.9	97.6			
					n _{eto}							-	-	-	-	-			

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	5514	7514	1124	1524	2224	3024	4024	5524	7524	1134	1534	1834
MCA	M _N	n _N	I _N	P _N	I _N	1.8	2.4	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0
					I _{0,max}	2.7	3.6	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0
21X42	17.0	4160	19.8	7.40	I _{max}	3.6	4.8	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0
					M ₀									-	39.0	39.0	39.0
					M _N									-	17.0	17.0	17.0
					M _{0,max}									35.3	52.2	72.1	88.5
					M _{max}									35.3	52.2	72.1	88.5
					n _{eto}									-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□1524	□2224	□3024	□4024	□5524	□7524
MCA	M _N	n _N	I _N	P _N	I _N	3.9	5.9	7.3	9.5	13.0	16.5
					I _{0,max}	5.9	8.4	11.0	14.3	19.5	26.4
					I _{max}	7.8	11.8	14.6	19.0	26.0	33.0
					M ₀	-	7.0	7.0	7.0		
					M _N	-	6.2	6.2	6.2		
					M _{0,max}	16.0	21.4	28.2	32.0		
					M _{max}	16.0	21.4	28.2	32.0		
					n _{eto}	-	-	-	-	-	-
13I34	6.3	3410	6.0	2.20	M ₀	-	13.5	13.5	13.5		
14L16	12.0	1635	4.8	2.10	M _N	-	12.3	12.3	12.3		
					M _{0,max}	23.4	34.7	45.5	50.8		
					M _{max}	23.4	34.7	45.5	50.8		
					n _{eto}	-	-	-	-		
14L35	10.8	3455	9.1	3.90	M ₀			-	13.5	13.5	13.5
					M _N			-	10.8	10.8	10.8
					M _{0,max}		21.1	28.4	39.8	51.1	
					M _{max}		21.1	28.4	39.8	51.1	
					n _{eto}		-	-	-	-	-
17N17	21.5	1680	8.5	3.80	M ₀			-	23.9	23.9	23.9
					M _N			-	21.6	21.6	21.6
					M _{0,max}		42.1	55.9	77.5	93.3	
					M _{max}		42.2	56.0	77.5	93.3	
					n _{eto}		-	-	-	-	-
17N35	19.0	3480	15.8	6.90	M ₀				-	23.9	
					M _N				-	18.9	
					M _{0,max}				38.0	49.5	
					M _{max}				38.0	49.5	
					n _{eto}				-	-	
19S17	36.3	1700	13.9	6.40	M ₀				-	40.0	
					M _N				-	36.0	
					M _{0,max}				71.6	94.7	
					M _{max}				71.6	94.7	
					n _{eto}				-	-	
19S35	36.0	3510	28.7	13.20	M ₀						
					M _N						
					M _{0,max}						
					M _{max}						
					n _{eto}						
21X17	61.4	1710	22.5	11.00	M ₀					-	
					M _N					-	
					M _{0,max}					99.0	
					M _{max}					99.0	
					n _{eto}					-	
21X35	55.0	3520	42.5	20.30	M ₀						
					M _N						
					M _{0,max}						
					M _{max}						
					n _{eto}						

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□1134	□1534	□1834	□2234	□3034	□3734	□4534	E84AVTC					
23.5	32.0	39.0	47.0	61.0	76.0	89.0	I_N	2.20	6.0	3410	6.3	13I34
32.9	43.2	60.0	70.5	91.5	114.0	133.5	I_{0,max}					
47.0	64.0	78.0	94.0	122.0	152.0	178.0	I_{max}					
							M₀					
							M_N					
							M_{0,max}					
							M_{max}					
							n_{eto}					
							M₀					
							M_N					
							M_{0,max}					
							M_{max}					
							n_{eto}					
13.5							M₀	3.90	9.1	3455	10.8	14L35
10.8							M_N					
56.5							M_{0,max}					
56.6							M_{max}					
-							n_{eto}					
							M₀	3.80	8.5	1680	21.5	17N17
							M_N					
							M_{0,max}					
							M_{max}					
							n_{eto}					
23.9	23.9						M₀	6.90	15.8	3480	19.0	17N35
18.9	18.9						M_N					
72.5	97.8						M_{0,max}					
72.5	97.8						M_{max}					
-	-						n_{eto}					
40.0	40.0						M₀	6.40	13.9	1700	36.3	19S17
36.0	36.0						M_N					
138.9	165.2						M_{0,max}					
139.0	165.3						M_{max}					
-	-						n_{eto}					
-	40.0	40.0	40.0	40.0			M₀	13.20	28.7	3510	36.0	19S35
-	35.9	35.9	35.9	35.9			M_N					
55.1	78.8	97.8	112.8	146.2			M_{0,max}					
55.1	78.8	97.8	112.9	146.2			M_{max}					
-	-	-	-	-			n_{eto}					
75.0	75.0	75.0	75.0				M₀	11.00	22.5	1710	61.4	21X17
61.4	61.4	61.4	61.4				M_N					
143.7	198.5	242.2	277.2				M_{0,max}					
144.0	198.7	242.3	277.2				M_{max}					
-	-	-	-				n_{eto}					
-	-	-	75.0	75.0	75.0	75.0	M₀	20.30	42.5	3520	55.0	21X35
-	-	-	55.1	55.1	55.1	55.1	M_N					
97.5	120.6	138.5	177.5	216.7	267.8		M_{0,max}					
97.5	120.6	138.6	178.0	217.5	269.8		M_{max}					
-	-	-	-	-	-		n_{eto}					

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□7524	□1134	□1534	□1834	□2234	□3034	□3734	□4534
MCA	M _N	n _N	I _N	P _N	I _N	16.5	23.5	32.0	39.0	47.0	61.0	76.0	89.0
					I _{0,max}	26.4	32.9	43.2	60.0	70.5	91.5	114.0	133.5
					I _{max}	33.0	47.0	64.0	78.0	94.0	122.0	152.0	178.0
22P08-...5F□□	110.0	760	22.1	8.80	M ₀	-	120.0	120.0	120.0	120.0			
					M _N	-	110.6	110.6	110.6	110.6			
					M _{0,max}	157.8	233.4	323.3	396.6	394.3			
					M _{max}	157.8	233.5	323.3	396.6	394.3			
					n _{eto}	-	-	-	-	-			
22P14-...5F□□	107.0	1425	37.7	16.00	M ₀		-	120.0	120.0	120.0	120.0	120.0	120.0
					M _N		-	107.2	107.2	107.2	107.2	107.2	107.2
					M _{0,max}		186.5	232.5	268.8	345.7	422.7	458.8	
					M _{max}		186.7	232.7	269.0	346.3	423.7	460.9	
					n _{eto}		-	-	-	-	-	-	-
22P17-...5F□□	105.0	1670	42.7	18.50	M ₀		-	-	120.0	120.0	120.0	120.0	120.0
					M _N		-	-	105.8	105.8	105.8	105.8	105.8
					M _{0,max}		162.7	204.2	236.9	307.8	374.9	461.2	
					M _{max}		162.7	204.2	237.1	308.3	377.0	462.4	
					n _{eto}		-	-	-	-	-	-	-
22P29-...5F□□	100.0	2935	72.1	30.70	M ₀					-	120.0	120.0	120.0
					M _N					-	99.9	99.9	99.9
					M _{0,max}					180.5	224.5	270.5	
					M _{max}					180.8	226.0	271.4	
					n _{eto}					-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]
- If the motors are operated at a lower switching frequency, please contact your Lenze sales office!

MCA asynchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP23s motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□7524	□1134	□1534	□1834	□2234	□3034	□3734	□4534	
MCA	M _N	n _N	I _N	P _N	I _N	16.5	23.5	32.0	39.0	47.0	61.0	76.0	89.0	
					I _{0,max}	26.4	32.9	43.2	60.0	70.5	91.5	114.0	133.5	
					I _{max}	33.0	47.0	64.0	78.0	94.0	122.0	152.0	178.0	
20X14-...2F□□	61.0	1420	23.0	9.10	M ₀	-	67.0	68.0	68.0	68.0				
					M _N	-	61.2	61.2	61.2	61.2				
					M _{0,max}	94.8	139.9	192.6	235.5	250.0				
					M _{max}	94.9	139.9	192.8	235.7	250.0				
					n _{eto}	-	-	-	-	-				
20X29-...2F□□	53.5	2930	42.4	16.40	M ₀			-	-	57.0	68.0	68.0	68.0	
					M _N			-	-	53.4	53.4	53.4	53.4	
					M _{0,max}		96.8	121.2	140.3	182.5	222.1	250.0		
					M _{max}		96.8	121.2	140.4	182.6	223.0	250.0		
					n _{eto}			-	-	-	-	-	-	
22P08-...2F□□	120.0	760	23.5	9.60	M ₀	-	135.0	135.0	135.0	135.0				
					M _N	-	120.6	120.6	120.6	120.6				
					M _{0,max}	157.8	234.2	325.4	401.4	400.9				
					M _{max}	157.8	234.8	325.8	401.4	400.9				
					n _{eto}	-	-	-	-	-				
22P14-...2F□□	115.0	1425	40.0	17.20	M ₀			-	-	135.0	135.0	135.0	135.0	
					M _N			-	-	115.3	115.3	115.3	115.3	
					M _{0,max}		188.4	235.1	270.8	350.2	425.8	493.6		
					M _{max}		188.7	235.1	271.0	350.3	428.1	496.1		
					n _{eto}			-	-	-	-	-	-	
22P17-...2F□□	112.0	1670	44.5	19.60	M ₀			-	-	135.0	135.0	135.0	135.0	
					M _N			-	-	112.1	112.1	112.1	112.1	
					M _{0,max}		163.1	204.6	237.9	309.7	376.9	463.1		
					M _{max}		163.1	204.6	238.2	310.6	379.0	465.2		
					n _{eto}			-	-	-	-	-	-	
22P29-...2F□□	110.0	2935	77.8	33.80	M ₀					-	-	135.0		
					M _N					-	-	110.0		
					M _{0,max}					180.0	224.4	268.2		
					M _{max}					180.7	225.0	269.4		
					n _{eto}					-	-	-		

- I... [A], M... [Nm], n... [r/min], P... [kW]
- If the motors are operated at a lower switching frequency, please contact your Lenze sales office!

MCA asynchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	008C□B	016C□B	032C□B	048C□B	064C□B
MCA	M _N	n _N	I _N	P _N	I _N	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	4.6	9.1	18.1	27.2	36.3
					I _{max}	8.0	16.0	32.0	48.0	64.0
					M ₀	2.3				
					M _N	2.0				
					M _{0,max}	5.6				
					M _{max}	8.1				
					n _{eto}	-				
10I40	2.0	3950	2.4	0.80	M ₀	3.0	4.6			
13I41	4.0	4050	4.4	1.70	M _N	3.0	4.0			
					M _{0,max}	4.3	11.0			
					M _{max}	9.4	18.2			
					n _{eto}	-	-			
14L20	6.7	2000	3.3	1.40	M ₀	8.0	8.0			
14L41	5.4	4100	5.8	2.30	M _N	6.7	6.7			
					M _{0,max}	10.7	25.3			
					M _{max}	21.6	42.8			
					n _{eto}	-	-			
17N23	10.8	2300	5.5	2.60	M ₀	8.0	8.0			
17N41	9.5	4110	10.2	4.10	M _N	5.4	5.4			
					M _{0,max}	11.0	24.0			
					M _{max}	20.7	29.1			
					n _{eto}	-	-			
19S23	16.3	2340	8.2	4.00	M ₀	12.8	12.8			
19S42	12.0	4150	14.0	5.20	M _N	10.8	10.8			
					M _{0,max}	20.5	43.5			
					M _{max}	40.2	63.7			
					n _{eto}	-	-			
21X25	24.6	2490	13.5	6.40	M ₀	6.1	12.8	12.8		
					M _N	6.1	9.5	9.5		
					M _{0,max}	7.8	21.5	33.5		
					M _{max}	17.4	29.6	57.7		
					n _{eto}	-	-	-		
					M ₀	15.1	22.5			
					M _N	15.1	16.3			
					M _{0,max}	18.7	43.5			
					M _{max}	38.5	67.9			
					n _{eto}	-	-			
					M ₀	9.8	16.7			
					M _N	9.8	12.0			
					M _{0,max}	18.4	31.9			
					M _{max}	29.9	58.2			
					n _{eto}	-	-			
					M ₀	21.0	39.0			
					M _N	21.0	24.6			
					M _{0,max}	41.0	64.5			
					M _{max}	64.4	120.5			
					n _{eto}	-	-			

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	008C□B	016C□B	032C□B	048C□B	064C□B
MCA	M _N	n _N	I _N	P _N	I _N	4.0	8.0	12.7	17.0	20.0
21X42	17.0	4160	19.8	7.40	I _{0,max}	4.6	9.1	18.1	27.2	36.3
					I _{max}	8.0	16.0	32.0	48.0	64.0
					M ₀				13.0	17.0
					M _N				13.0	17.0
					M _{0,max}				30.0	45.0
					M _{max}				59.4	83.0
					n _{eto}				-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	008C□B	016C□B	032C□B	048C□B	064C□B
MCA	M _N	n _N	I _N	P _N	I _N	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	4.6	9.1	18.1	27.2	36.3
					I _{max}	8.0	16.0	32.0	48.0	64.0
					M ₀		7.0			
					M _N		6.3			
					M _{0,max}		10.7			
					M _{max}		20.8			
					n _{eto}		-			
					M ₀	8.9	13.5			
					M _N	8.9	12.0			
					M _{0,max}	11.5	25.4			
					M _{max}	21.6	46.7			
					n _{eto}	-	-			
					M ₀		8.3	13.5	13.5	
					M _N		8.3	10.8	10.8	
					M _{0,max}		11.0	27.0	41.0	
					M _{max}		22.2	42.0	60.0	
					n _{eto}		-	-	-	
					M ₀		19.5	23.9		
					M _N		19.5	21.5		
					M _{0,max}		23.0	53.0		
					M _{max}		44.8	80.0		
					n _{eto}		-	-		
					M ₀			12.7	23.0	
					M _N			12.7	19.0	
					M _{0,max}			23.0	37.5	
					M _{max}			37.7	64.4	
					n _{eto}			-	-	
					M ₀			28.3	40.0	40.0
					M _N			28.3	36.3	36.3
					M _{0,max}			46.5	72.0	98.0
					M _{max}			75.4	130.8	158.9
					n _{eto}			-	-	-
					M ₀				52.5	
					M _N				52.5	
					M _{0,max}				107.0	
					M _{max}				190.0	
					n _{eto}				-	

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
MCA	M _N	n _N	I _N	P _N	I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
					I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
					M ₀	2.2	2.3						
					M _N	2.0	2.0						
					M _{0,max}	4.4	7.3						
					M _{max}	4.4	7.3						
					n _{eto}	-	-						
10I40	2.0	3950	2.4	0.80	M ₀			4.6	4.6				
13I41	4.0	4050	4.4	1.70	M _N			4.0	4.0				
					M _{0,max}			12.6	19.5				
					M _{max}			12.6	19.5				
					n _{eto}			-	-				
14L20	6.7	2000	3.3	1.40	M ₀			8.0	8.0				
14L41	5.4	4100	5.8	2.30	M _N			6.7	6.7				
					M _{0,max}			15.1	29.3				
					M _{max}			15.1	29.3				
					n _{eto}			-	-				
17N23	10.8	2300	5.5	2.60	M ₀			7.0	8.0				
17N41	9.5	4110	10.2	4.10	M _N			5.4	5.4				
					M _{0,max}			13.2	26.0				
					M _{max}			13.2	26.0				
					n _{eto}			-	-				
19S23	16.3	2340	8.2	4.00	M ₀			12.8	12.8				
19S42	12.0	4150	14.0	5.20	M _N			10.8	10.8				
					M _{0,max}			24.4	46.2				
					M _{max}			24.4	46.2				
					n _{eto}			-	-				
21X25	24.6	2490	13.5	6.40	M ₀			22.5	22.5				
					M _N			16.3	16.3				
					M _{0,max}			47.2	78.0				
					M _{max}			47.2	88.2				
					n _{eto}			-	-				

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
MCA	M _N	n _N	I _N	P _N	I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
21X42	17.0	4160	19.8	7.40	I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
					M ₀					24.0	39.0	39.0	39.0
					M _N					17.0	17.0	17.0	17.0
					M _{0,max}					24.0	47.0	84.0	94.0
					M _{max}					43.9	63.3	96.8	123.0
					n _{eto}					-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E	9330-E	9331-E
MCA	M _N	n _N	I _N	P _N	I _N	7.0	13.0	23.5	32.0	47.0	59.0	89.0	110.0
					I _{0,max}	10.5	19.5	23.5	32.0	47.0	52.0	80.0	110.0
					I _{max}	10.5	19.5	35.3	48.0	70.5	88.5	133.5	165.0
					M ₀	7.0	7.0						
					M _N	6.3	6.3						
					M _{0,max}	13.0	25.0						
					M _{max}	13.0	25.0						
					n _{eto}	-	-						
					M ₀	13.5							
					M _N	12.0							
					M _{0,max}	29.6							
					M _{max}	29.6							
					n _{eto}	-							
					M ₀		13.5	13.5					
					M _N		10.8	10.8					
					M _{0,max}		29.3	47.0					
					M _{max}		29.3	53.8					
					n _{eto}		-	-					
					M ₀		23.9						
					M _N		21.5						
					M _{0,max}		57.2						
					M _{max}		57.2						
					n _{eto}		-						
					M ₀			23.9	23.9	23.9			
					M _N			19.0	19.0	19.0			
					M _{0,max}			27.5	57.0	89.0			
					M _{max}			50.7	69.2	100.2			
					n _{eto}			-	-	-			
					M ₀		34.0	40.0	40.0				
					M _N		34.0	36.3	36.3				
					M _{0,max}		50.1	76.0	112.0				
					M _{max}		50.1	95.9	130.8				
					n _{eto}		-	-	-				
					M ₀		21.0	39.0	40.0	40.0	40.0		
					M _N		21.0	36.0	36.0	36.0	36.0		
					M _{0,max}		21.0	39.0	73.0	80.0	161.5		
					M _{max}		45.7	67.6	104.3	132.9	180.0		
					n _{eto}		-	-	-	-	-		
					M ₀			65.5	75.0	75.0			
					M _N			61.4	61.4	61.4	61.4		
					M _{0,max}			65.5	102.0	178.0	200.0		
					M _{max}			104.1	143.3	210.7	257.3		
					n _{eto}			-	-	-	-		
					M ₀					68.0	75.0	75.0	75.0
					M _N					55.0	55.0	55.0	55.0
					M _{0,max}					68.0	88.0	156.0	219.0
					M _{max}					107.7	135.9	205.0	250.1
					n _{eto}					-	-	-	-

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCA asynchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9326-E□	9327-E□	9328-E□	9329-E□	9330-E□	9331-E□	9332-E□
MCA	M _N	n _N	I _N	P _N	I _N	23.5	32.0	47.0	59.0	89.0	110.0	145.0
					I _{0,max}	23.5	32.0	47.0	52.0	80.0	110.0	126.0
					I _{max}	35.3	48.0	70.5	88.5	133.5	165.0	217.5
					M ₀	115.0	120.0	120.0	120.0			
					M _N	108.0	110.0	110.0	110.0			
					M _{0,max}	115.0	166.0	242.0	267.0			
					M _{max}	185.0	247.0	338.8	345.8			
					n _{eto}	-	-	-	-			
22P08-...5F□□	110.0	760	22.1	8.80	M ₀			120.0	120.0	120.0		
22P14-...5F□□	107.0	1425	37.7	16.00	M _N			107.0	107.0	107.0		
22P17-...5F□□	105.0	1670	42.7	18.50	M _{0,max}			146.0	160.0	264.0		
22P29-...5F□□	100.0	2935	72.1	30.70	M _{max}			230.1	292.9	341.8		
26T05-...5F□□	216.0	550	34.9	12.40	n _{eto}			-	-	-		
26T10-...5F□□	210.0	1030	61.5	22.70	M ₀			191.0	220.0	220.0		
26T12-...5F□□	207.0	1200	75.1	26.00	M _N			191.0	216.0	216.0		
26T22-...5F□□	195.0	2235	112.9	45.60	M _{0,max}			191.0	303.0	615.0		
					M _{max}			313.0	482.0	612.0	751.0	
					n _{eto}			-	-	-	-	
					M ₀					159.0	220.0	220.0
					M _N					197.0	210.0	210.0
					M _{0,max}					159.0	300.0	440.0
					M _{max}					343.0	552.0	671.0
					n _{eto}					-	-	-
					M ₀						207.0	220.0
					M _N						255.0	207.0
					M _{0,max}						258.0	327.0
					M _{max}						424.0	512.0
					n _{eto}						-	-
					M ₀							177.0
					M _N							177.0
					M _{0,max}							203.0
					M _{max}							315.0
					n _{eto}							-

- I... [A], M... [Nm], n... [r/min], P... [kW]
- If the motors are operated at a lower switching frequency, please contact your Lenze sales office!

MCA asynchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP23s motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9326-E□	9327-E□	9328-E□	9329-E□	9330-E□	9331-E□	9332-E□	
MCA	M _N	n _N	I _N	P _N	I _N	23.5	32.0	47.0	59.0	89.0	110.0	145.0	
					I _{0,max}	23.5	32.0	47.0	52.0	80.0	110.0	126.0	
					I _{max}	35.3	48.0	70.5	88.5	133.5	165.0	217.5	
					M ₀	61.0	68.0	68.0					
					M _N	61.0	61.0	61.0					
					M _{0,max}	61.0	93.0	153.0					
					M _{max}	109.3	156.7	232.1					
					n _{eto}	-	-	-					
20X14-...2F□□	61.0	1420	23.0	9.10	M ₀		28.0	66.3	68.0	68.0			
					M _N		28.0	53.5	53.5	53.5			
					M _{0,max}		28.0	66.3	72.0	129.0			
					M _{max}		68.5	112.5	146.4	226.7			
					n _{eto}		-	-	-	-			
20X29-...2F□□	53.5	2930	42.4	16.40	M ₀		115.0	135.0	135.0	135.0			
					M _N		115.0	120.0	120.0	120.0			
					M _{0,max}		115.0	166.0	242.0	267.0			
					M _{max}		185.0	247.0	338.8	345.8			
					n _{eto}		-	-	-	-			
22P08-...2F□□	120.0	760	23.5	9.60	M ₀		135.0	135.0	135.0	135.0			
					M _N		115.0	115.0	115.0	115.0			
					M _{0,max}		146.0	160.0	264.0	264.0			
					M _{max}		230.1	292.9	341.8	341.8			
					n _{eto}		-	-	-	-			
22P14-...2F□□	115.0	1425	40.0	17.20	M ₀		124.0	134.0	135.0	135.0			
					M _N		112.0	112.0	112.0	112.0			
					M _{0,max}		124.0	140.0	240.0	335.0			
					M _{max}		180.5	227.7	342.1	378.3			
					n _{eto}		-	-	-	-			
22P17-...2F□□	112.0	1670	44.5	19.60	M ₀				118.0	135.0	135.0		
					M _N				110.0	110.0	110.0		
					M _{0,max}				122.0	171.0	200.0		
					M _{max}				215.6	273.1	355.1		
					n _{eto}				-	-	-		
22P29-...2F□□	110.0	2935	77.8	33.80	M ₀					118.0	135.0	135.0	
					M _N					110.0	110.0	110.0	
					M _{0,max}					122.0	171.0	200.0	
					M _{max}					215.6	273.1	355.1	
					n _{eto}					-	-	-	
26T05-...2F□□	280.0	550	42.4	16.10	M ₀		191.0	290.0	290.0	290.0			
					M _N		191.0	280.0	280.0	280.0			
					M _{0,max}		191.0	303.0	333.0	615.0			
					M _{max}		313.0	482.0	612.0	751.0			
					n _{eto}		-	-	-	-			
26T10-...2F□□	260.0	1030	69.6	28.00	M ₀				159.0	290.0	290.0		
					M _N				197.0	260.0	260.0		
					M _{0,max}				159.0	300.0	440.0		
					M _{max}				343.0	552.0	671.0		
					n _{eto}				-	-	-		

- I... [A], M... [Nm], n... [r/min], P... [kW]
- If the motors are operated at a lower switching frequency, please contact your Lenze sales office!

MCA asynchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP23s motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9326-E□	9327-E□	9328-E□	9329-E□	9330-E□	9331-E□	9332-E□
MCA	M _N	n _N	I _N	P _N	I _N	23.5	32.0	47.0	59.0	89.0	110.0	145.0
					I _{0,max}	23.5	32.0	47.0	52.0	80.0	110.0	126.0
					I _{max}	35.3	48.0	70.5	88.5	133.5	165.0	217.5
					M ₀					232.0	290.0	290.0
					M _N					255.0	255.0	255.0
					M _{0,max}					258.0	327.0	397.0
					M _{max}					424.0	512.0	663.0
					n _{eto}					-	-	-
					M ₀						177.0	222.0
					M _N						177.0	230.0
					M _{0,max}						203.0	220.0
					M _{max}						315.0	432.0
					n _{eto}						-	-
26T12-...2F□□	255.0	1200	83.3	32.00								
26T22-...2F□□	230.0	2235	126.7	53.80								

- I... [A], M... [Nm], n... [r/min], P... [kW]
- If the motors are operated at a lower switching frequency, please contact your Lenze sales office!

MCA asynchronous servo motors




Technical data

Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA10I40 (non-ventilated)

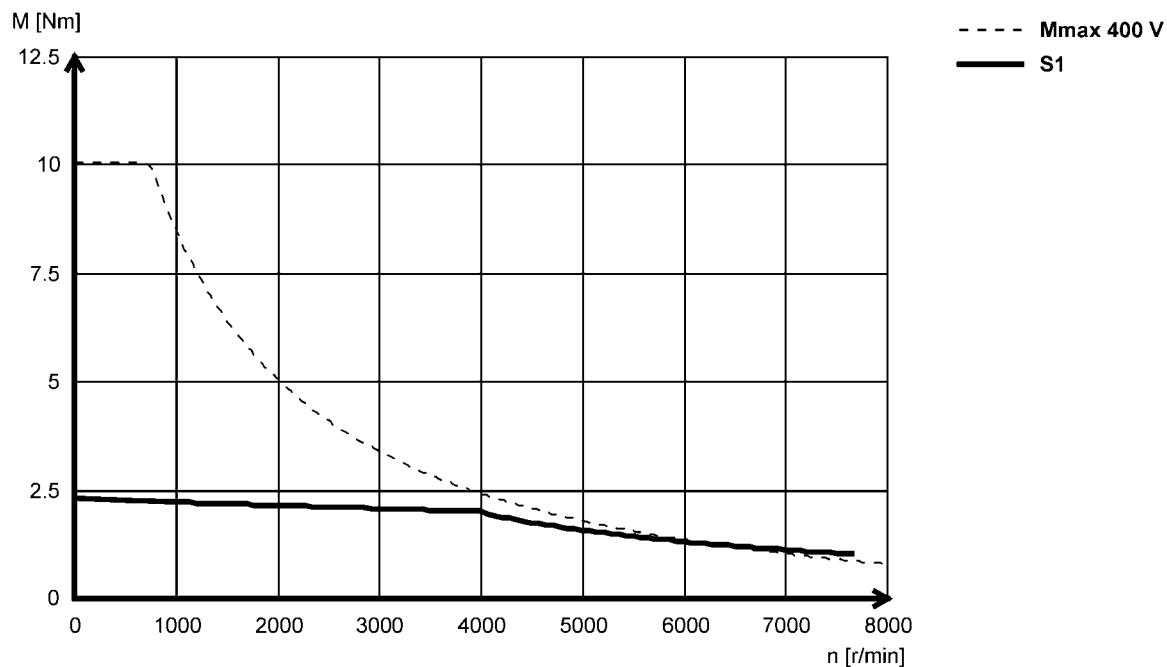

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA13I34 (forced ventilated)

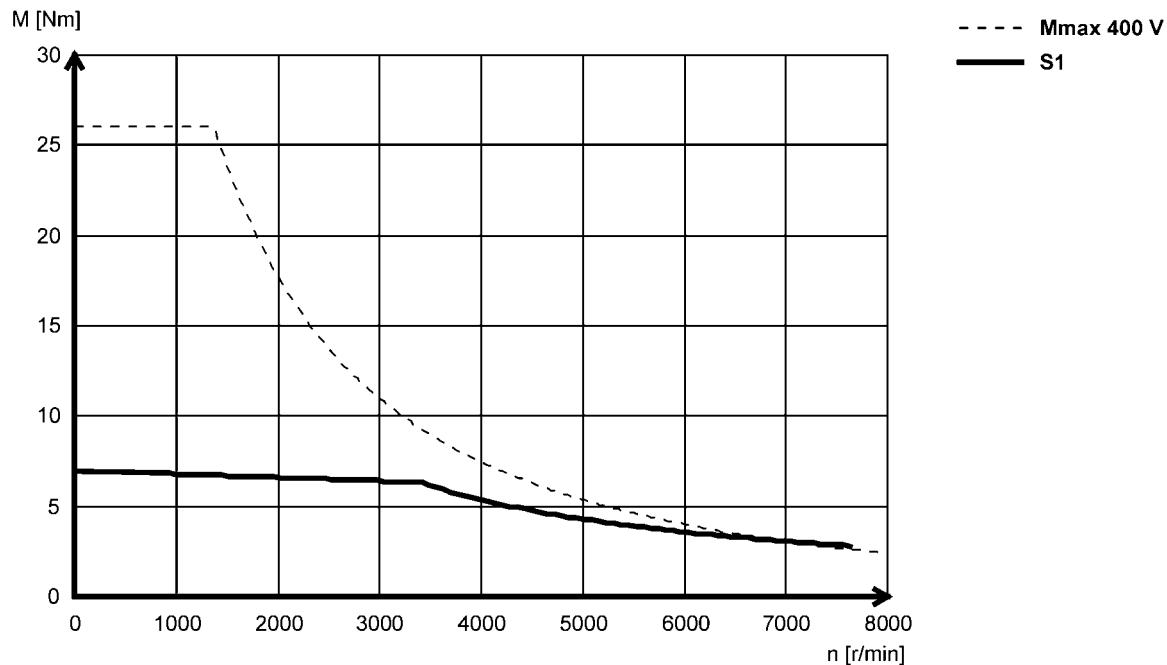

MCA13I41 (non-ventilated)

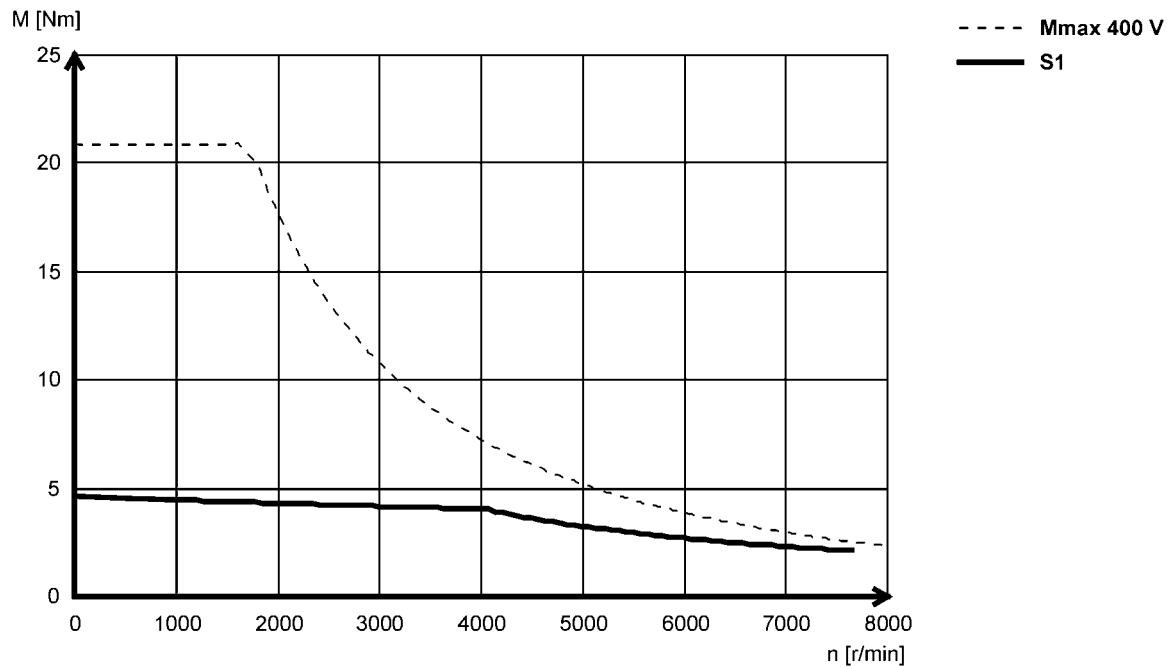

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA14L16 (forced ventilated)

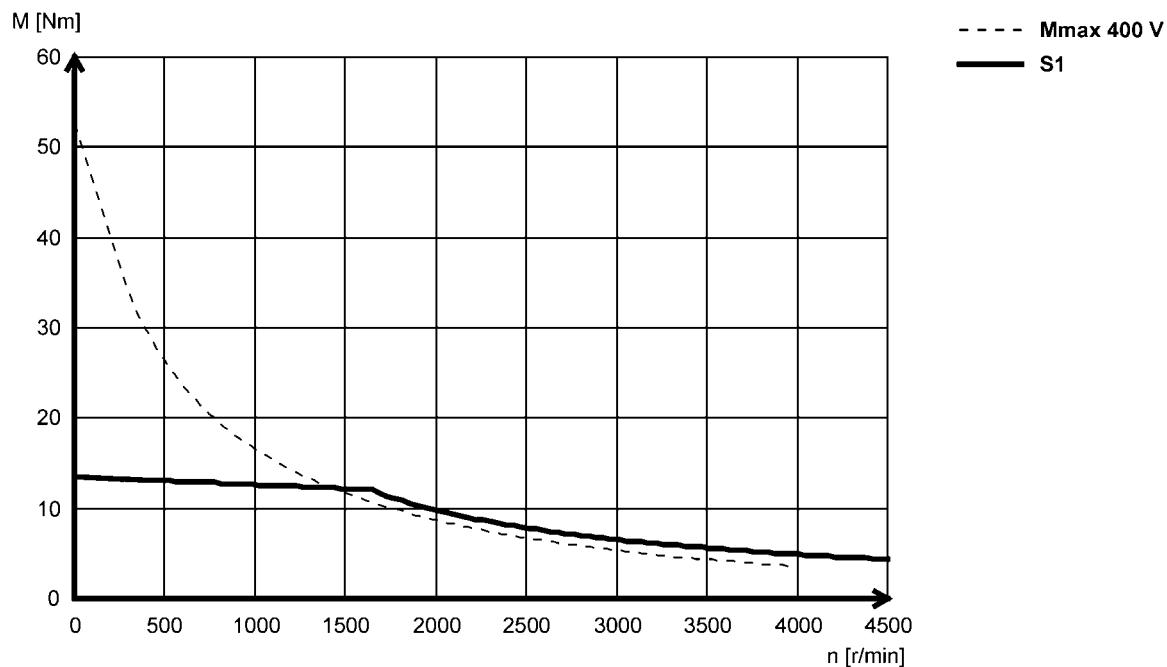

MCA14L20 (non-ventilated)

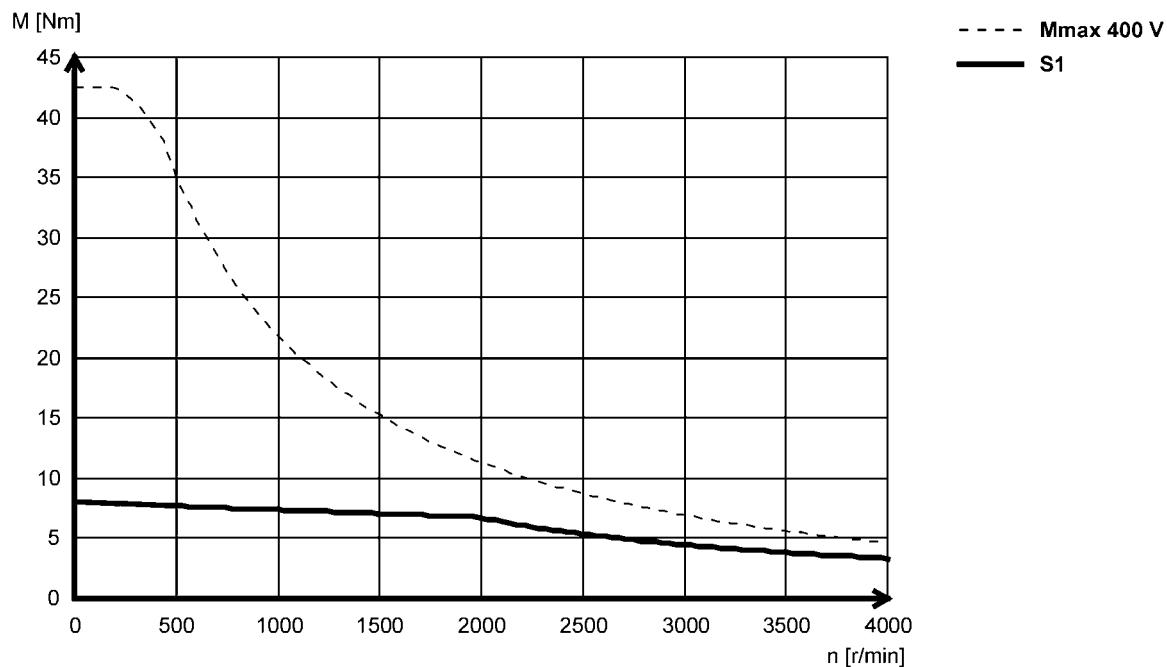

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA14L35 (forced ventilated)

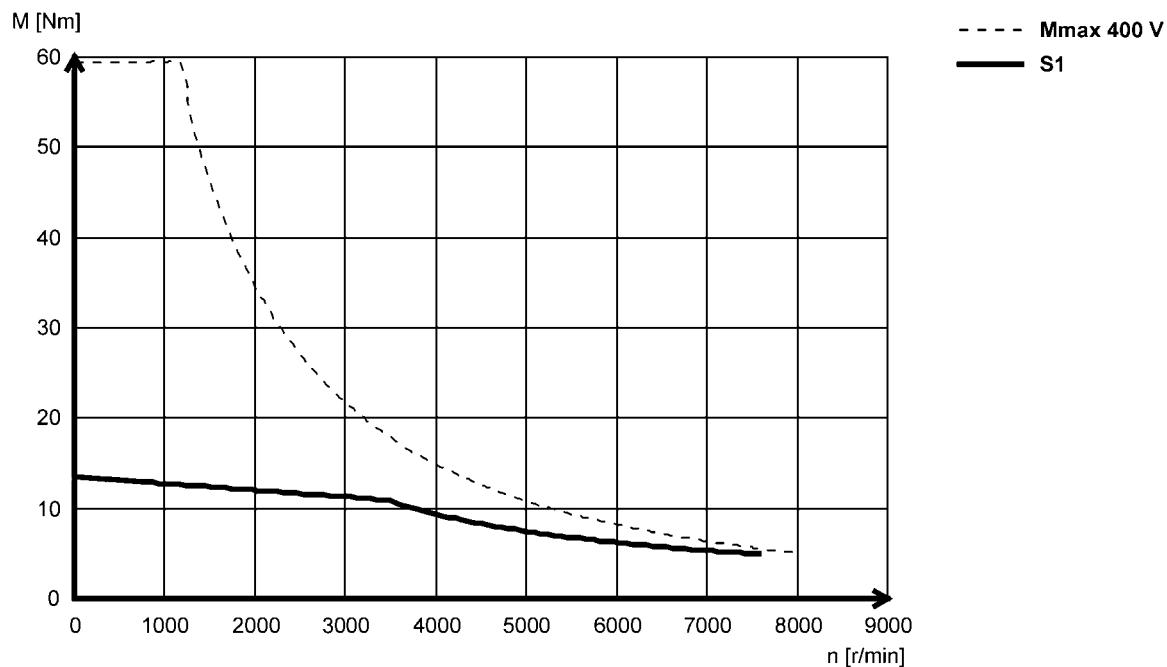

MCA14L41 (non-ventilated)

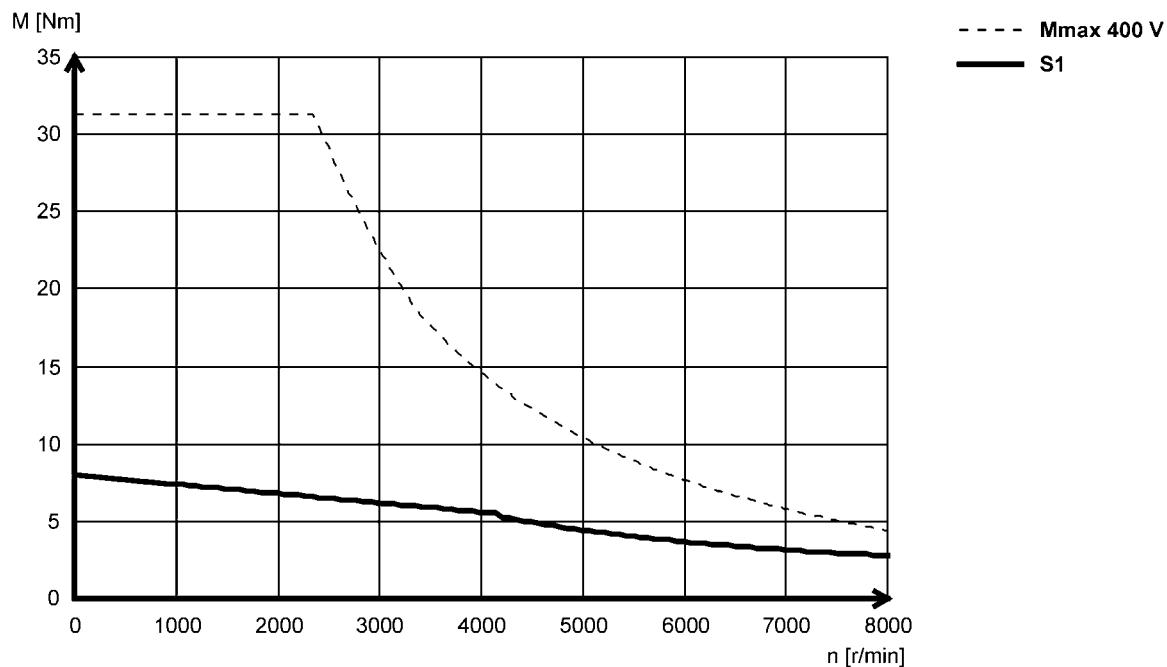

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA17N17 (forced ventilated)

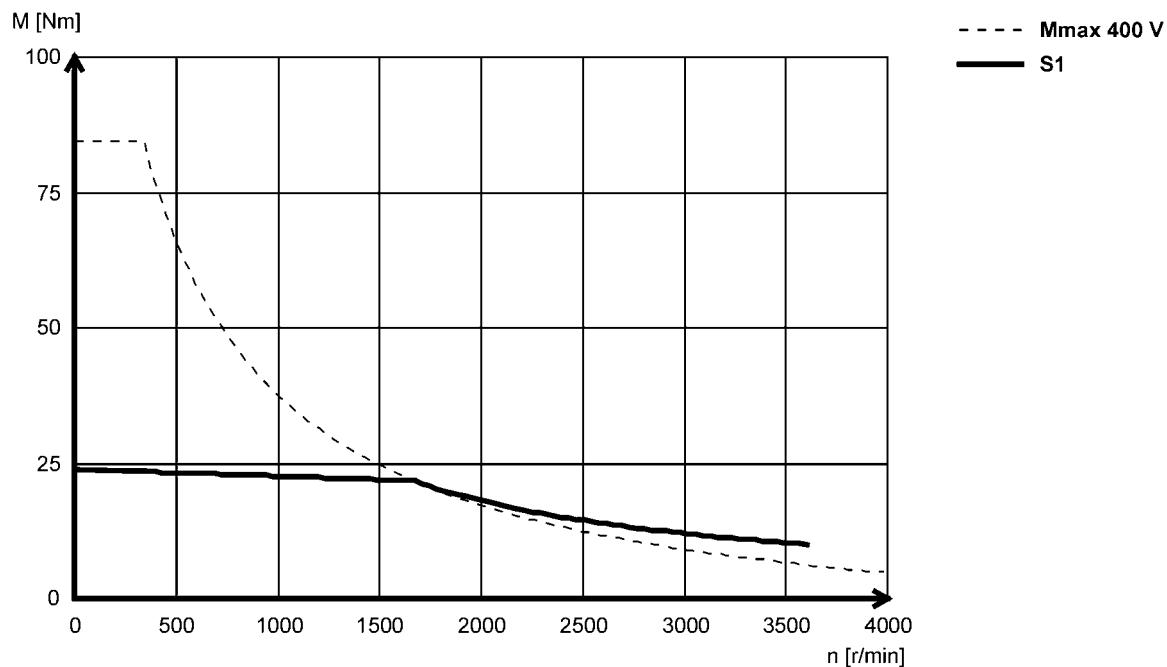

MCA17N23 (non-ventilated)

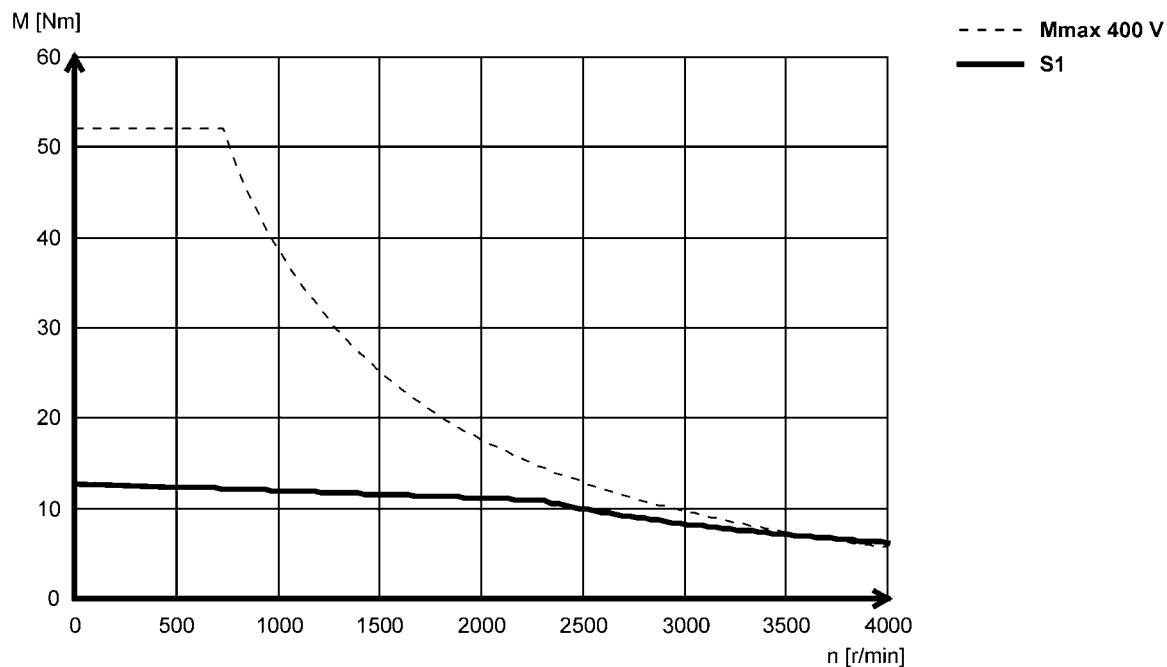

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA17N35 (forced ventilated)

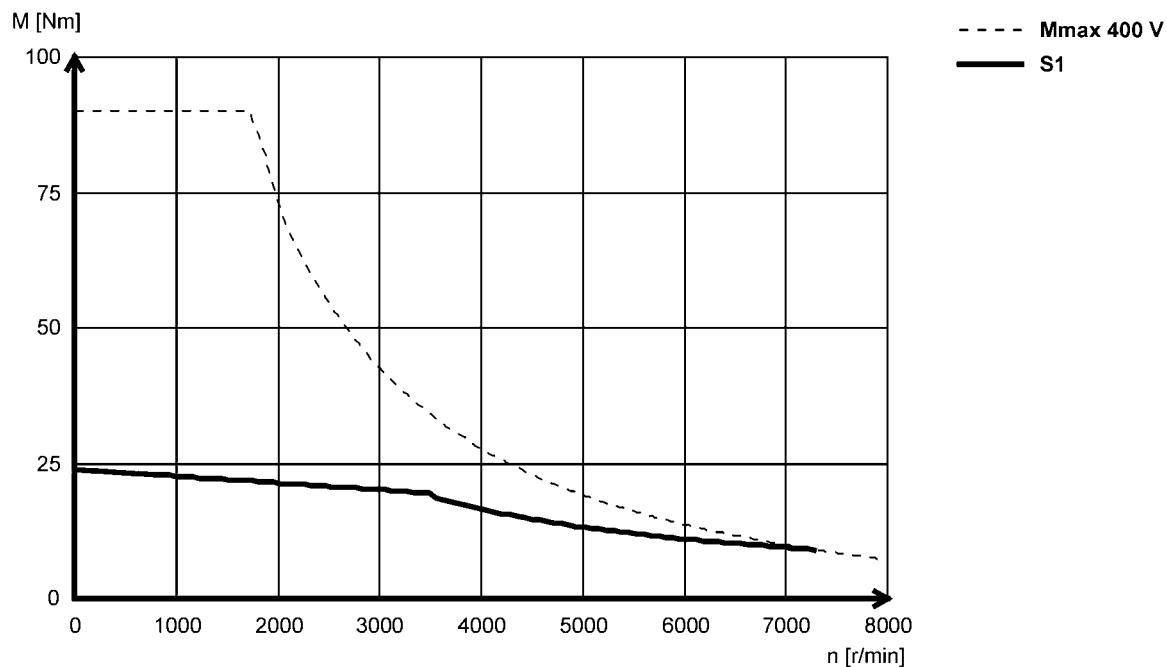

MCA17N41 (non-ventilated)

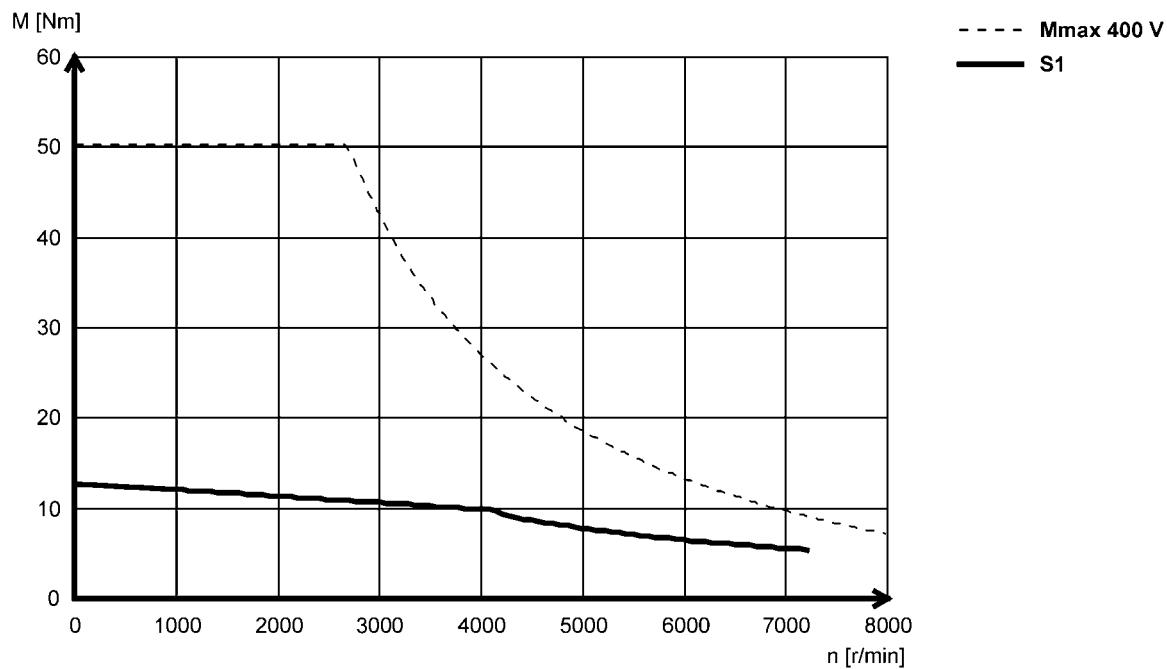

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA19517 (forced ventilated)

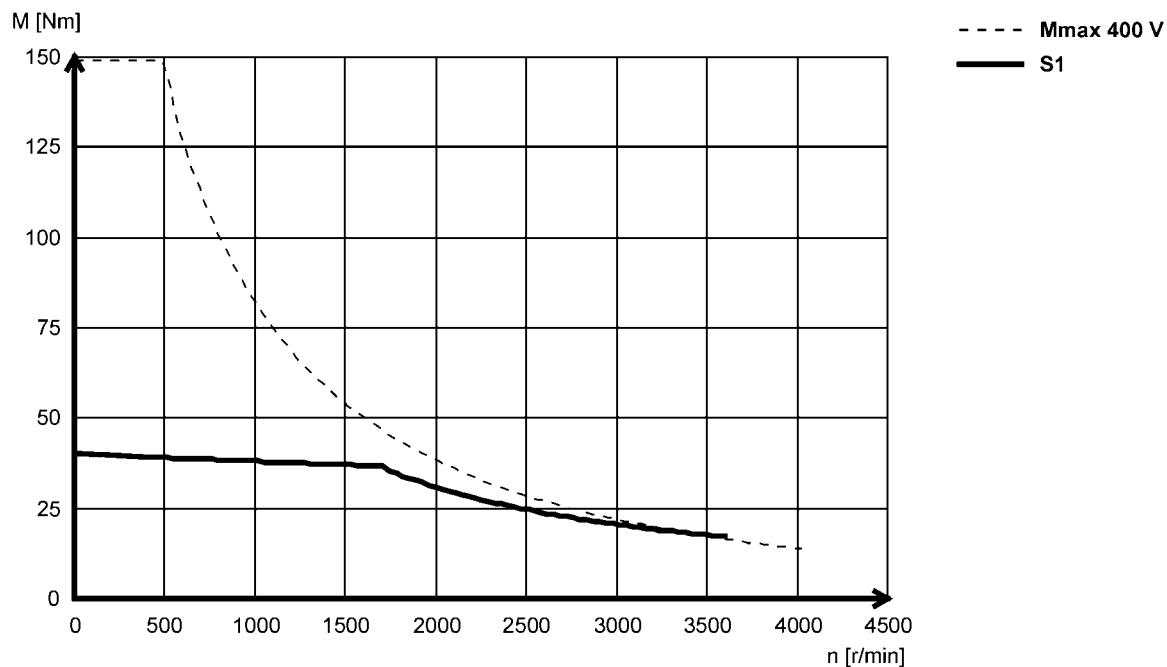

MCA19523 (non-ventilated)

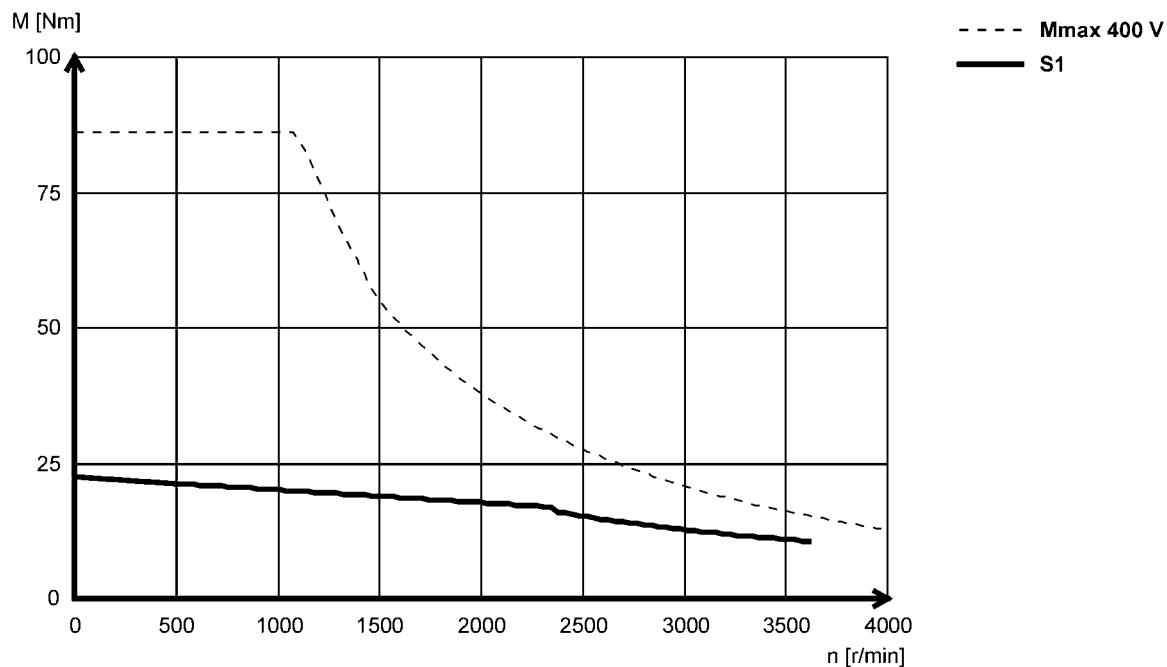

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA19S35 (forced ventilated)

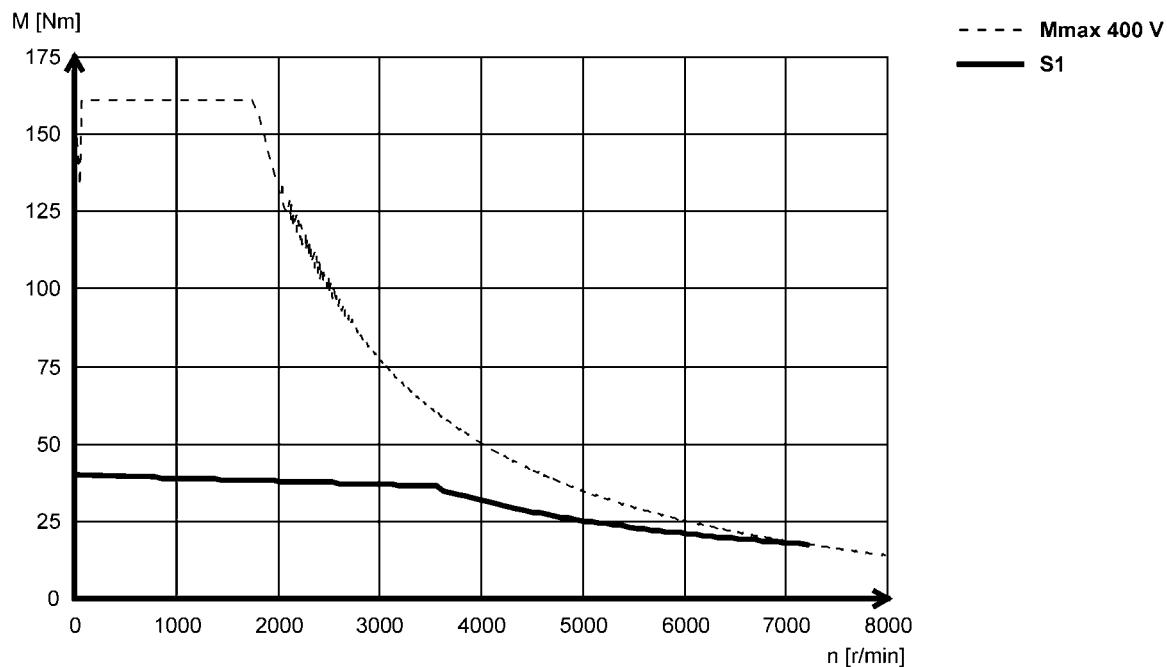

MCA19S42 (non-ventilated)

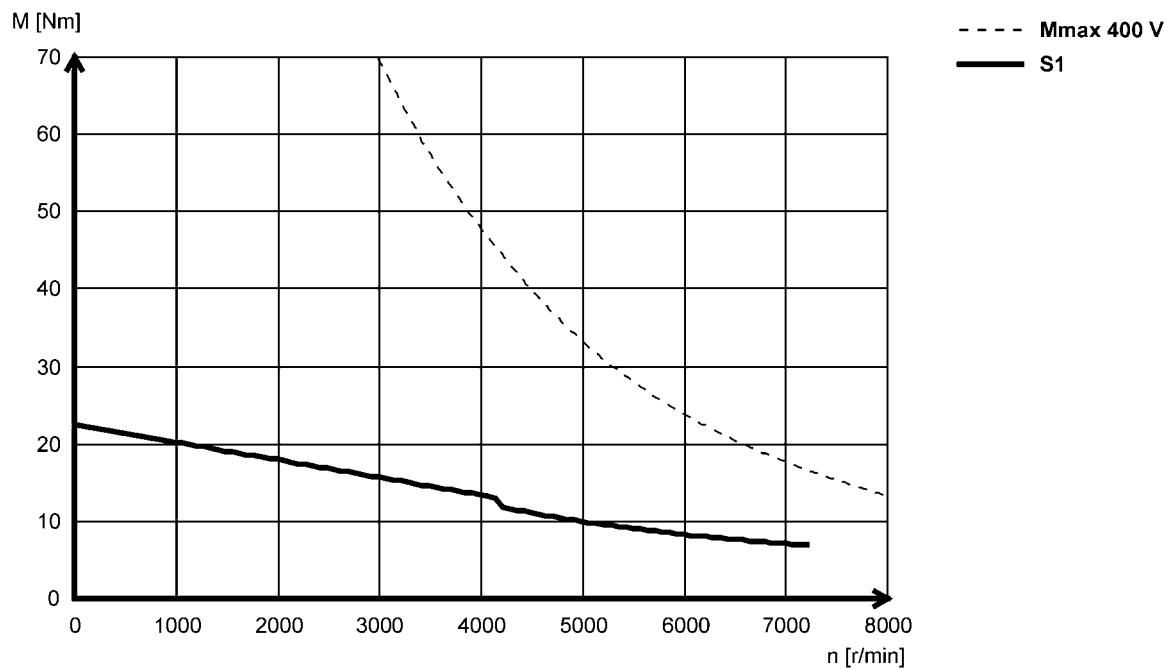

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA20X14...2F□□ (forced ventilated)

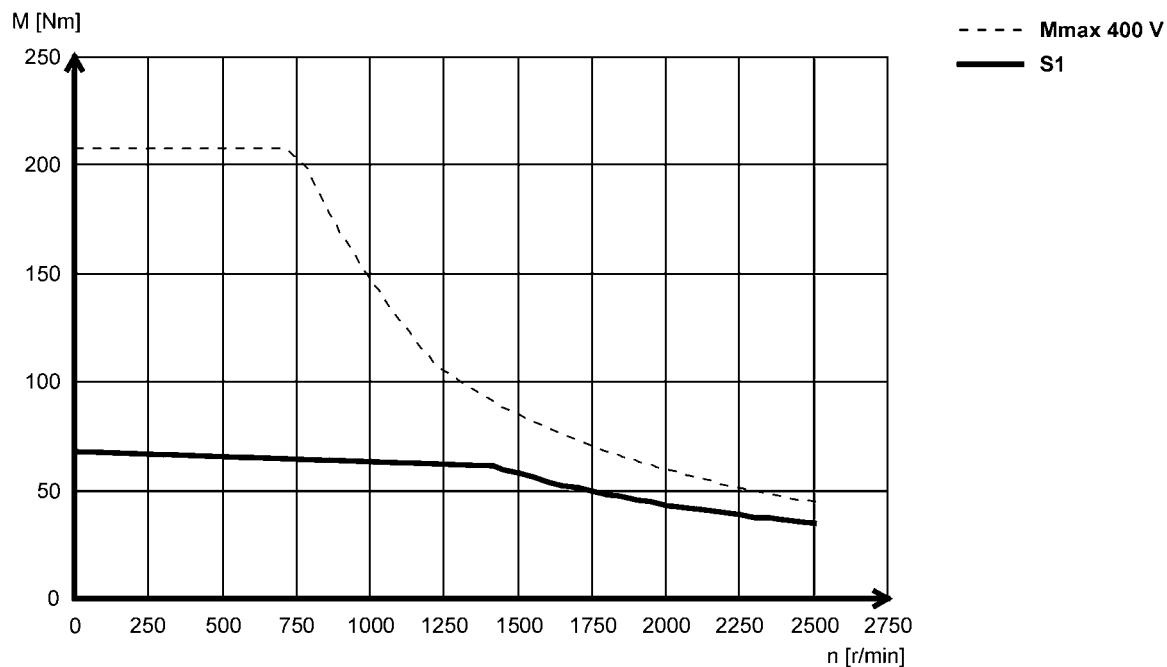

MCA20X29...2F□□ (forced ventilated)

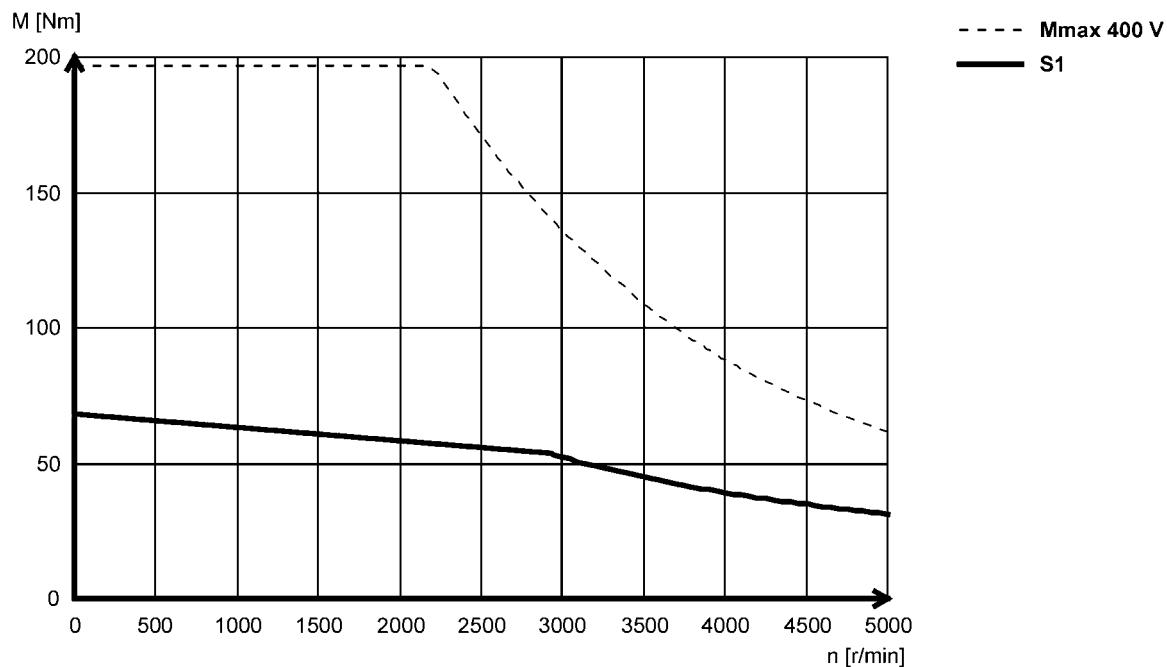

6.11

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA21X17 (forced ventilated)

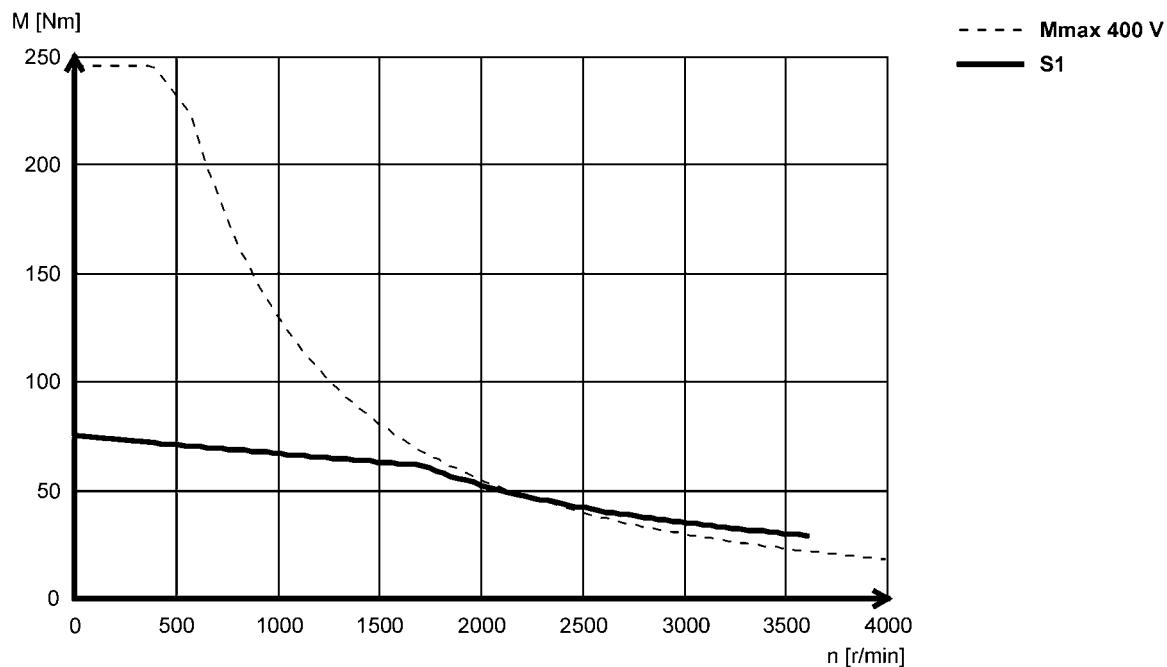

MCA21X25 (non-ventilated)

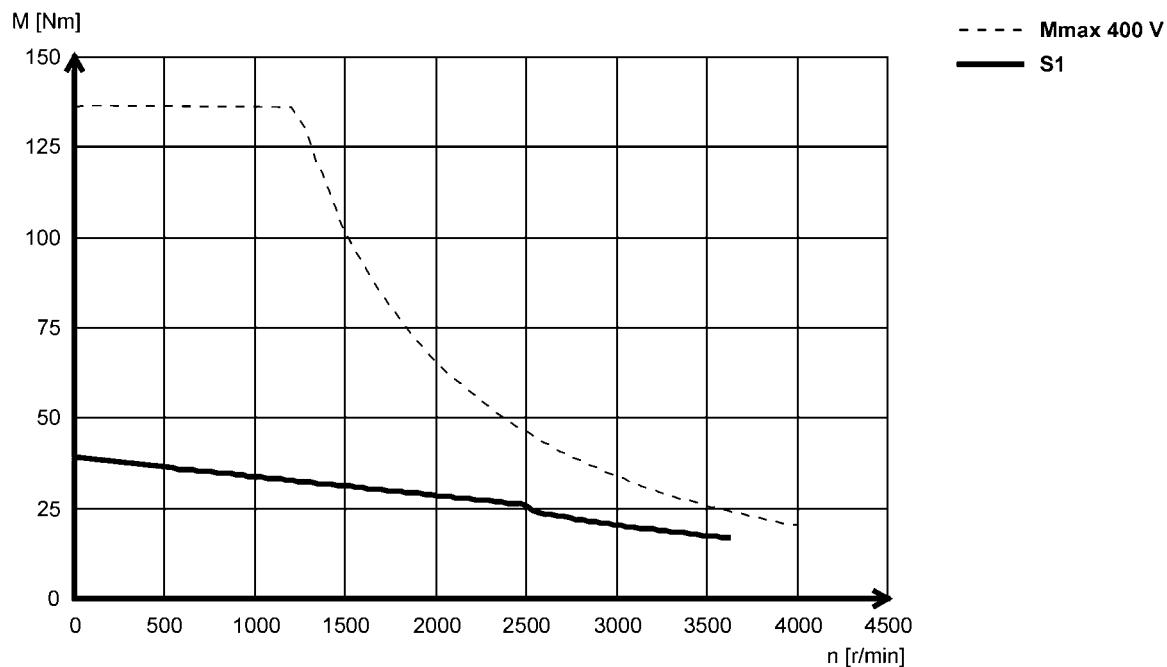

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA21X35 (forced ventilated)

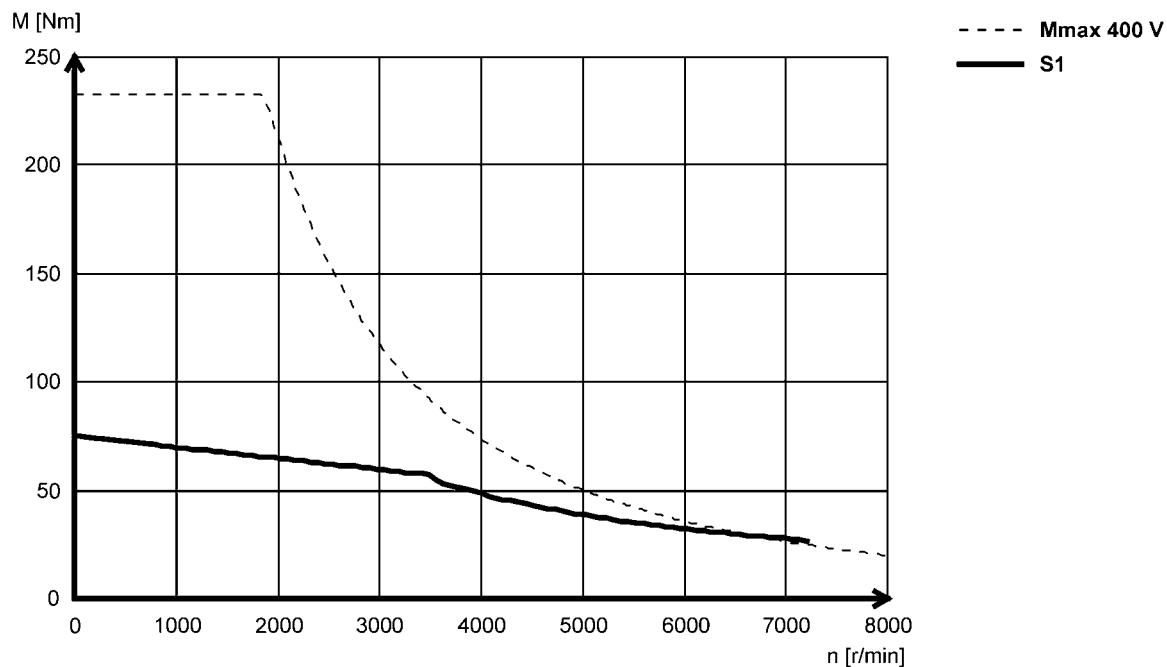

MCA21X42 (non-ventilated)

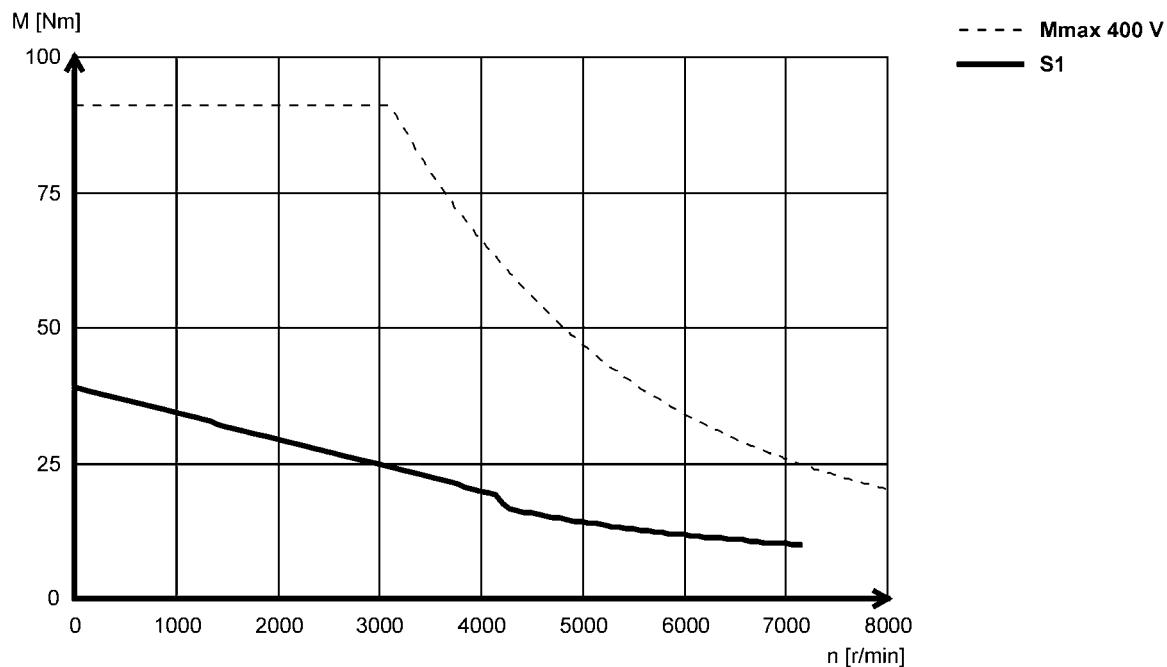

6.11

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA22P08...5F□□ (forced ventilated)

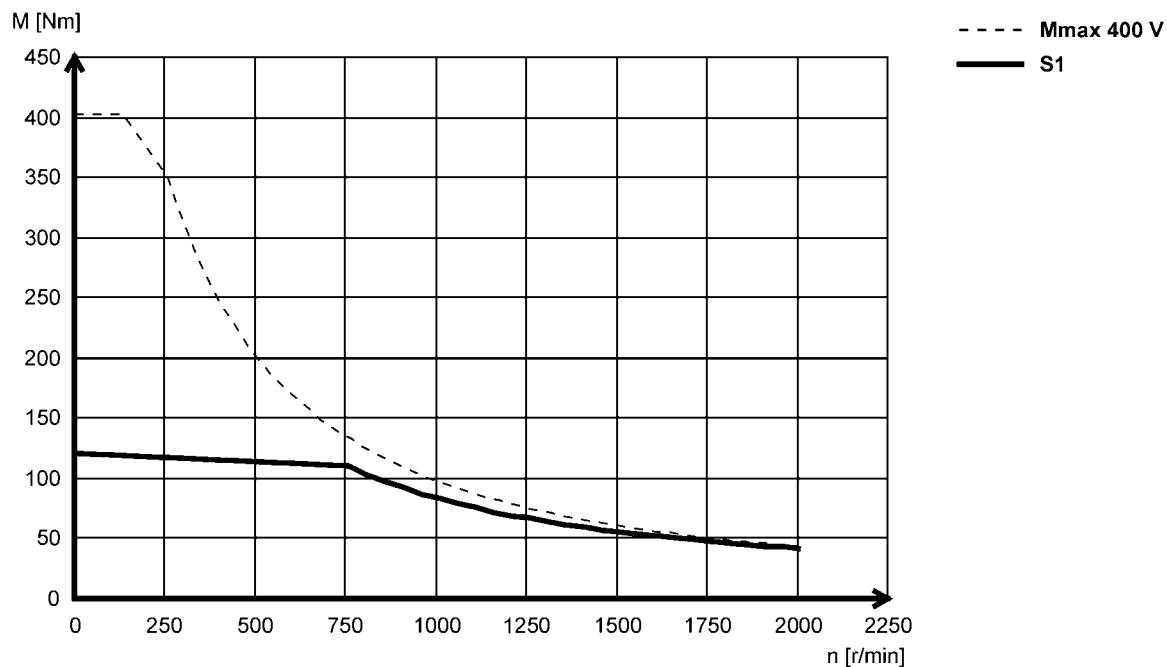

MCA22P08...2F□□ (forced ventilated)

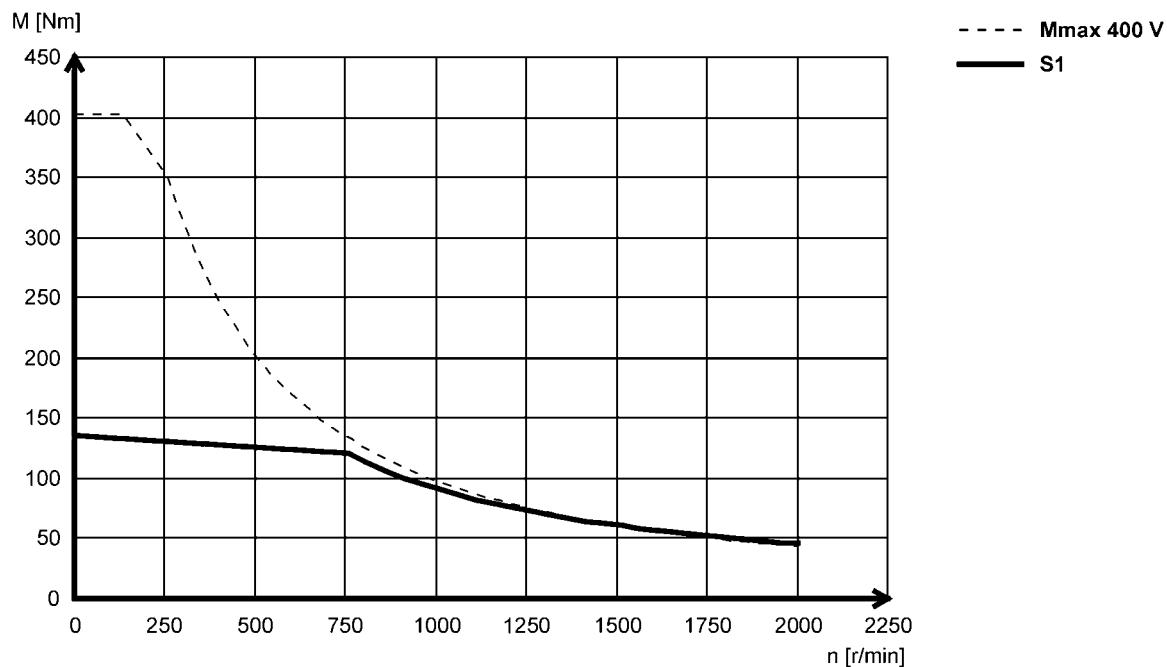

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA22P14...5F□□ (forced ventilated)

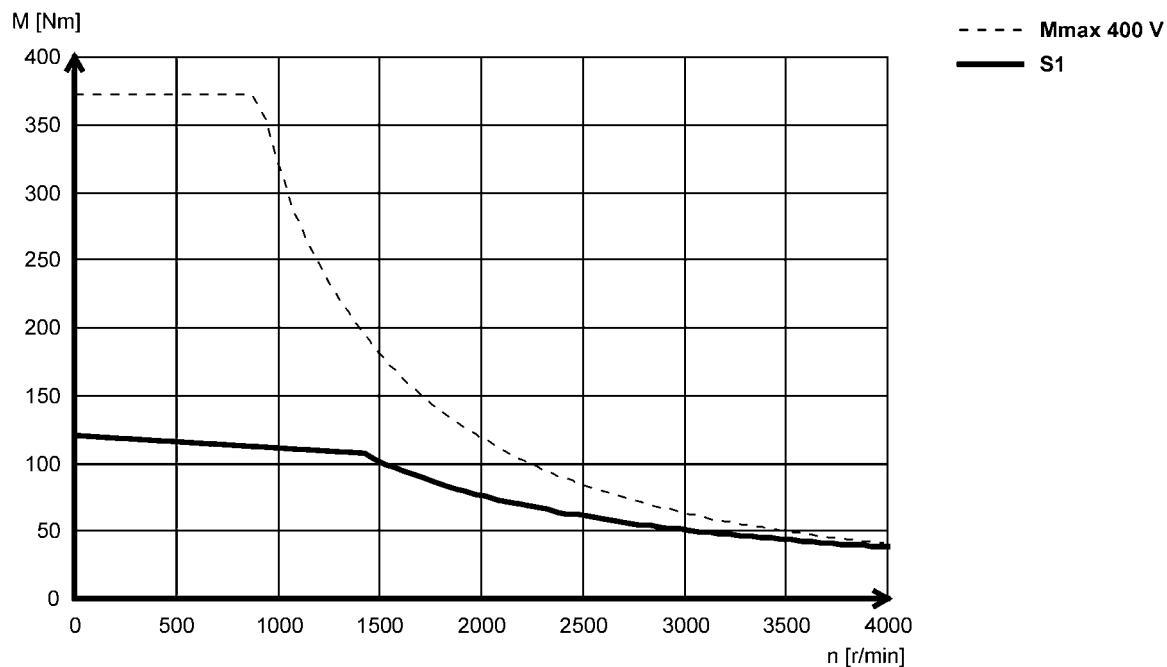

MCA22P14...2F□□ (forced ventilated)

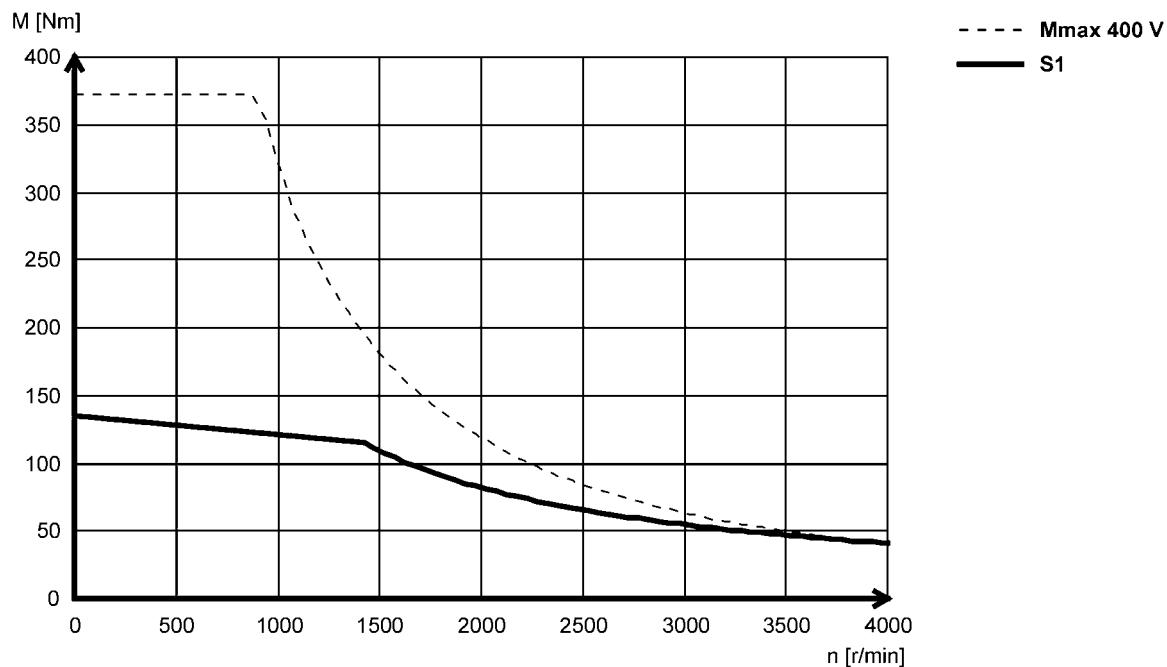

6.11

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA22P17...5F□□ (forced ventilated)

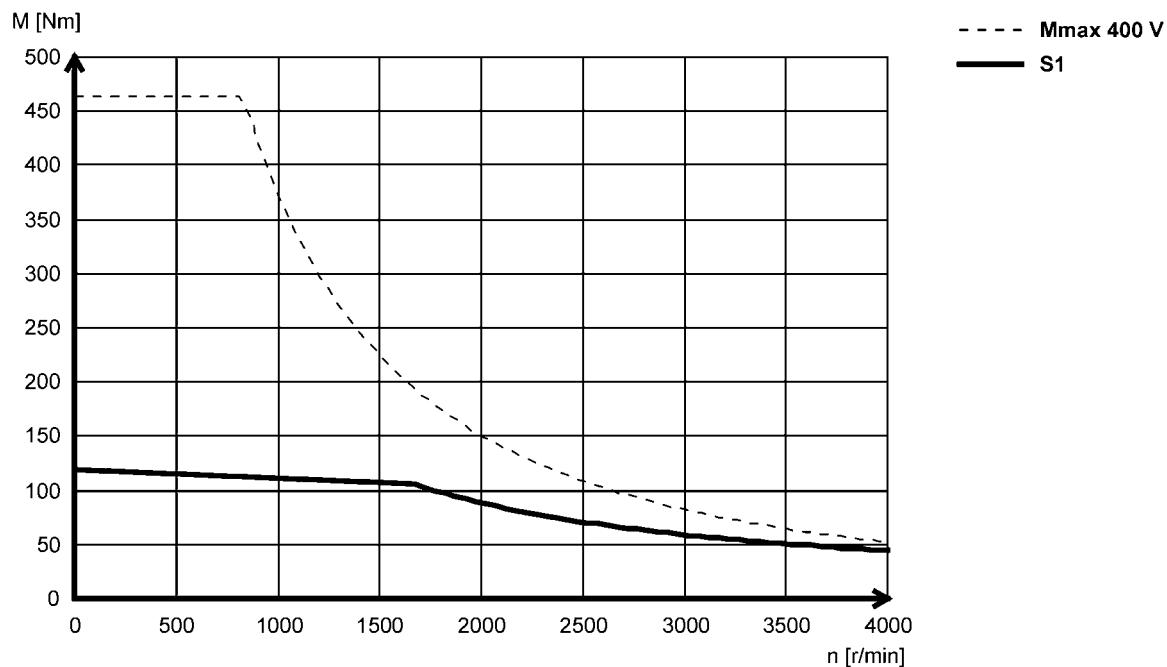

MCA22P17...2F□□ (forced ventilated)

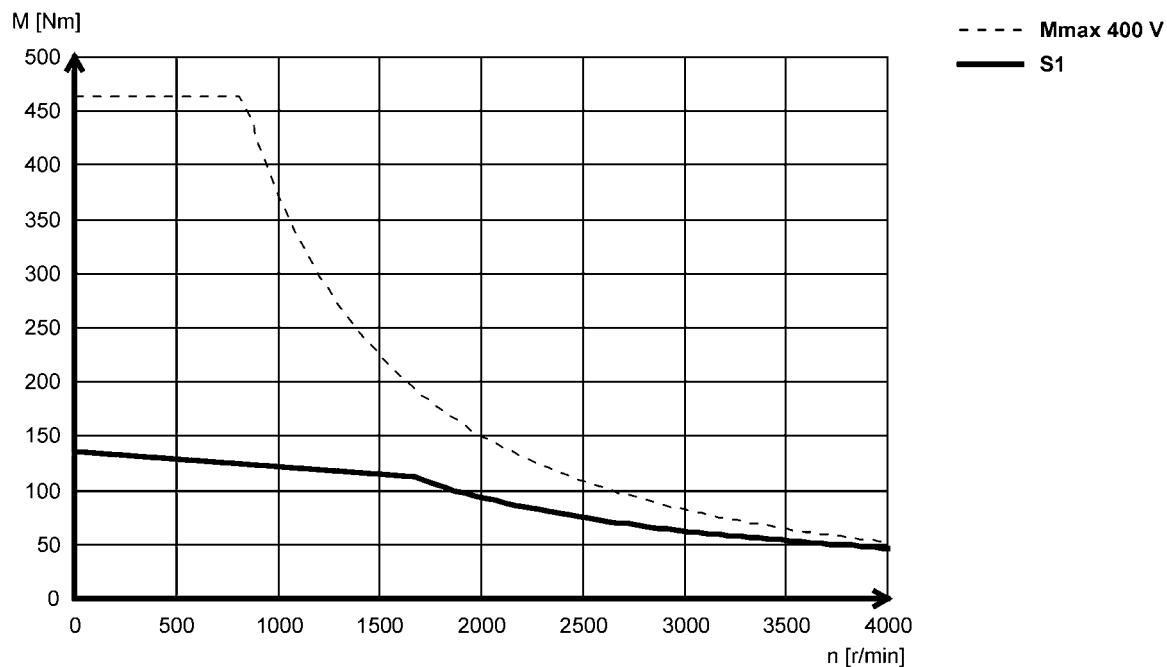

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA22P29...5F□□ (forced ventilated)

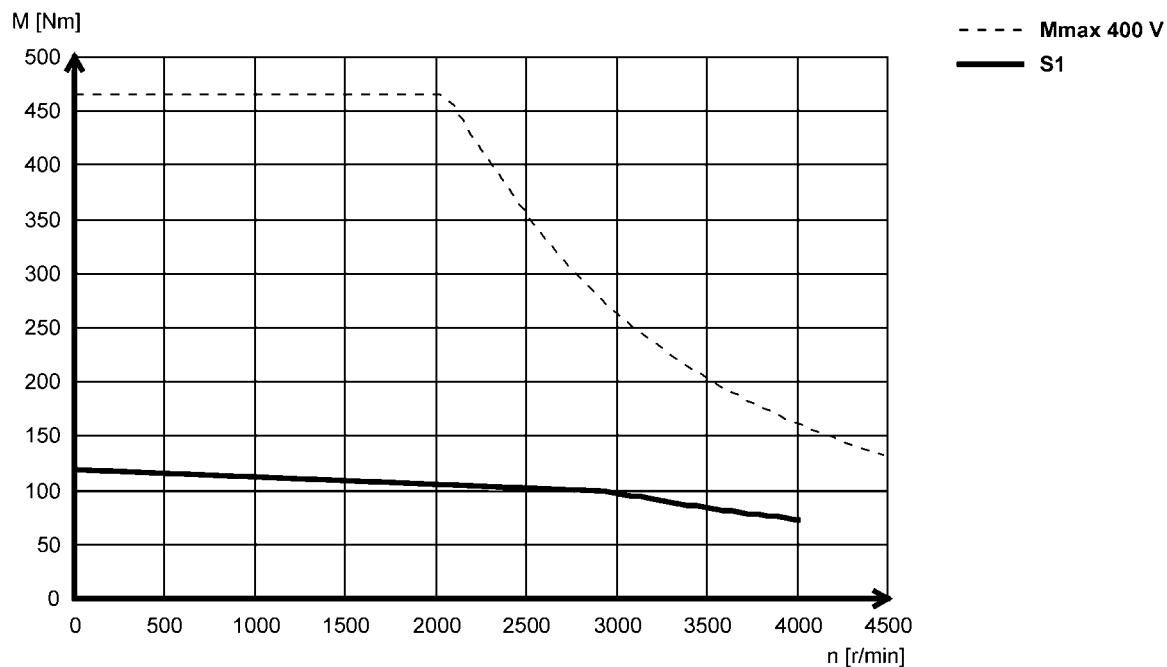

MCA22P29...2F□□ (forced ventilated)

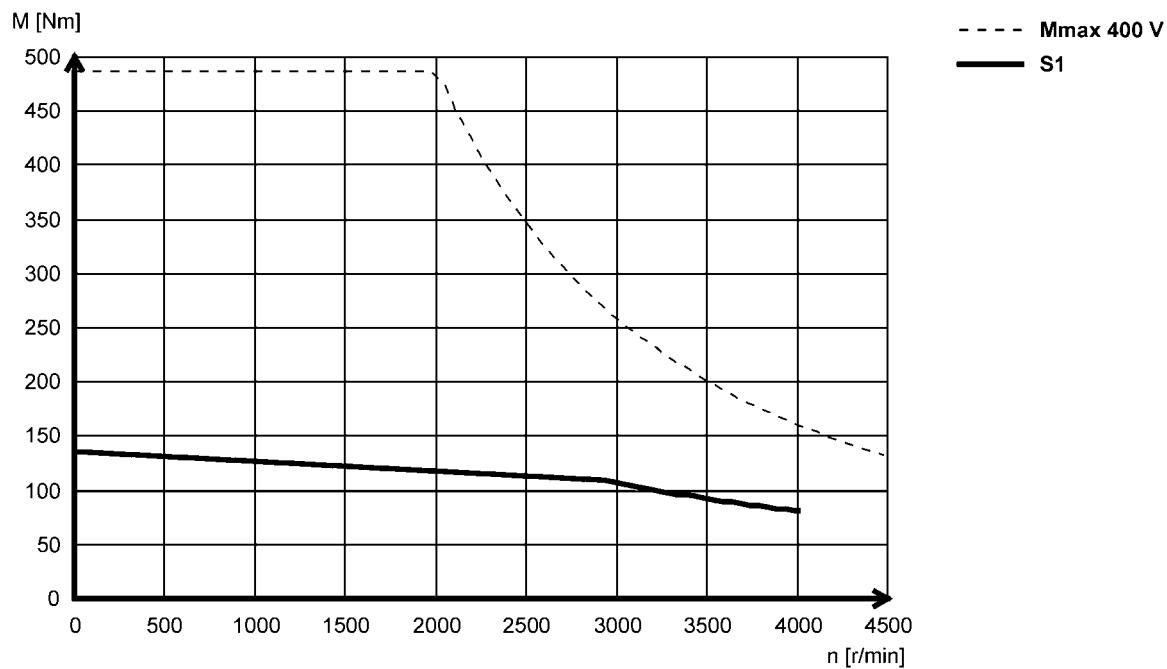

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA26T05...5F□□ (forced ventilated)

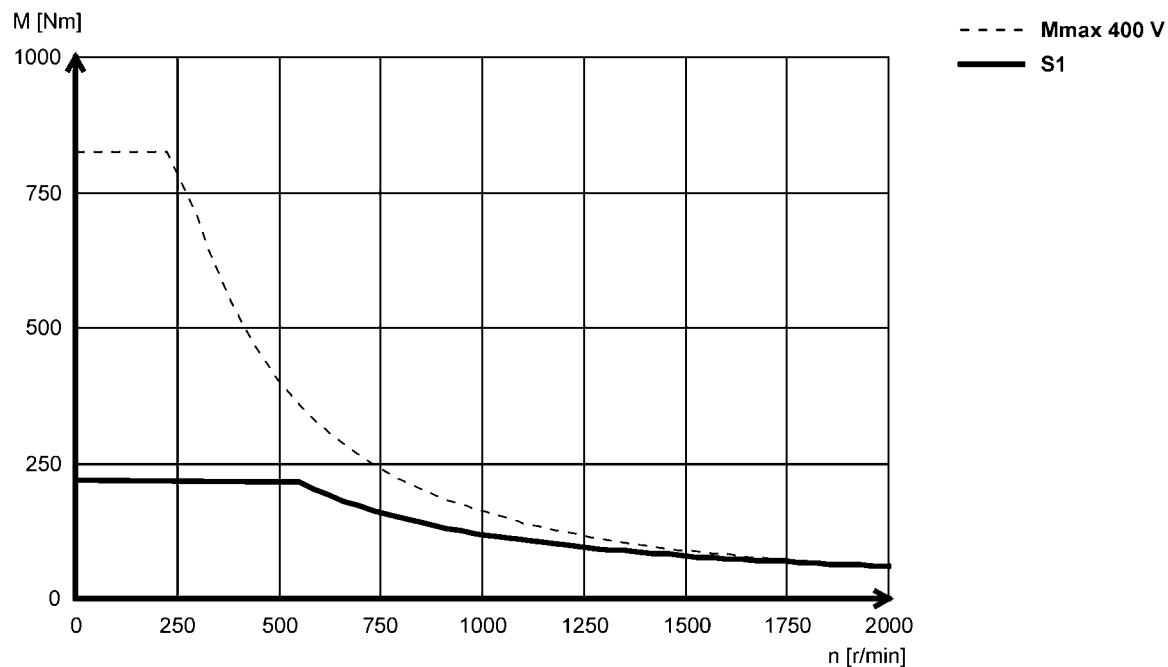

MCA26T05...2F□□ (forced ventilated)

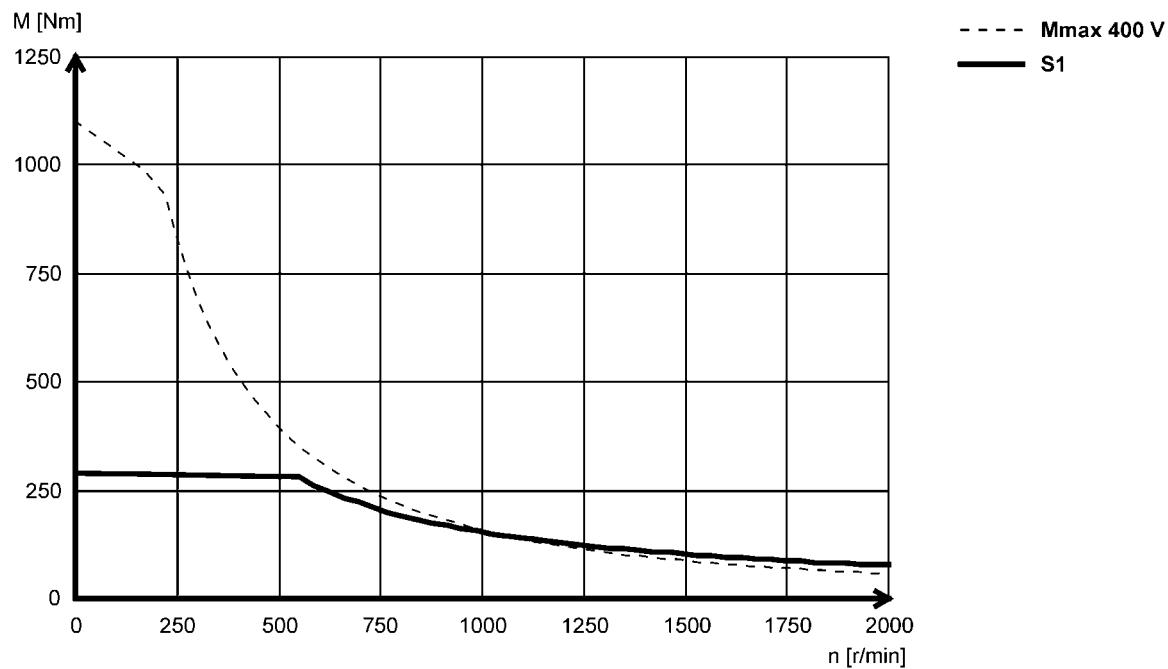

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA26T10...5F□□ (forced ventilated)

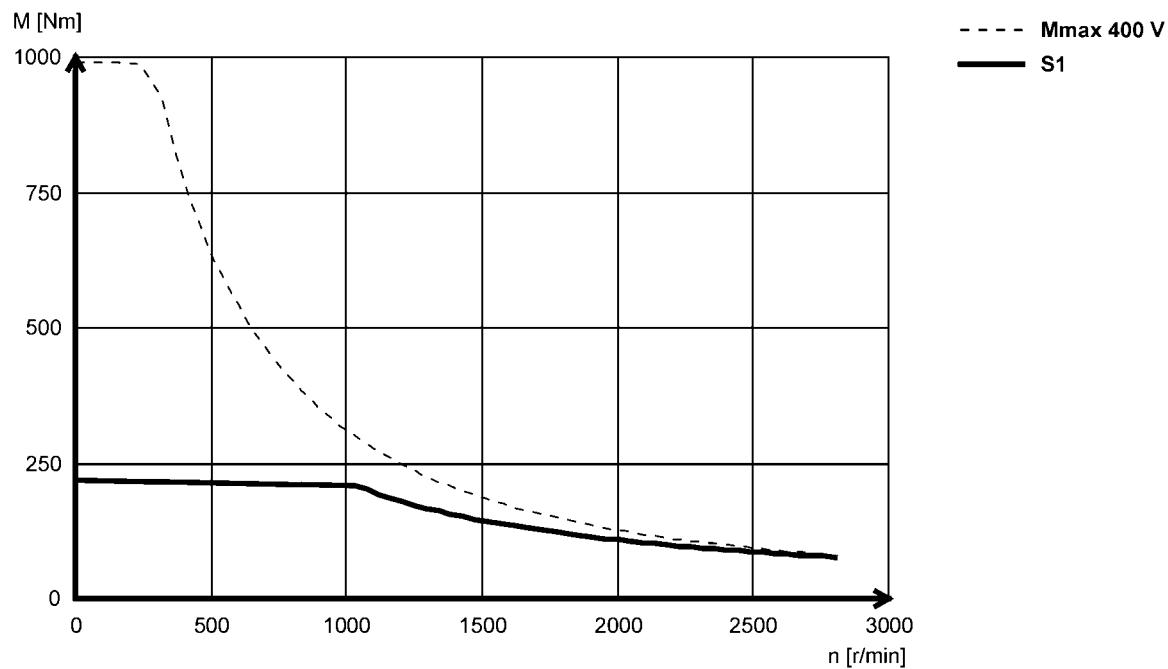

MCA26T10...2F□□ (forced ventilated)

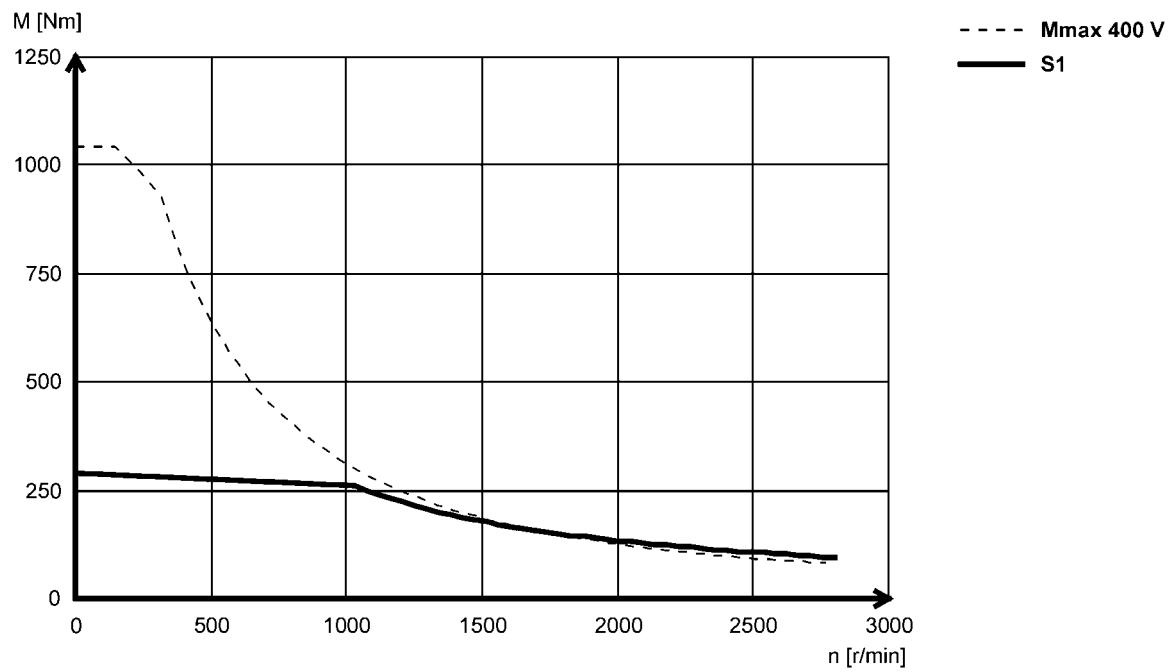

6.11

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA26T12...5F□□ (forced ventilated)

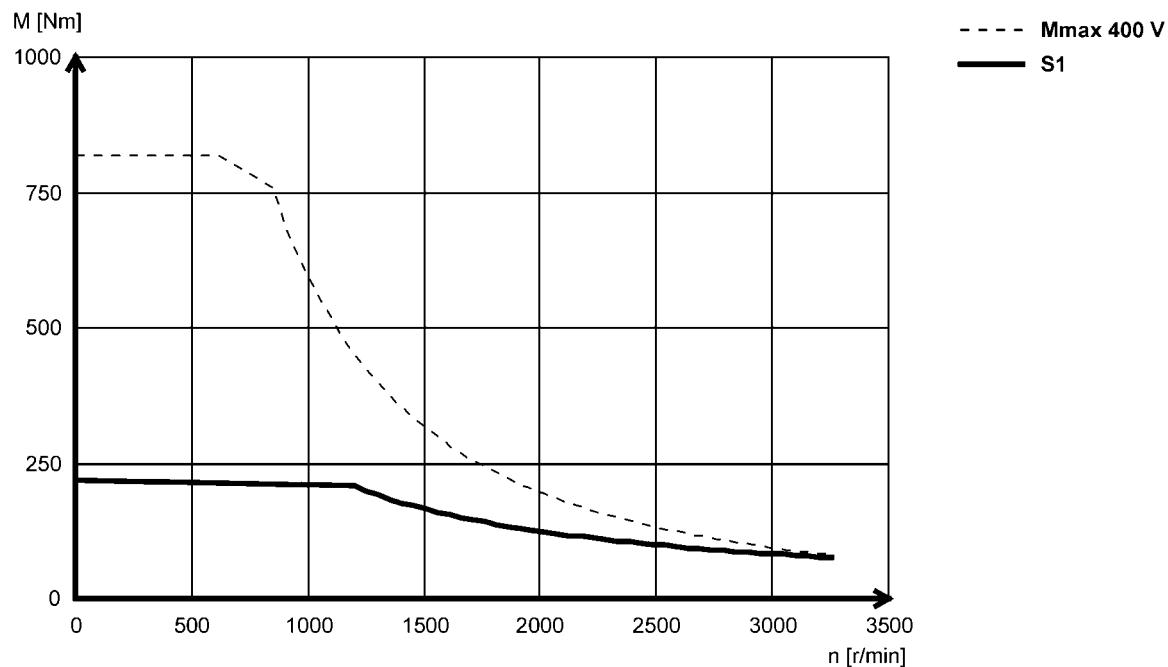

MCA26T12...2F□□ (forced ventilated)

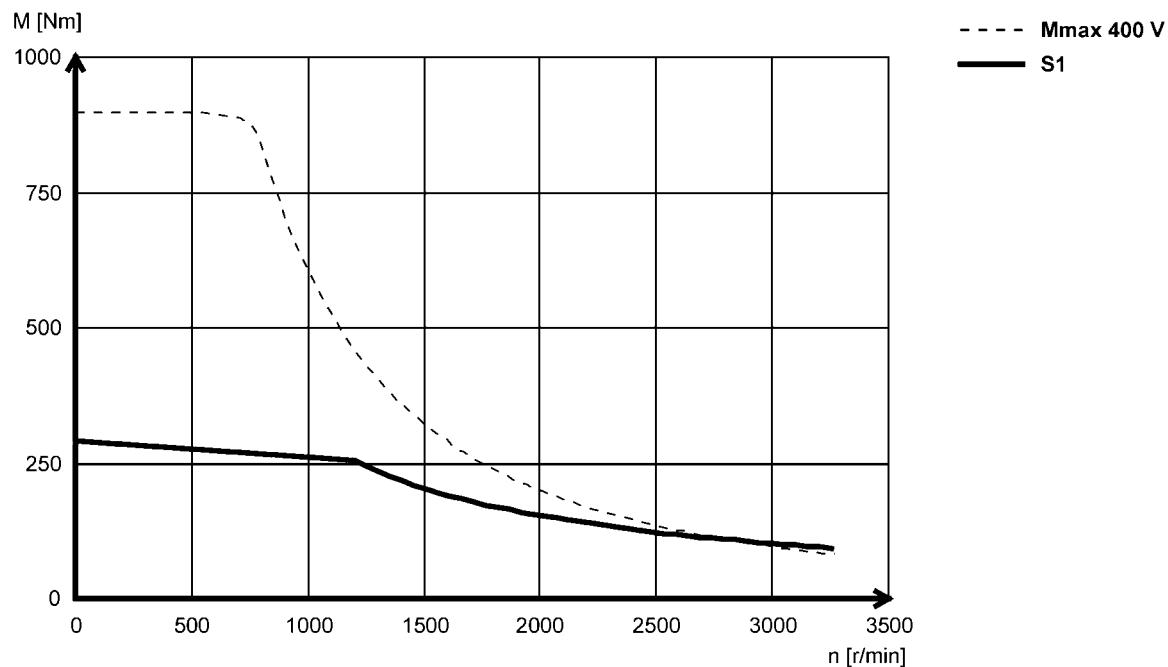

MCA asynchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCA26T22...5F□□ (forced ventilated)

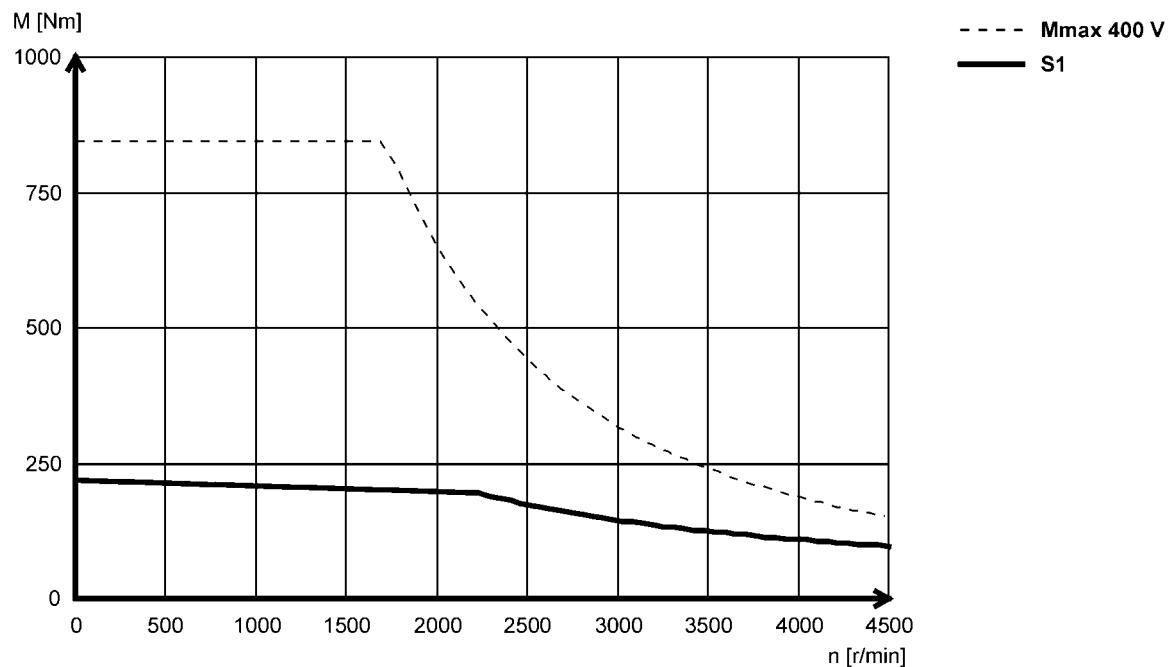

MCA26T22...2F□□ (forced ventilated)

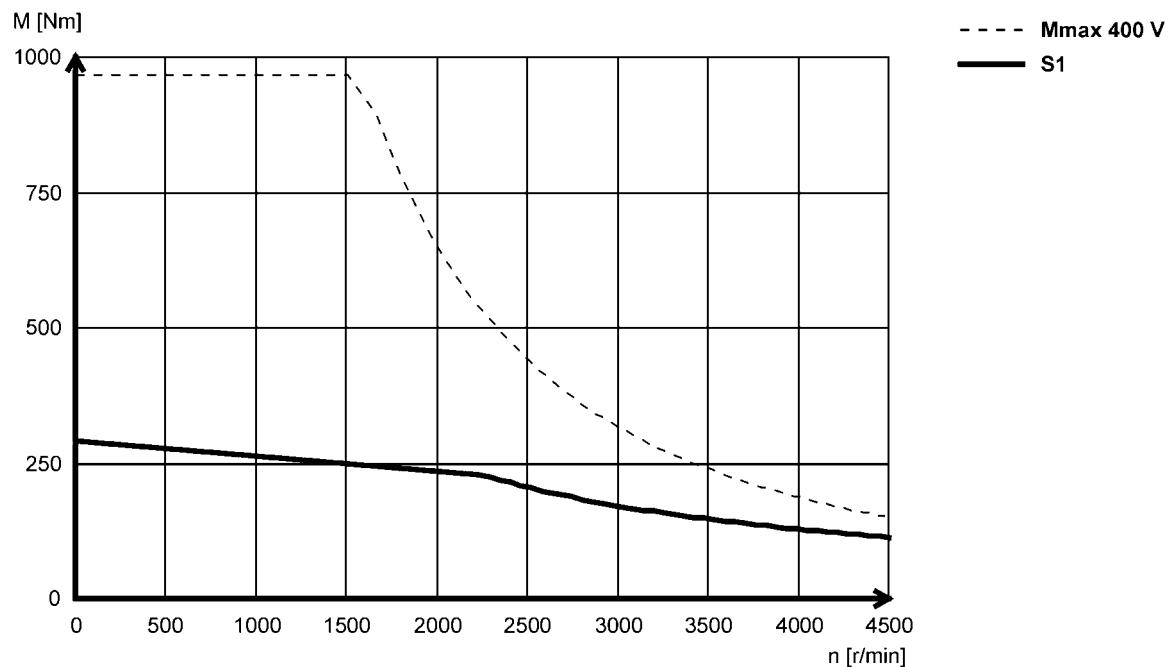


MCA asynchronous servo motors

Technical data



Dimensions, self-ventilated

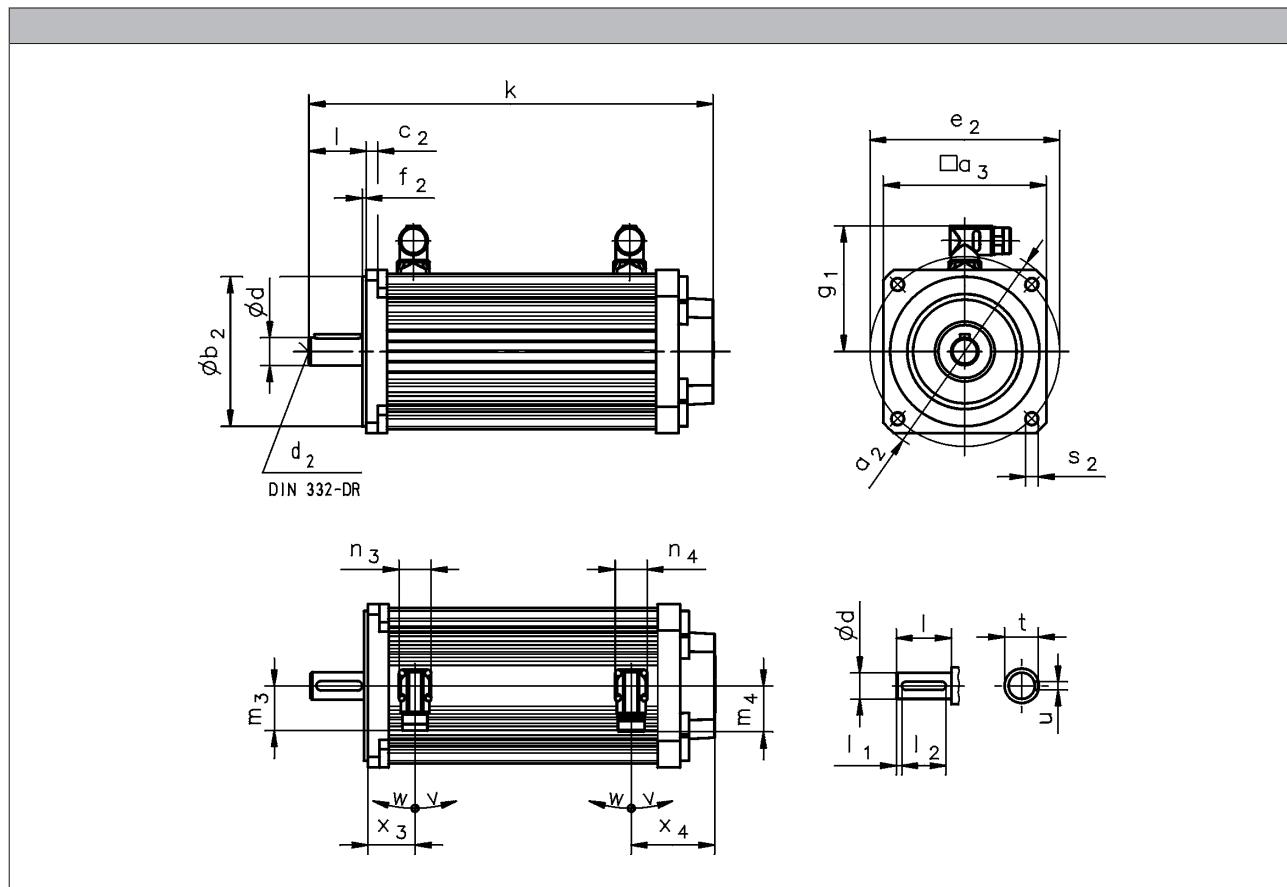

			MCA10I40	MCA13I41	MCA14L20	MCA17N23	MCA19S23	MCA21X25
					MCA14L41	MCA17N41	MCA19S42	MCA21X42
R□0 B0	k	[mm]	292	311	352	390	461	550
	x ₃	[mm]	37	45	41	43	56	62
	x ₄	[mm]	61	65		73		78
R□0 P□	k	[mm]	317	346	385	425	499	592
	x ₃	[mm]	59	72	68	75	91	102
	x ₄	[mm]	61	65		73		78
S□□ / E□□ / T20 / B0	k	[mm]	346	365	407	444	511	599
	x ₃	[mm]	37	45	41	43	56	62
	x ₄	[mm]	115	119	128	127	123	127
S□□ / E□□ / T20 / P□	k	[mm]	371	400	440	479	549	641
	x ₃	[mm]	59	72	68	75	91	102
	x ₄	[mm]	115	119	128	127	123	127

- Speed/angle sensor: R50 / S□□ / E□□ / T20
- Brake: B0 / P□

MCA asynchronous servo motors



Technical data

Dimensions, self-ventilated

	g_1 [mm]	n_3 [mm]	n_4 [mm]	m_3 [mm]	m_4 [mm]	v [°]	w [°]
MCA10I40	90						
MCA13I41	102						
MCA14L20	109	28		40			
MCA14L41							
MCA17N23	118		28			195	
MCA17N41					40		80
MCA19S23	151						
MCA19S42		40		71			
MCA21X25	162						
MCA21X42							

	d k6 [mm]	d_2 M5 [mm]	l 30 [mm]	l_1 2.5 [mm]	l_2 25 [mm]	u 5.0 [mm]	t 16.0 [mm]
MCA10	14	M5	30	2.5	25	5.0	16.0
MCA13	19	M6	40	2.0	36	6.0	21.5
MCA14	24	M8	50		40		27.0
MCA17						8.0	
MCA19	28	M10	60		50		31.0
MCA21	38	M12	80		70	10.0	41.0

	a_2 j6 [mm]	a_3 [mm]	b_2 80 [mm]	c_2 8 [mm]	e_2 100 [mm]	f_2 3.0 [mm]	s_2 7 [mm]
MCA10	120	102	80	8	100	3.0	7
			70		85	2.5	M6
MCA13	160	130	110	9	130		9.0
							M8
MCA14	188	142	130	10	165		11.0
			110		130		M8
MCA17	200	165	130	12	165		11.0
			110		130		M8
MCA19	250	192	180	11	215	4.0	13.0
			110		130	3.5	M8
			214		215		
MCA21	300	250	230	12	265	4.0	13.0
		214	110	11	130		M8


MCA asynchronous servo motors



Technical data

Dimensions, forced ventilated

Motors MCA13 to 19/21

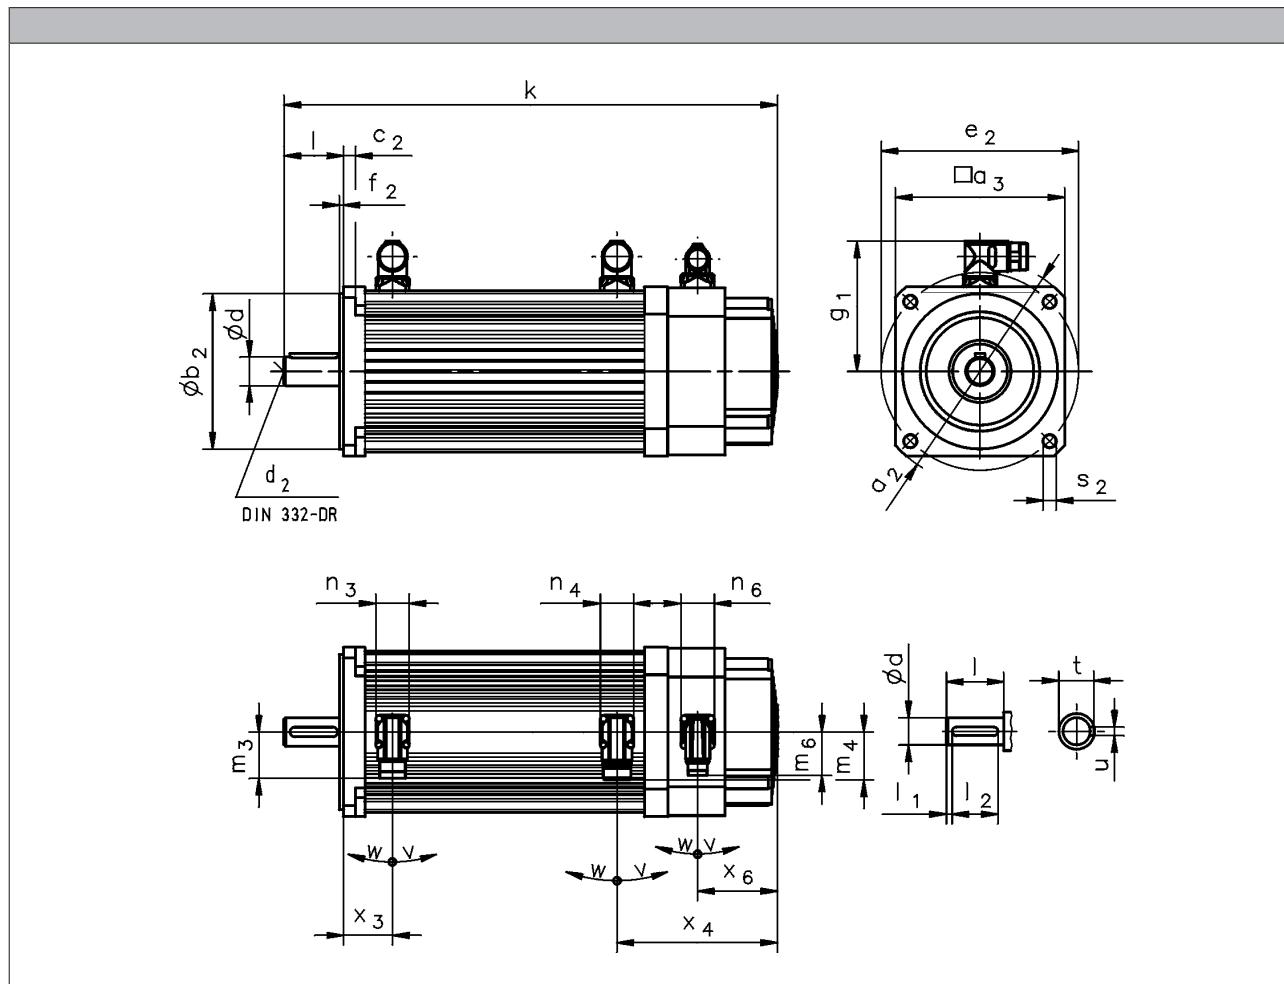

		MCA13I34	MCA14L16 MCA14L35	MCA17N17 MCA17N35	MCA19S17 MCA19S35	MCA21X17 MCA21X35
R□0 B0	k [mm]	379	414	476	558	646
	x ₃ [mm]	45	41	43	56	62
	x ₄ [mm]	133	135	159	170	174
R□0 P□	k [mm]	414	447	511	596	688
	x ₃ [mm]	72	68	75	91	102
	x ₄ [mm]	133	135	159	170	174
S□□ / E□□ / T20 / B0	k [mm]	433	469	530	608	695
	x ₃ [mm]	45	41	43	56	62
	x ₄ [mm]	187	190	213	220	223
S□□ / E□□ / T20 / P□	k [mm]	468	502	565	646	737
	x ₃ [mm]	72	68	75	91	102
	x ₄ [mm]	187	190	213	220	223
	x ₆ [mm]	73	67	94	103	96

- Speed/angle sensor: RS0 / S□□ / E□□ / T20
- Brake: B0 / P□

MCA asynchronous servo motors



Technical data

Dimensions, forced ventilated

Motors MCA13 to 19/21

	g_1 [mm]	n_3 [mm]	n_4 [mm]	n_6 [mm]	m_3 [mm]	m_4 [mm]	m_6 [mm]	v [°]	w [°]
MCA13 34	102								
MCA14L16	109	28			40				
MCA14L35									
MCA17N17	118		28	28					
MCA17N35					40		37	195	80
MCA19S17	151								
MCA19S35		40			71				
MCA21X17									
MCA21X35	162								

	d k6 [mm]	d_2 [mm]	l [mm]	l_1 [mm]	l_2 [mm]	u [mm]	t [mm]
MCA13	19	M6	40	2.0	36	6.0	21.5
MCA14	24	M8	50		40		27.0
MCA17					5.0	8.0	
MCA19	28	M10	60		50		31.0
MCA21	38	M12	80		70	10.0	41.0

	a_2 [mm]	a_3 [mm]	b_2 [mm]	c_2 [mm]	e_2 [mm]	f_2 [mm]	s_2 [mm]
			j6				
MCA13	160	130	110	9	130		9.0
							M8
MCA14	188	142	130		165		11.0
			110	10	130		M8
MCA17	200	165	130		165		11.0
			110	12	130		M8
MCA19	250	192	180		215	4.0	13.0
			110	11	130	3.5	M8
MCA21	300	250	180		215		4.0
	250	214	110	12	265		13.0
				11	130	3.5	M8


MCA asynchronous servo motors



Technical data

Dimensions, forced ventilated

MCA20/22/26 motors in B3 design

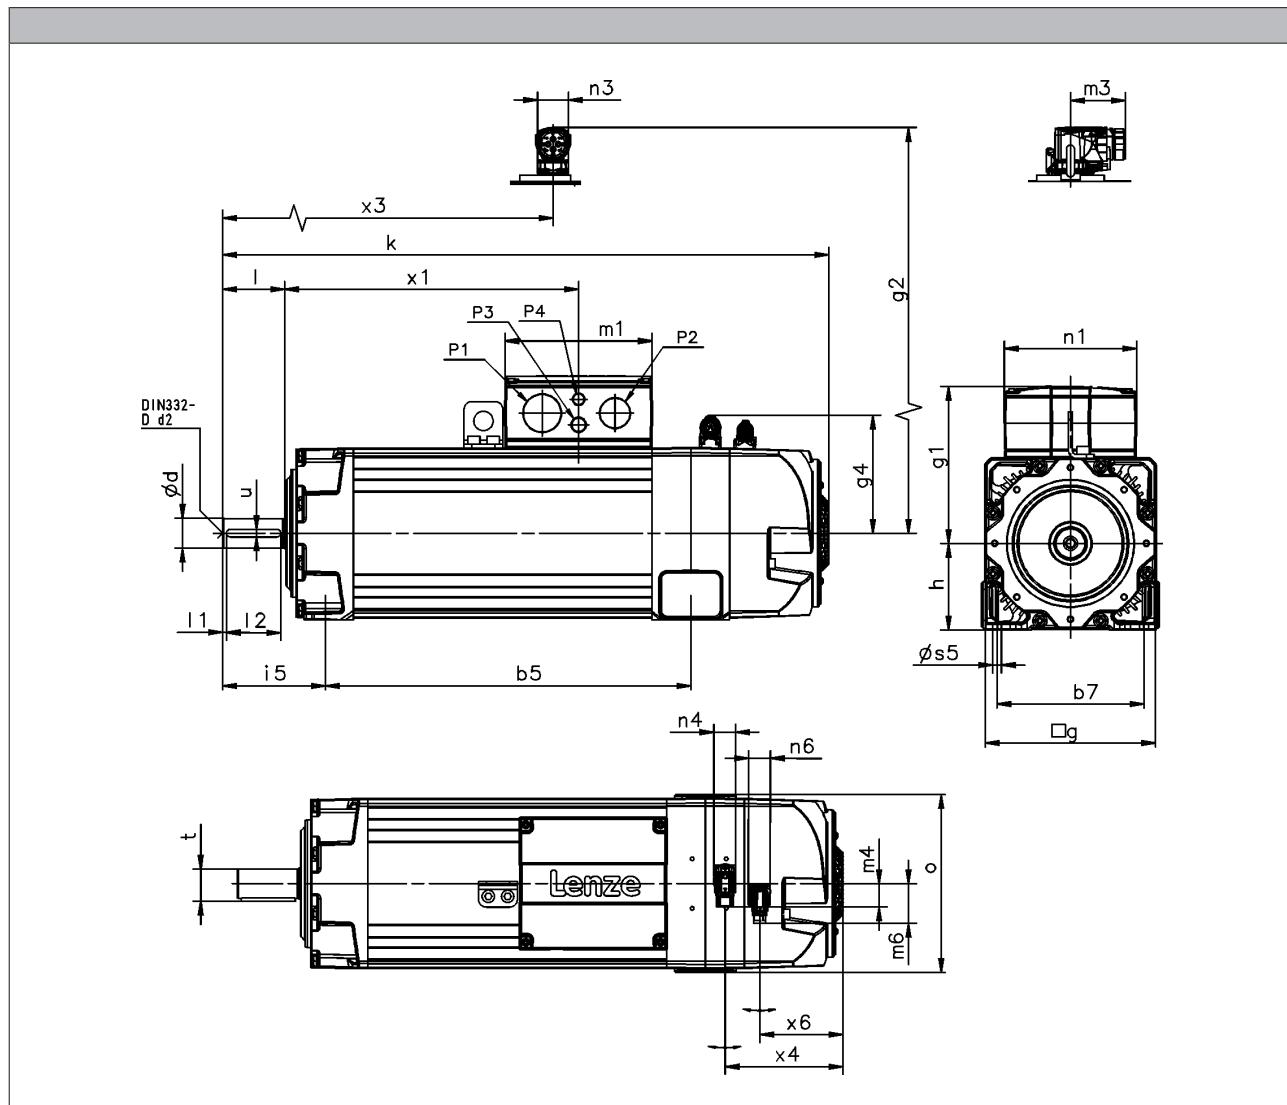

			MCA20	MCA22	MCA26
R□0 / E□□ / T□□ / S□□ / B0...F10	k	[mm]	666	783	970
R□0 / E□□ / T□□ / S□□ / B0...F1F	k	[mm]	754	865	1022
R□0 / E□□ / T□□ / S□□ / B0	x ₄	[mm]	146	153	194
	m ₄	[mm]	25.0	31.0	25.0
R□0 F1...F10	k	[mm]	753	878	1125
R□0 F1...F1F	k	[mm]	842	959	1177
R□0 F1	x ₄	[mm]	151	157	201
	m ₄	[mm]		31.0	
E□□ / T□□ / S□□ / F1...F10	k	[mm]	797	916	1163
E□□ / T□□ / S□□ / F1...F1F	k	[mm]	885	998	1215
E□□ / T□□ / S□□ / F1	x ₄	[mm]	146	162	200
	m ₄	[mm]		31.0	
R□0 / E□□ / T□□ / S□□ / F2...F10	k	[mm]	822	948	1163
R□0 / E□□ / T□□ / S□□ / F2...F1F	k	[mm]	910	1030	1215
R□0 / E□□ / T□□ / S□□ / F2	x ₄	[mm]	146	162	200
	m ₄	[mm]		31.0	

MCA asynchronous servo motors



Technical data

Dimensions, forced ventilated

MCA20/22/26 motors in B3 design

	g	g ₁	g ₂	g ₄	m ₁	m ₃	m ₆	n ₁	n ₃	n ₄	n ₆
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCA20	200	171	168	141	154	72		128	40		
MCA22	220	203		153	190		51	171		28	28
MCA26	260	256		173	234			212			

	o	P ₁	P ₂	P ₃	P ₄	x ₁	x ₃	x ₆
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCA20	206	M32x1.5	M25x1.5			299	422	101
MCA22	230	M50x1.5	M40x1.5			380		108
MCA26	269	M63x1.5	M50x1.5			465		152

	d	d	d ₂	l	l ₁	l ₂	u	t
	k6	m6		-0.7 ... 0.3				
	[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCA20								
MCA22	38		M12	80	5.0	70	10.0	41.0
MCA26		55	M20	110		100	16.0	59.0

	h	b ₅	b ₇	s ₅	i ₅
	[mm]	[mm]	[mm]	[mm]	[mm]
MCA20	100	366	160		134
MCA22	112	472	190	11.5	133
MCA26	132	581	215	14.0	165

- Speed/angle sensor: RS0 / S□□ / E□□ / T□□
- Brake: B0 / F1 / F2
- Blower: F10 / F1F


MCA asynchronous servo motors

Technical data



Dimensions, forced ventilated

MCA20/22/26 motors in B35 design

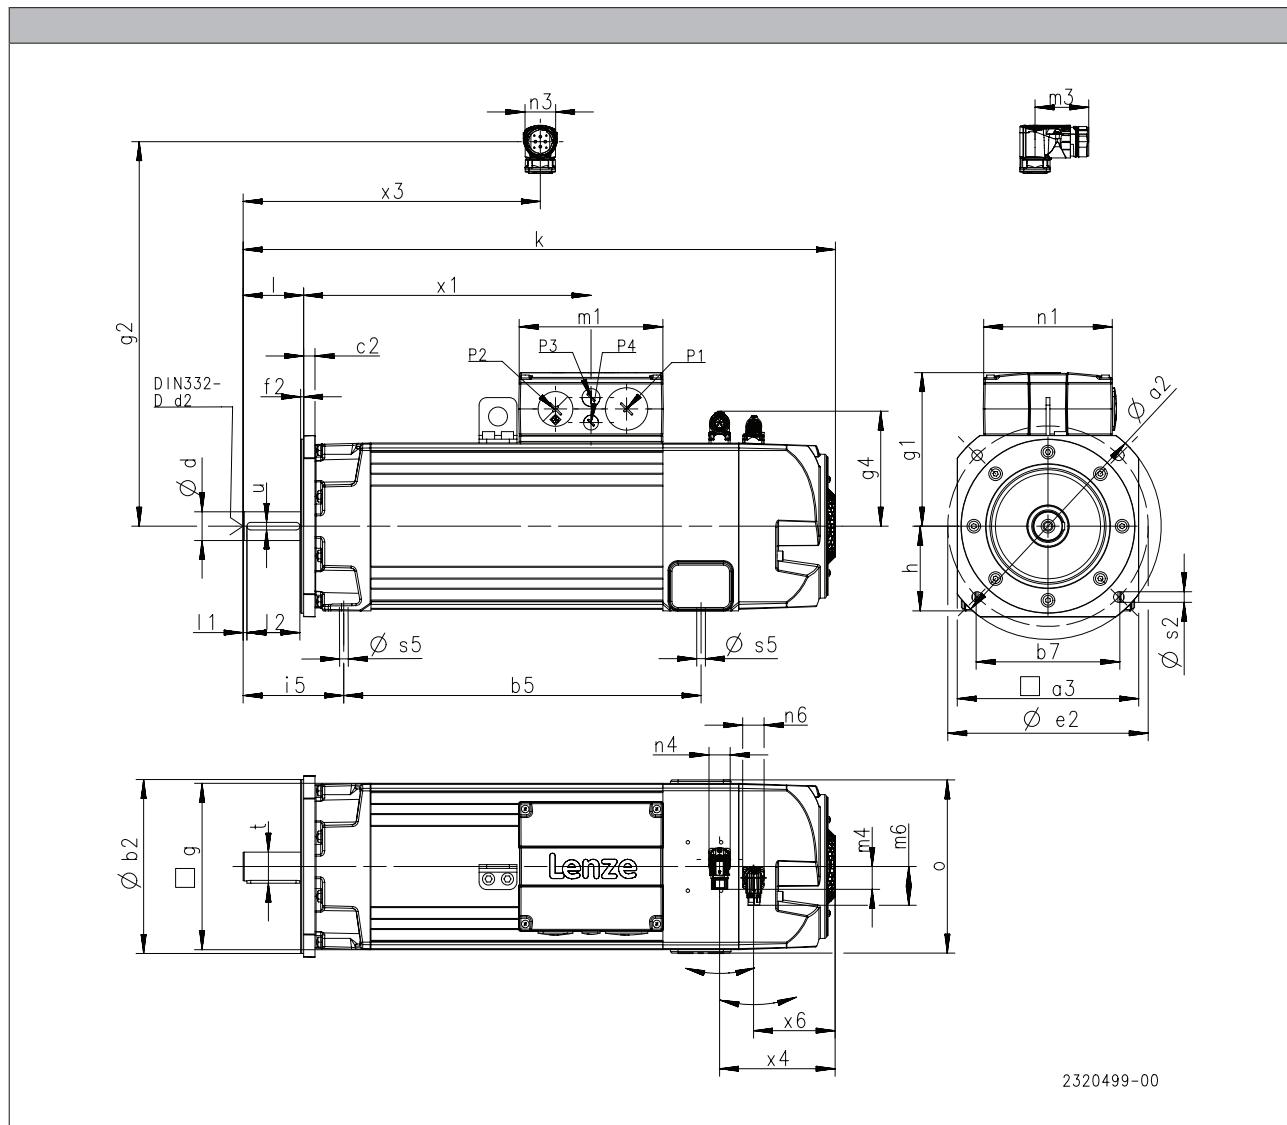

		MCA20	MCA22	MCA26
R□0 / E□□ / T□□ / S□□ / B0...F10	k [mm]	666	783	970
R□0 / E□□ / T□□ / S□□ / B0...F1F	k [mm]	754	865	1022
R□0 / E□□ / T□□ / S□□ / B0	x ₄ [mm]	146	153	194
	m ₄ [mm]	25.0	31.0	25.0
R□0 F1...F10	k [mm]	753	878	1125
R□0 F1...F1F	k [mm]	842	959	1177
R□0 F1	x ₄ [mm]	151	157	201
	m ₄ [mm]		31.0	
E□□ / T□□ / S□□ / F1...F10	k [mm]	797	916	1163
E□□ / T□□ / S□□ / F1...F1F	k [mm]	885	998	1215
E□□ / T□□ / S□□ / F1	x ₄ [mm]	146	162	200
	m ₄ [mm]		31.0	
R□0 / E□□ / T□□ / S□□ / F2...F10	k [mm]	822	948	1163
R□0 / E□□ / T□□ / S□□ / F2...F1F	k [mm]	910	1030	1215
R□0 / E□□ / T□□ / S□□ / F2	x ₄ [mm]	146	162	200
	m ₄ [mm]		31.0	

MCA asynchronous servo motors



Technical data

Dimensions, forced ventilated

MCA20/22/26 motors in B35 design

	g	g ₁	g ₂	g ₄	m ₁	m ₃	m ₆	n ₁	n ₃	n ₄	n ₆
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCA20	200	171	168	141	154	72		128	40		
MCA22	220	203		153	190		51	171		28	28
MCA26	260	256		173	234			212			

	o	P ₁	P ₂	P ₃	P ₄	x ₁	x ₃	x ₆
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCA20	206	M32x1.5	M25x1.5			299	422	101
MCA22	230	M50x1.5	M40x1.5			380		108
MCA26	269	M63x1.5	M50x1.5			465		152

	d	d	d ₂	l	l ₁	l ₂	u	t
	k6	m6		-0.7 ... 0.3				
	[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCA20								
MCA22	38		M12	80		70	10.0	41.0
MCA26		55	M20	110		100	16.0	59.0

	h	b ₅	b ₇	s ₅	i ₅
	[mm]	[mm]	[mm]	[mm]	[mm]
MCA20	100	366	160		
MCA22	112	472	190	11.5	133
MCA26	132	581	215	14.0	165

	a ₂	a ₃	b ₂	b ₂	c ₂	e ₂	f ₂	s ₂
			j6	h6				
	[mm]							
MCA20	250	196	180			215		
MCA22	300	240	230		15	265	4.0	14
MCA26	400	320		300		350	5.0	18

- Speed/angle sensor: RS0 / S□□ / E□□ / T□□
- Brake: B0 / F1 / F2
- Blower: F10 / F1F

MCA asynchronous servo motors

Technical data



MCA asynchronous servo motors



Accessories

Permanent magnet holding brake

The asynchronous servo motors MCA10 to 19 and 21 can be fitted with integral permanent magnet holding brakes.

In the case of permanent magnet brakes, the rated torque applies solely as holding torque at standstill. This is due to the nature of their design. During braking from full motor speed, e.g. in the event of emergency stops, the braking torque is significantly reduced.

As such, they may not be used as safety elements (particularly with lifting axes) without additional measures being implemented.

The brakes are activated when the supply voltage is disconnected (closed-circuit principle). When using the brakes purely as holding brakes, virtually no wear occurs on the friction surfaces.

If no suitable voltage (incorrect value, incorrect polarity) is applied to the brake, the brake will be applied and can be overheated and destroyed by the motor continuing to rotate.

The shortest switching times of the brakes are achieved by DC switching of the voltage. A spark suppressor is required to suppress interference and to increase the service life of the relay contacts here.

For traversing axes, adherence to the permissible load/brake motor (J_L / J_{MB}) moment of inertia ensures that the permissible maximum switching rate of the brake will not be exceeded and at least 2,000 emergency stop functions can be performed from a speed of 3,000 rpm.

For lifting axes, the load torque resulting from the weight acts additionally. In this case the specifications for J_L / J_{MB} do not apply.

Caution:

The brakes used are not safety brakes in the sense that a reduction in torque may arise as a result of disruptive factors that cannot be influenced, e.g. oil ingress.

The ohmic voltage drop along the cable must be taken into consideration in long motor supply cables and must be compensated for by a higher voltage at the line input.

The following applies for Lenze system cables:

$$U[V] = U_B[V] + 0.08 \frac{[V]}{[A] \cdot [m]} \cdot l_g[m] \cdot I_B[A]$$



Permanent magnet holding brake

MCA asynchronous servo motors



Accessories

Permanent magnet holding brake

Rated data with standard braking torque

- The figures stated apply to servo motors. They only apply to geared servo motors when the servo motor is connected via a mounting flange.

	$U_{N, DC}^{3, 4, 7)}$	$U_{N, AC}^{5, 7)}$	M_N	M_N	M_{av}	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{6)}$	m	J_{MB}	J_L/J_{MB}
	[V]	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm ²]	[ms]	[ms]	[J]	[kg]	[kgcm ²]	
MCA10	24		3.30	2.50	1.20	0.50	0.38	10.0	20.0	350	0.90	2.78	24.5
	205					0.060							
MCA13	24		12.0	11.0	5.50	0.67	1.06	20.0	29.0	400	0.80	9.36	7.70
	205					0.080							
MCA14	24		15.0	12.0	6.00	0.75	3.60	13.0	30.0	700	1.50	22.8	5.20
	205					0.090							
MCA17	24		24.0	22.0	11.0	0.75	25.0	50.0	1200	2.70	81.5	39.6	5.10
	205					0.090							
MCA19	24		46.0	40.0	18.0	1.00	9.50	73.0	1900	2.70	81.5	3.70	
	205					0.12							
MCA21	24		88.0	80.0	35.0	1.46	31.8	53.0	97.0	2800	5.00	212	1.70
	205					0.18							

¹⁾ Engagement and disengagement times are valid for rated voltage ($\pm 0\%$) and protective circuit for brakes with varistor for DC switching. The times may increase without a protective circuit.

²⁾ The currents are the maximum values when the brake is cold (value used for dimensioning the current supply). The values for a motor at operating temperature are considerably lower.

³⁾ With 24 V DC brake: smoothed DC voltage, ripple $\leq 1\%$.

With 205 V DC brake: connection to 230 V AC through rectifier.

⁴⁾ UR not possible in the case of a brake with a 205 V supply voltage.

⁵⁾ UR not possible in the case of a brake with 230 V supply voltage.

⁶⁾ Maximum switching energy per emergency stop at $n = 3000$ r/min for at least 2000 emergency stops.

⁷⁾ Voltage tolerance: permanent magnet brakes -10% to +5% spring-applied brakes $\pm 10\%$

MCA asynchronous servo motors



Accessories

Permanent magnet holding brake

Rated data with increased braking torque

- ▶ These ratings apply only for geared servo motors with integrated servo motor (without mounting flange).

	$U_{N, DC}^{3,4,7)}$	M_N	M_N	M_{av}	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{6)}$	m	J_{MB}	J_L/J_{MB}
	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm 2]	[ms]	[ms]	[J]	[kg]	[kgcm 2]	
MCA10	24	6.00	5.00	2.50	0.67	1.06	20.0	29.0	400	0.80	3.46	22.4
	205				0.80							
MCA13	24	15.0	12.0	6.00	0.75	3.60	13.0	30.0	700	1.50	11.9	8.40
	205				0.090							
MCA14	24	23.0	20.0	20.0	0.92	9.50	18.0	55.0	1350	2.40	22.8	6.60
	205				0.12							
MCA17	24				0.92	31.8	30.0	100	2800	4.80	104	4.50
	205				0.12							
MCA19	24	48.0	40.0	35.0	1.46		53.0	97.0		5.00	212	1.70
	205				0.18							
MCA21	24	88.0	80.0	35.0	1.46					5.00	212	1.70
	205				0.18							

¹⁾ Engagement and disengagement times are valid for rated voltage ($\pm 0\%$) and protective circuit for brakes with varistor for DC switching. The times may increase without a protective circuit.

²⁾ The currents are the maximum values when the brake is cold (value used for dimensioning the current supply). The values for a motor at operating temperature are considerably lower.

³⁾ With 24 V DC brake: smoothed DC voltage, ripple $\leq 1\%$.

With 205 V DC brake: connection to 230 V AC through rectifier.

⁴⁾ UR not possible in the case of a brake with a 205 V supply voltage.

⁵⁾ UR not possible in the case of a brake with 230 V supply voltage.

⁶⁾ Maximum switching energy per emergency stop at $n = 3000$ r/min for at least 2000 emergency stops.

⁷⁾ Voltage tolerance: permanent magnet brakes -10% to +5% spring-applied brakes $\pm 10\%$

MCA asynchronous servo motors



Accessories

Spring-applied holding brake

Spring-operated holding brakes are available for the asynchronous servo motors MCA20, 22 and 26.

The brakes are activated when the supply voltage is disconnected (closed-circuit principle). When using the brakes purely as holding brakes, virtually no wear occurs on the friction surfaces.

If no suitable voltage (incorrect value, incorrect polarity) is applied to the brake, the brake will be applied and can be overheated and destroyed by the motor continuing to rotate.

The shortest switching times of the brakes are achieved by DC switching of the voltage. A spark suppressor is required to suppress interference and to increase the service life of the relay contacts here.

Caution:

The brakes used are not safety brakes in the sense that a reduction in torque may arise as a result of disruptive factors that cannot be influenced, e.g. oil ingress.

The ohmic voltage drop along the cable must be taken into consideration in long motor supply cables and must be compensated for by a higher voltage at the line input.

The following applies for Lenze system cables:

$$U[V] = U_B[V] + 0.08 \frac{[V]}{[A] \cdot [m]} \cdot l_g[m] \cdot l_B[A]$$



Spring-applied holding brake

MCA asynchronous servo motors



Accessories

Spring-applied holding brake

Rated data with standard braking torque

- The figures stated apply to servo motors. They only apply to geared servo motors when the servo motor is connected via a mounting flange.

	$U_{N, DC}^{3, 4, 7)}$	$U_{N, AC}^{5, 7)}$	M_N	M_N	M_{av}	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{6)}$	m	J_{MB}	J_L/J_{MB}
			20 °C	120 °C	120 °C								
	[V]	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm²]	[ms]	[ms]	[J]	[kg]	[kgcm²]	
MCA20	24		90.0	80.0	50.0	3.13	6.88	70.0	220	18000	13.0	177	19.6
		230				0.37							
MCA22	24		150	130	80.0	3.75	18.1	50.0	260	23000	20.5	505	8.20
		230				0.44		130					
MCA26	24		300	260	160	3.75	36.3	175	320	39000	26.0	1405	12.7
		230				0.37			70.4	360	51000	30.7	

Rated data with increased braking torque

- The figures stated apply to servo motors. They only apply to geared servo motors when the servo motor is connected via a mounting flange.

	$U_{N, DC}^{3, 4, 7)}$	$U_{N, AC}^{5, 7)}$	M_N	M_N	M_{av}	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{6)}$	m	J_{MB}	J_L/J_{MB}
			20 °C	120 °C	120 °C								
	[V]	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm²]	[ms]	[ms]	[J]	[kg]	[kgcm²]	
MCA20	24		150	130	100	2.58	14.1	70.0	240	31000	15.4	189	33.0
		230				0.30							
MCA22	24		300	260	160	3.75	36.3	175	320	39000	26.0	523	14.1
		230				0.44		130	310				
MCA26	24		500	430	260	3.75	70.4	175	390	51000	30.8	1405	12.7
		230				0.44							

¹⁾ Engagement and disengagement times are valid for rated voltage ($\pm 0\%$) and protective circuit for brakes with varistor for DC switching. The times may increase without a protective circuit.

²⁾ The currents are the maximum values when the brake is cold (value used for dimensioning the current supply). The values for a motor at operating temperature are considerably lower.

³⁾ With 24 V DC brake: smoothed DC voltage, ripple $\leq 1\%$.

With 205 V DC brake: connection to 230 V AC through rectifier.

⁴⁾ UR not possible in the case of a brake with a 205 V supply voltage.

⁵⁾ UR not possible in the case of a brake with 230 V supply voltage.

⁶⁾ Maximum switching energy per emergency stop at $n = 3000$ r/min for at least 2000 emergency stops.

⁷⁾ Voltage tolerance: permanent magnet brakes -10% to +5% spring-applied brakes $\pm 10\%$

MCA asynchronous servo motors



Accessories

Resolver

Stator-fed resolver with two stator windings offset by 90° and one rotor winding with transformer winding.

Speed/angle sensor				
	1)			
Product key			RS0	RV0
			RS0	RV03
Resolution				
Angle		[°]		0.80
Accuracy		[°]		-10 ... 10
Absolute positioning				1 revolution
Max. speed				
	n_{\max}	[r/min]		8000
Max. input voltage				
DC	$U_{in,\max}$	[V]		10.0
Max. input frequency				
	$f_{in,\max}$	[kHz]		4.00
Ratio				
Stator / rotor		± 5 %		0.30
Rotor impedance				
	Z_{ro}	[Ω]		51 + j90
Stator impedance				
	Z_{so}	[Ω]		102 + j150
Impedance				
	Z_{rs}	[Ω]		44 + j76
Min. insulation resistance				
At DC 500 V	R	[MΩ]		10.0
Number of pole pairs				1
Max. angle error		[°]		-10 ... 10
Inverter assignment				E84AVTC E94A ECS EVS93

1) 6 - Product key > speed/angle sensor

Speed-dependent safety functions

Suitable for safety function			No	Yes
Max. permissible angular acceleration				
MCA10 ... MCA19 ²⁾	α	[rad/s ²]		22 000
MCA20 ... MCA26 ²⁾	α	[rad/s ²]		22 000
Functional safety				
IEC 61508				SIL3
EN 13849-1				Up to Performance Level e

2) 1 - Single encoder concepts with resolvers

MCA asynchronous servo motors



Accessories

Incremental encoder and SinCos absolute value encoder

Encoder type			TTL incremental	SinCos incremental	
Speed/angle sensor				S20	S1S
	1)		T20	T40	
Product key			IG2048-5V-T	IG4096-5V-T	IG2048-5V-S
Encoder type				Single-turn	
Pulses			2048	4096	2048
Output signals			TTL		1 Vss
Interfaces			A, B, N track and inverted		
Absolute revolutions				0	
Resolution					
Angle ²⁾		[°]	2.60	1.30	0.40
Accuracy		[°]	-2 ... 2		-0.8 ... 0.8
Min. input voltage					
DC	U _{in,min}	[V]	4.75	4.50	4.75
Max. input voltage					
DC	U _{in,max}	[V]	5.25	5.50	5.25
Max. speed					
	n _{max}	[r/min]	8789	5273	8000
Max. current consumption					
	I _{max}	[A]	0.15	0.10	0.070
Limit frequency					
	f _{max}	[kHz]	300	180	200
Inverter assignment			E84AVTC E94A ECS EVS93		E94A

1) 6 - Product key > speed/angle sensor

2) Inverter-dependent.

Speed-dependent safety functions

Suitable for safety function			No	No	No	Yes
Max. permissible angular acceleration						
MQA20 ... MQA26	α	[rad/s ²]				73000
Functional safety						
IEC 61508						SIL3
EN 13849-1						Up to Performance Level e

MCA asynchronous servo motors



Accessories

Incremental encoder and SinCos absolute value encoder

Encoder type			SinCos absolute value					
Speed/angle sensor	1)		EQI	SRS	SRM	ECN	EQN	
Product key			AM32-5V-E	AS1024-8V-H	AM1024-8V-H	AS2048-5V-E	AM2048-5V-E	
Encoder type			Multi-turn	Single-turn	Multi-turn	Single-turn	Multi-turn	
Pulses			32	1024		2048		
Output signals			1 Vss					
Interfaces			EnDat	Hiperface		EnDat		
Absolute revolutions			4096	1	4096	1	4096	
Resolution								
Angle		[°]	0.40					
Accuracy		[°]	-5 ... 5	-0.8 ... 0.8		-0.6 ... 0.6		
Min. input voltage								
DC	U _{in,min}	[V]	4.75	7.00		4.75		
Max. input voltage								
DC	U _{in,max}	[V]	5.25	12.0		5.25		
Max. speed								
	n _{max}	[r/min]	12000	6000		12000		
Max. current consumption								
	I _{max}	[A]	0.17	0.080		0.15		0.25
Limit frequency								
	f _{max}	[kHz]	6.00		200			
Inverter assignment			E94A	E84AVTC E94A ECS EVS93		E94A		

¹⁾

6 - Product key > speed/angle sensor

MCA asynchronous servo motors



Accessories

Blowers

Rated data for 50 Hz

		Enclosure	Number of phases		U _{min} [V]	U _{max} [V]	U _{N, AC} [V]	P _N [kW]	I _N [A]
MCA13								0.019	0.12
MCA14						240			
MCA17								0.040	0.25
MCA19									
MCA20	F10 F1F	IP23s		1	210	250	230	0.17	0.73
MCA21	F10	IP54				240		0.060	0.26
MCA22	F10 F1F	IP23s				250		0.24	1.05
MCA26		IP54						0.40	1.75

Rated data for 60 Hz

		Enclosure	Number of phases		U _{min} [V]	U _{max} [V]	U _{N, AC} [V]	P _N [kW]	I _N [A]
MCA13								0.019	0.12
MCA14						240			
MCA17								0.040	0.25
MCA19									
MCA20	F10 F1F	IP23s		1	210	250	230	0.20	0.90
MCA21	F10	IP54				240		0.060	0.26
MCA22	F10 F1F	IP23s				250		0.28	1.23
MCA26		IP54						0.41	1.82


MCA asynchronous servo motors



Accessories

Temperature monitoring

The thermal sensors (1x KTY 83-110) used continuously monitor the motor temperature. The temperature signal is transmitted over the system cable of the feedback system to the servo controller. This means that the temperature of the motor is determined with great accuracy in the permitted operating range and at the same time the overtemperature response configured in the controller is executed in the event of overtemperature in one of the winding phases.

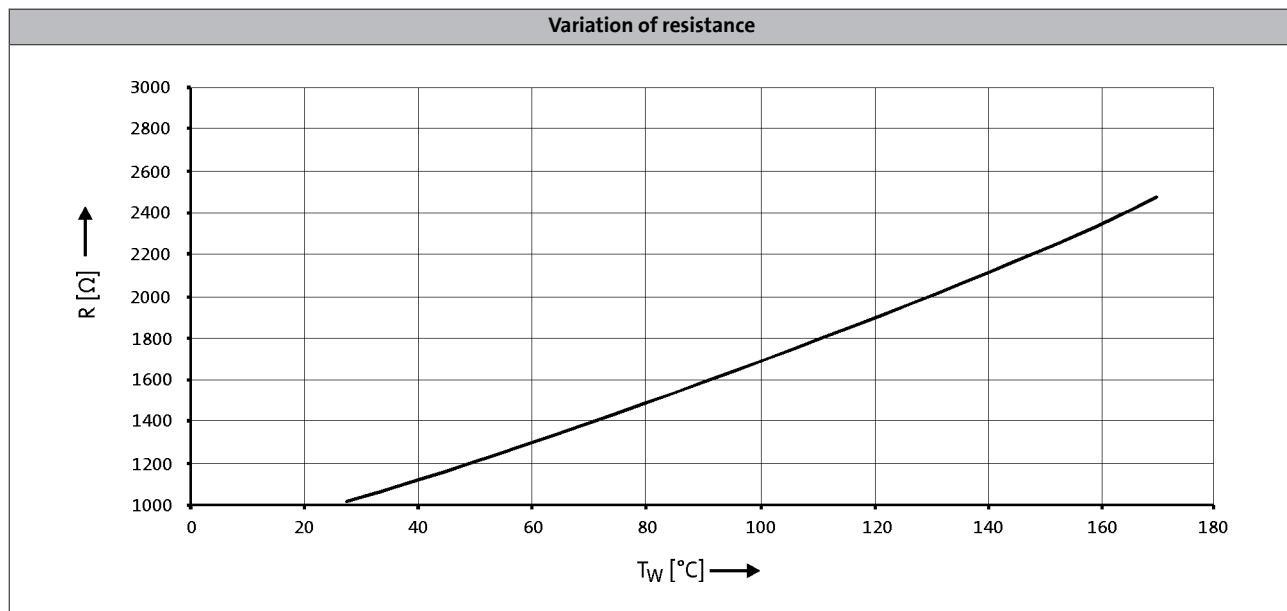

- If the detector is supplied with a measured current of 1 mA, the above relationship between the temperature and the resistance applies.

MCA asynchronous servo motors




Accessories

Terminal box

Motors MCA10 to 19/21

If a servo motor is to be connected to an existing cable or plug connectors are not to be used for other reasons, the connection can also be made via a terminal box.

The motor can either be fitted with a terminal box for the power connection and motor holding brake or a second terminal box provided to connect the motor feedback and blower (if applicable).

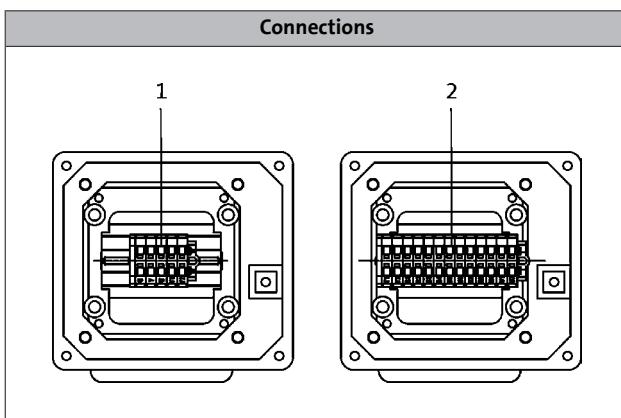

MCA asynchronous servo motors with blower and terminal box


MCA asynchronous servo motors



Accessories

Terminal box

Motors MCA10 to 19/21

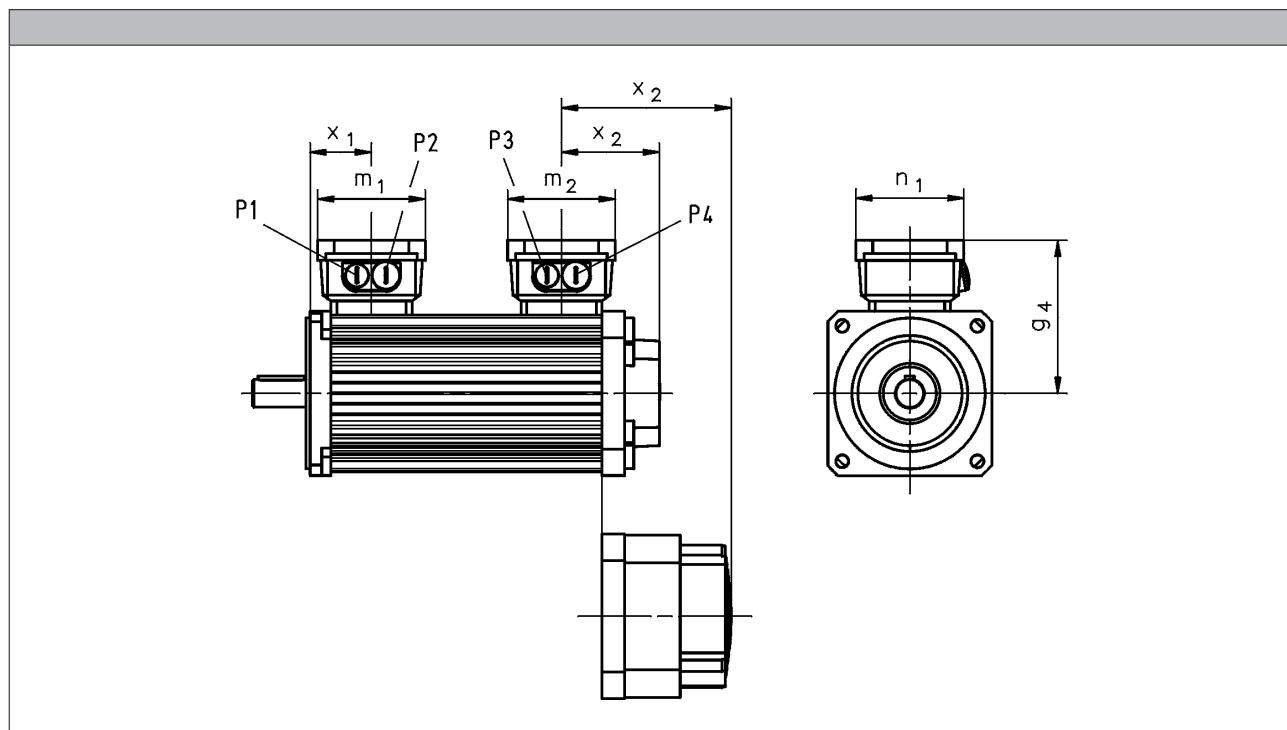

			MCA10I40	MCA13I41	MCA14L20	MCA17N23	MCA19S23	MCA21X25
					MCA14L41	MCA17N41	MCA19S42	MCA21X42
R□O B0	x ₂	[mm]	78	77		85	93	97
R□O P□	x ₂	[mm]	78	77		85	93	97
S□□ / E□□ / T20 / B0	x ₂	[mm]	132	131	140	139	143	147
S□□ / E□□ / T20 / P□	x ₂	[mm]	132	131	140	139	143	147

			MCA13I34	MCA14L16	MCA17N17	MCA19S17	MCA21X17
				MCA14L35	MCA17N35	MCA19S35	MCA21X35
R□O B0	x ₂	[mm]	145	147	171	190	193
R□O P□	x ₂	[mm]	145	147	171	190	193
S□□ / E□□ / T20 / B0	x ₂	[mm]	199	202	225	240	243
S□□ / E□□ / T20 / P□	x ₂	[mm]	199	202	225	240	243

► Speed/angle sensor: RS0 / S□□ / E□□ / T20

► Brake: B0 / P□

	g ₄	m ₁	m ₂	n ₁	x ₁	P ₁	P ₂	P ₃	P ₄
	[mm]								
MCA10	113				54				
MCA13	125				57				
MCA14	133				53				
MCA17	141				55				
MCA19	158				64				
MCA21	169				70				
						M20x1.5	M20x1.5	M20x1.5	M20x1.5

MCA asynchronous servo motors



Accessories

ICN connector

Servo motors MCA10 to 21 provide ICN connectors as standard for electrical connection. Servo motors MCA22 and MCA26 provide a terminal box for electrical connection.


A connector is used for the connection of motor and brake. The connections to the feedback system/temperature monitoring and the blower each employ a separate connector.

The connectors can be rotated through 270° and are fitted with a bayonet catch for SpeedTec connectors. As the connector fixing is also compatible with conventional union nuts. Existing mating connectors can therefore still be used without difficulty.

Connection for power and brake


► MCA10 to 17

Pin assignment		
Contact	Designation	Meaning
1	BD1	Holding brake +
2	BD2	Holding brake -
PE	PE	PE conductor
4	U	Phase U power
5	V	Phase V power
6	W	Phase W power



► MCA19 to 21

Pin assignment		
Contact	Designation	Meaning
1		Not assigned
2		
+	BD1	Holding brake +
-	BD2	Holding brake -
PE	PE	PE conductor
U	U	Phase U power
V	V	Phase V power
W	W	Phase W power



MCA asynchronous servo motors




Accessories

ICN connector

Feedback connection


- Resolver

Pin assignment		
Contact	Designation	Meaning
1	+Ref	Transformer windings
2	-Ref	
3	+VCC ETS	Supply: Electronic nameplate
4	+COS	Cosine stator windings
5	-COS	
6	+SIN	Sine stator windings
7	-SIN	
8		
9		Not assigned
10		
11	+KTY	KTY temperature sensor
12	-KTY	



- Hiperface incremental encoder and SinCos absolute value encoder

Pin assignment		
Contact	Designation	Meaning
1	B	Track B/+SIN
2	A ⁻	Track A inverse/-COS
3	A	Track A/+COS
4	+U _B	Supply +
5	GND	Mass
6	Z ⁻	Zero track inverse/-RS485
7	Z	Zero track/+RS485
8		Not assigned
9	B ⁻	Track B inverse/-SIN
10		Not assigned
11	+KTY	KTY temperature sensor
12	-KTY	



MCA asynchronous servo motors




Accessories

ICN connector

Feedback connection


- SinCos absolute value encoder with EnDat interface

Pin assignment		
Contact	Designation	Meaning
1	U _P sensor	Supply: UP sensor
2		Not assigned
3		
4	0 V sensor	Supply: 0 V sensor
5	+KTY	KTY temperature sensor
6	-KTY	
7	+U _B	Supply +
8	Cycle	EnDat interface cycle
9	Cycle ⁻	EnDat interface inverse cycle
10	GND	Mass
11	Shield	Encoder housing screen
12	B	Track B
13	B ⁻	Track B inverse/-SIN
14	Data	EnDat interface data
15	A	Track A
16	A ⁻	Track A inverse
17	Data ⁻	EnDat interface inverse data



Blower connection

Pin assignment		
Contact	Designation	Meaning
PE	PE	PE conductor
1	U1	
2	U2	Fan
3		
4		
5		
6		



MCA asynchronous servo motors

Technical data



MCA asynchronous servo motors

Technical data



MCA asynchronous servo motors

Technical data



Lenze SE
Hans-Lenze-Straße 1
D-31855 Aerzen
Phone: +49 (0)5154 82-0
Telefax: +49 (0)5154 82 28 00

www.Lenze.com